## 40338 Christmas Tree LED lighting Kit (Standard Version) GC113


## Instructions for installing this kit:



Power supply mode: USB power cord (please bring your own power supply).

It can be energized through a USB battery box (please pay attention to the positive and negative poles of the battery), power bank, mobile phone charger or USB socket. The normal voltage is 3-5V.

## **USB** connectors to connect devices

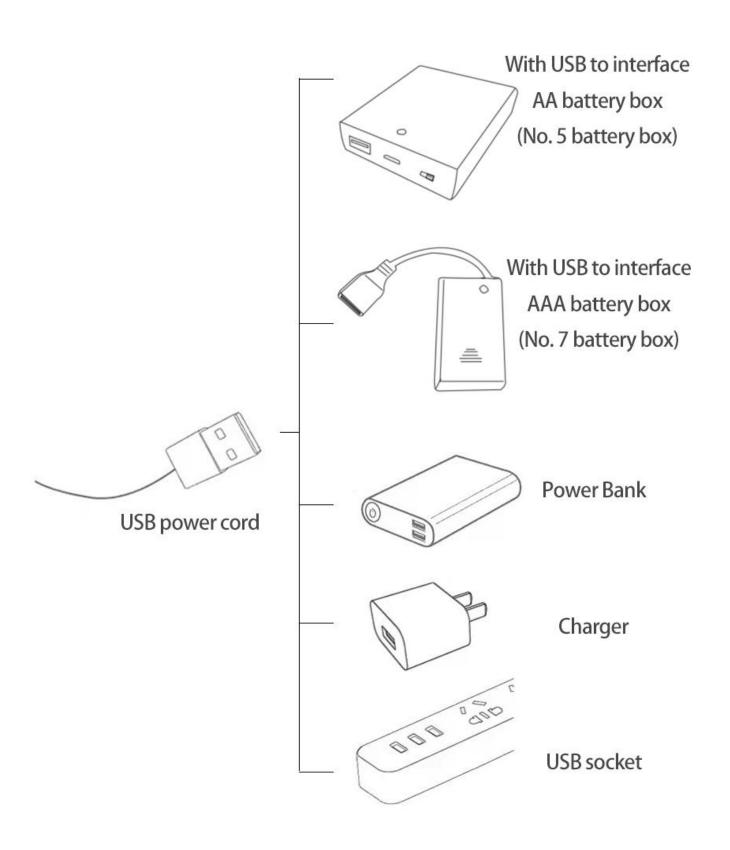

There are 4 bags of this product, and the AAA battery box is a gift. (Without battery)



Take out the accessories inside (accessories include: AAA battery box, 30cm USB power cord,6-seater expansion board). The following power supply methods use mobile power, equipped with a USB power cord, and the battery box (battery self-supplied) can be used by yourself.




Take out the AAA battery box.




Flip to the back of the battery box.




Slide up to remove the battery cover.

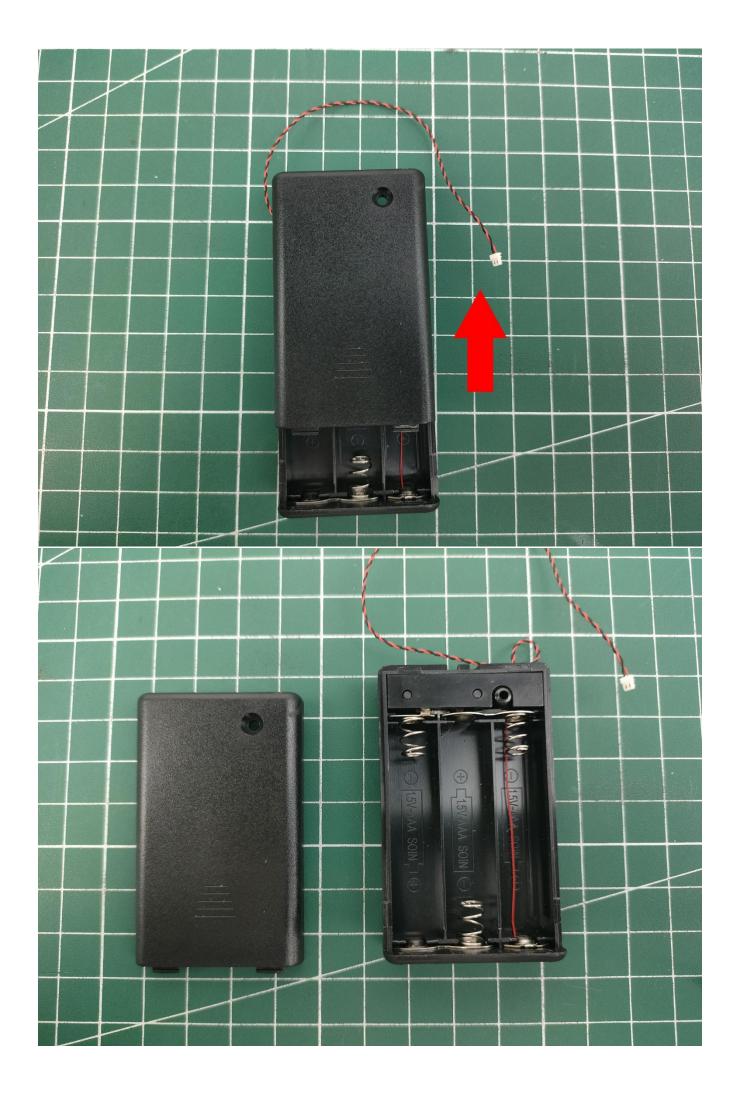

Install 3 AAA batteries (note the positive and negative poles).

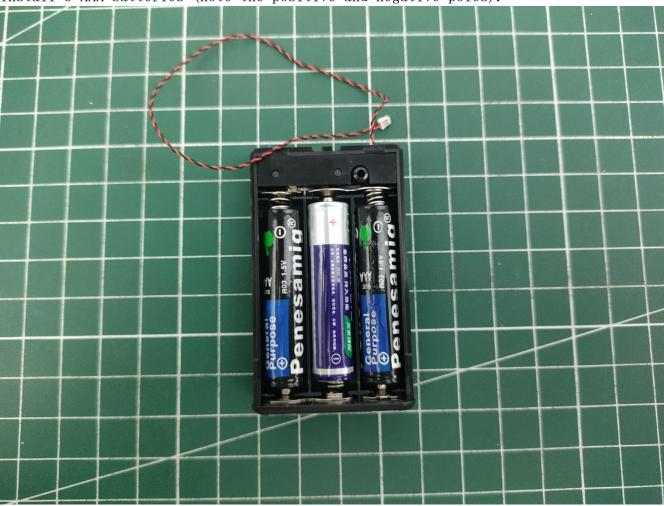


Slide down to install the battery cover.

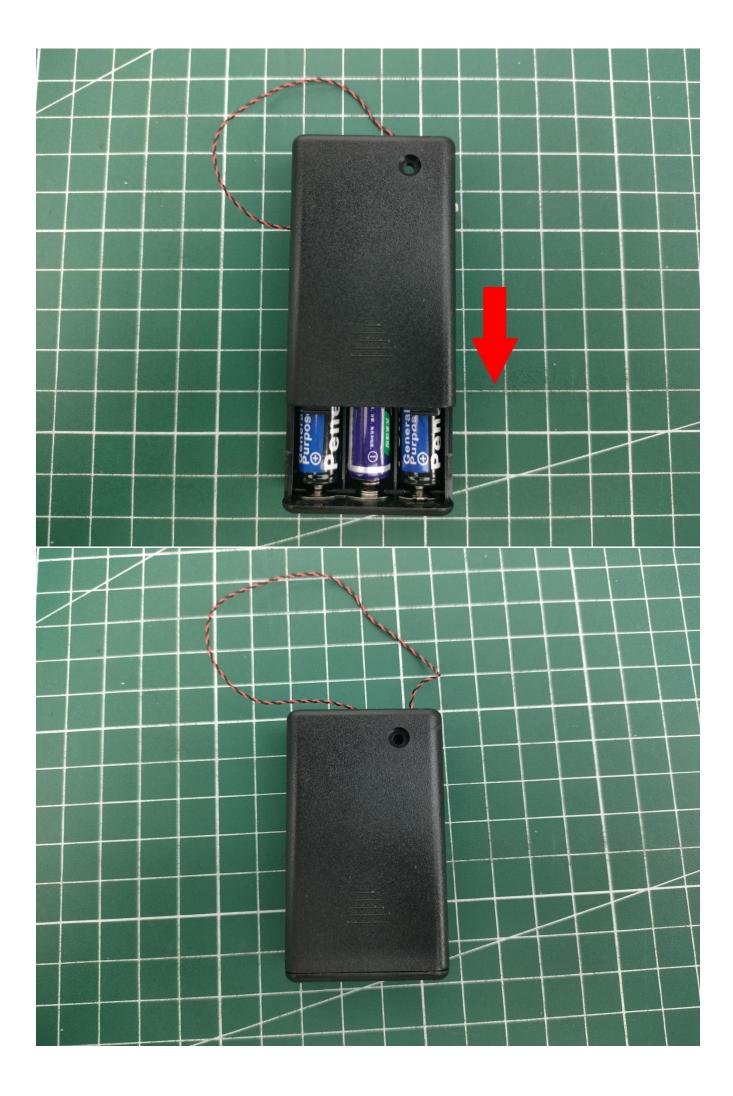


Take out one 6-seater expansion board.




Please pay attention to the use of the interface. The interface is small. Please use it carefully: the = number of the 2P interface is aligned with the = number of the expansion board. The equal sign on the expansion board refers to the two solder joints on the outside, not the two inside the jack Metal pin.








Connect the expansion board and the battery box.

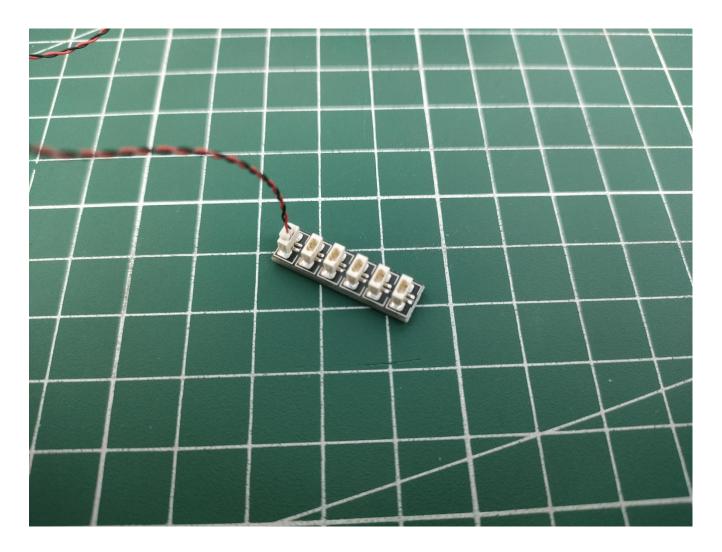


Take out the lighting from the No. 1 bag.




Connect the lighting to the 6-seater expansion board.

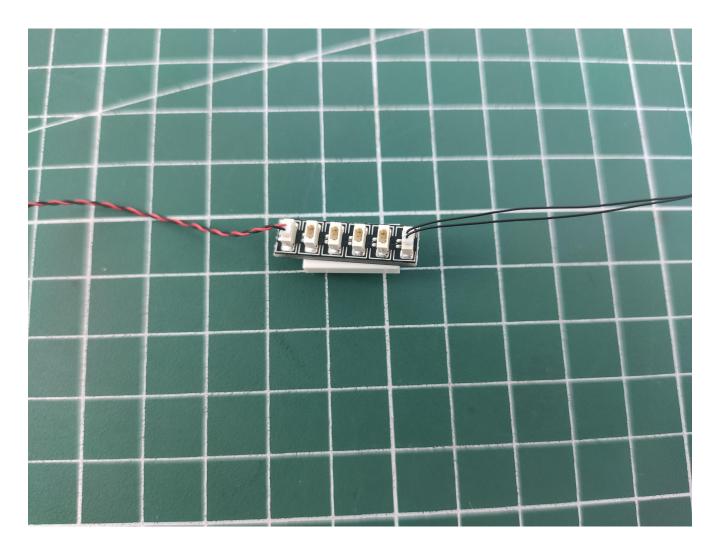


Turn on the battery box switch.

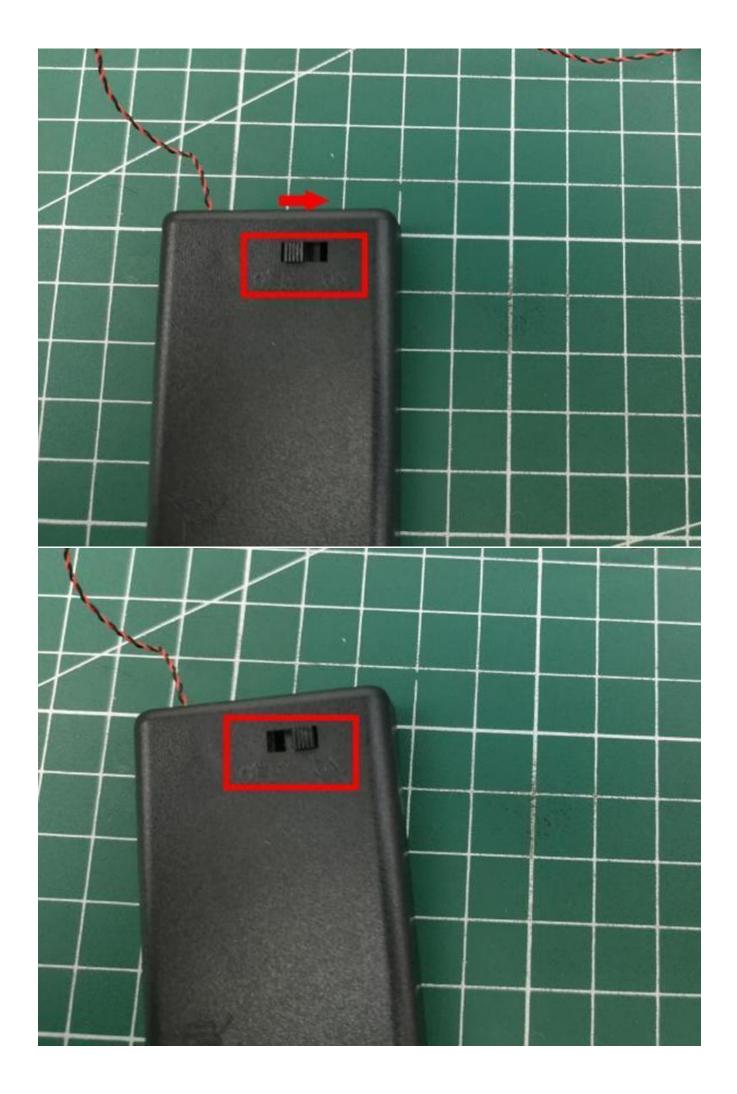

Test whether the lighting can work normally. (Note: If the lighting fails to work normally, please contact us in time).

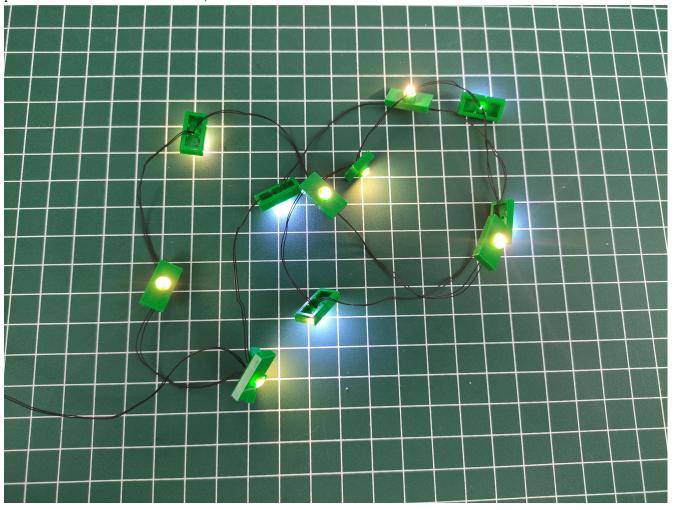

Separate the AAA battery box and the 6-seat expansion board.

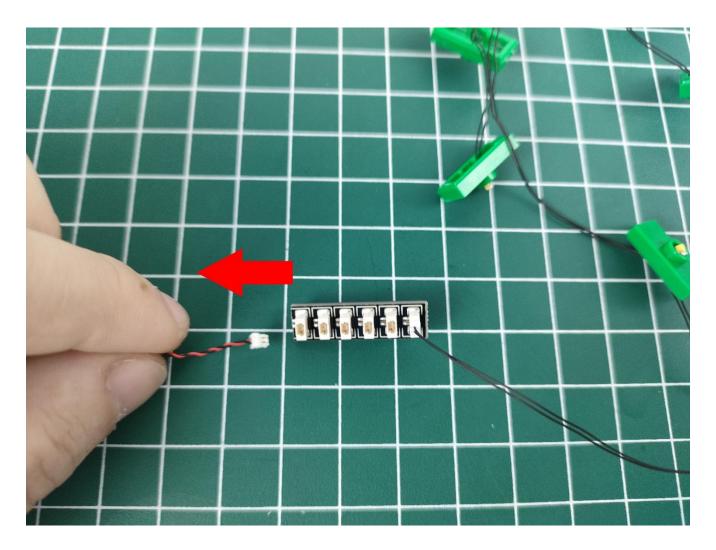

Put theAAA battery box back into the bag.




Take out the 30cm USB power cord.




Connect the USB power cord to the power bank.



Connect the USB power cord to the 6-seater expansion board.

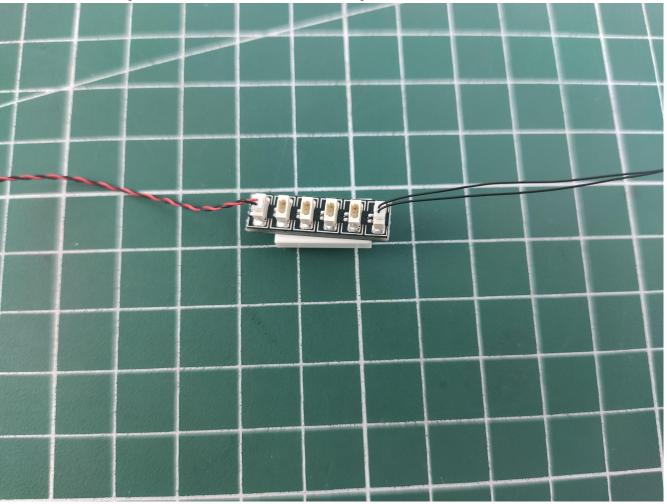

Turn on the power bank switch to test whether the lighting can work normally. (Note: If the lighting fails to work normally, please contact us in time).

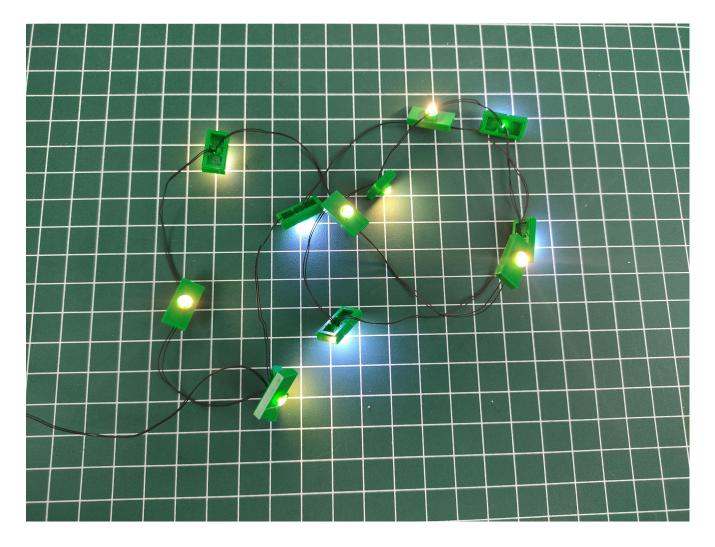


Remove all the lamp wires and put them back in the corresponding bag.




Test all the lights and put them back in their original bags.


## Note:


Please be careful when installing. The lamp wire is relatively slender and cannot be pressed on the raised position of the building block. It should pass along the gap, otherwise the lamp wire will be pinched.

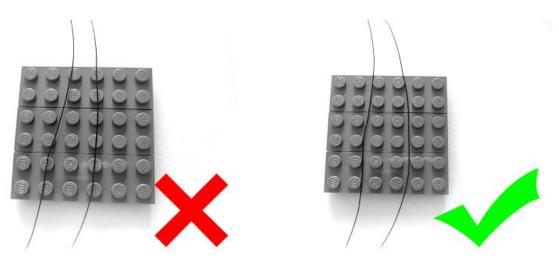

start installation:

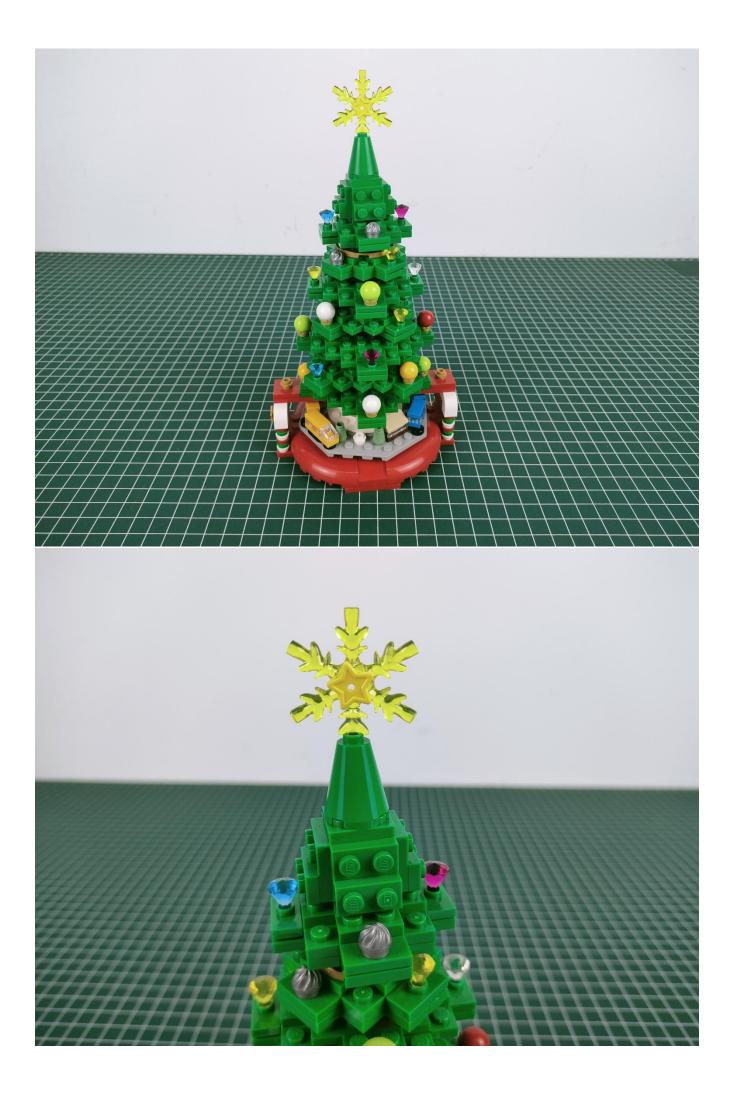


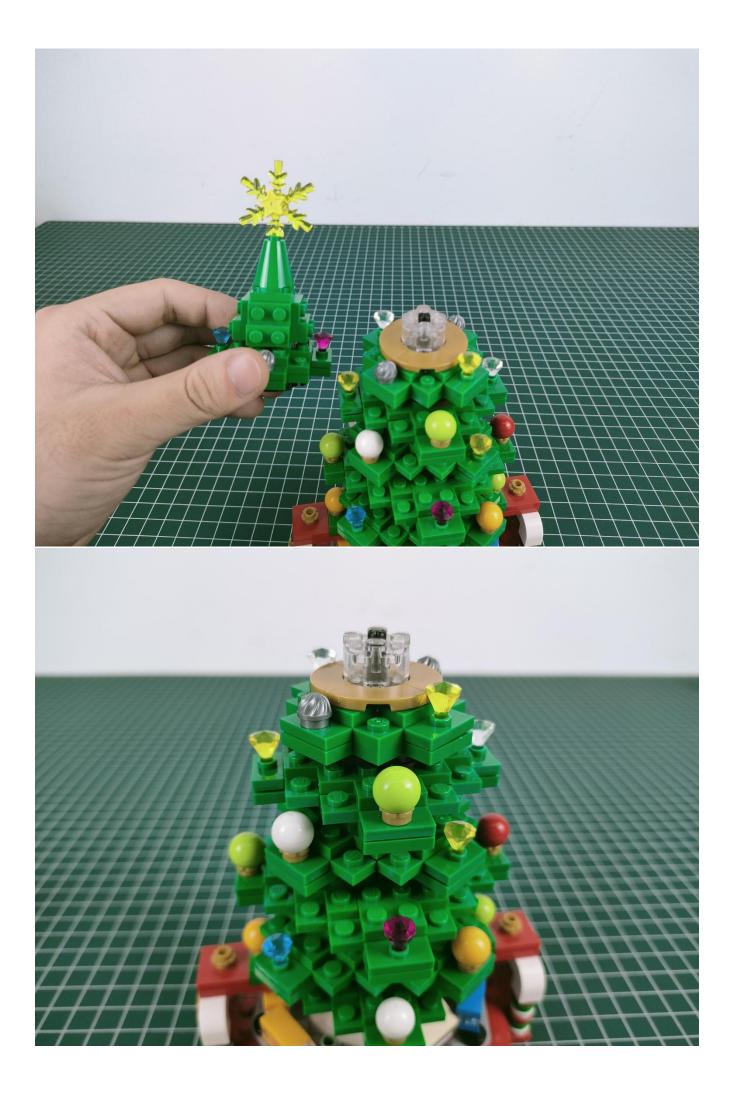


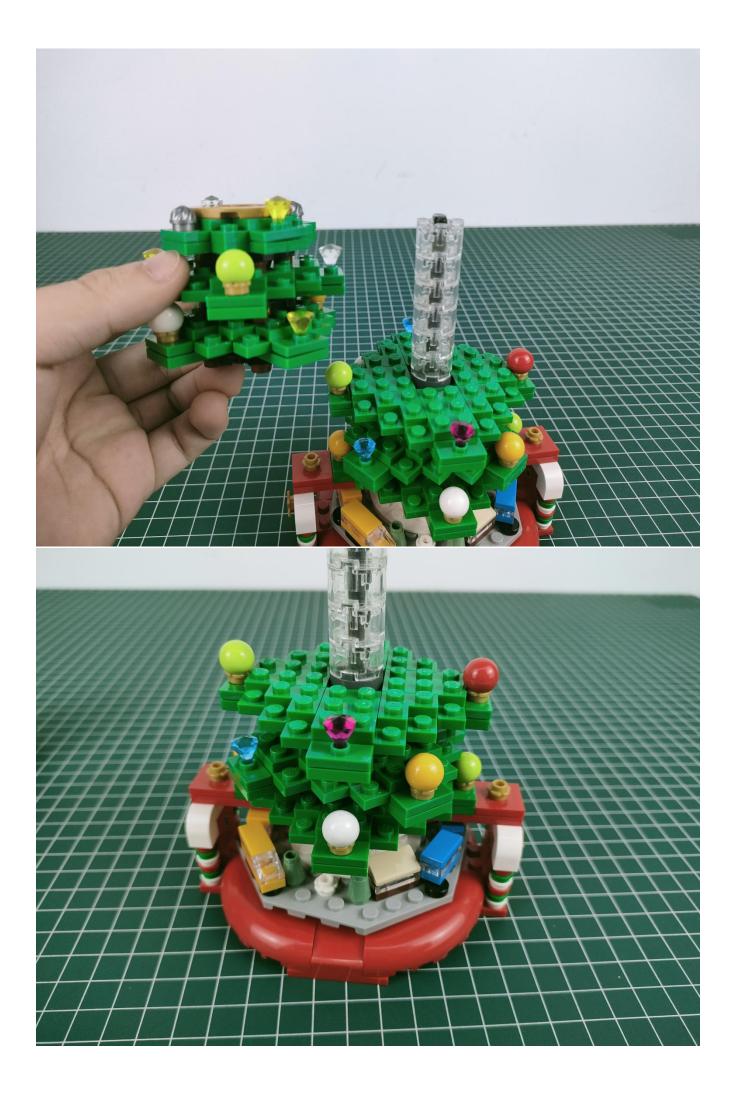








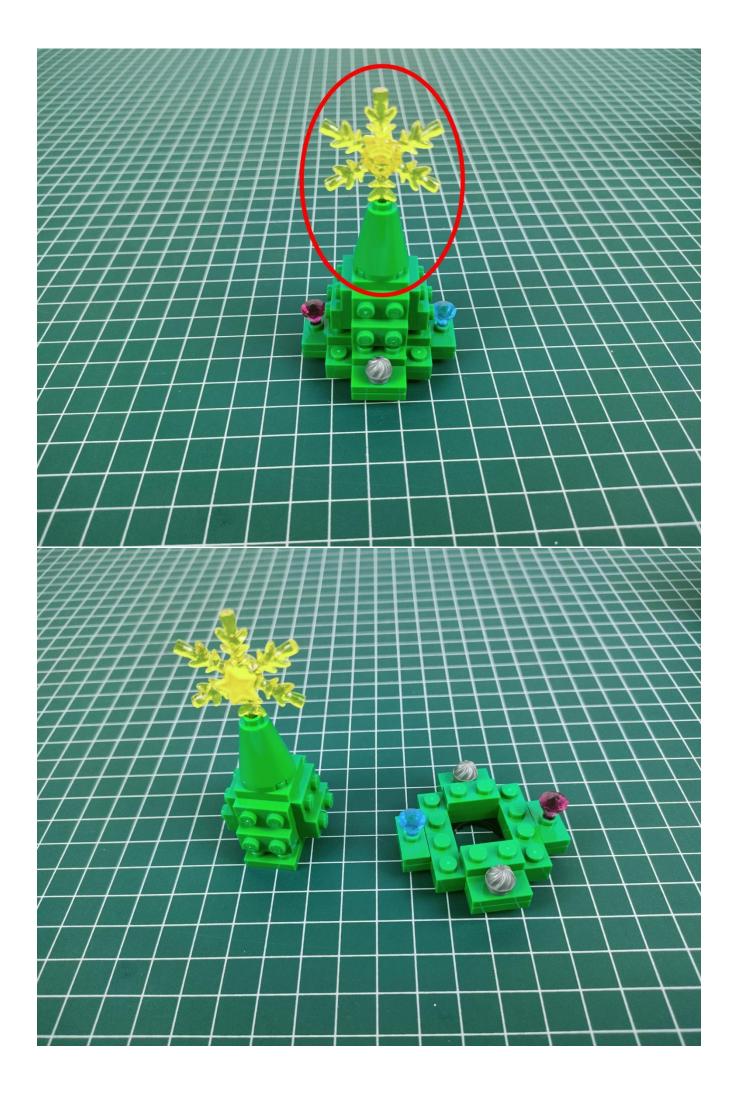


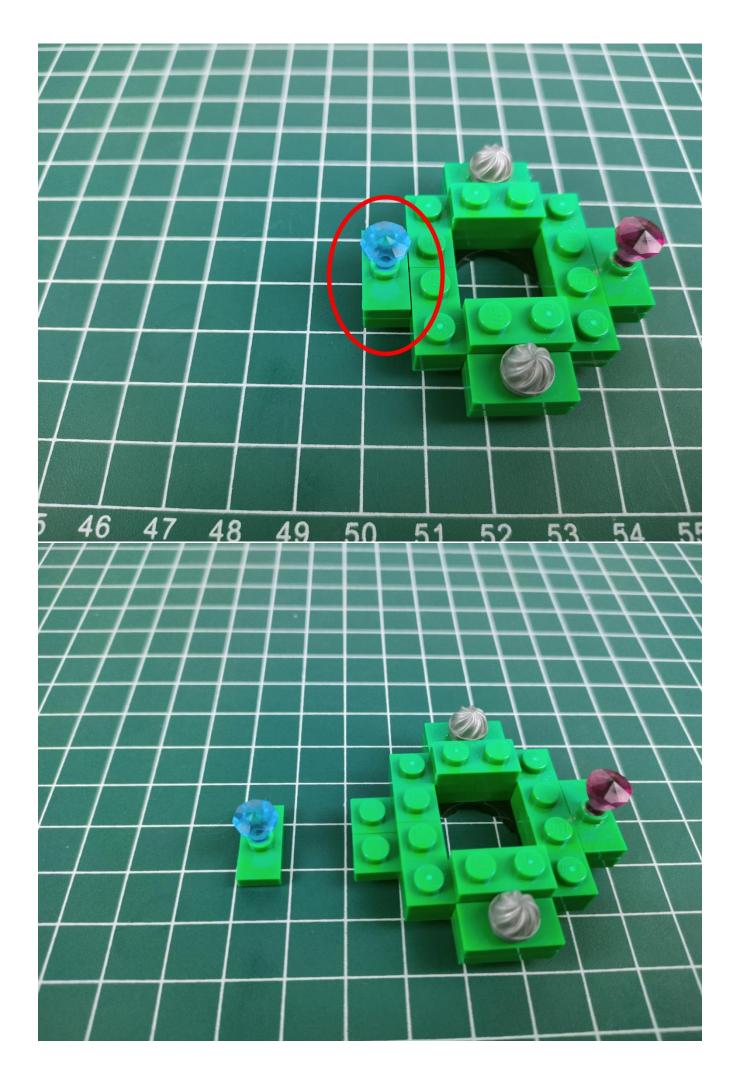


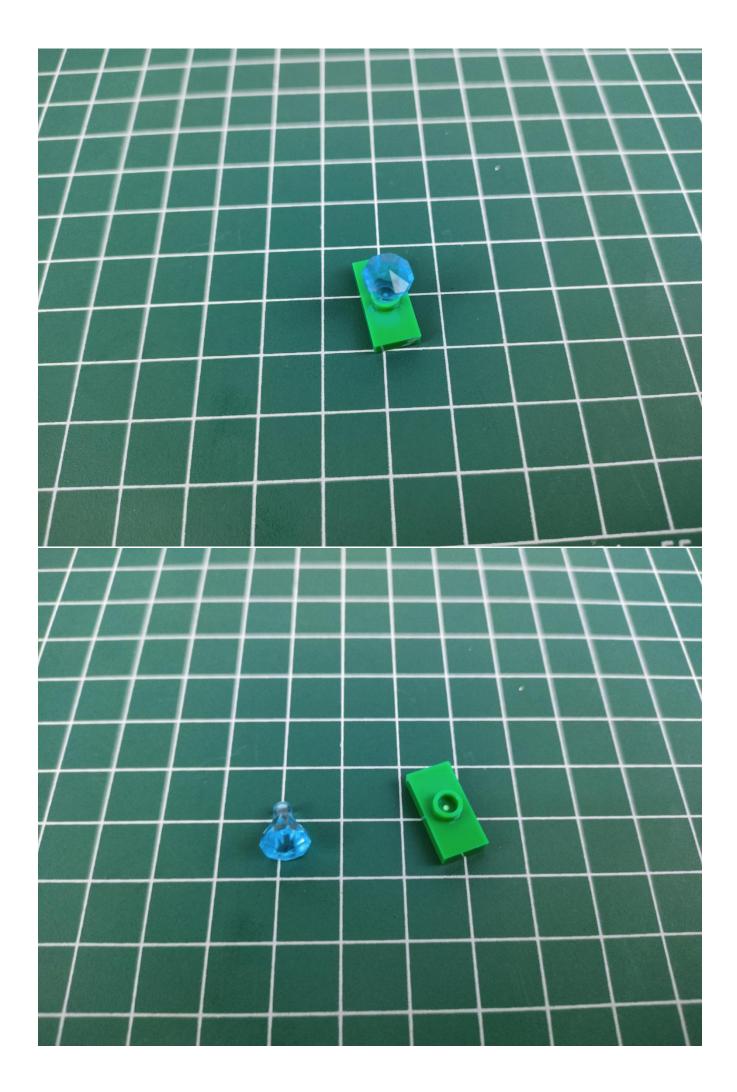


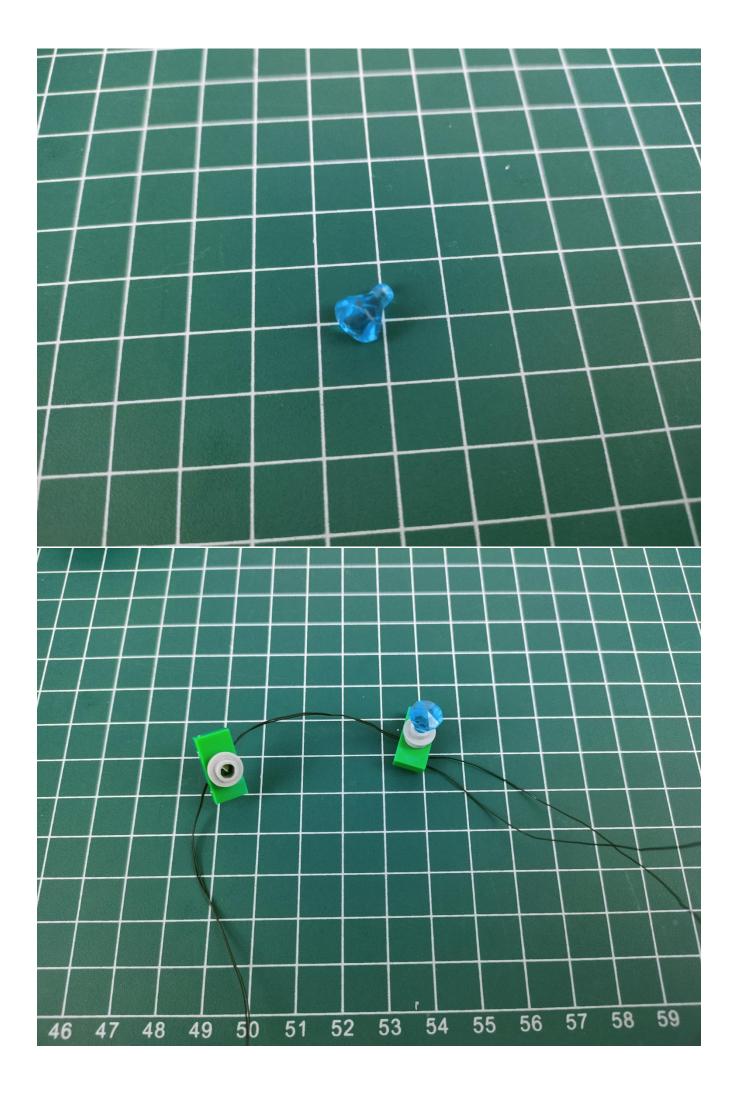


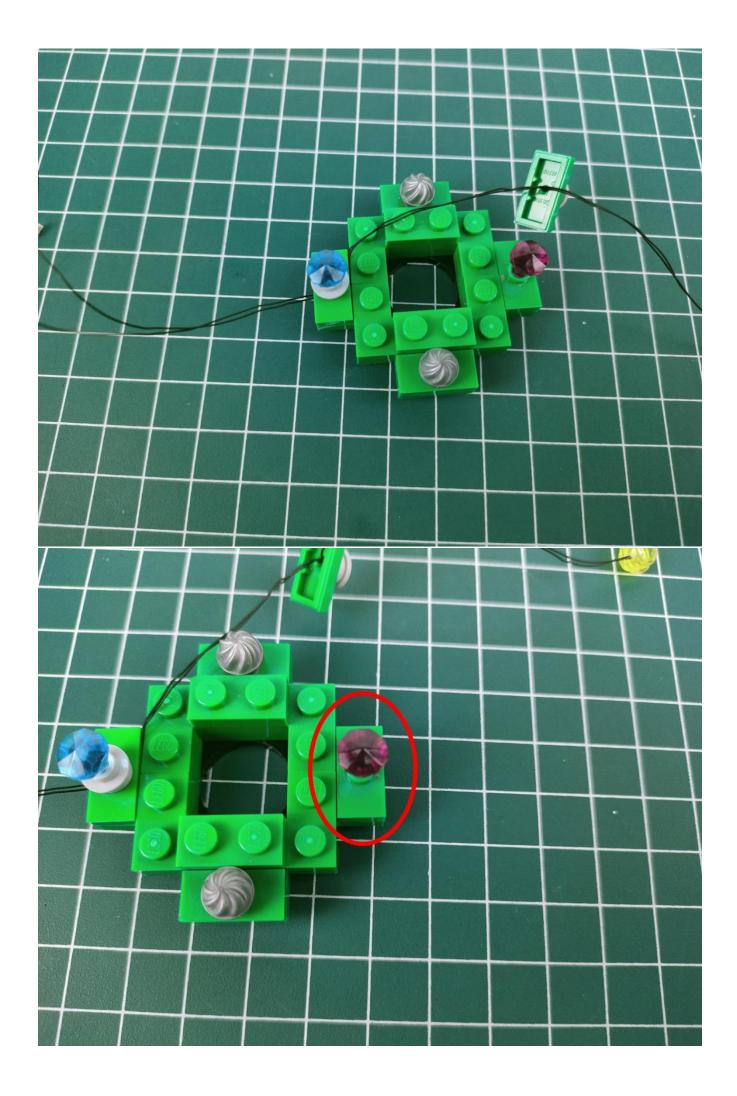


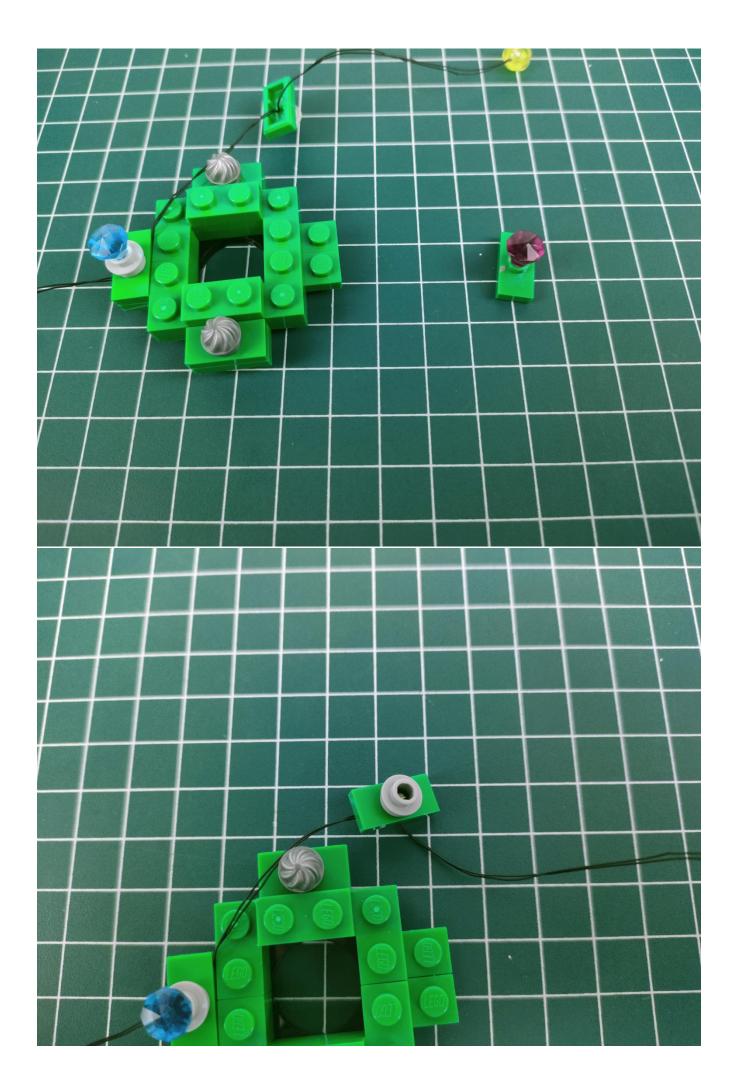


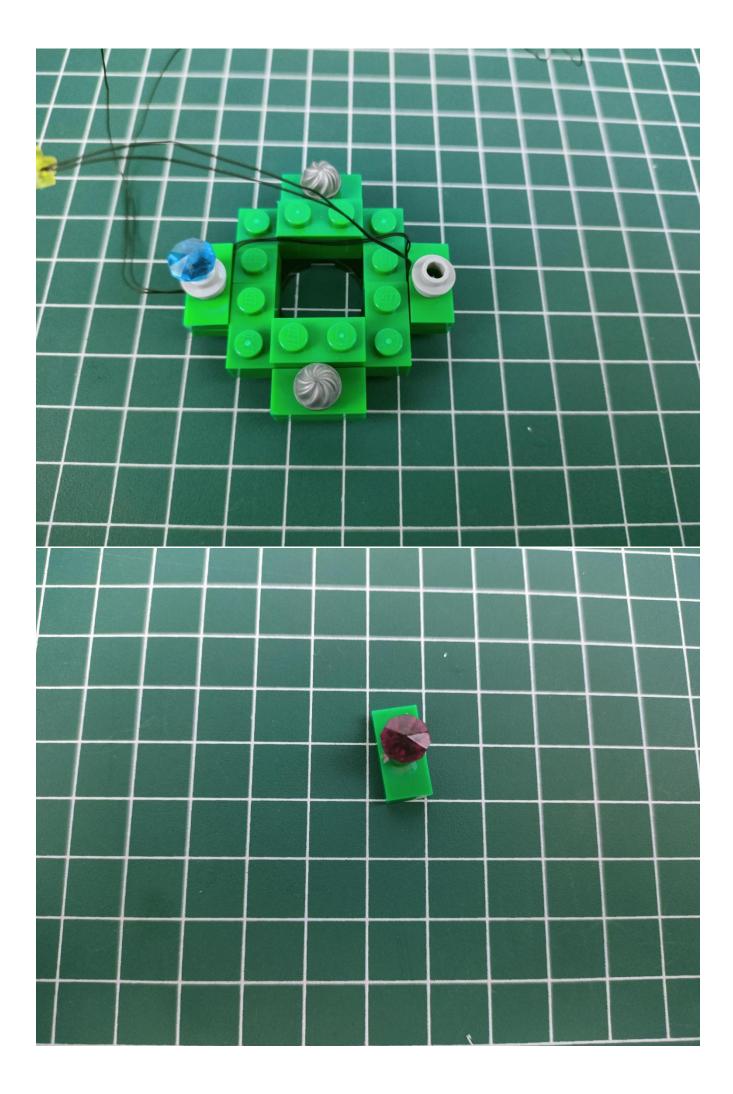


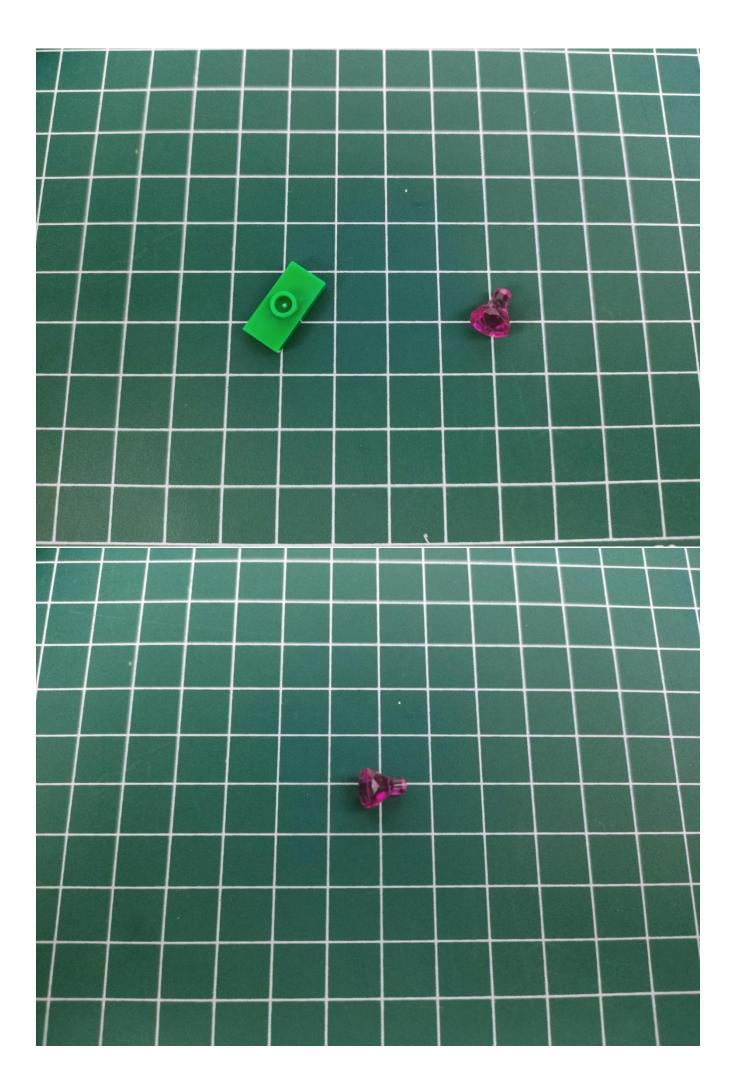


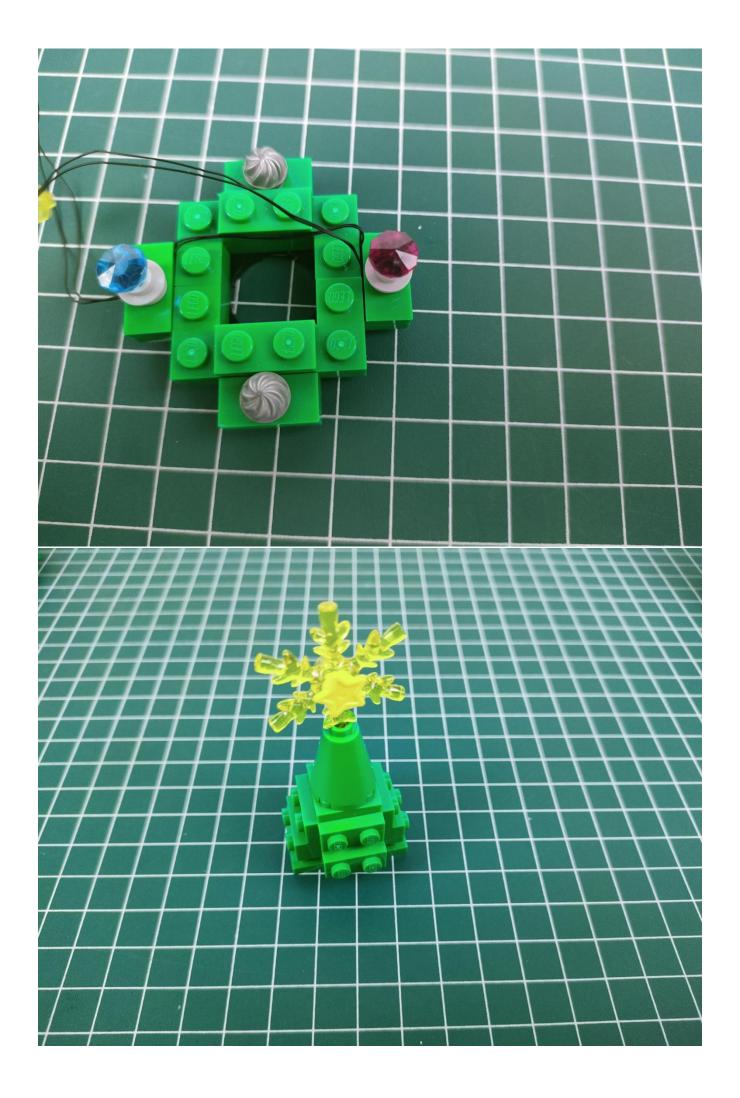


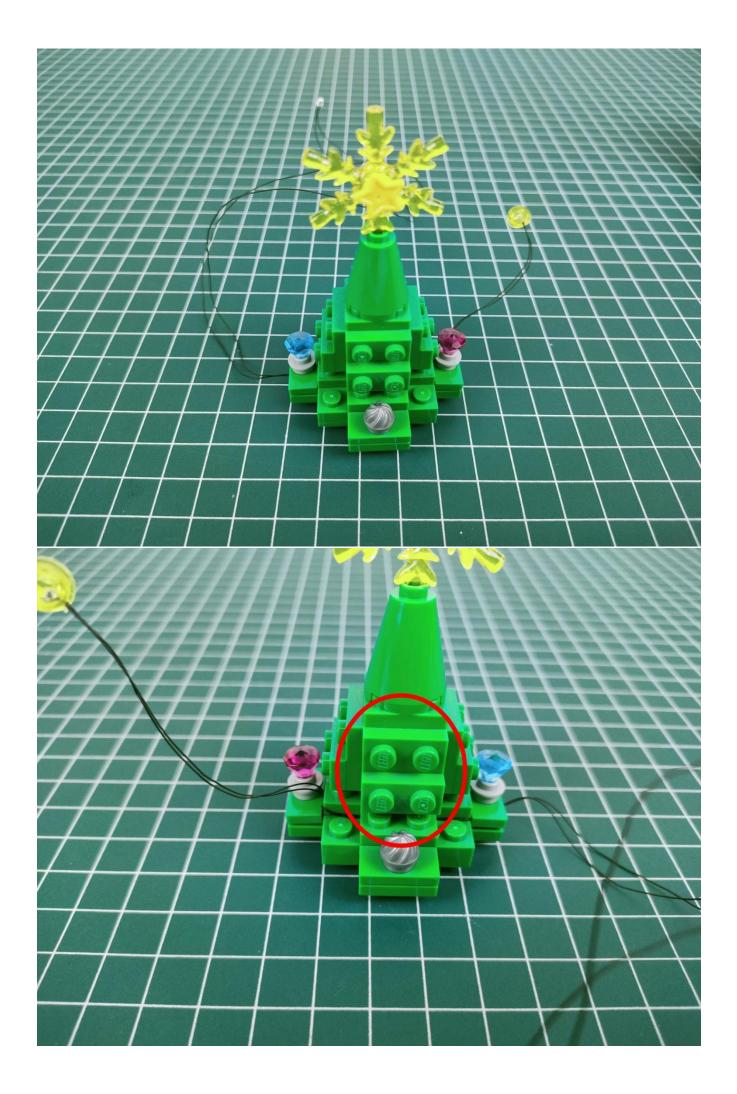


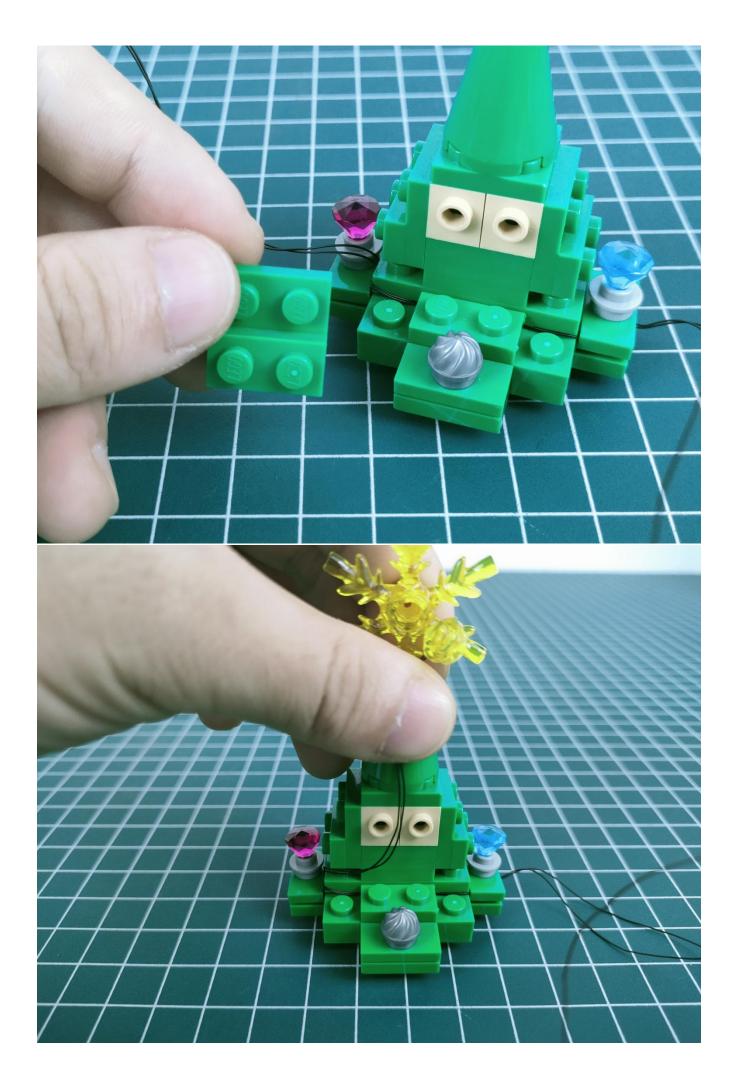


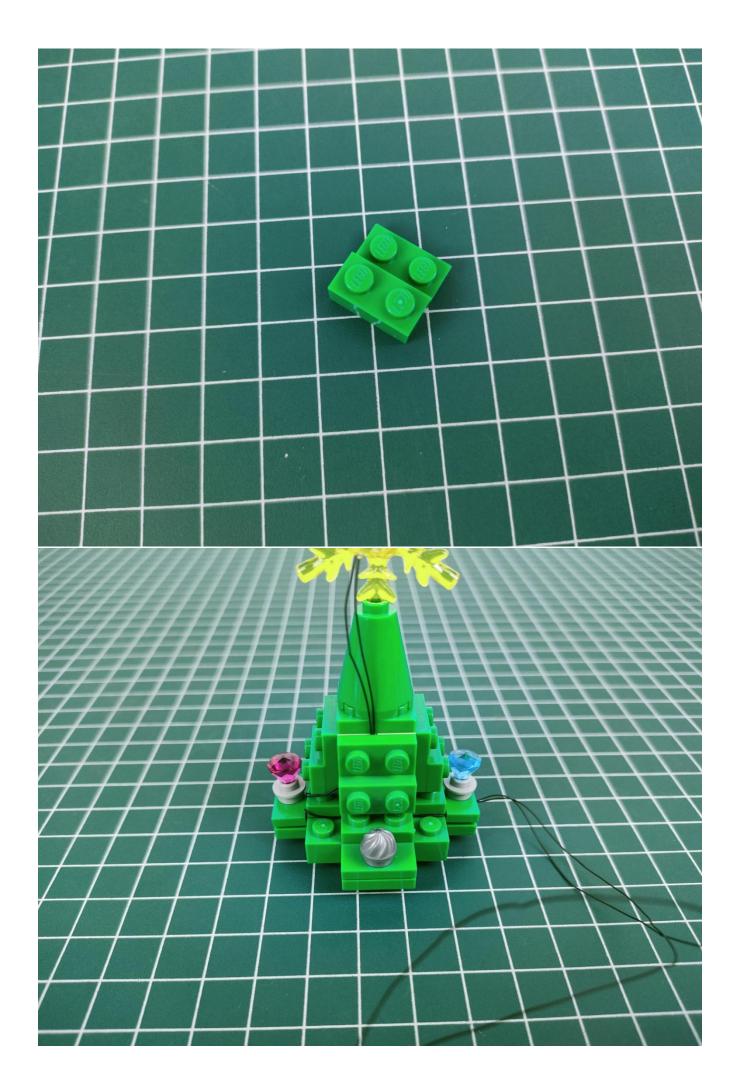

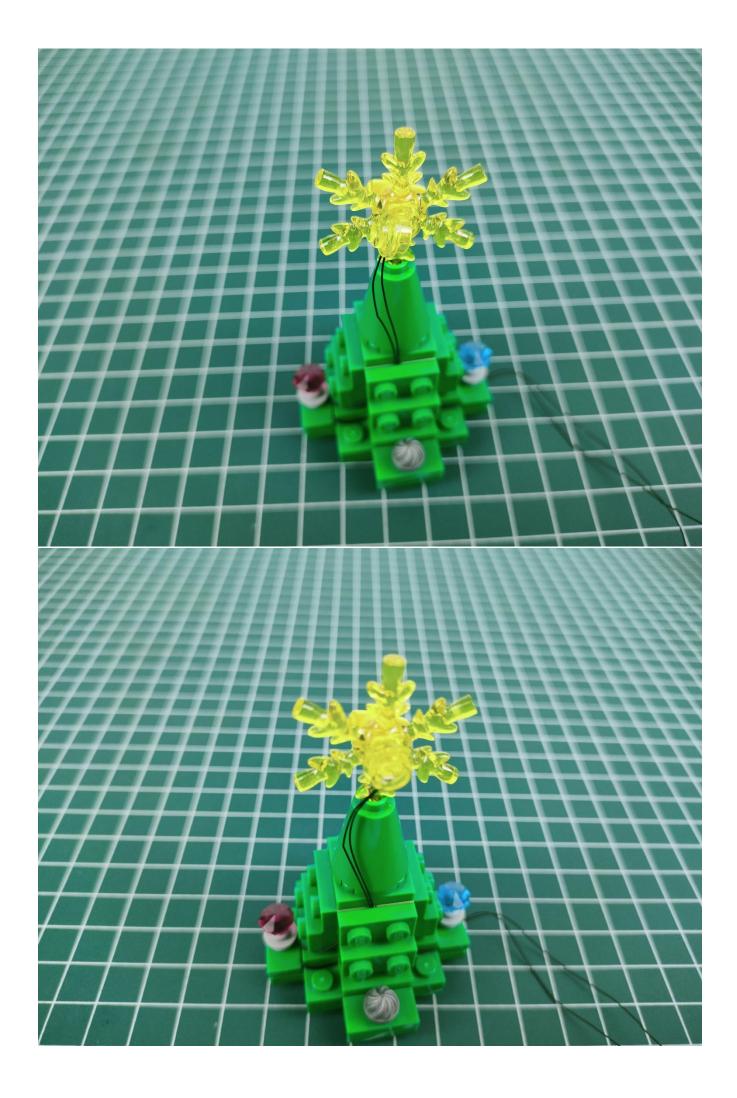


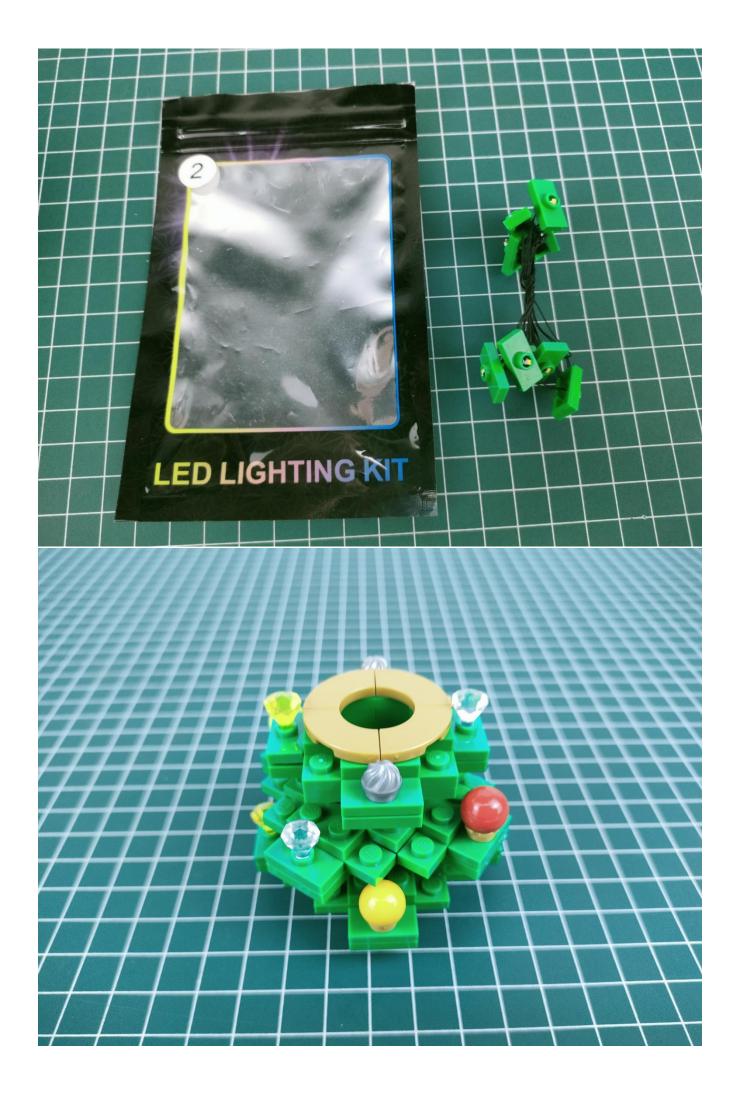


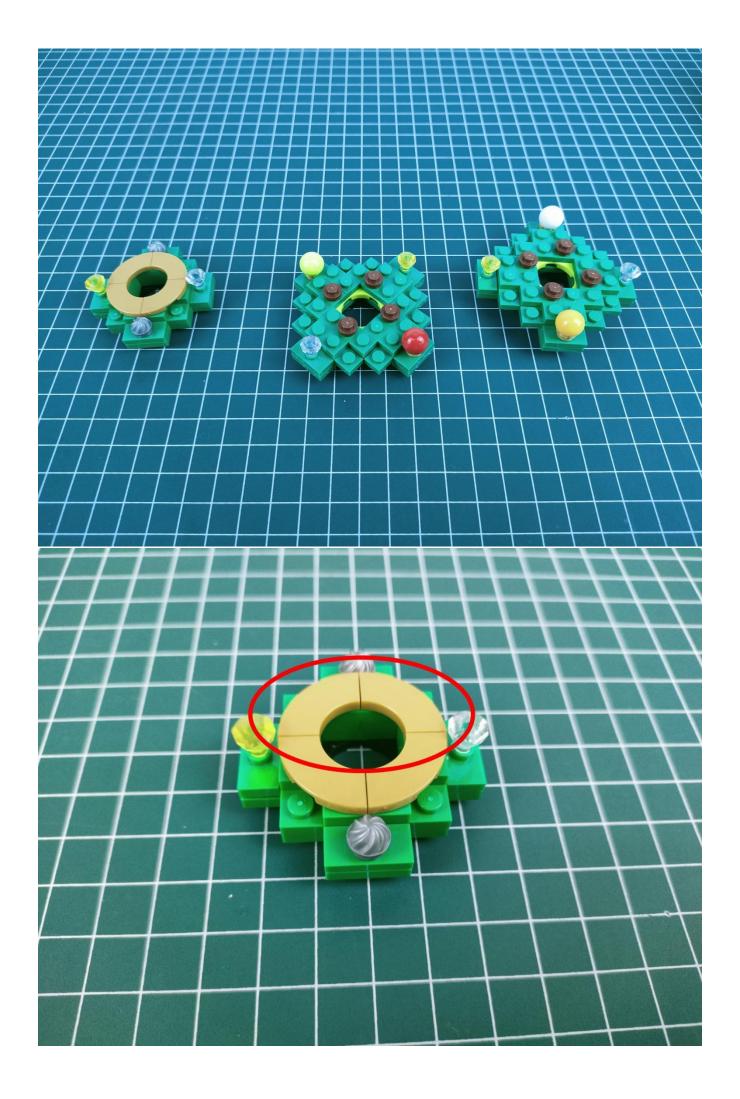


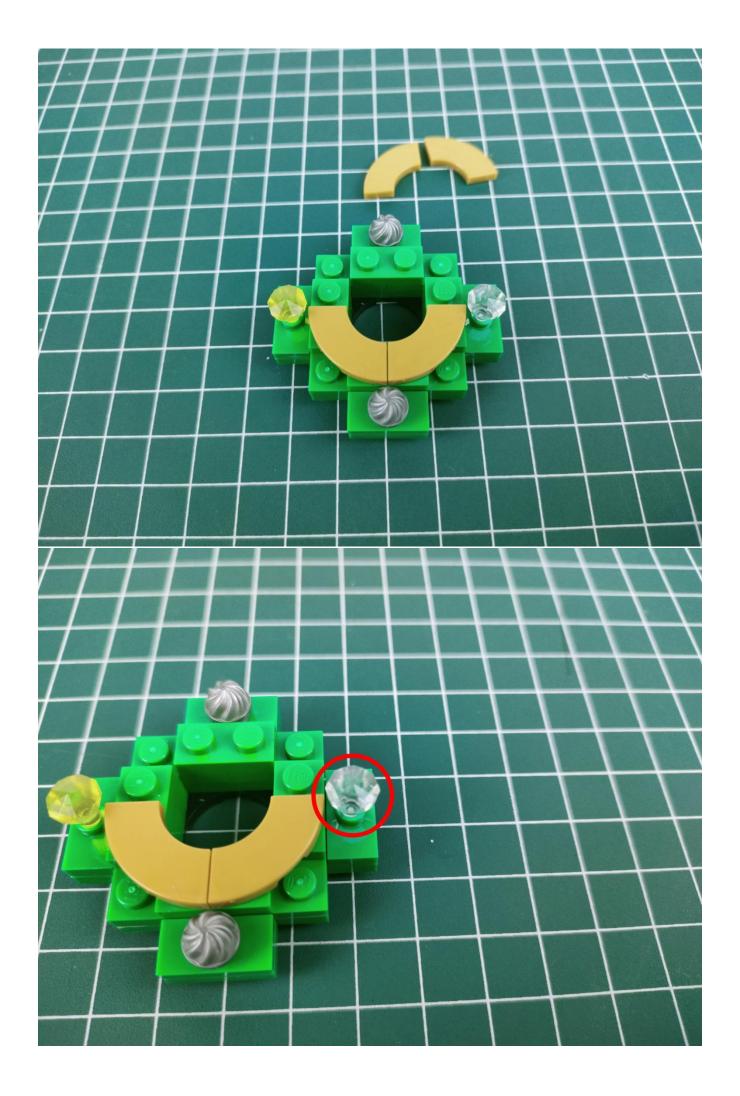





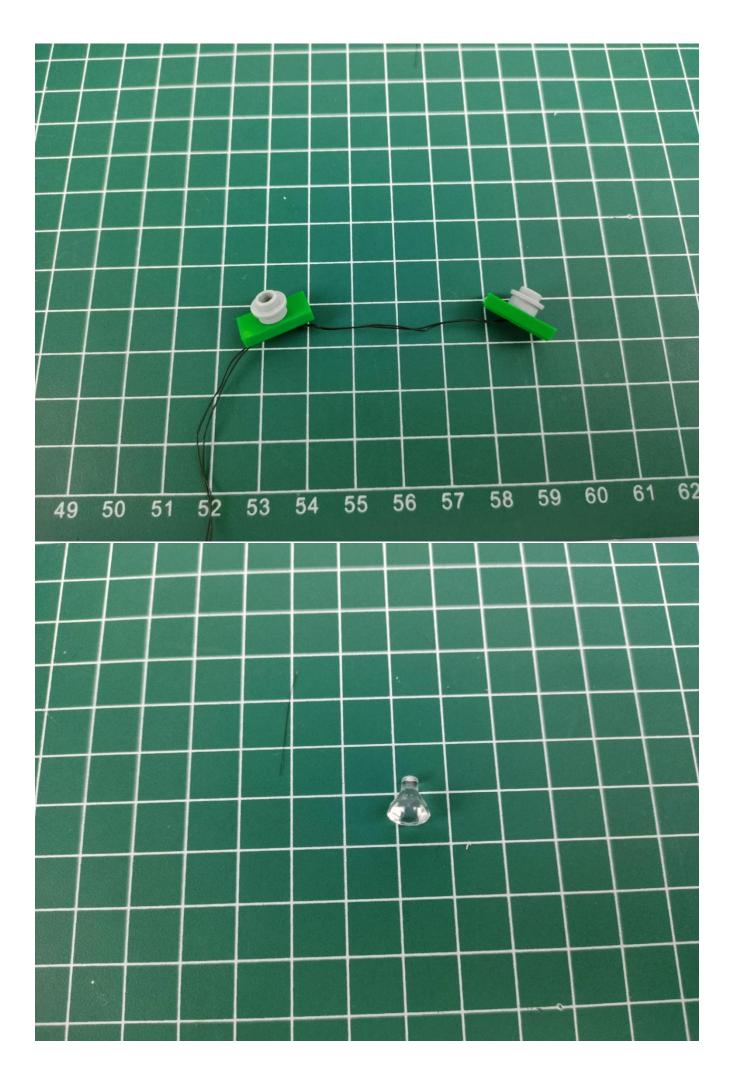


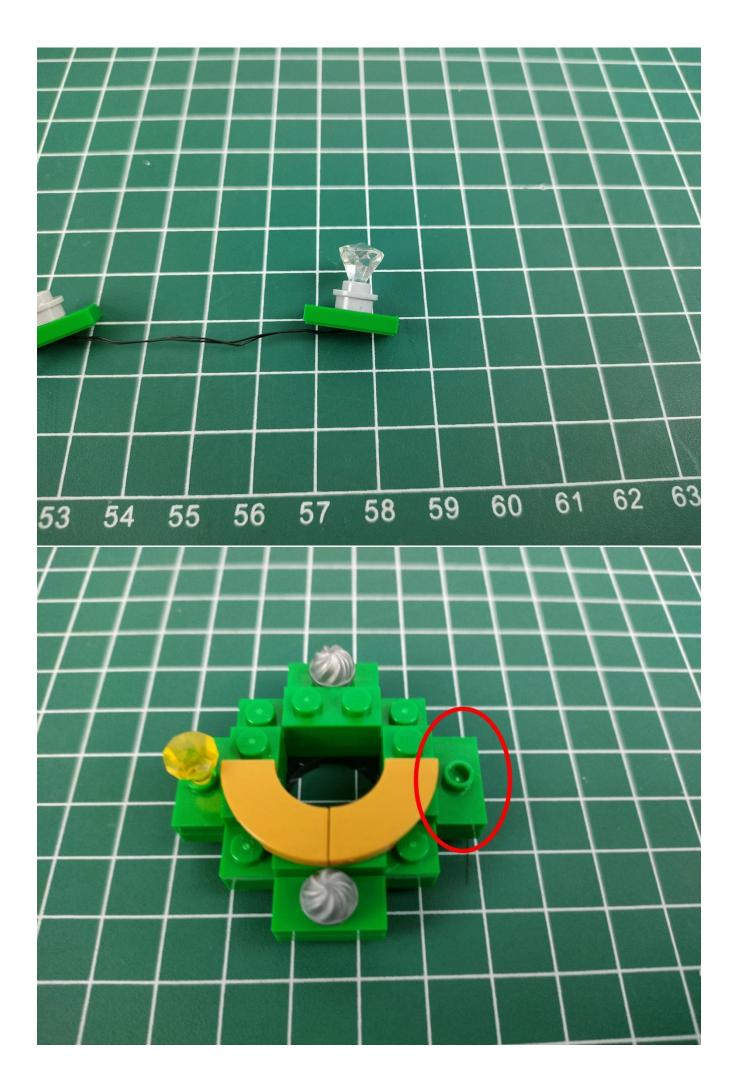


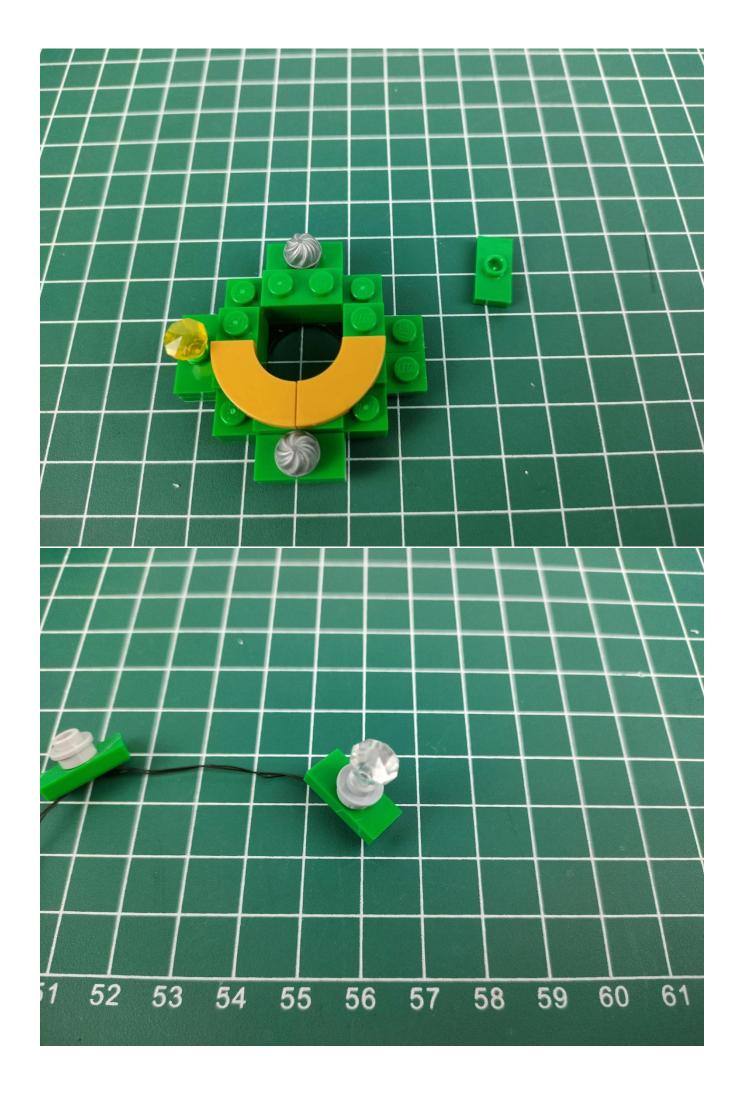


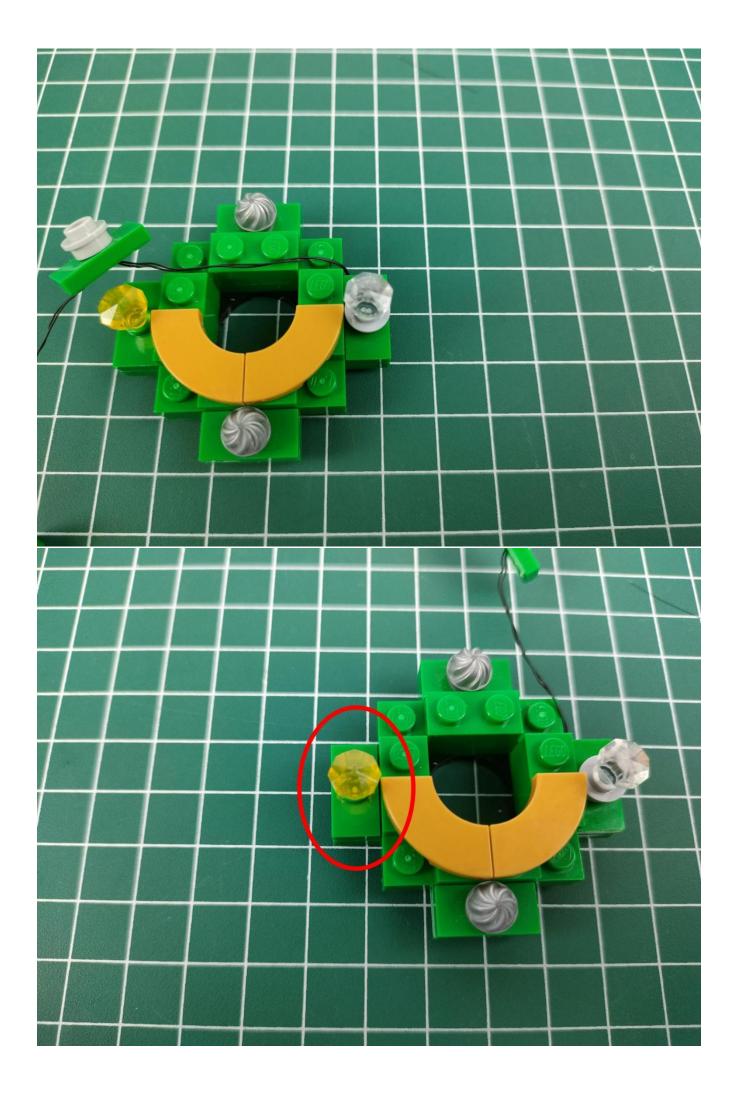

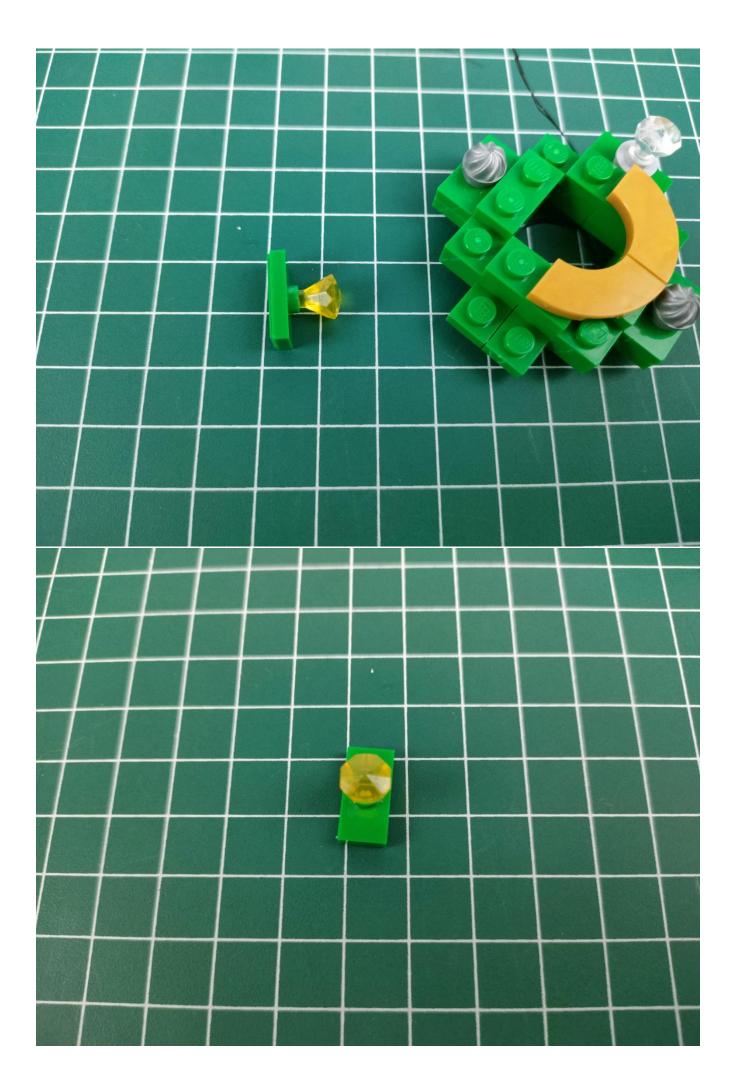


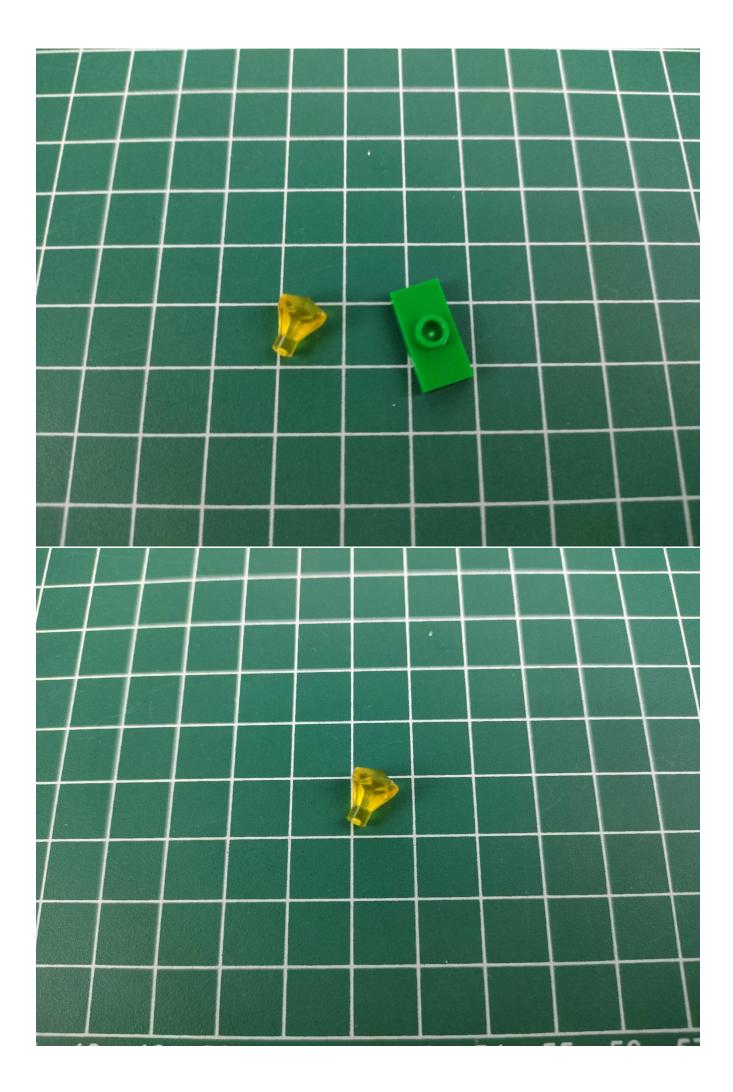

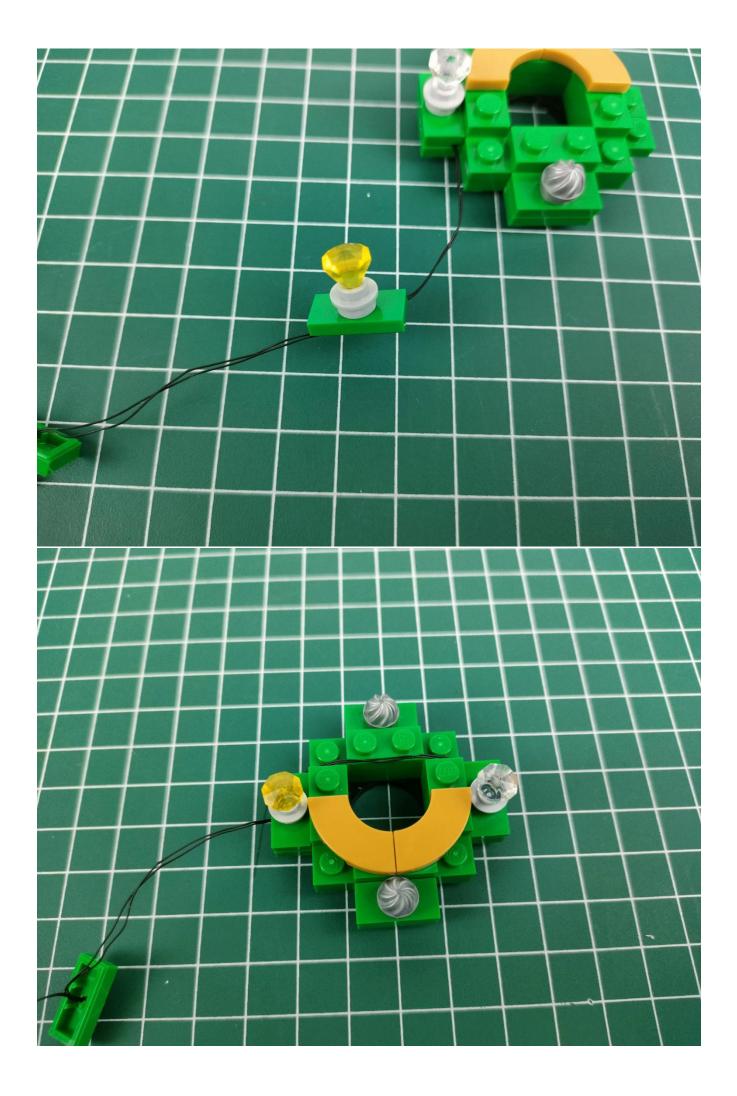


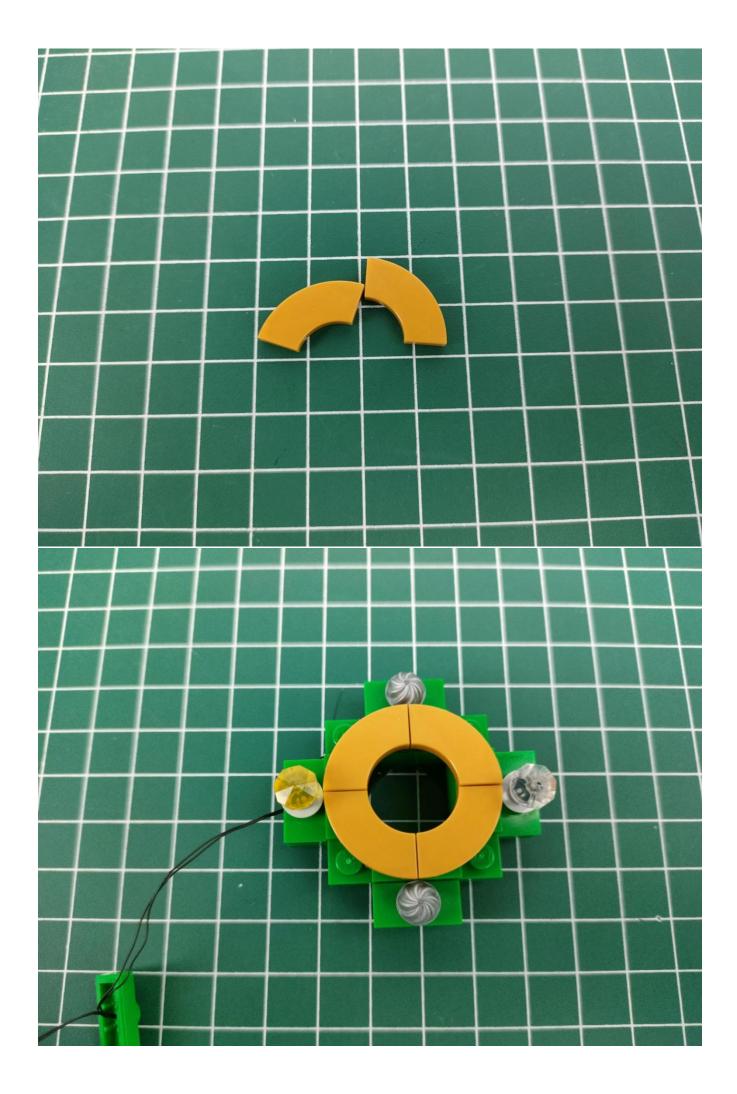





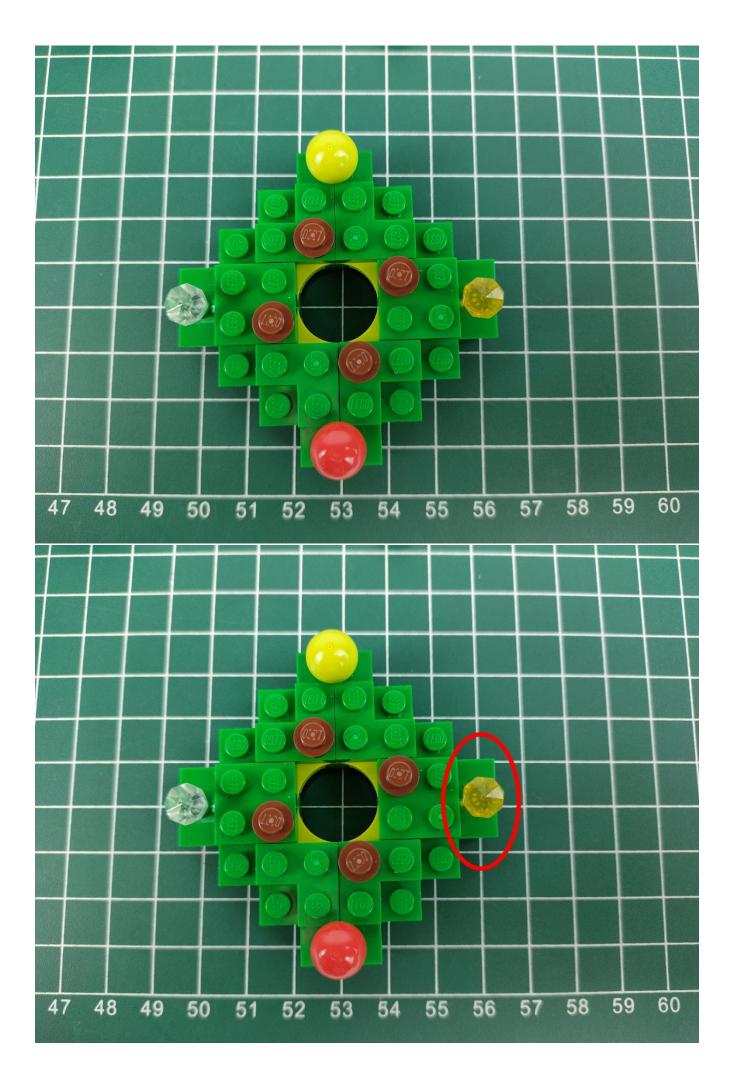





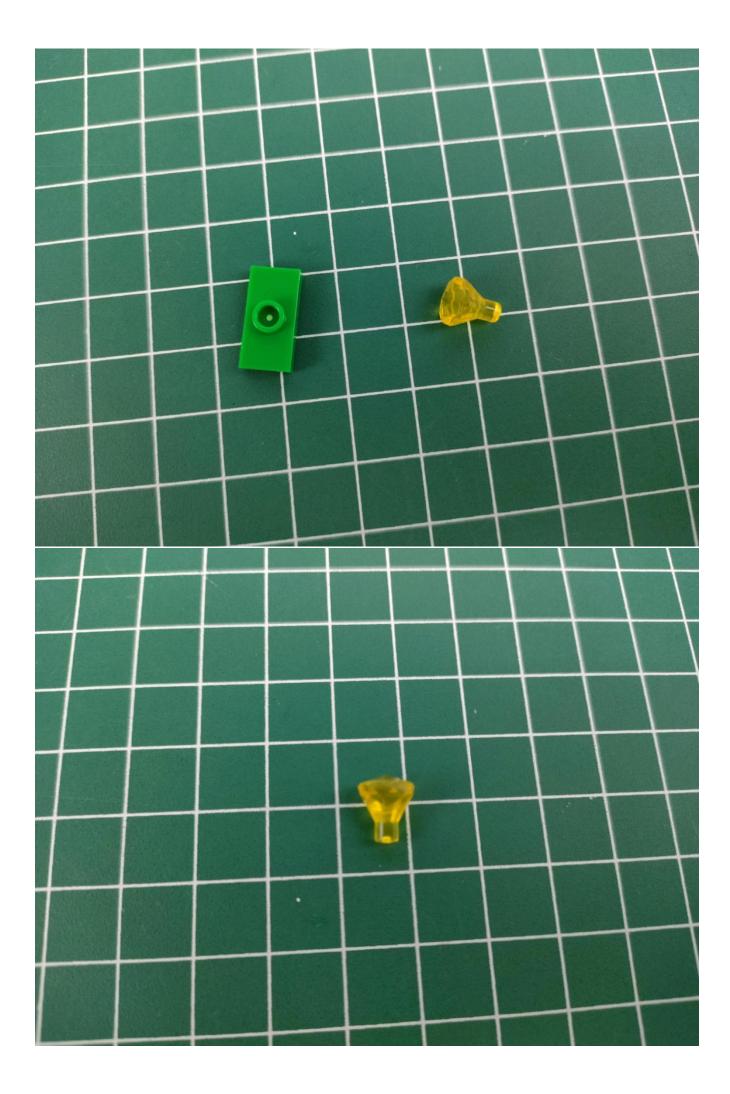


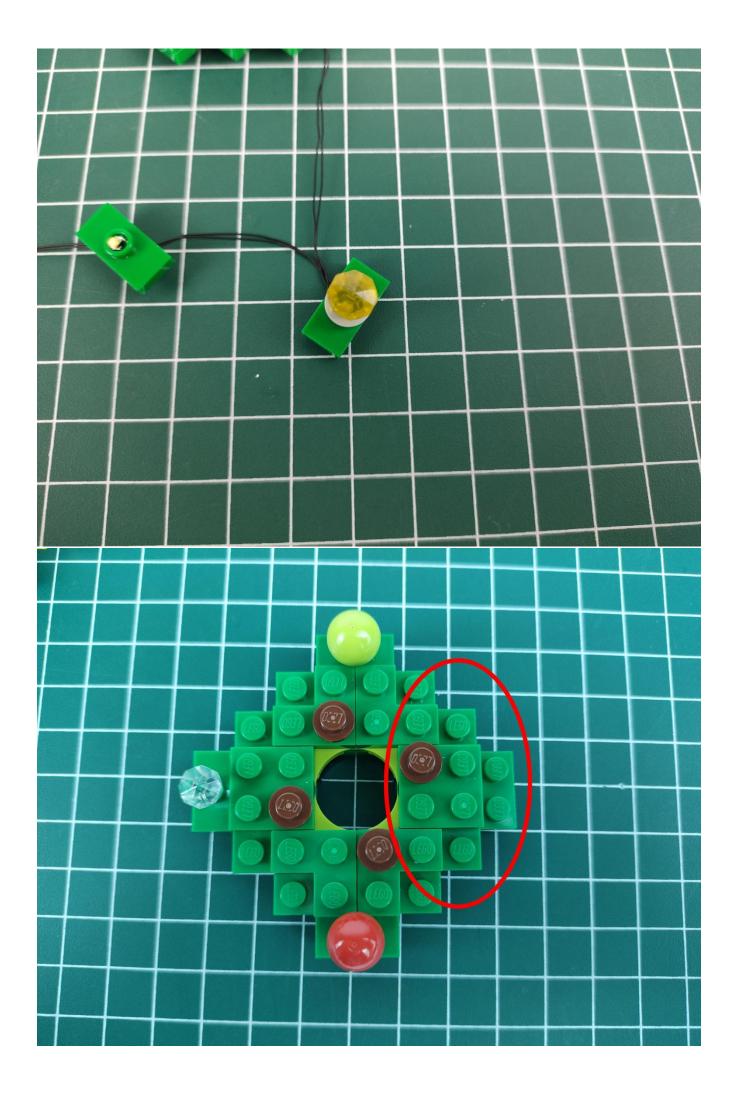


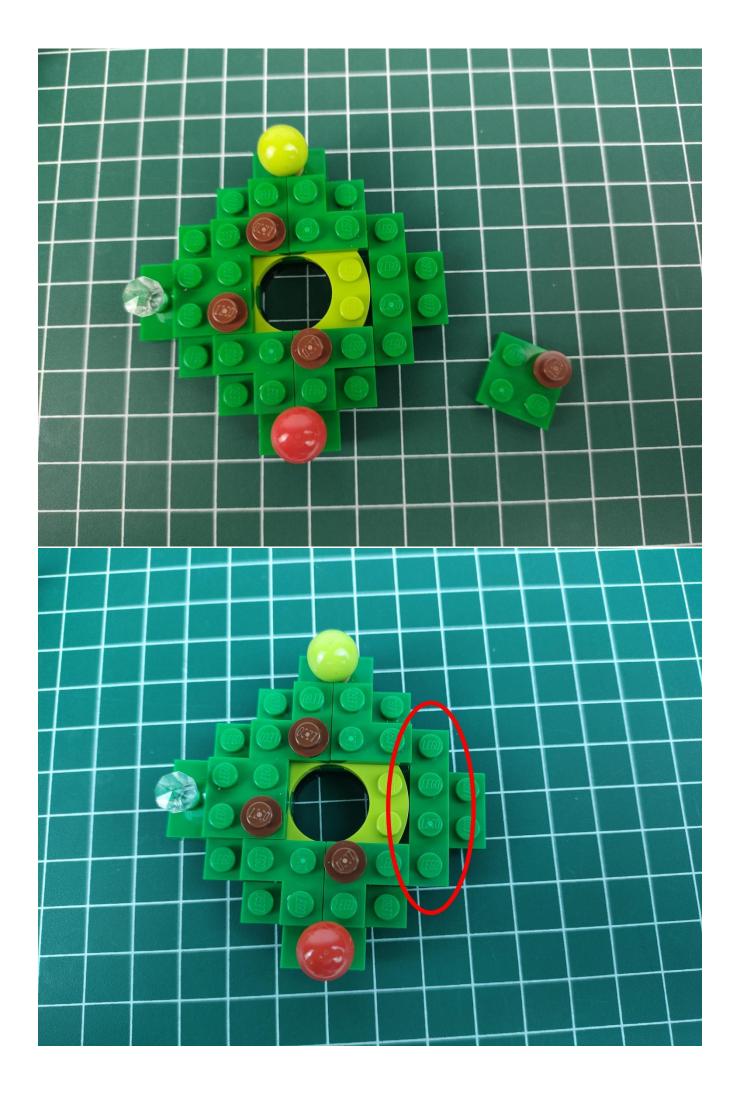


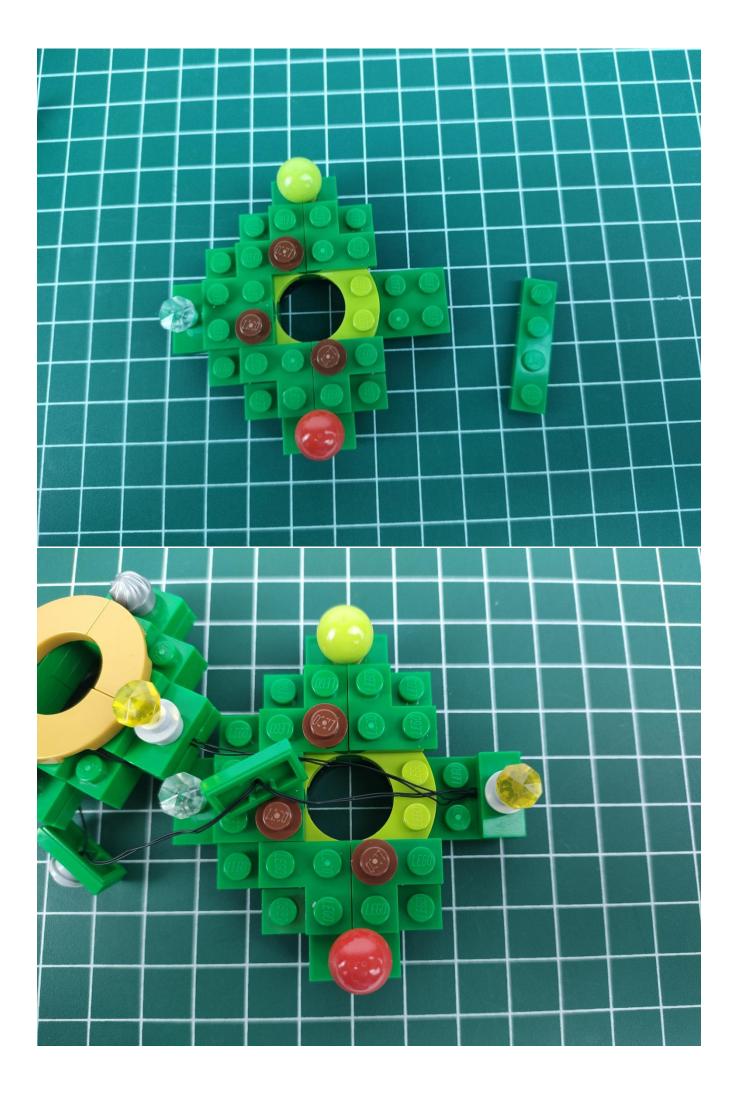


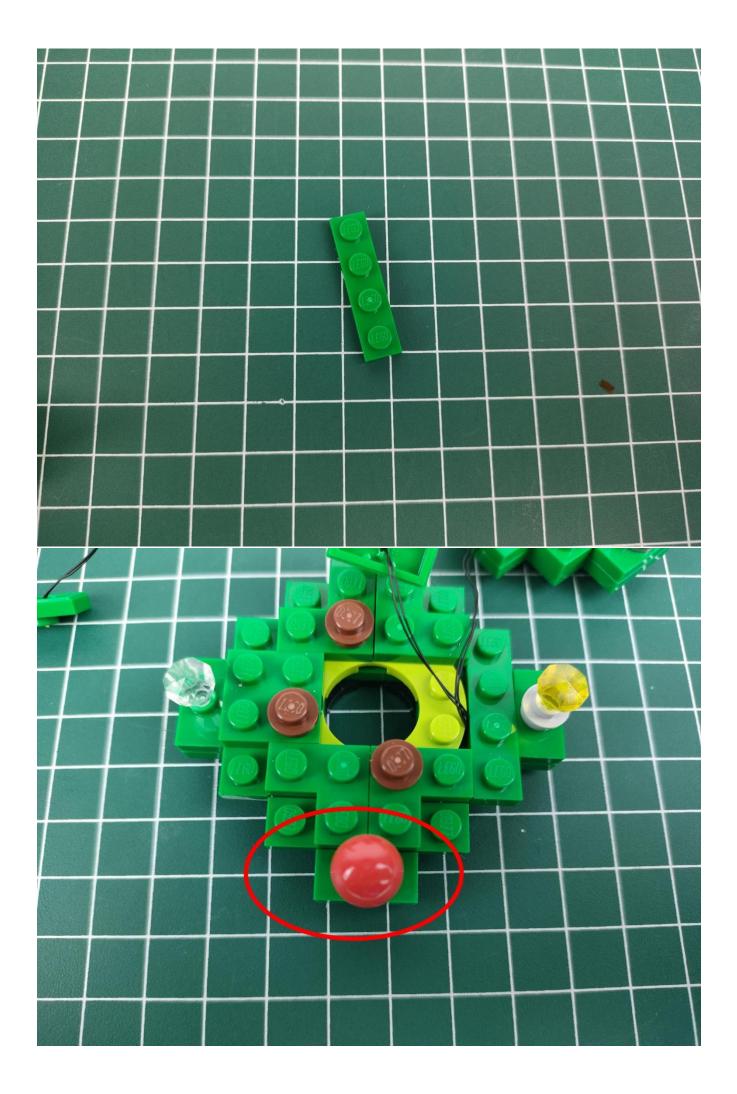


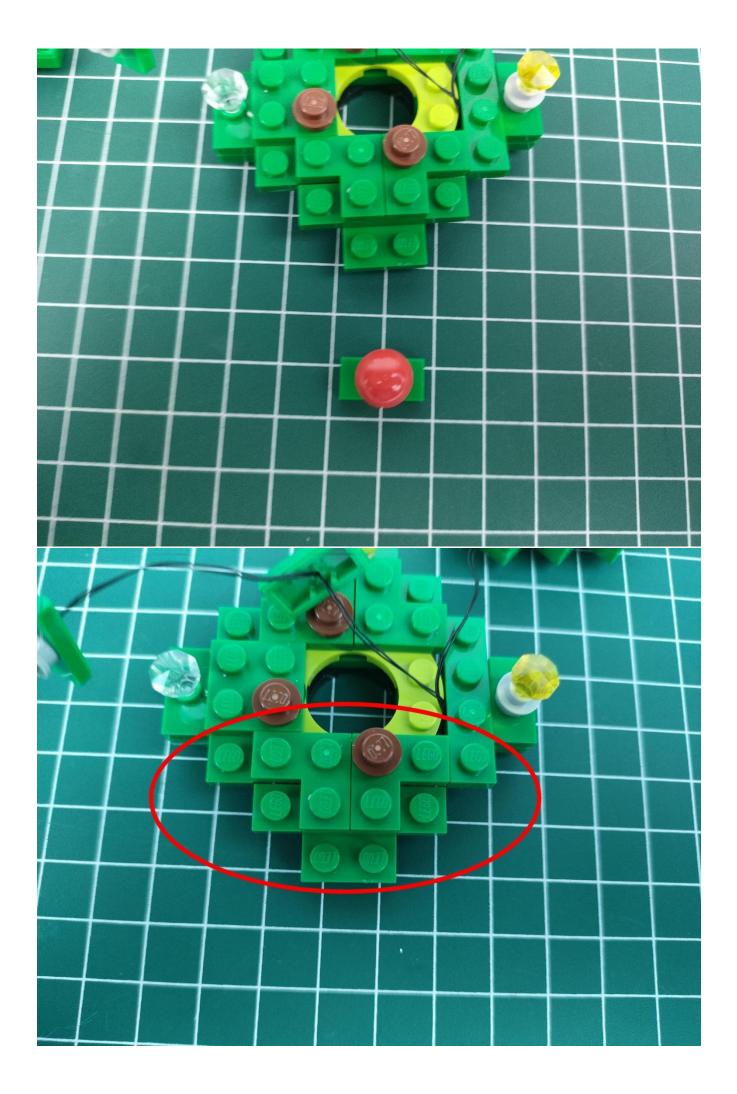


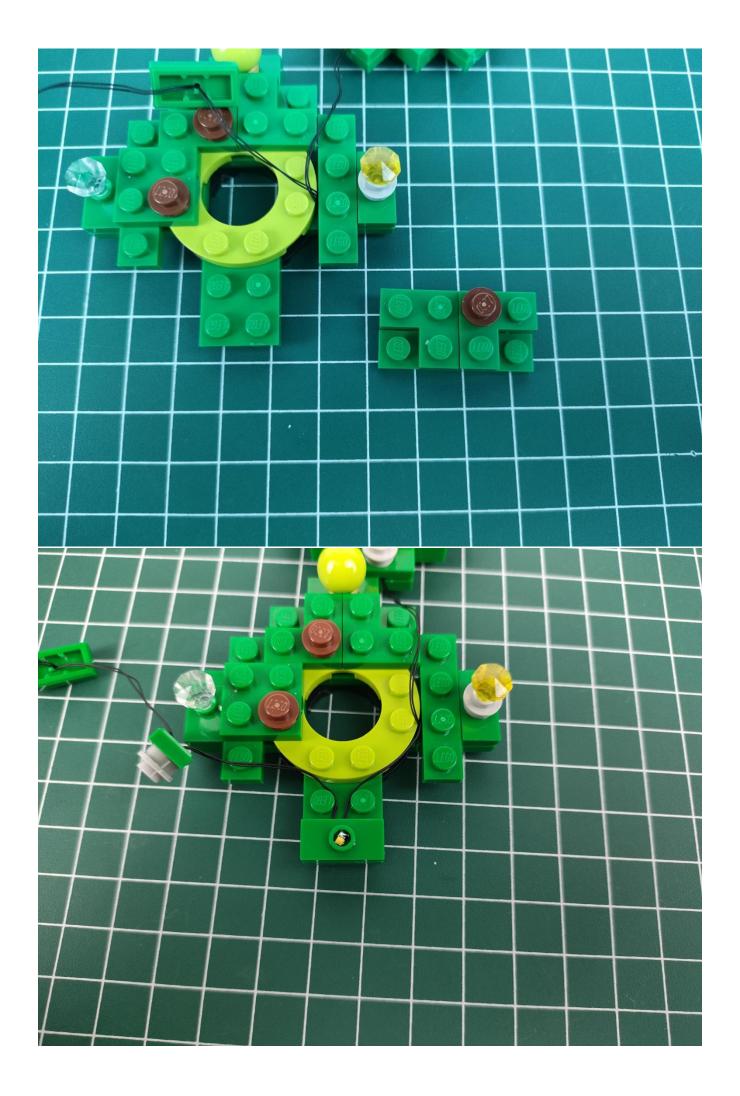


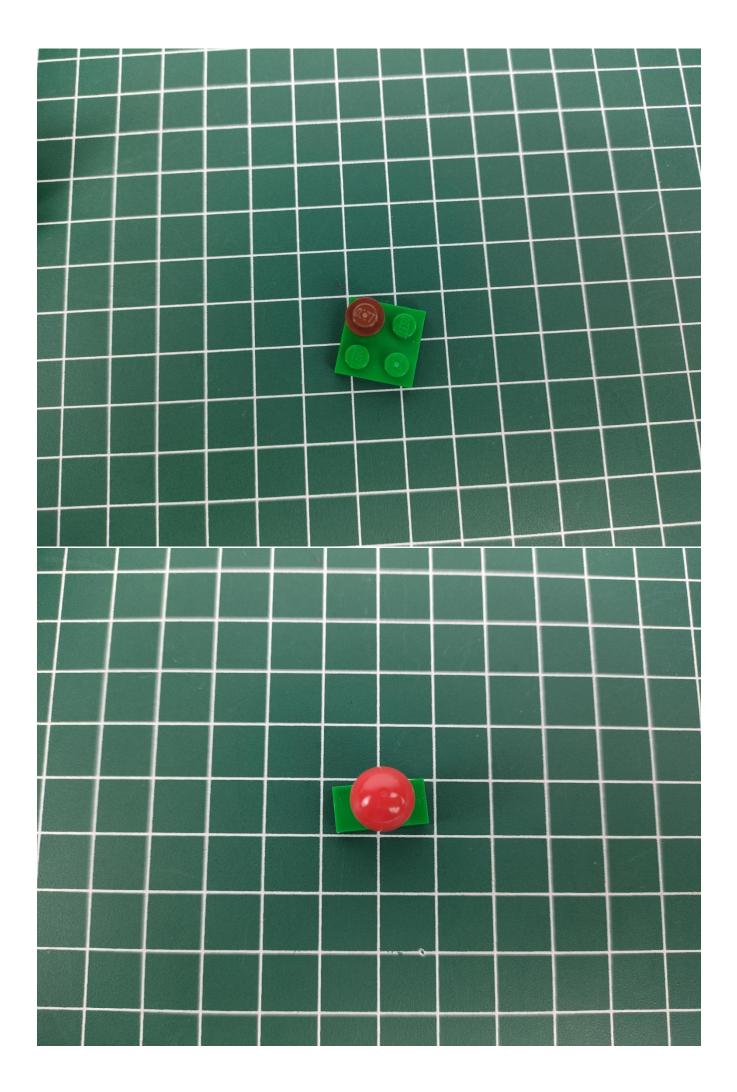


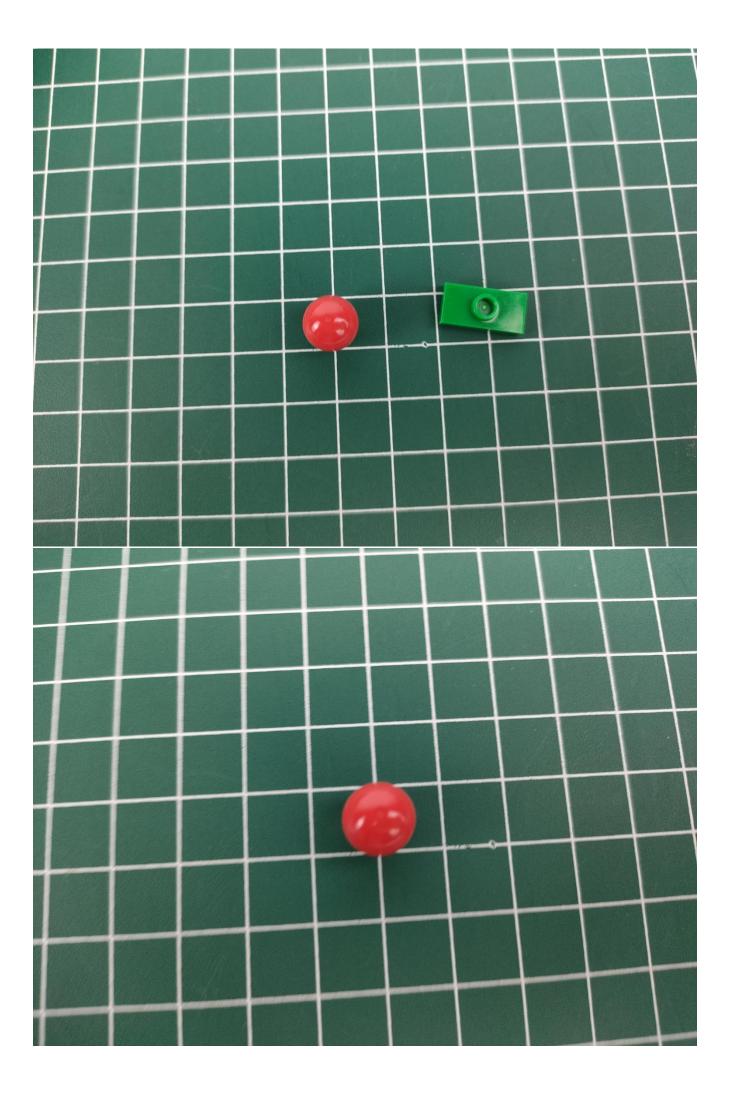


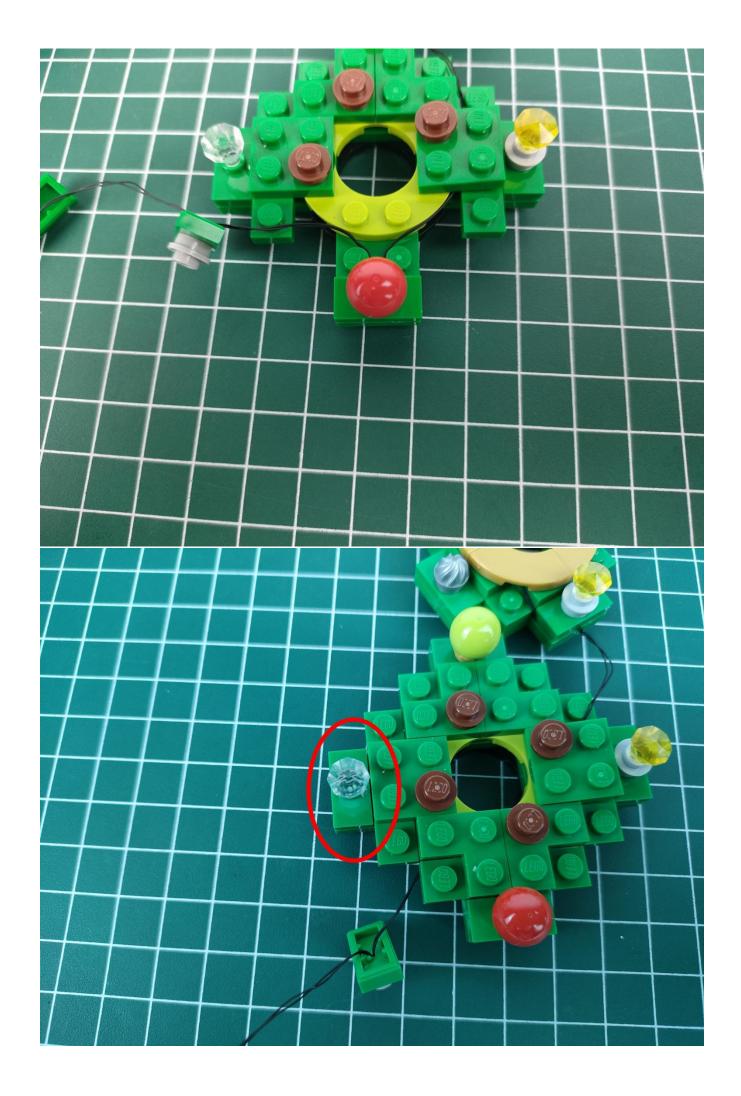


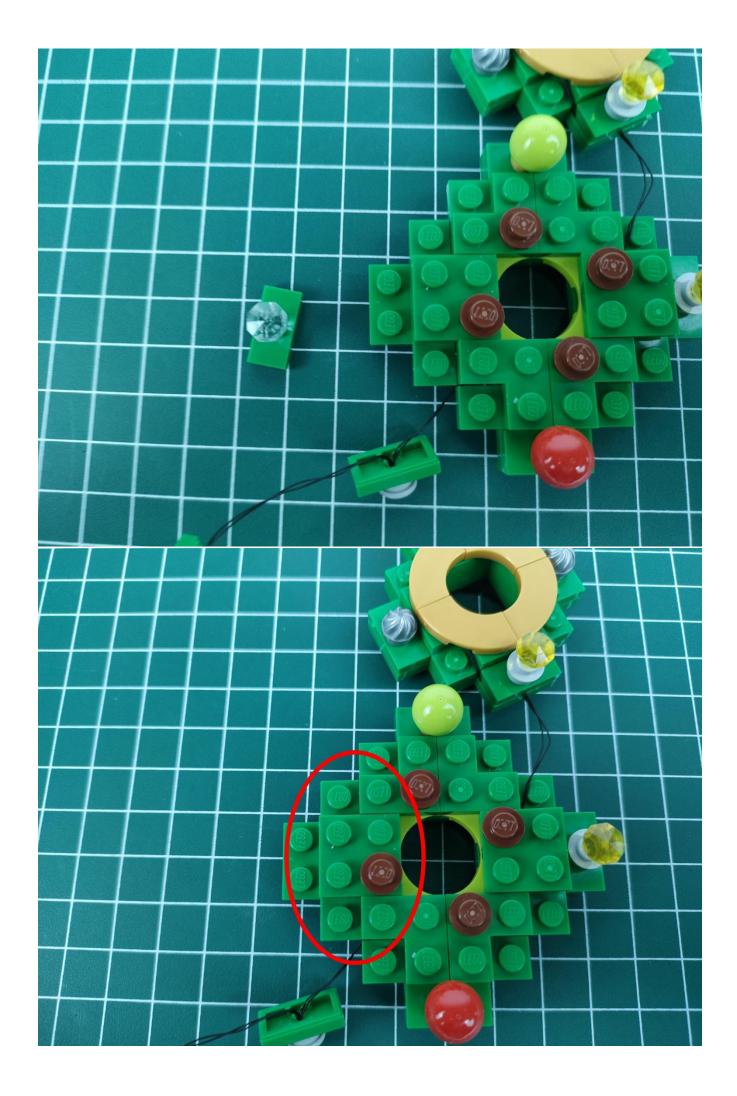


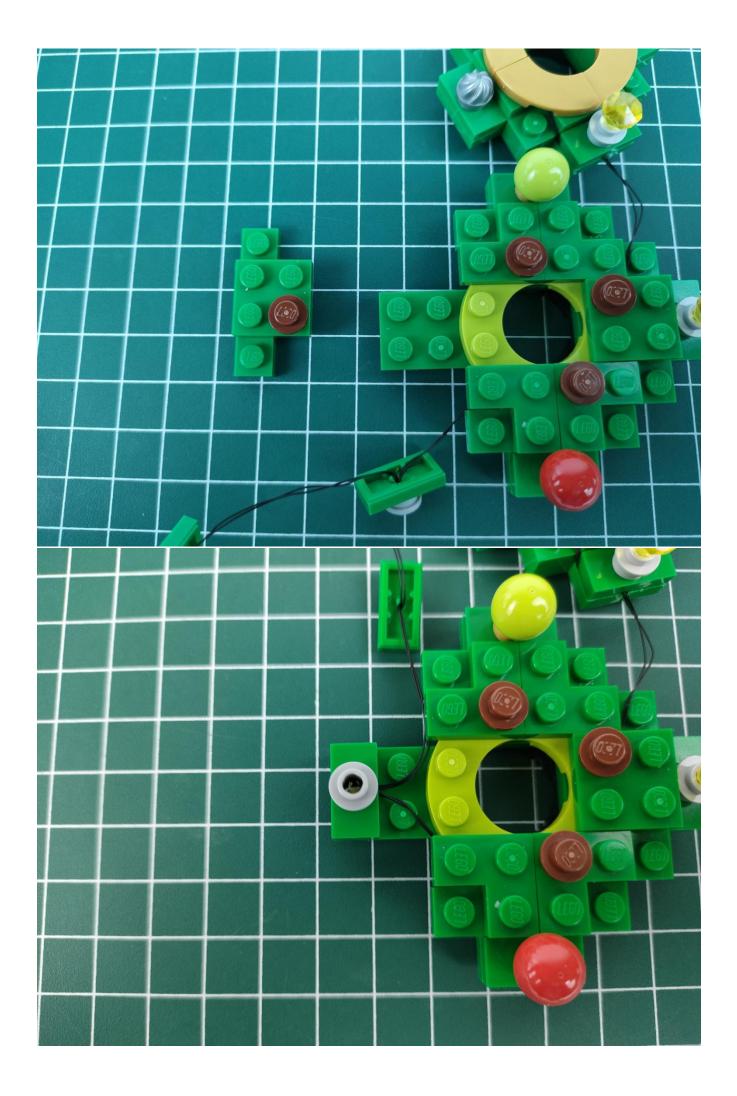


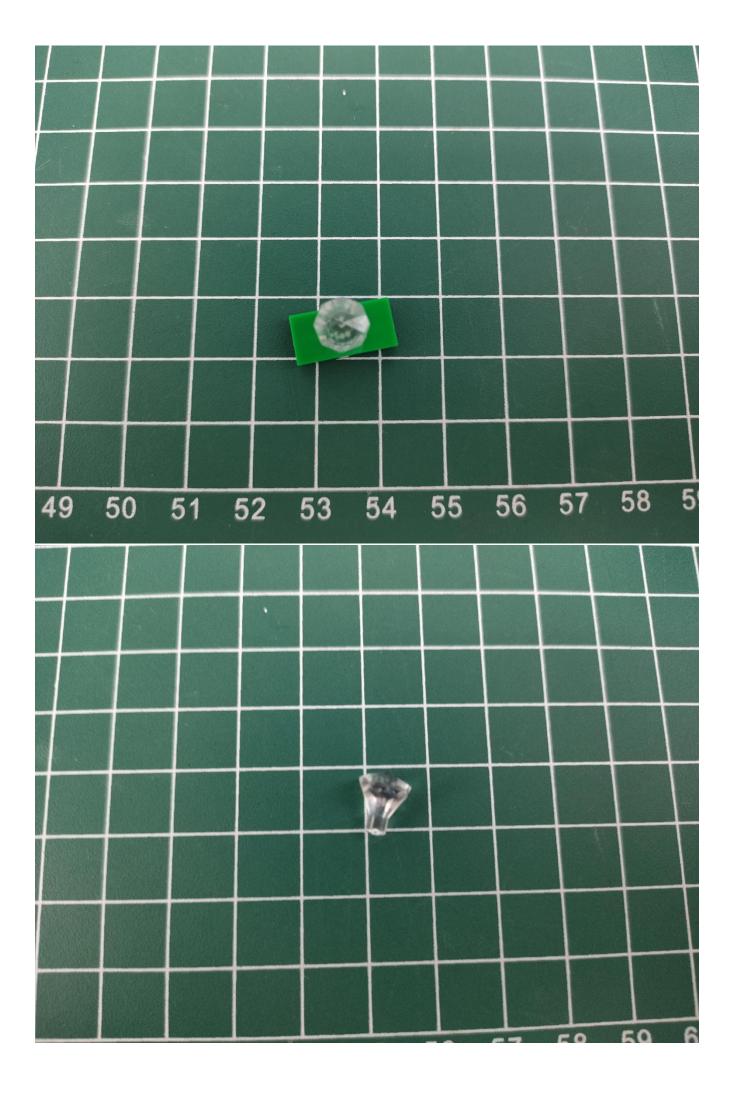


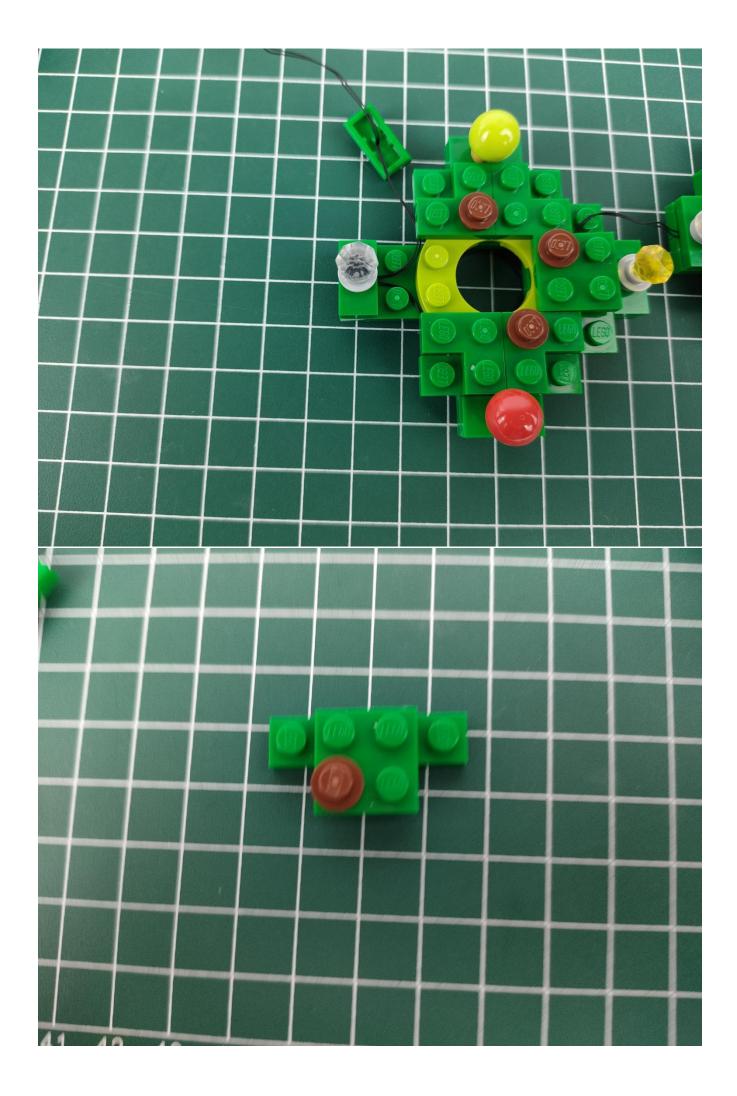


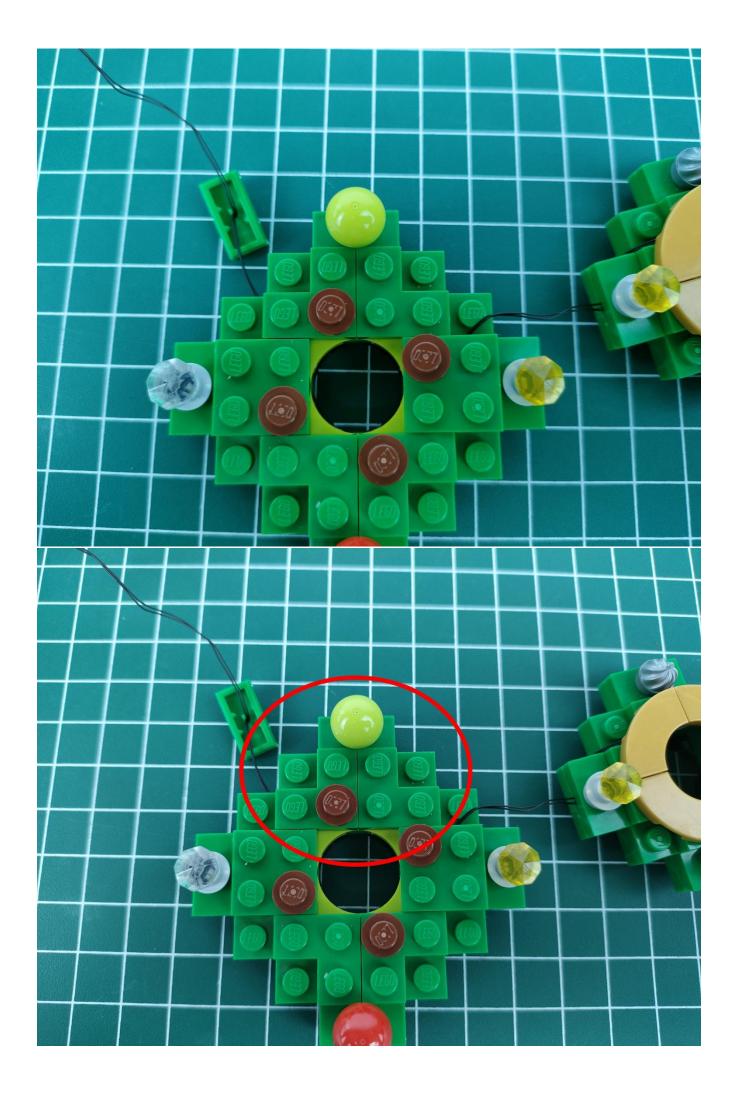


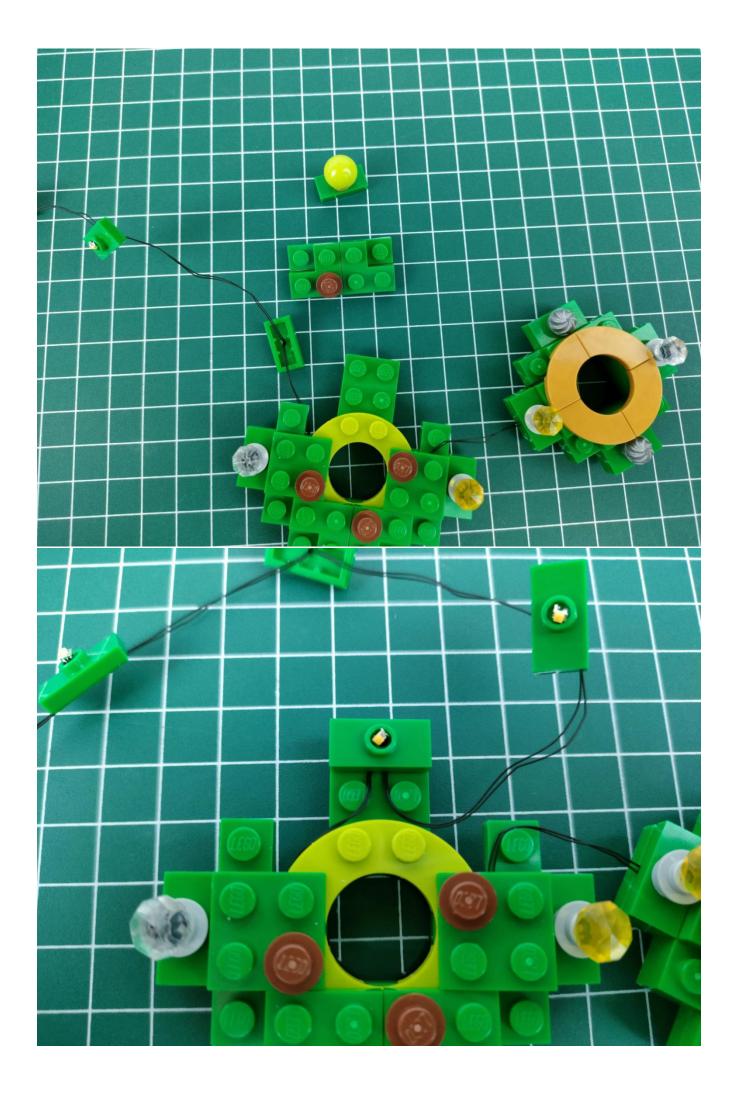


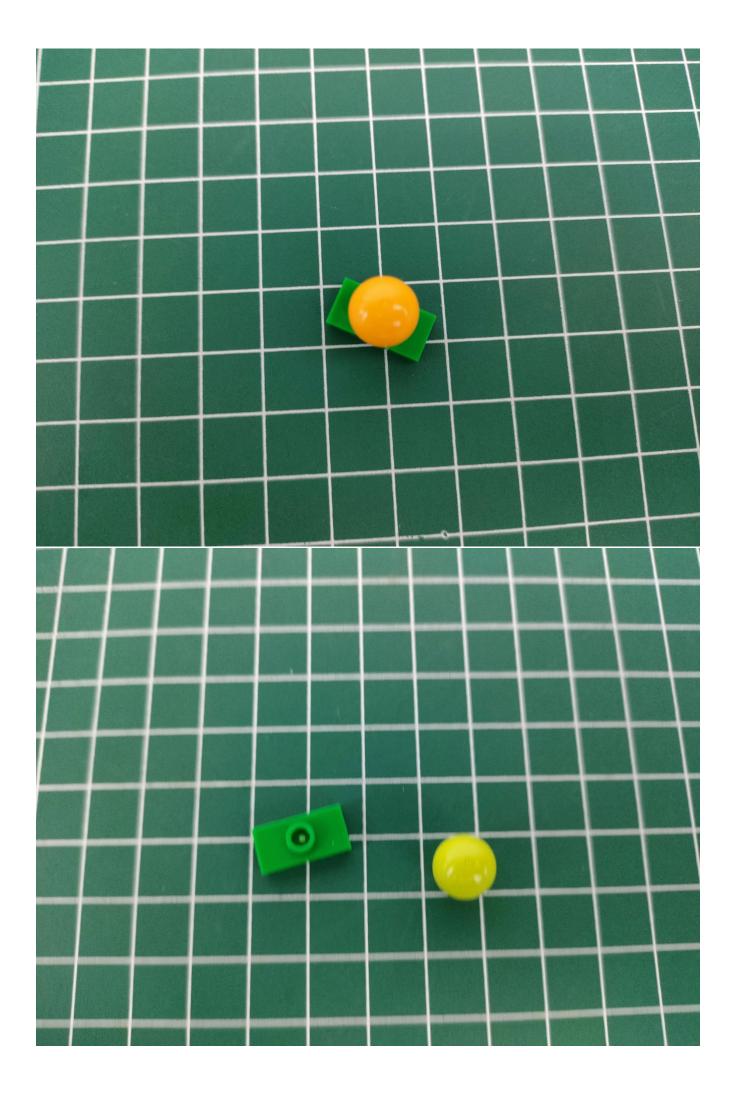

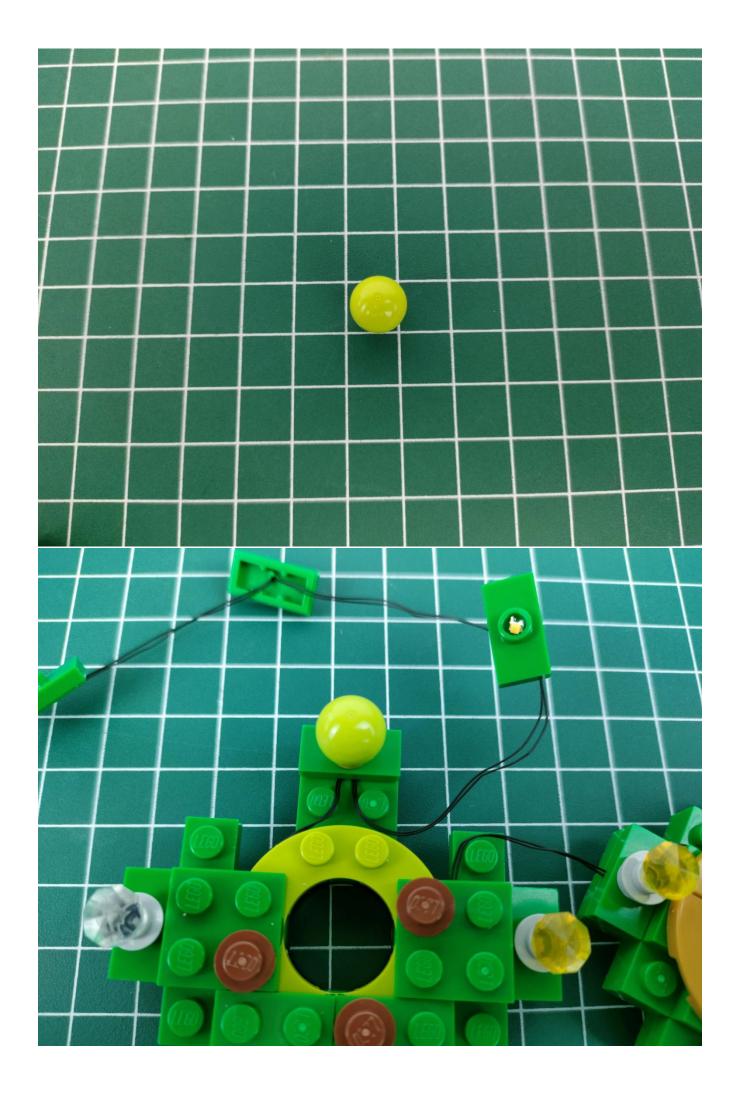


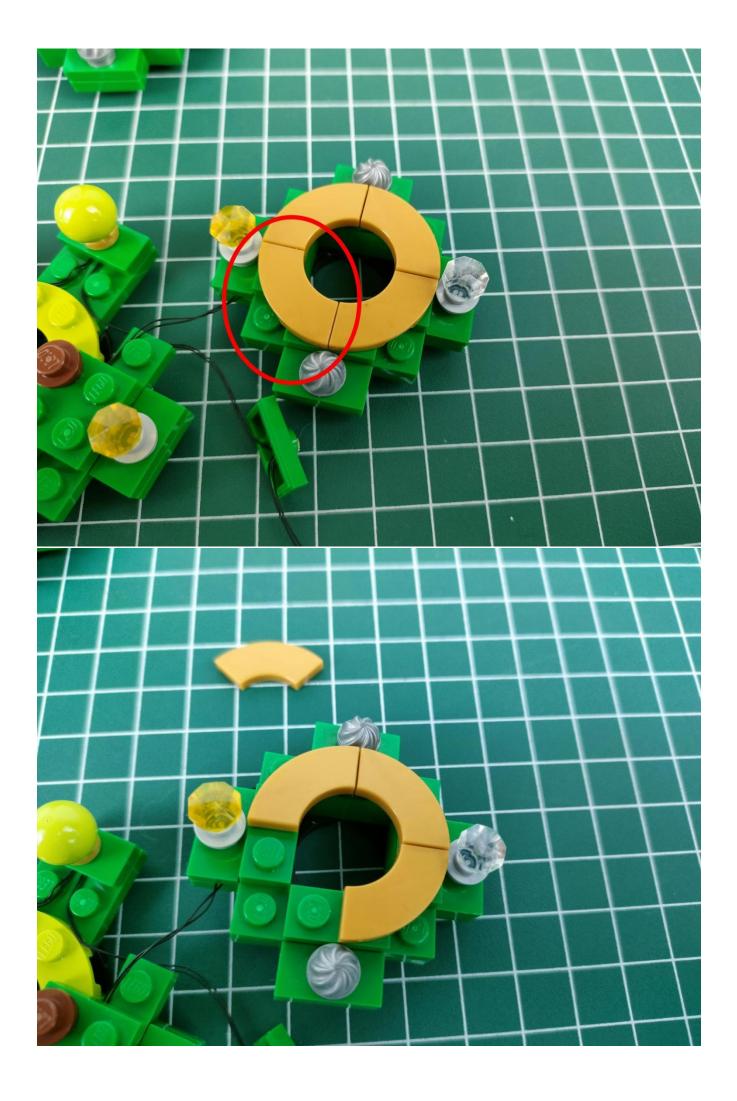

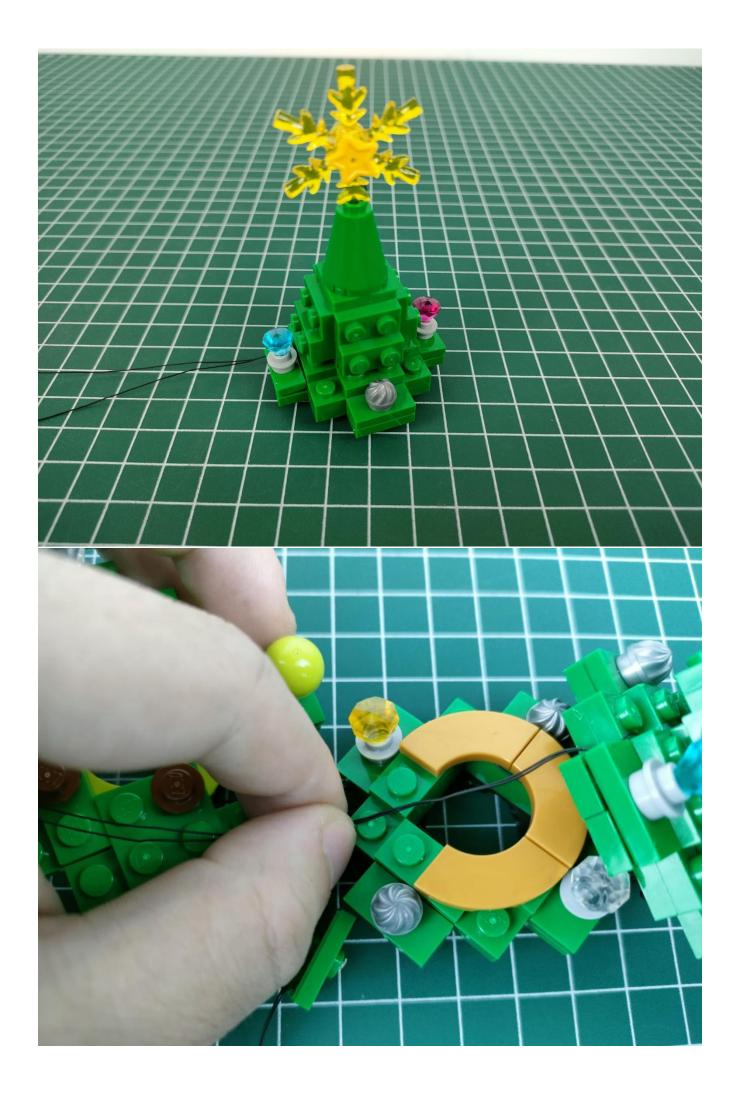


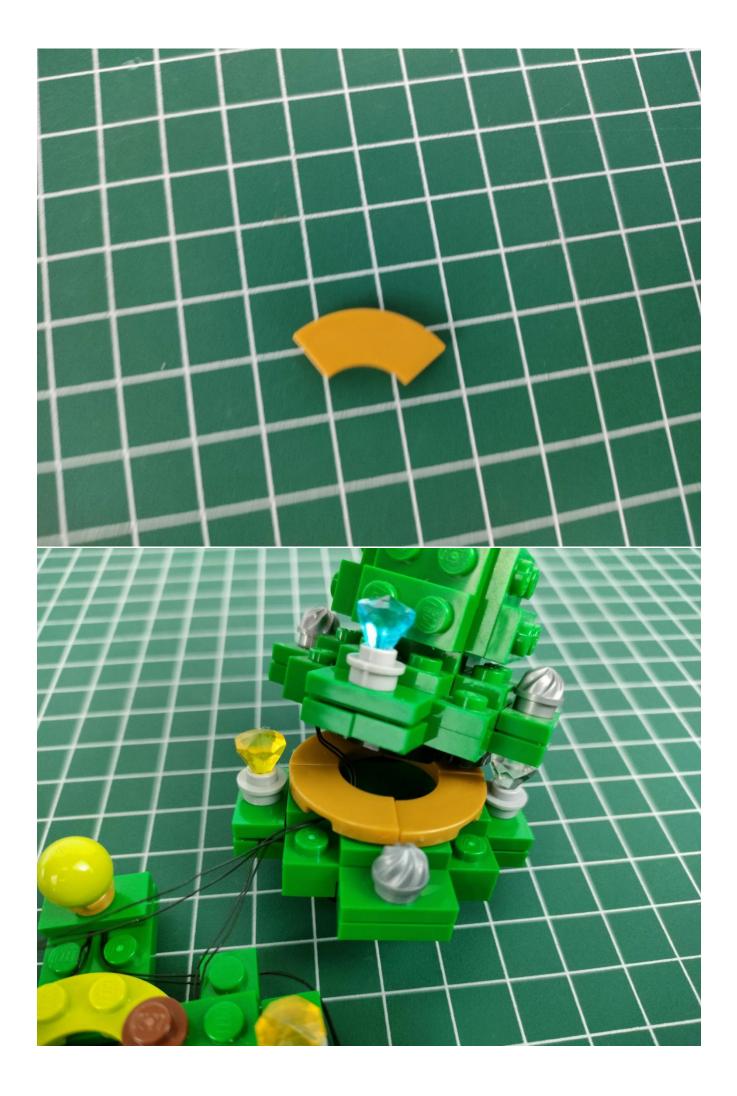





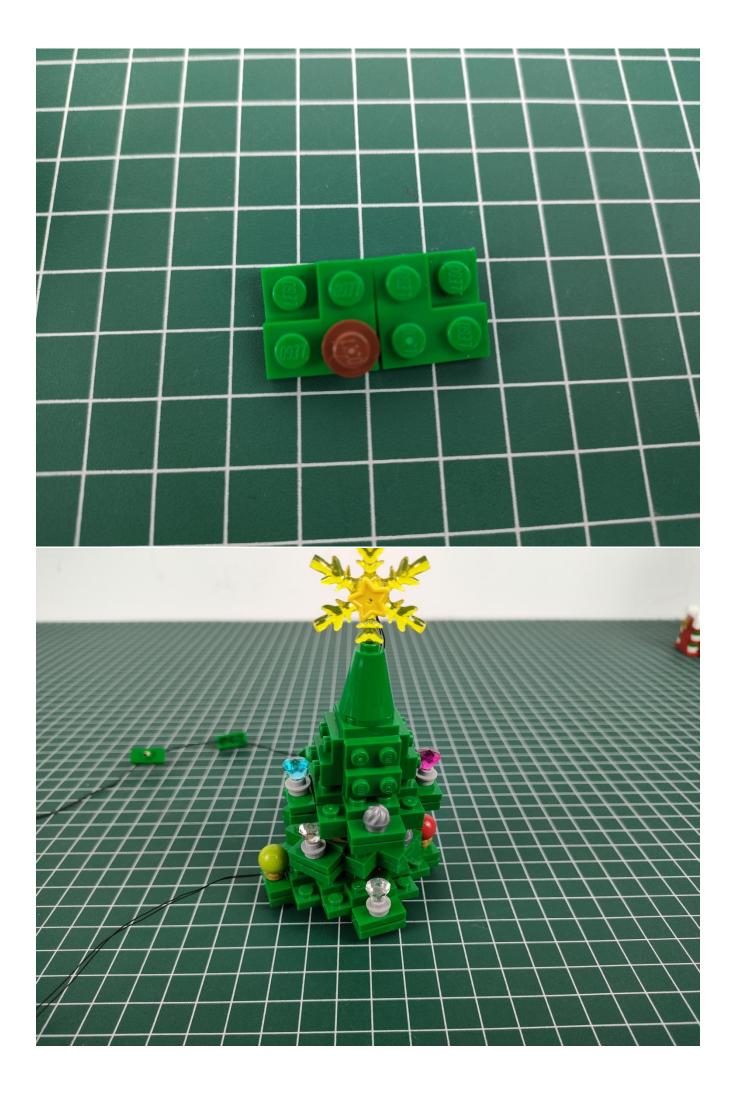





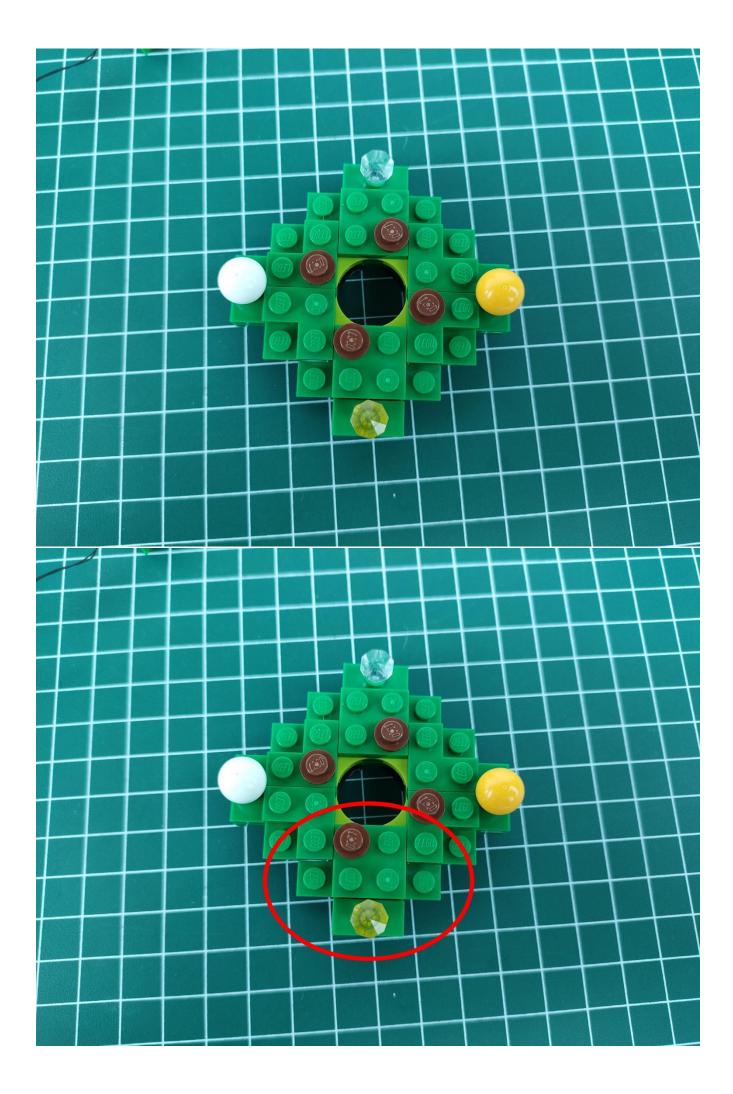


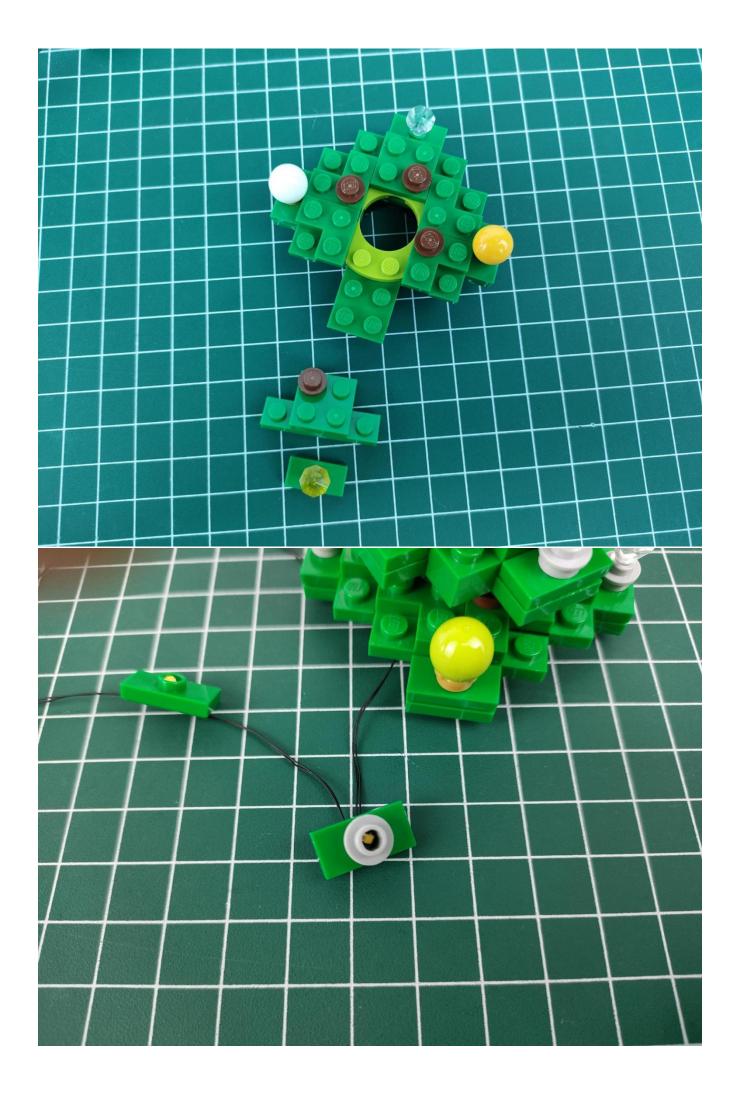


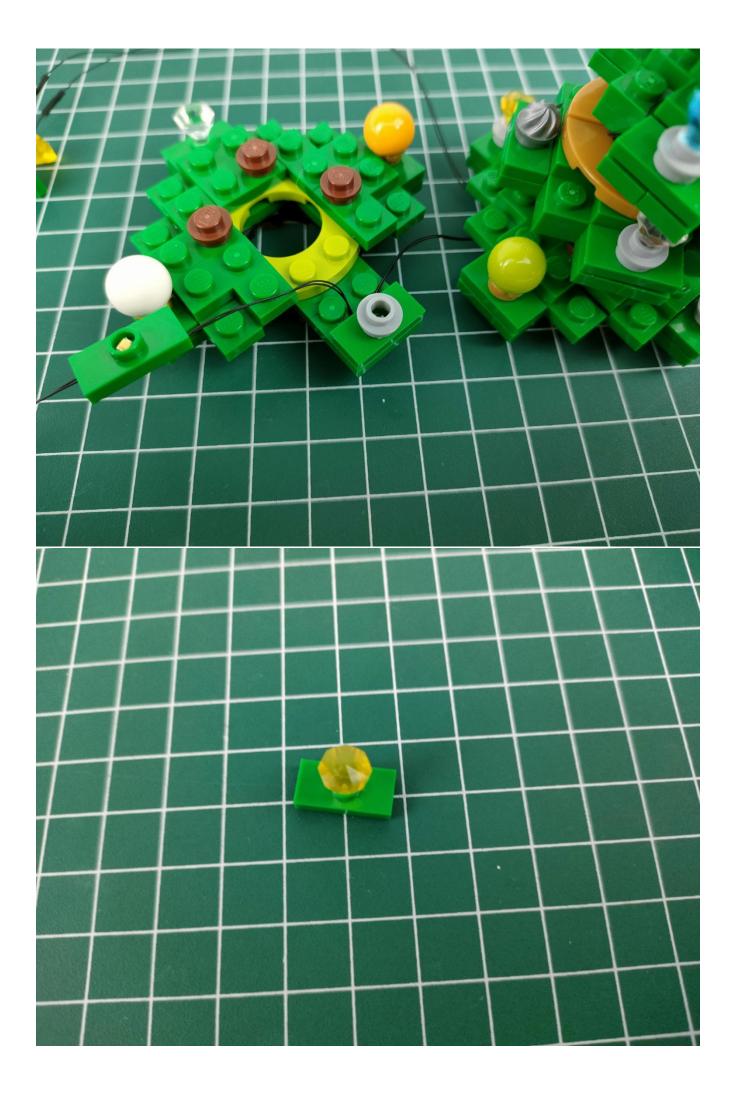


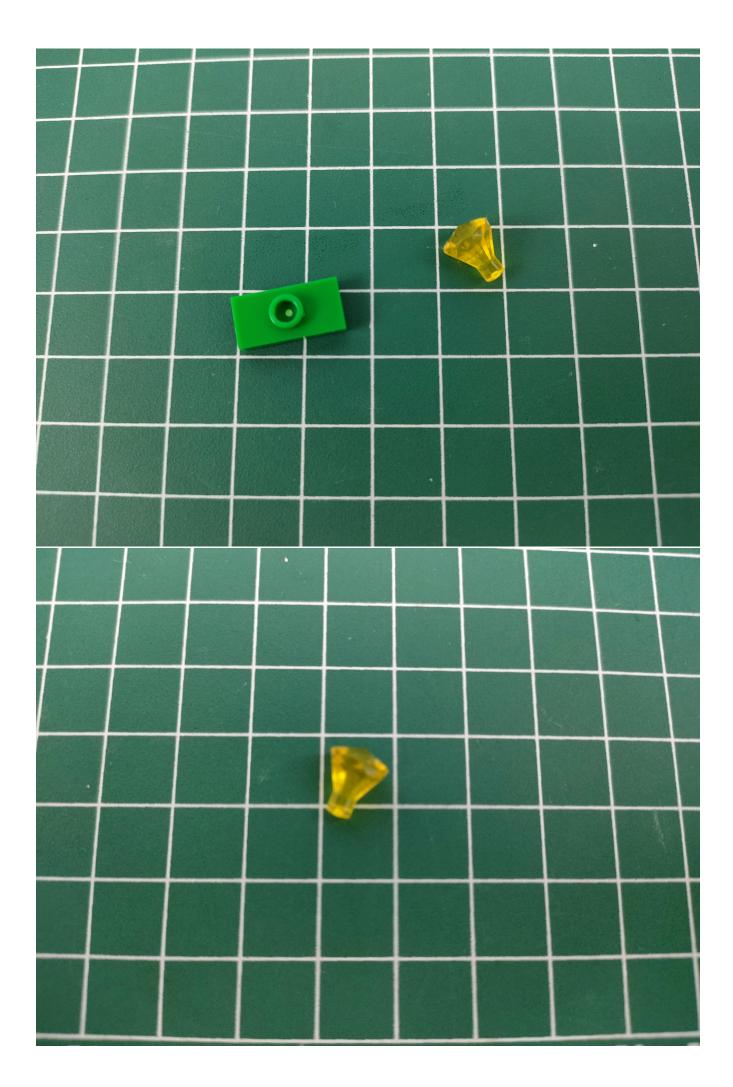


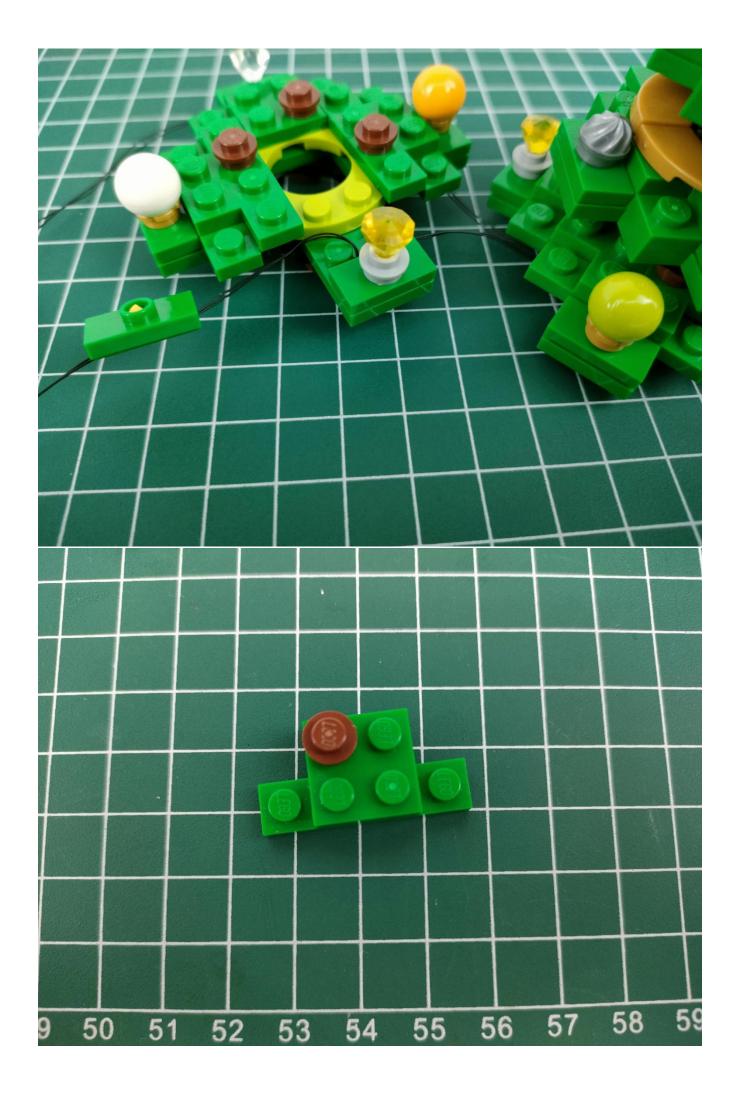


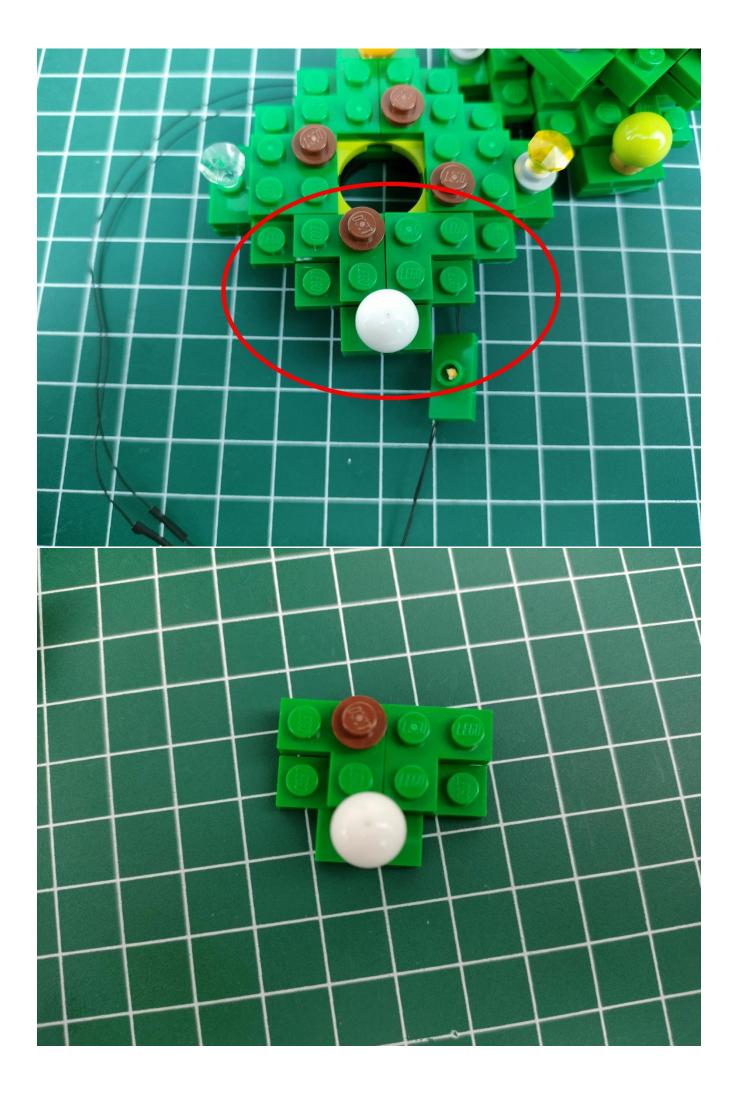


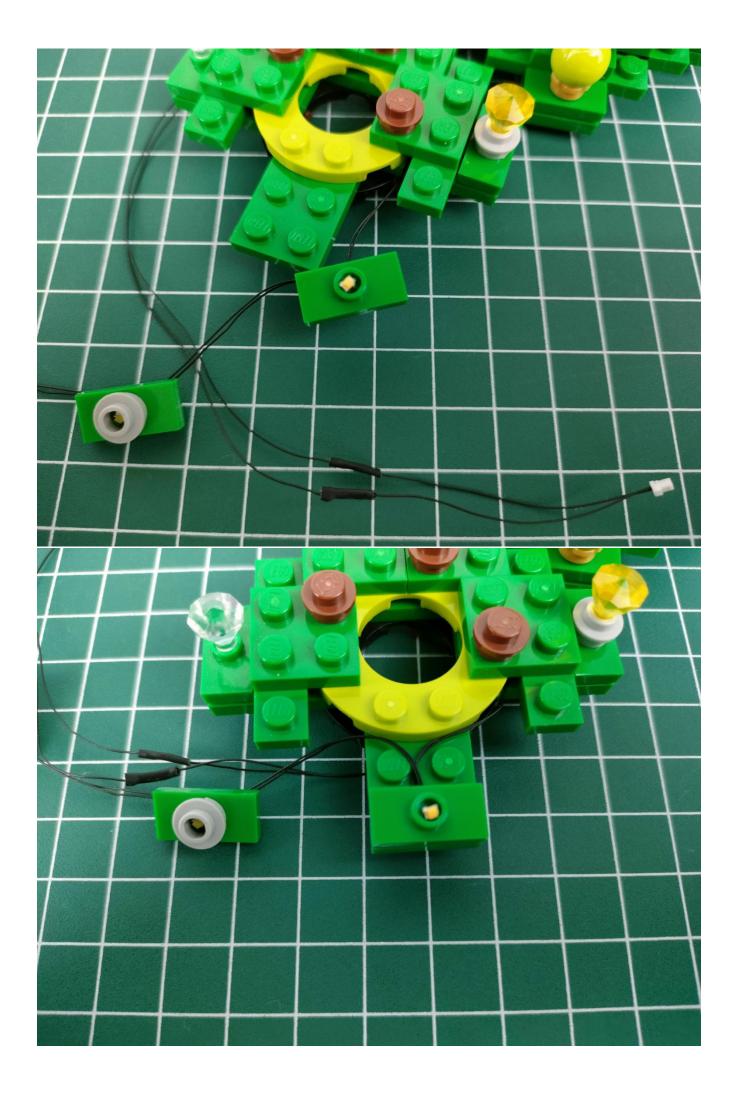


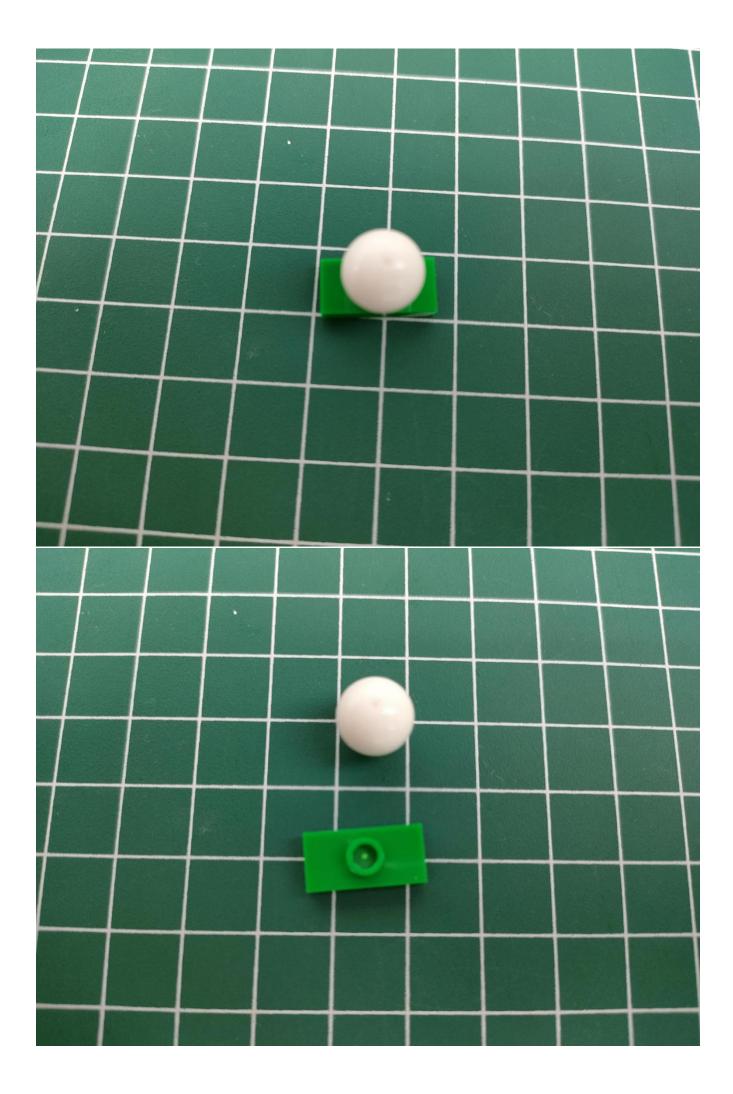


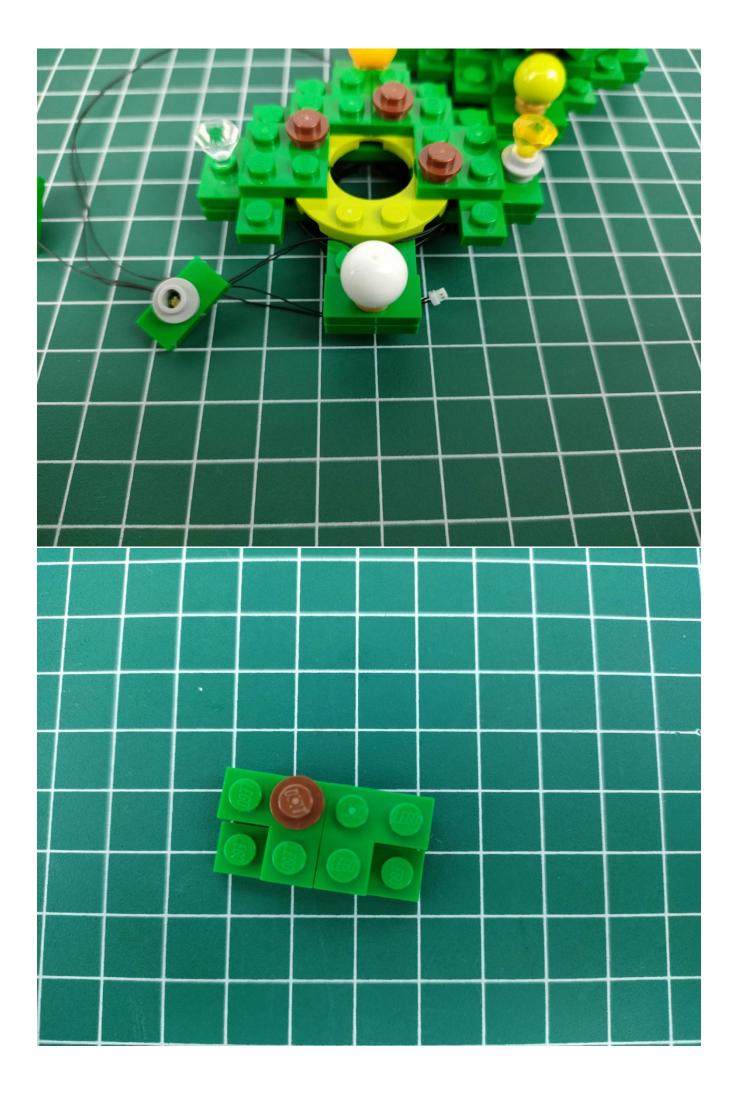


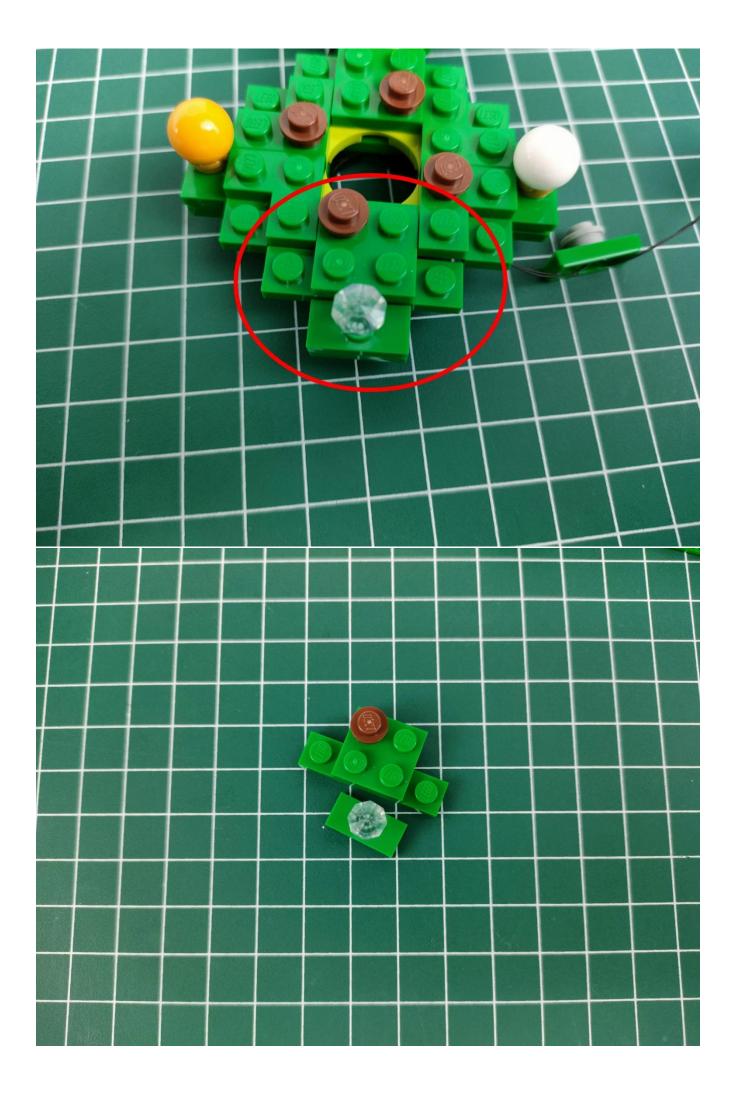


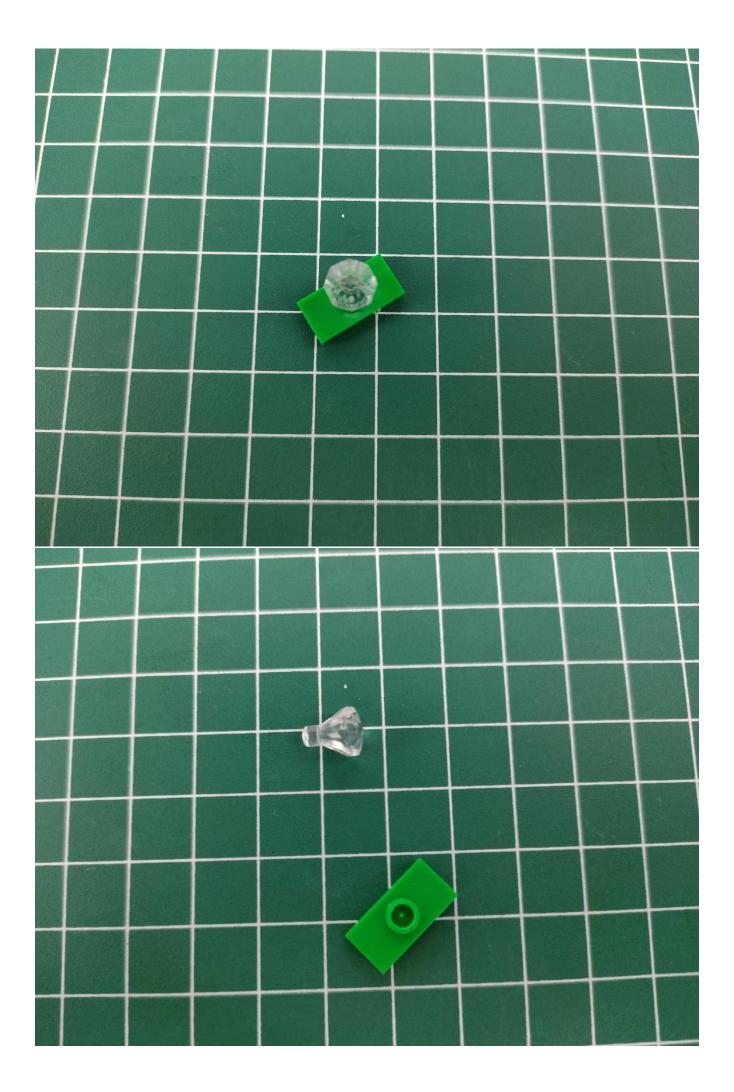


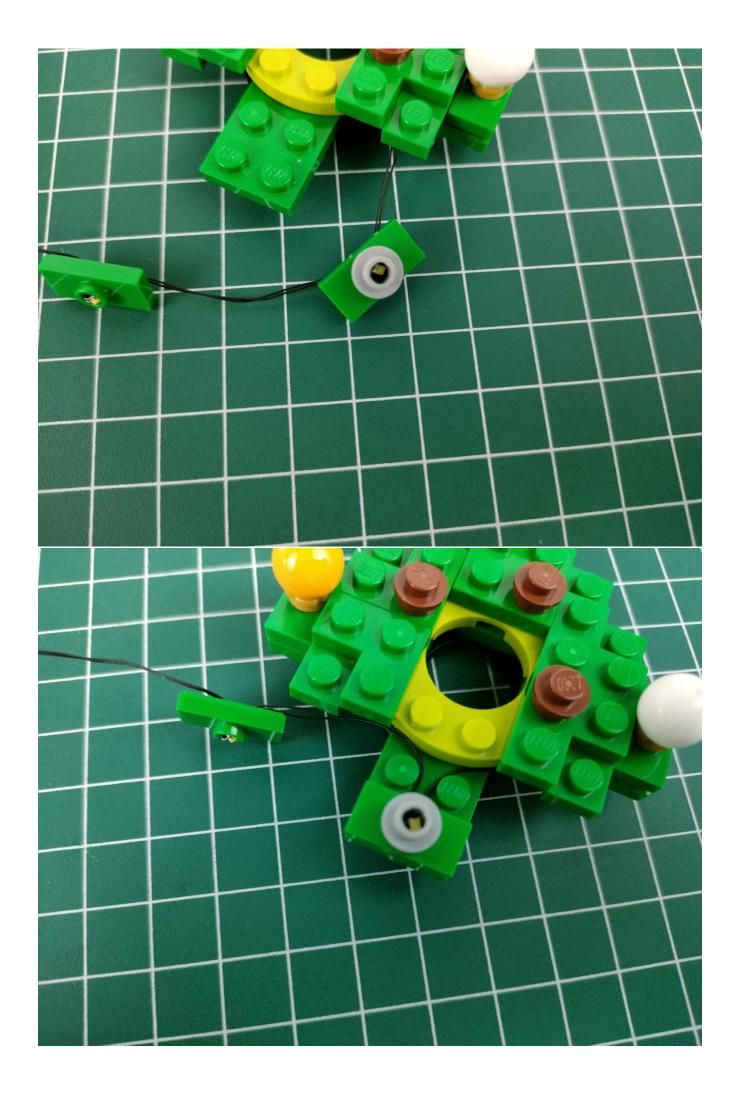


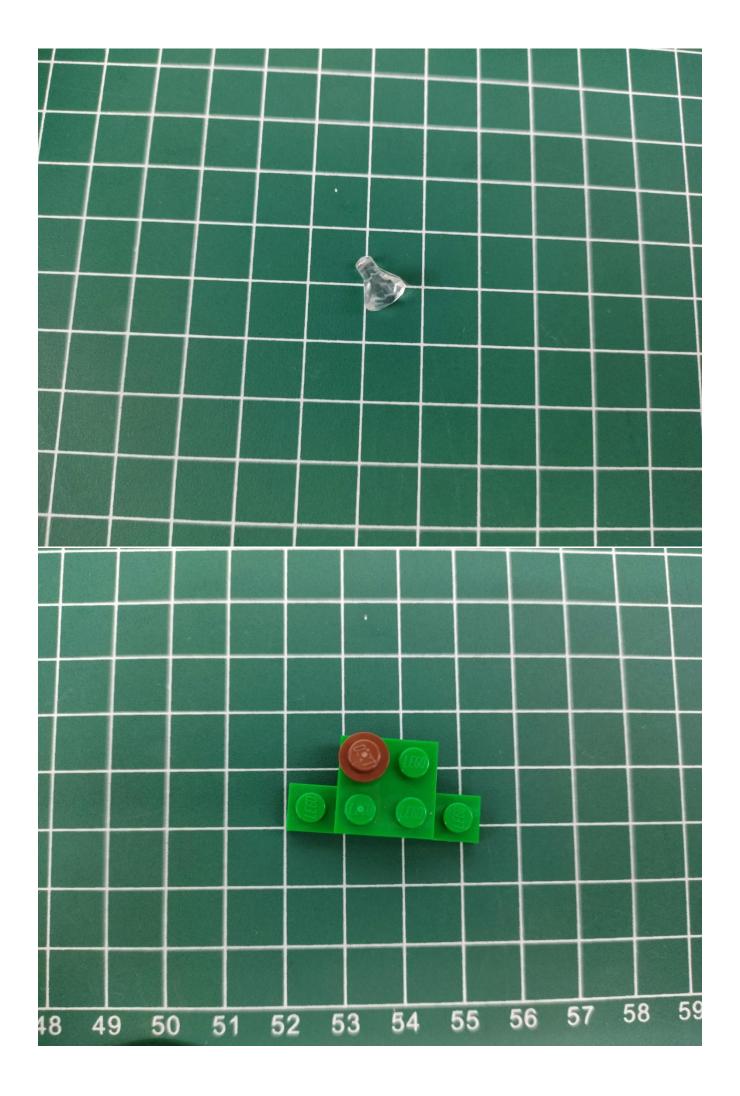


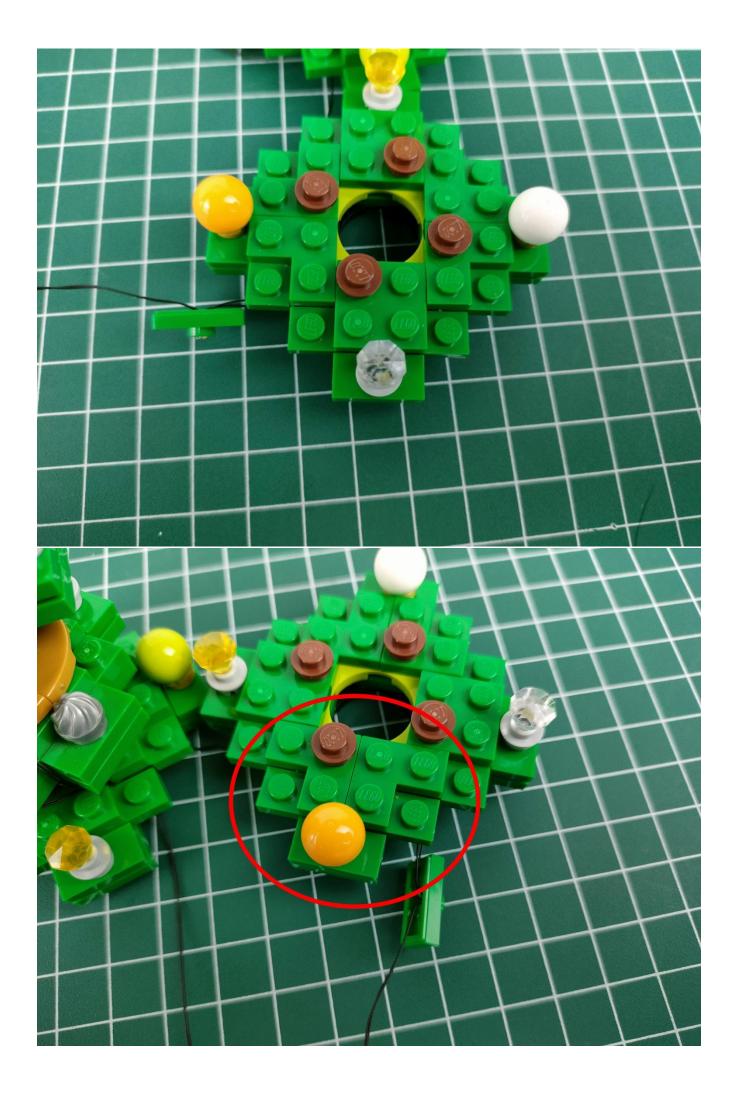

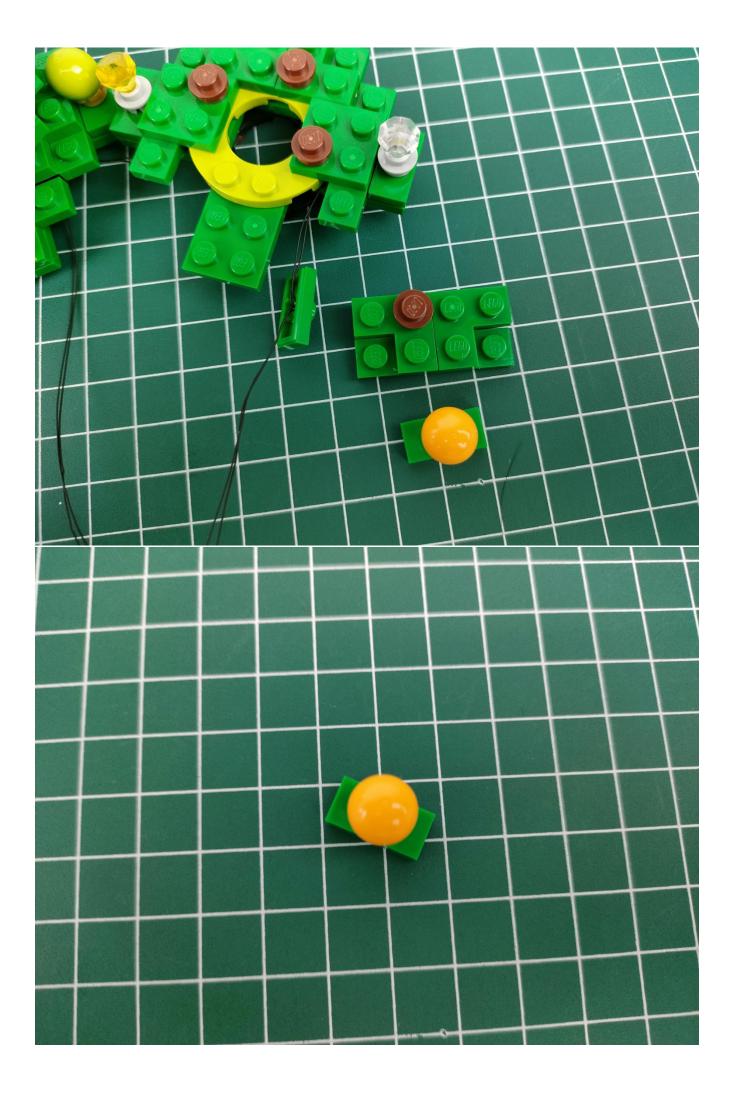


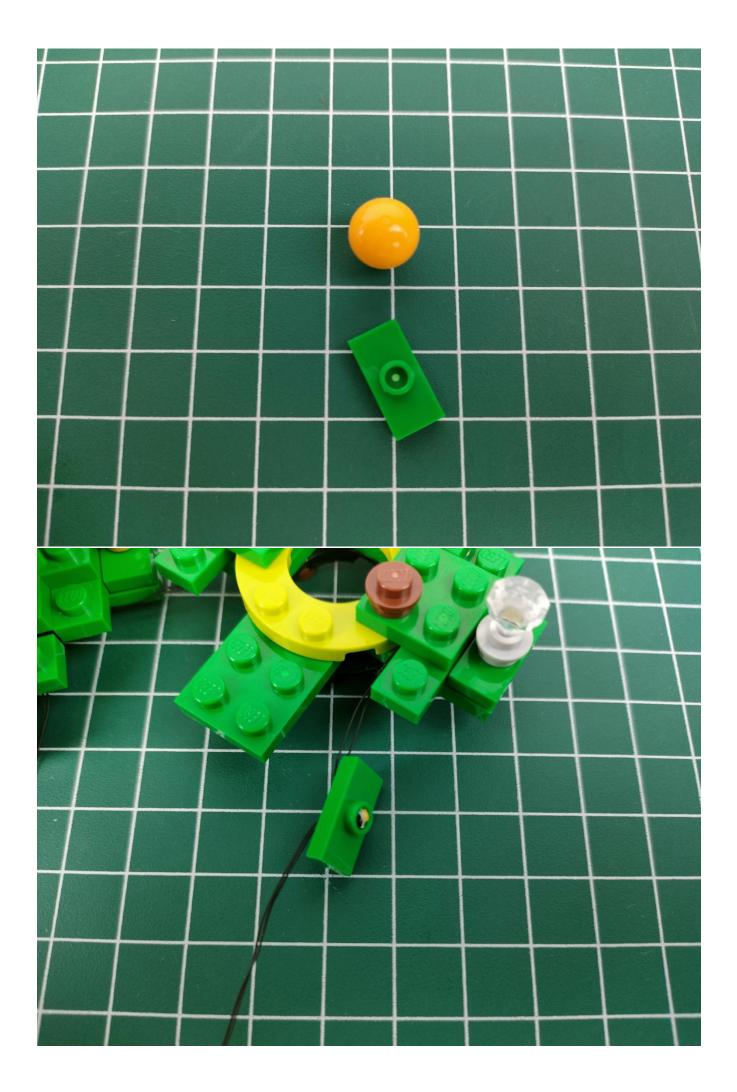

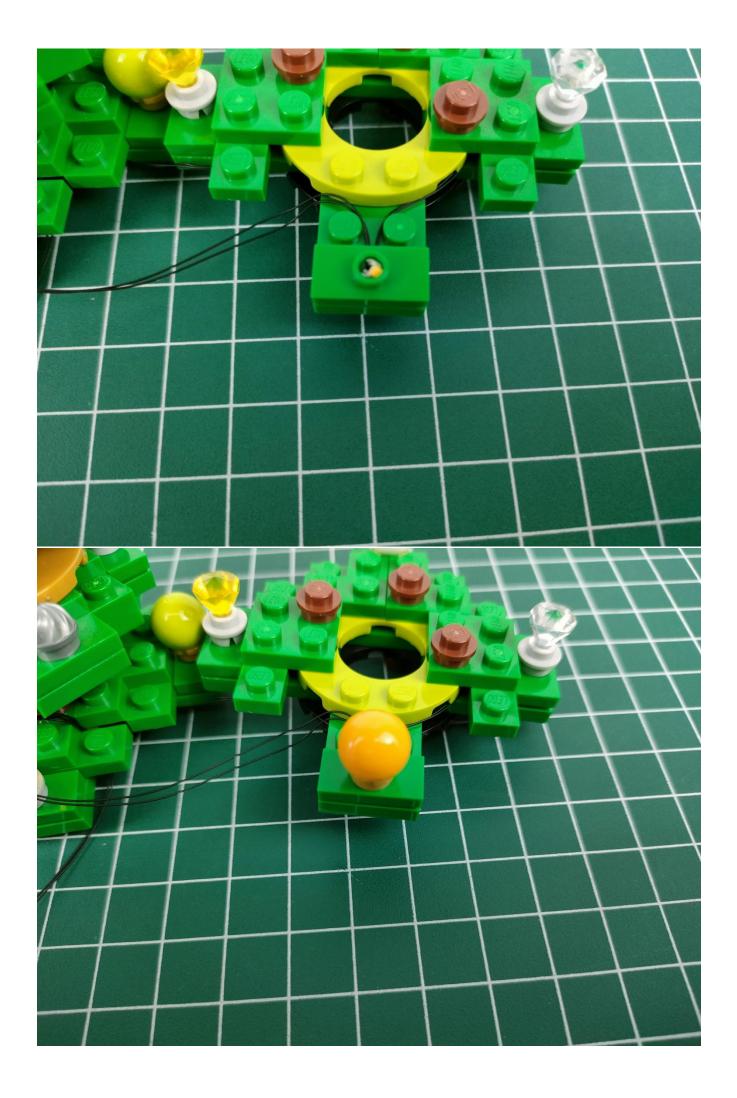


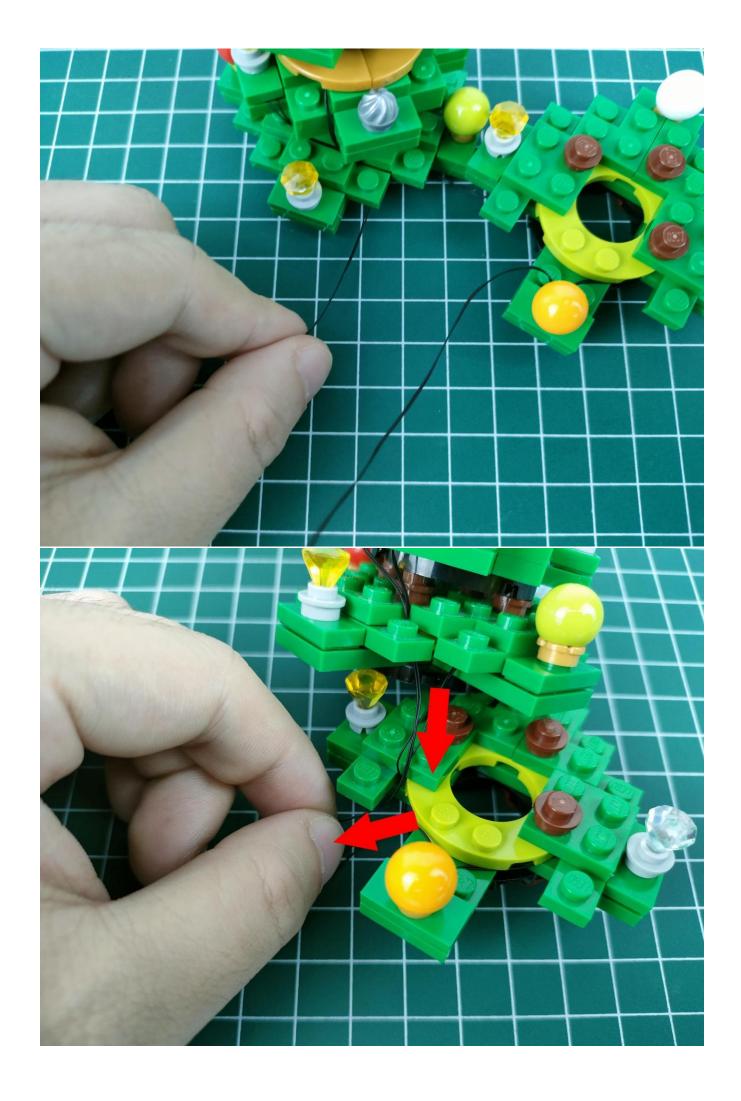





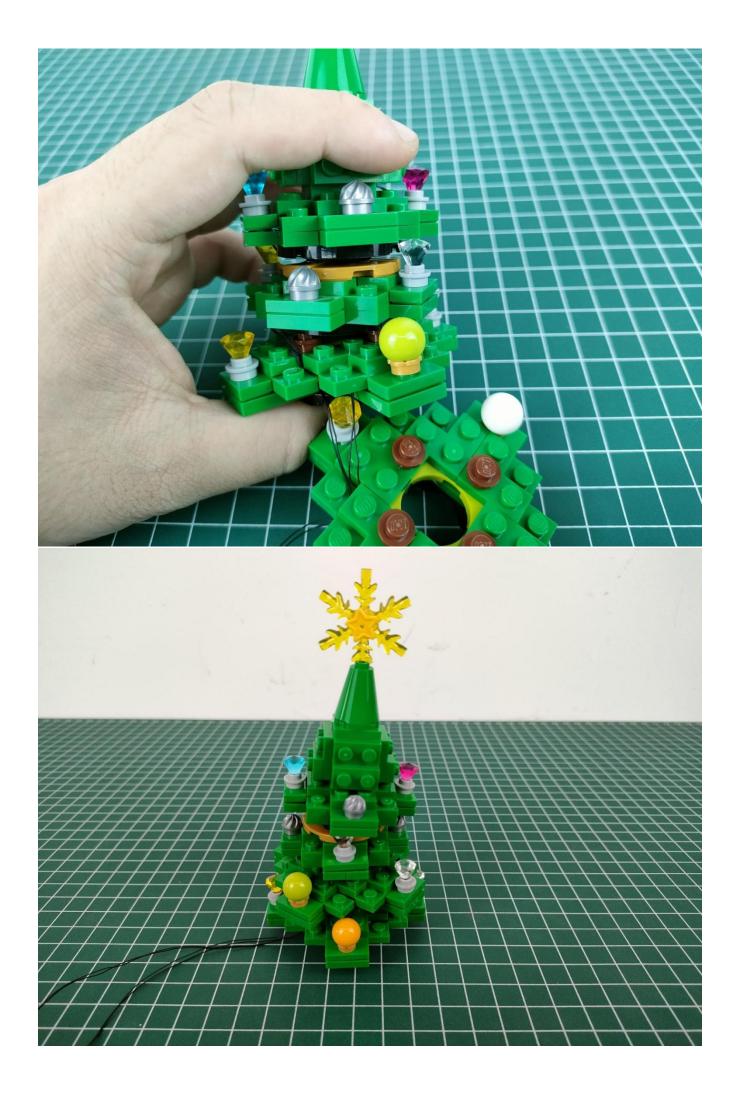





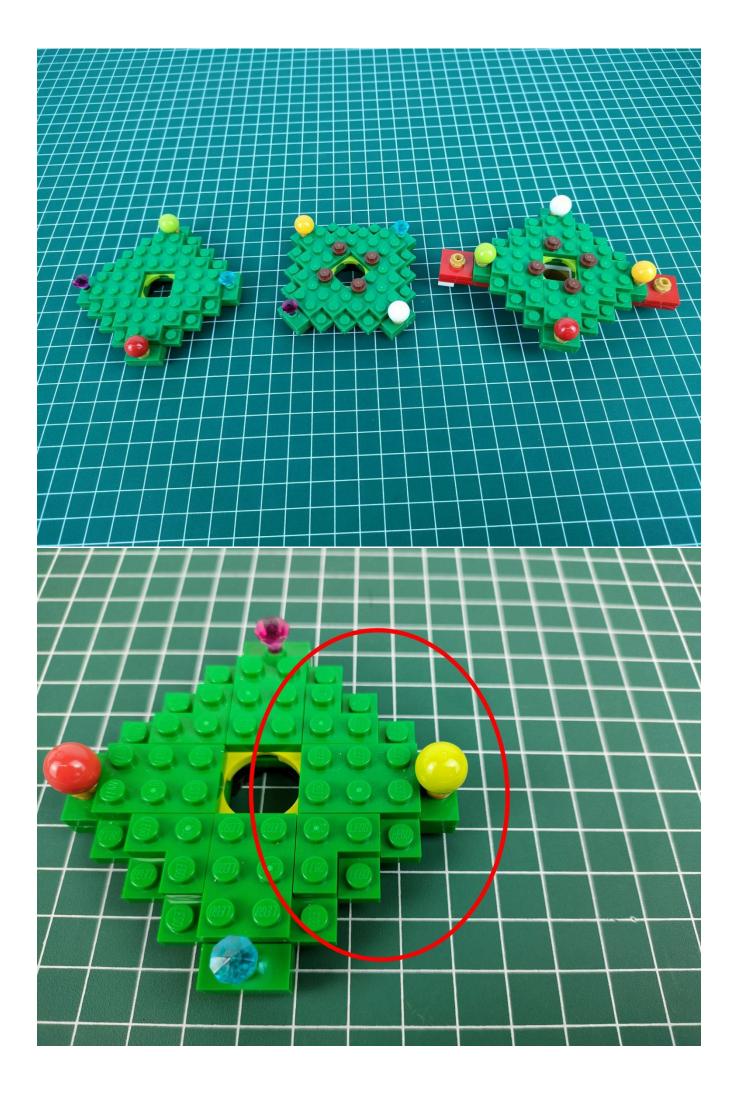


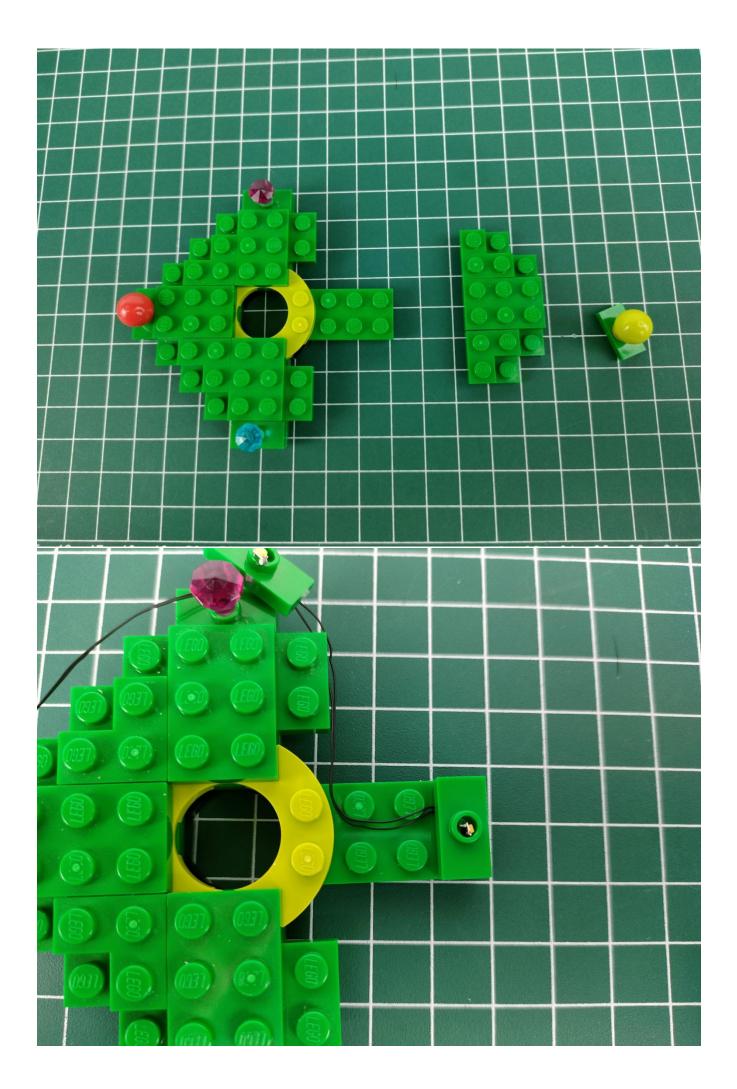

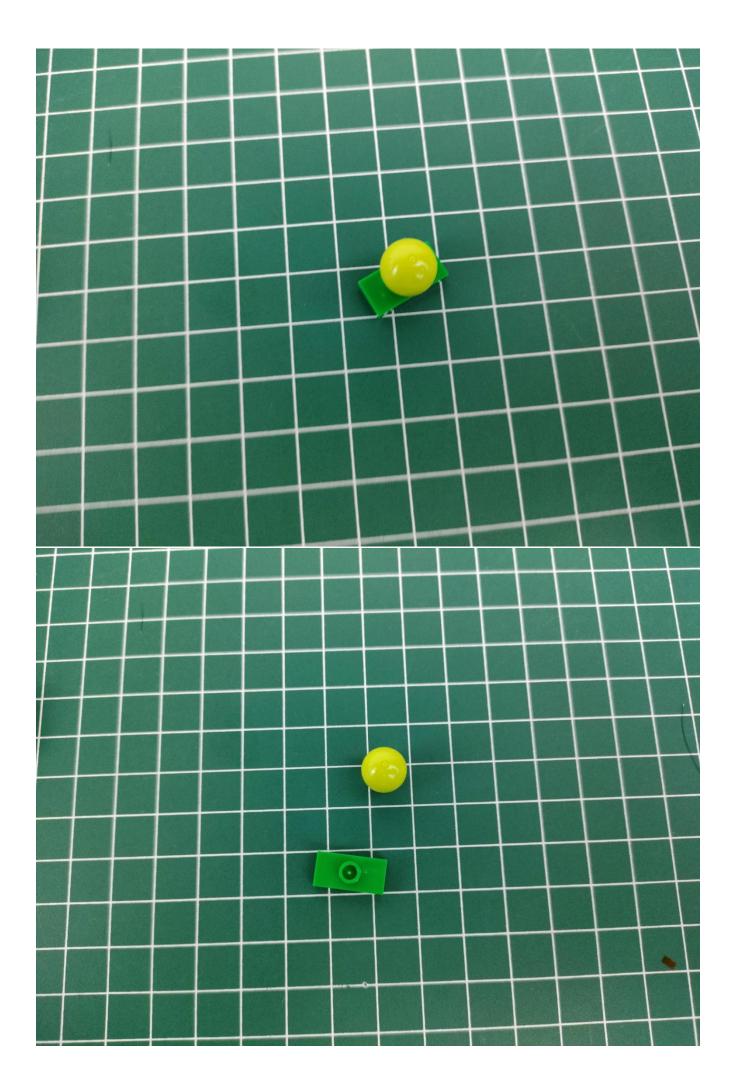


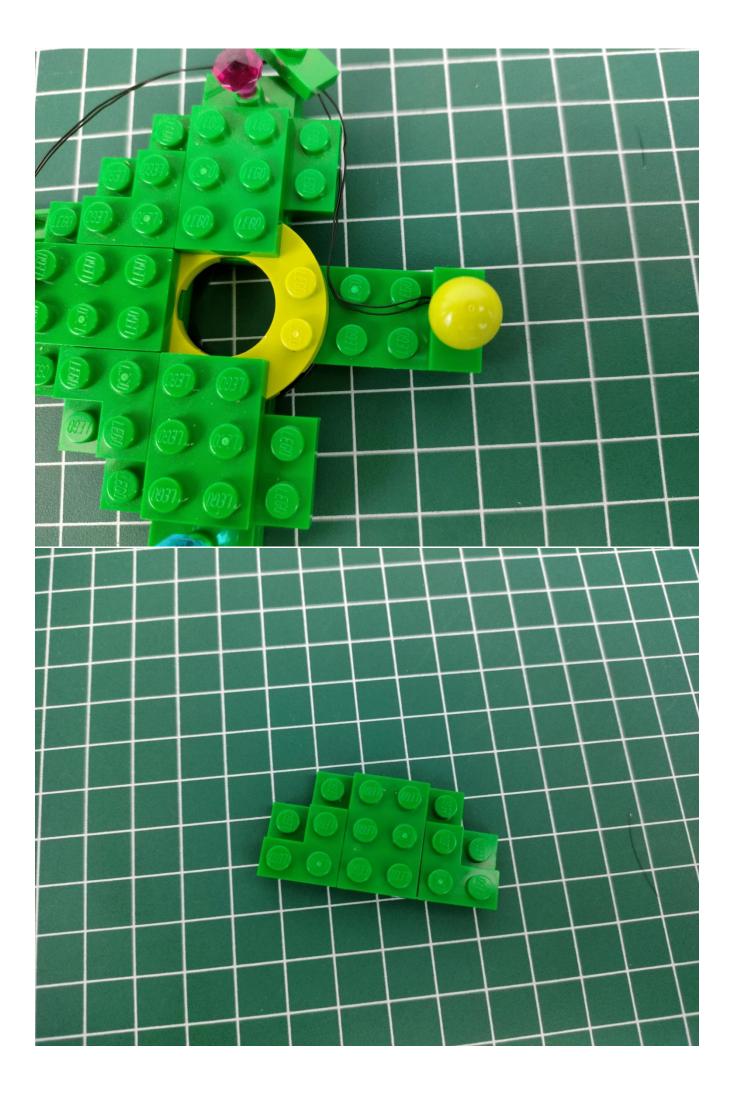


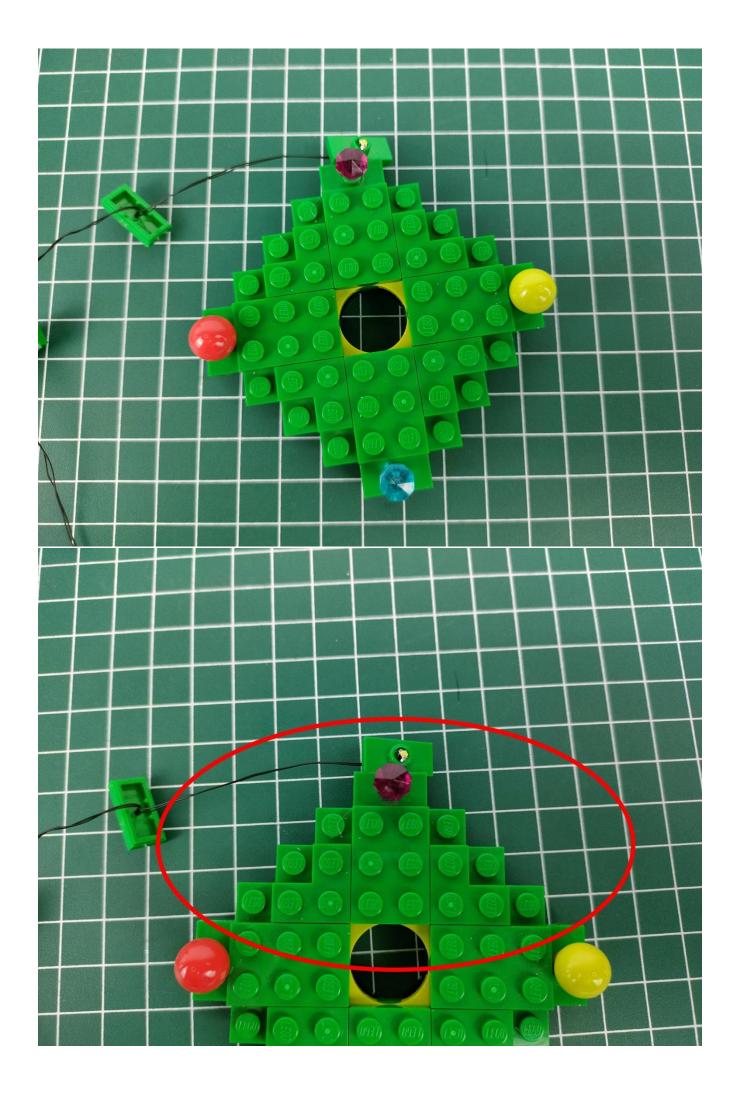


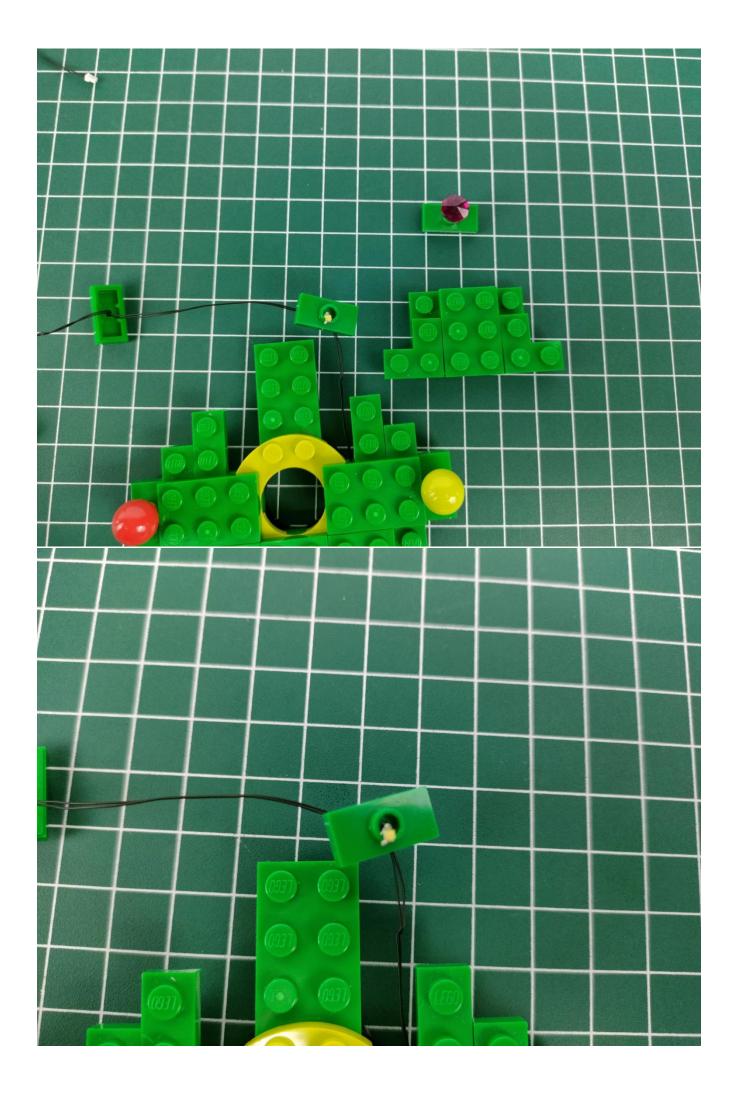





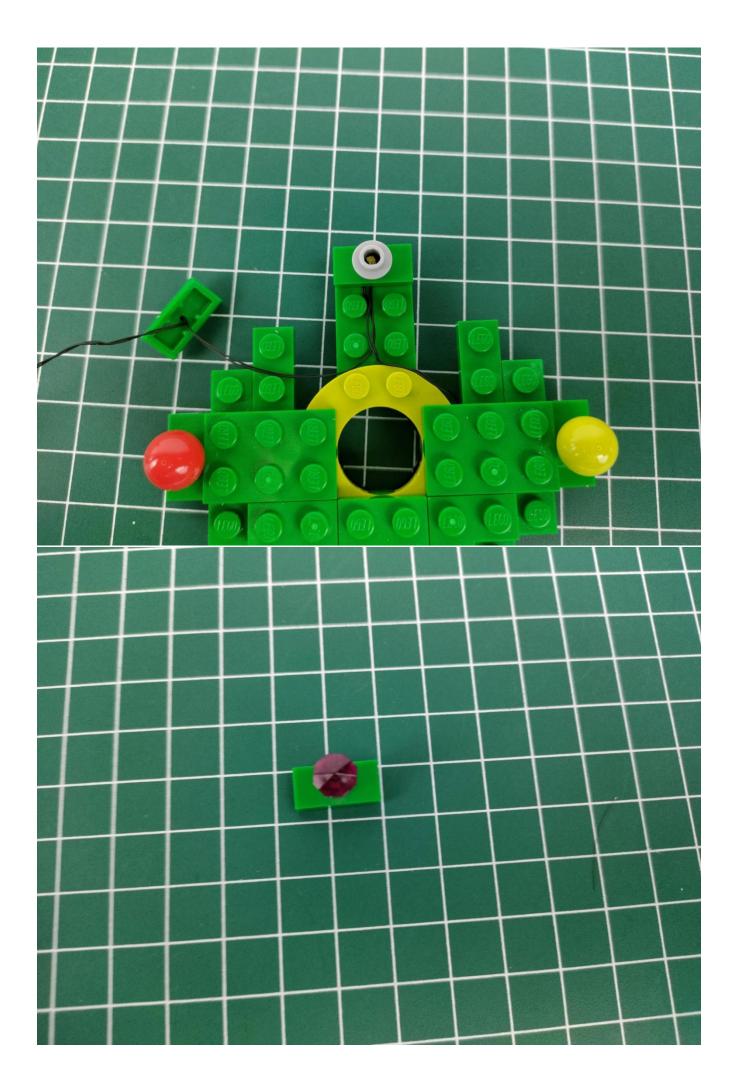


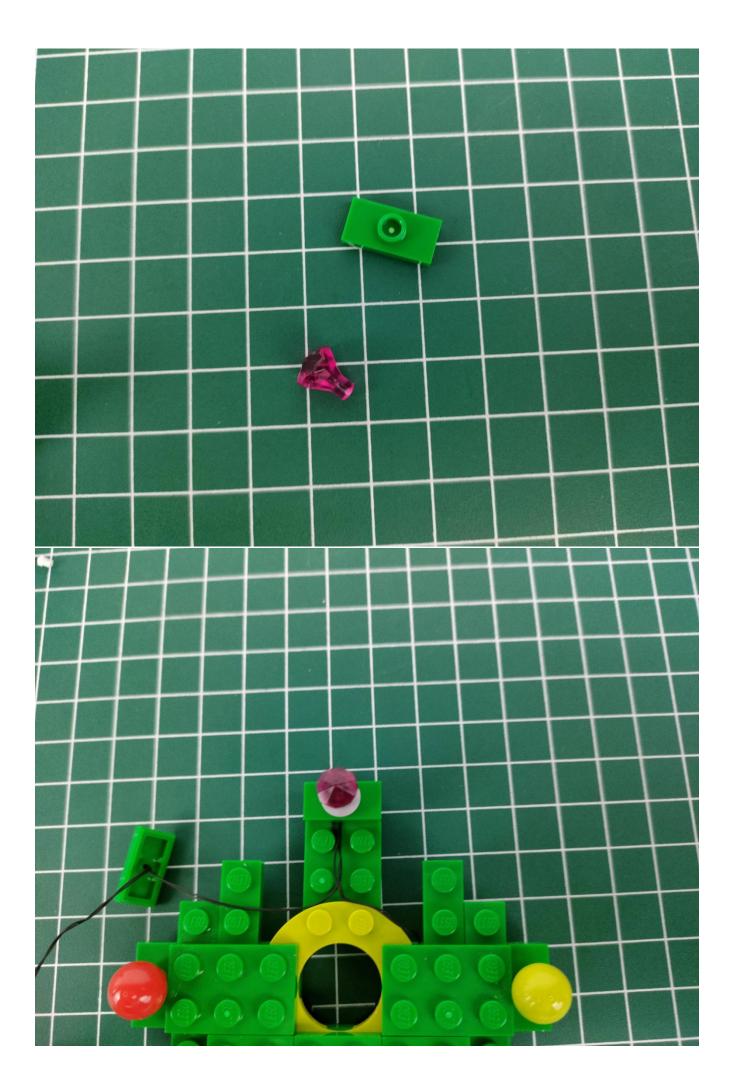


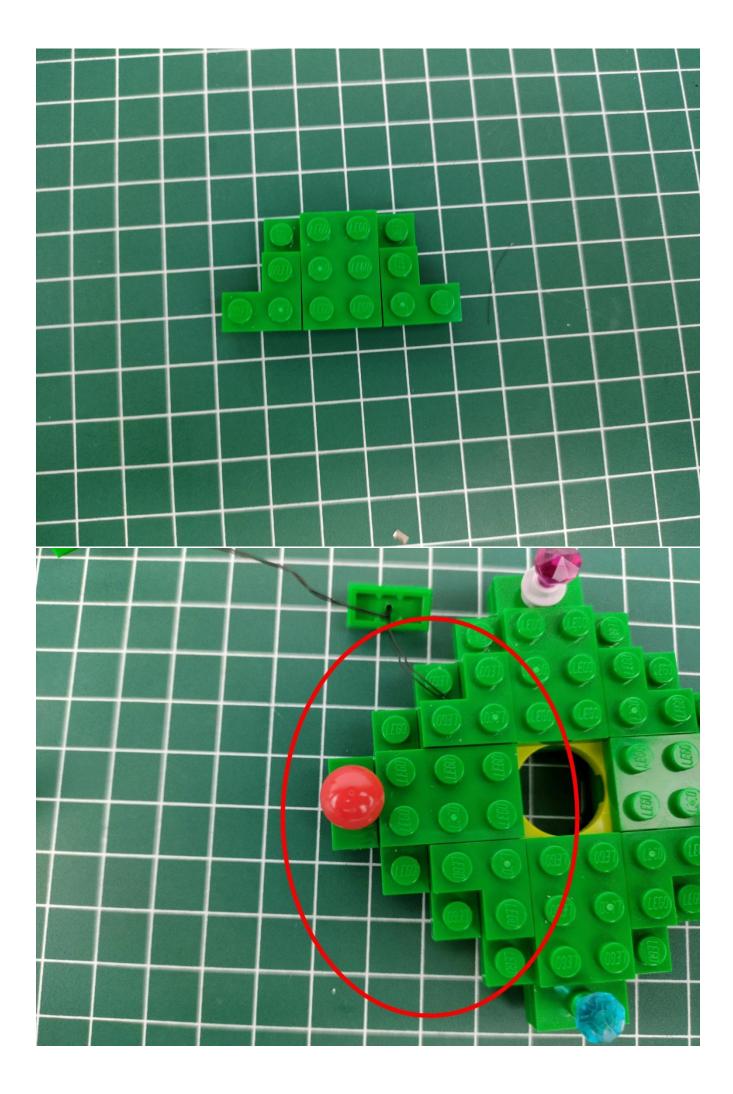

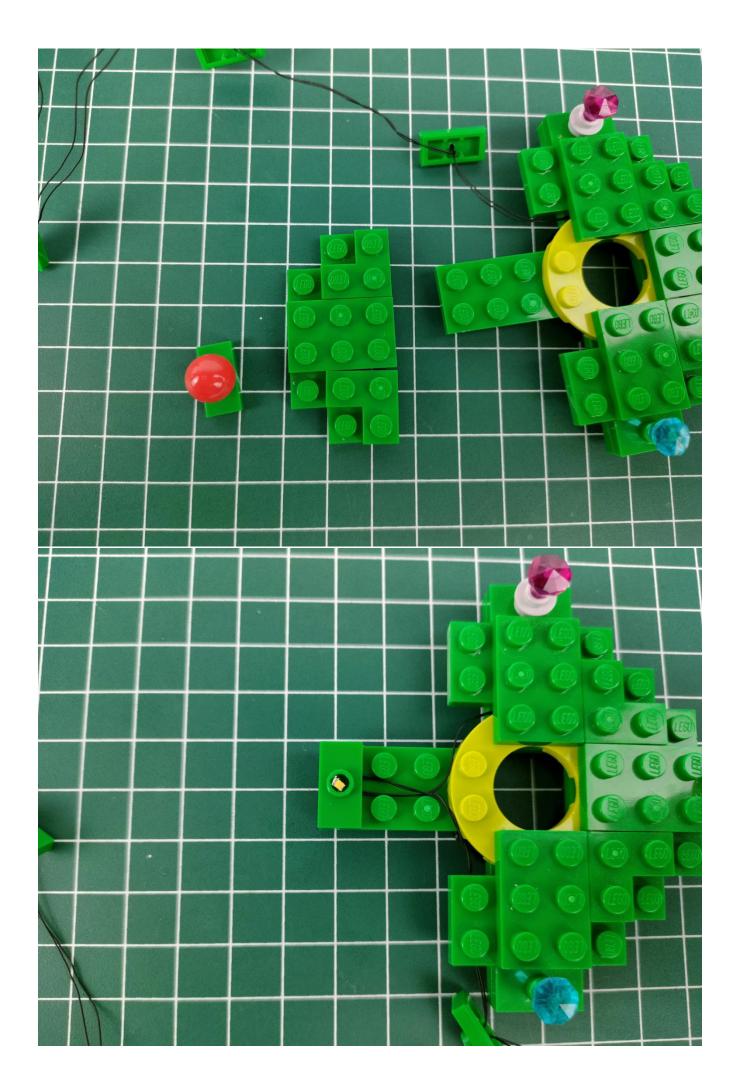


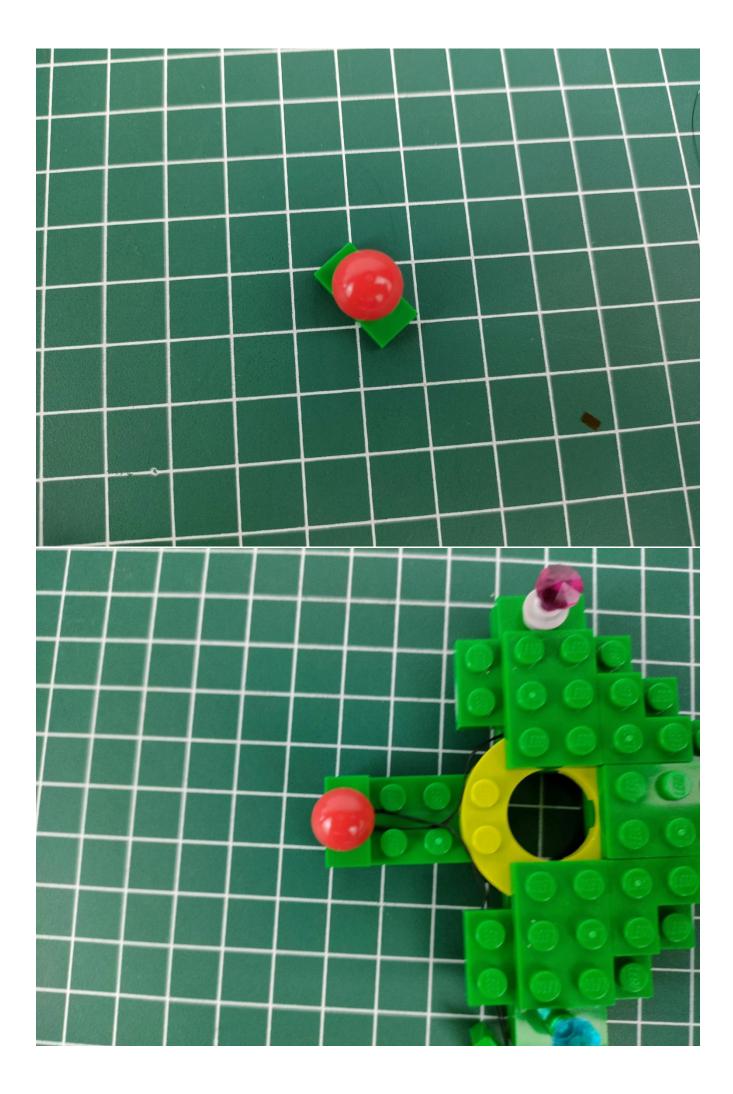


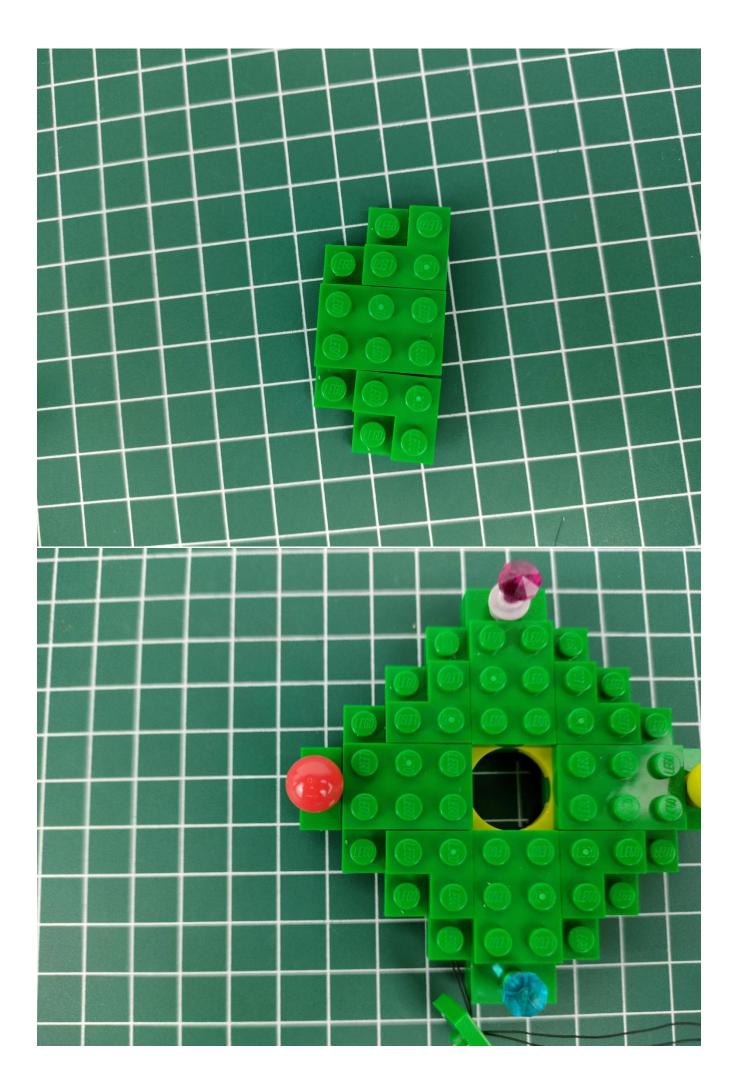


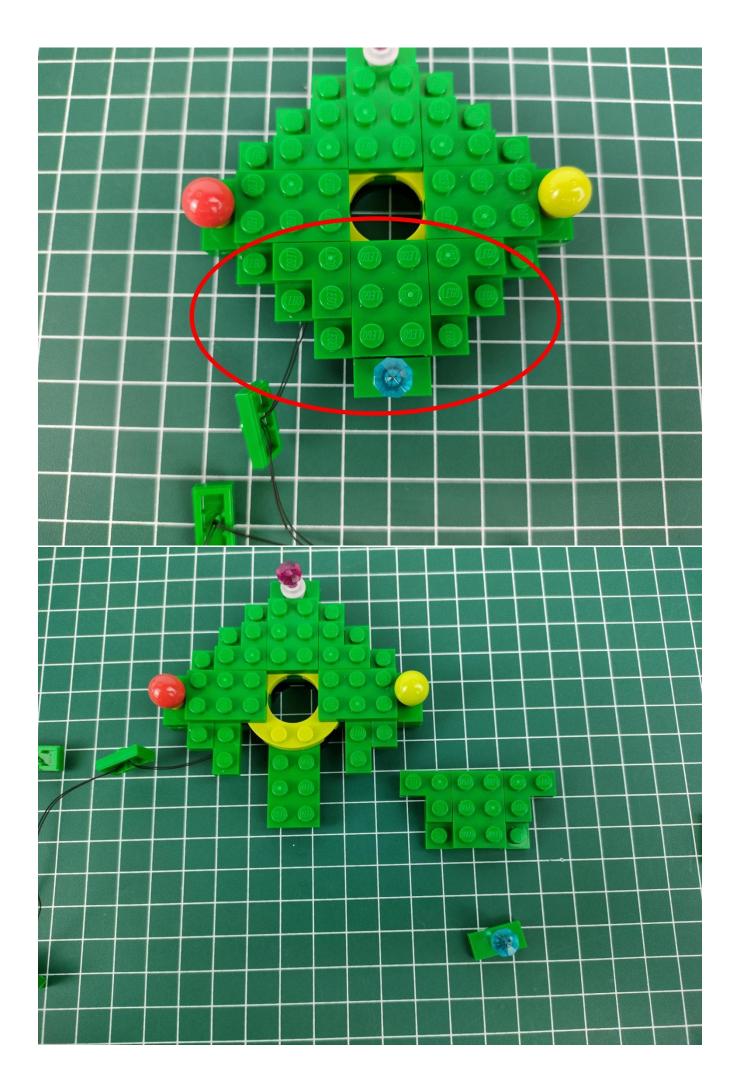





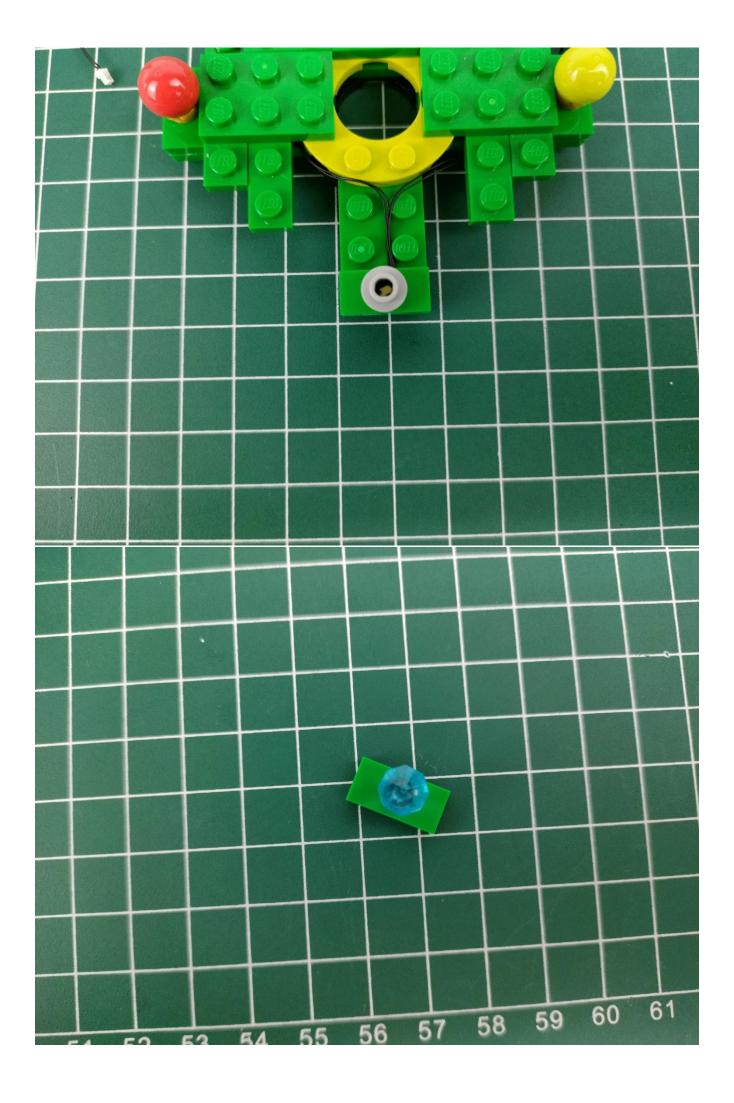


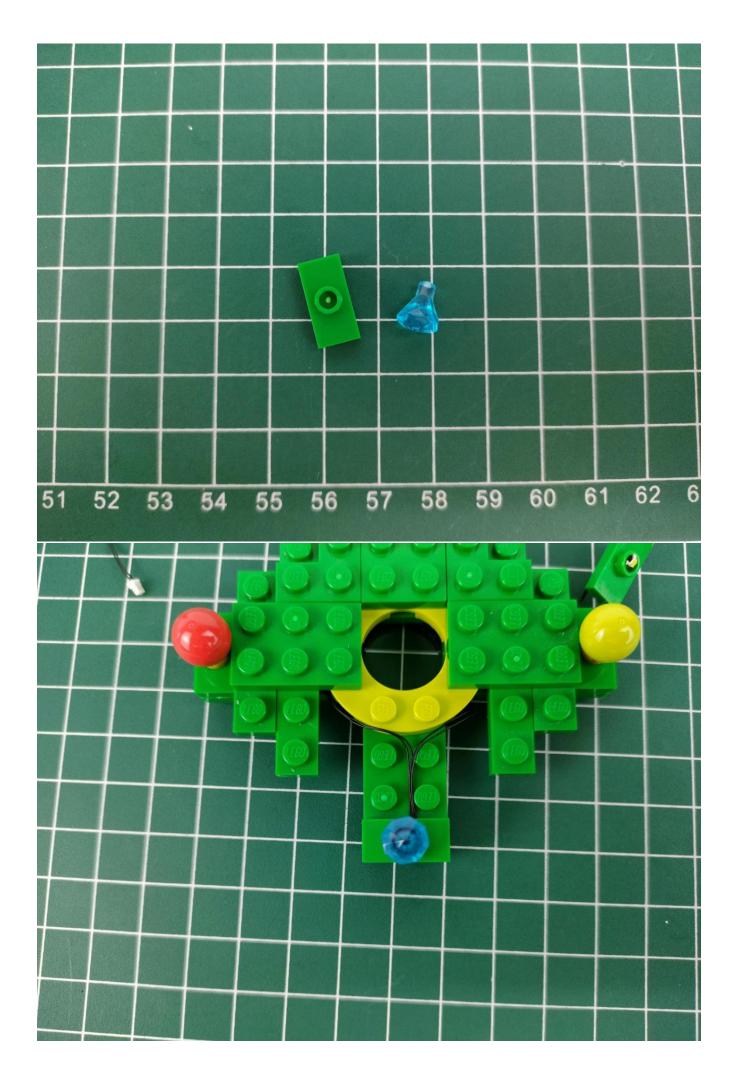


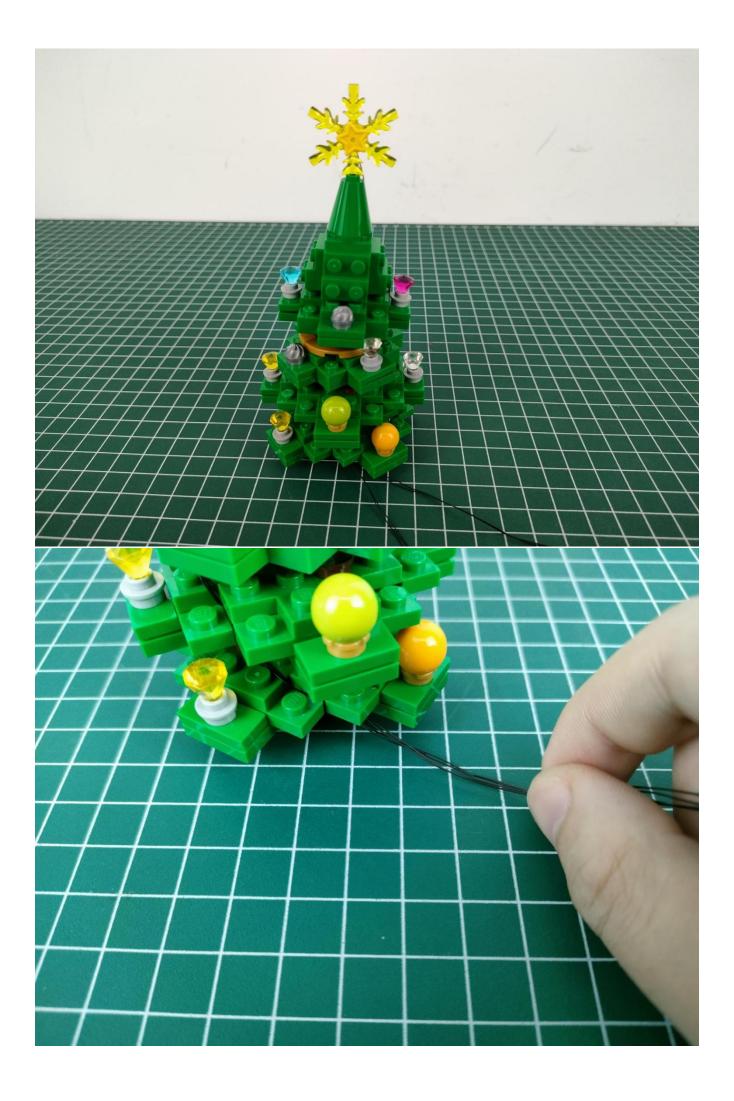

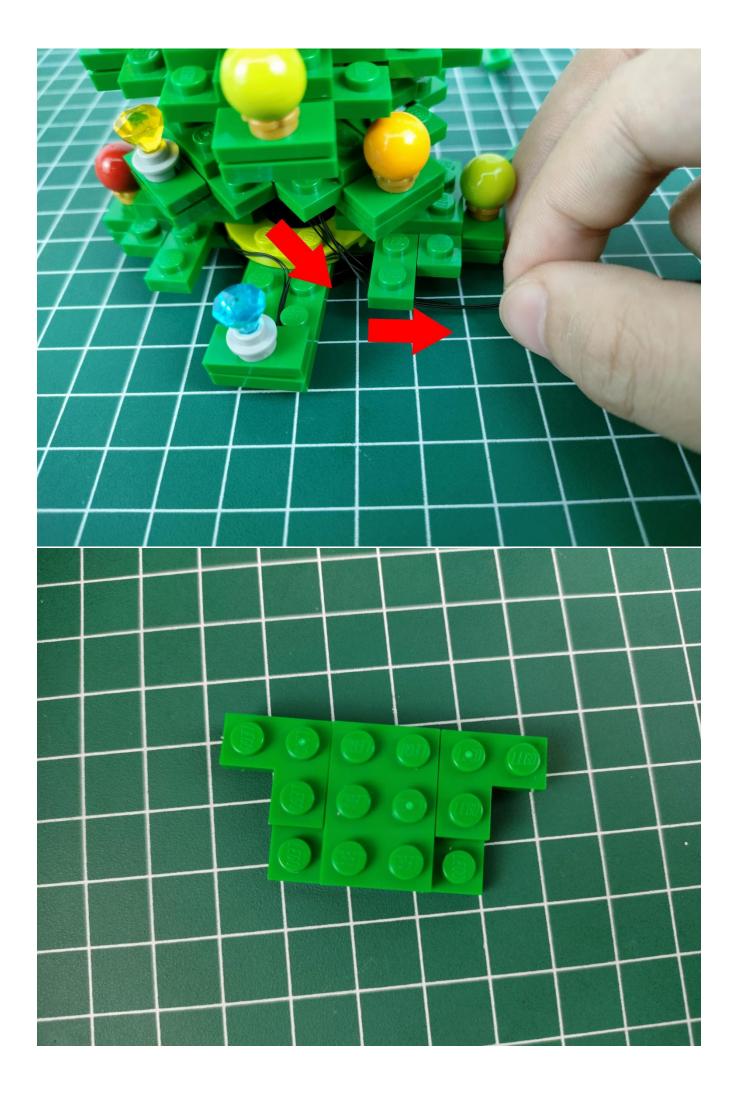


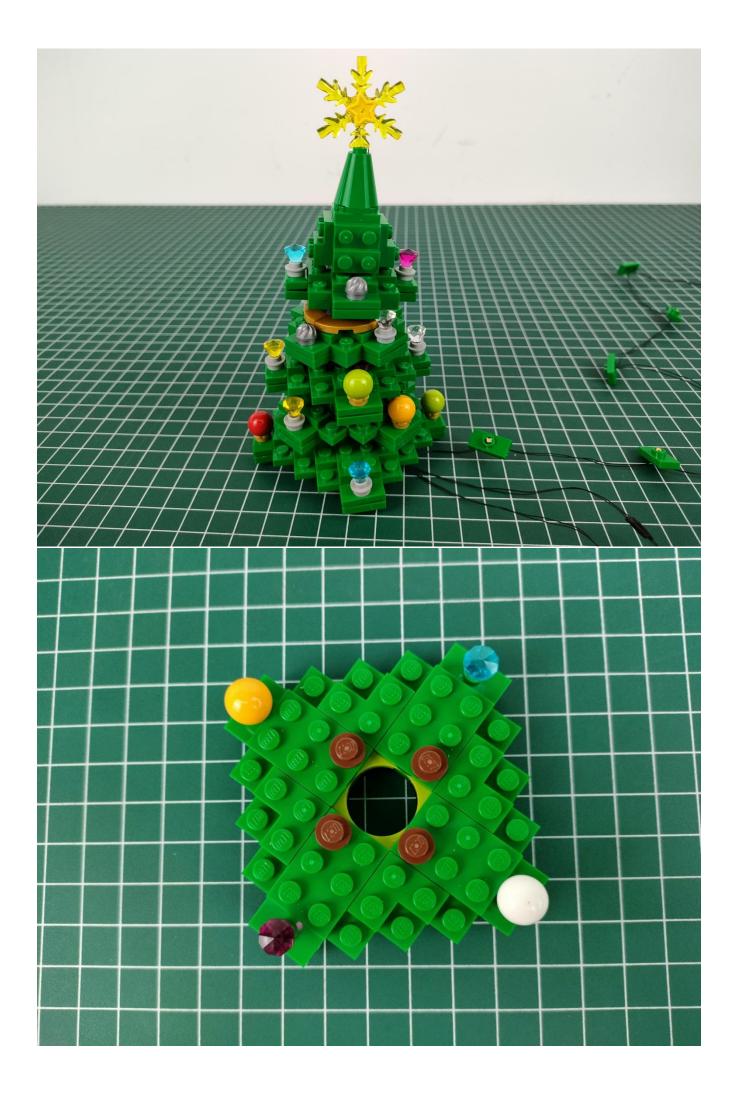


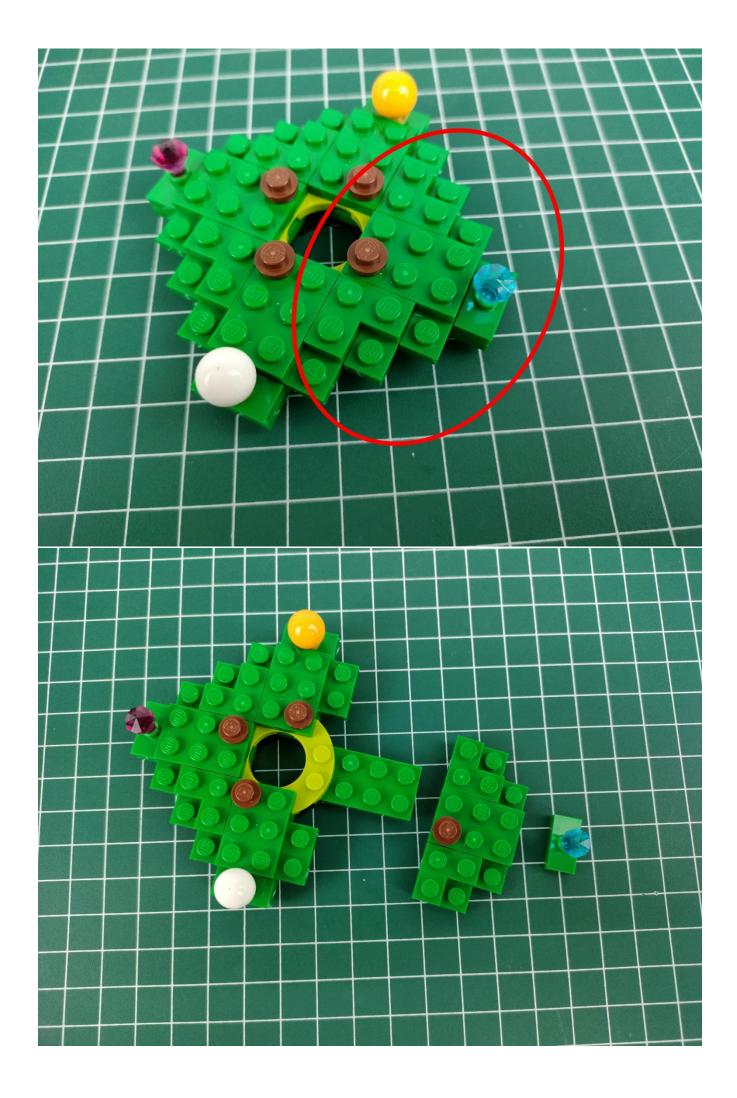


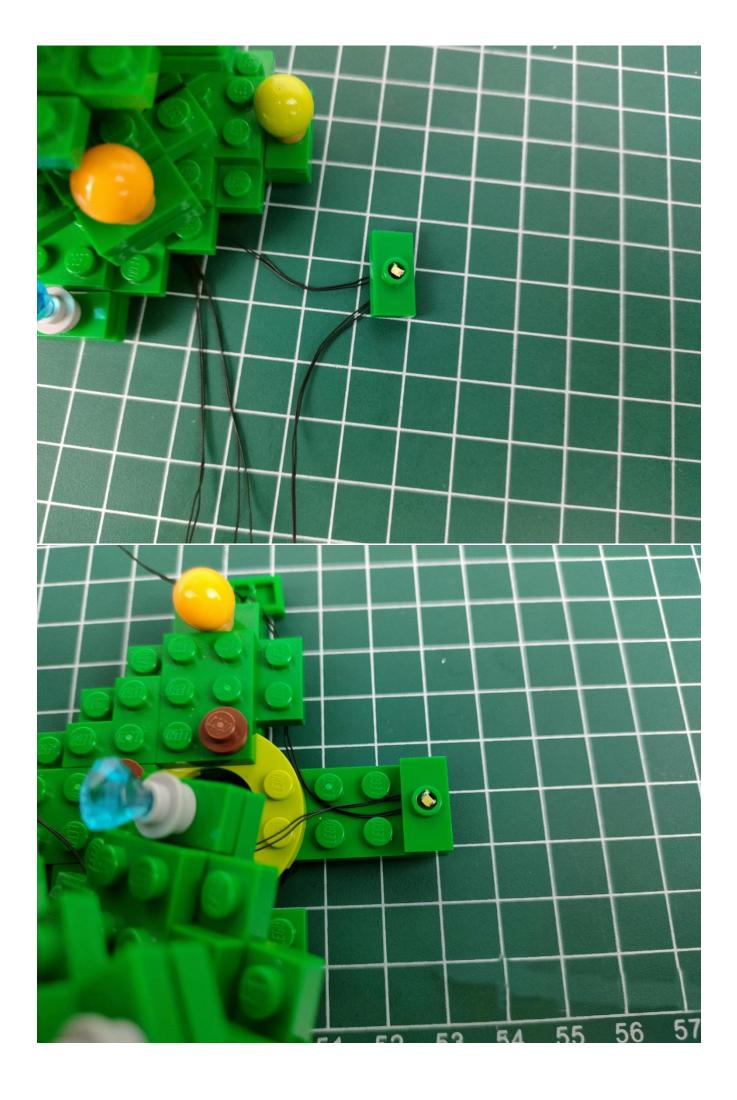





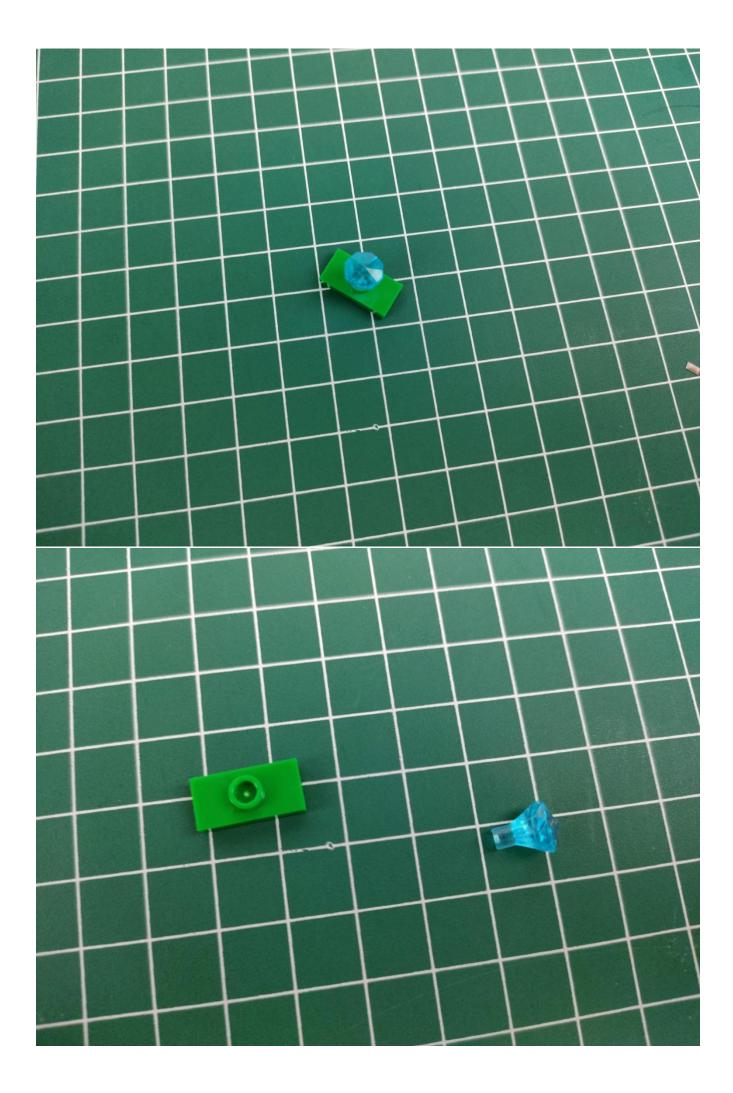


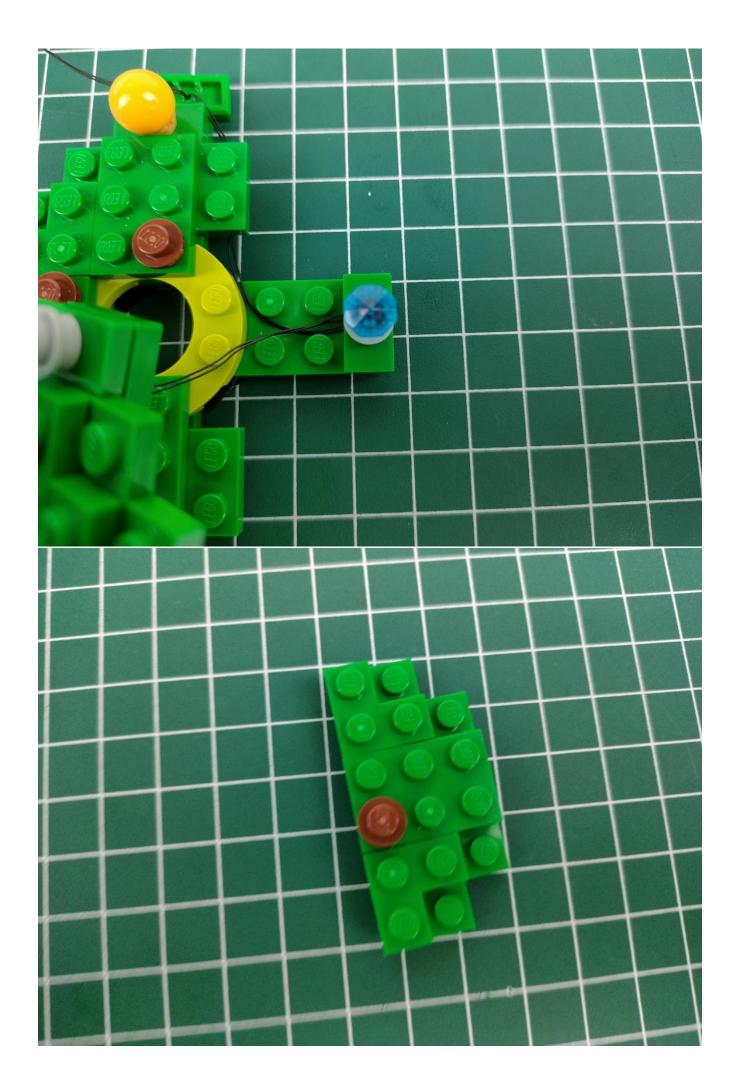


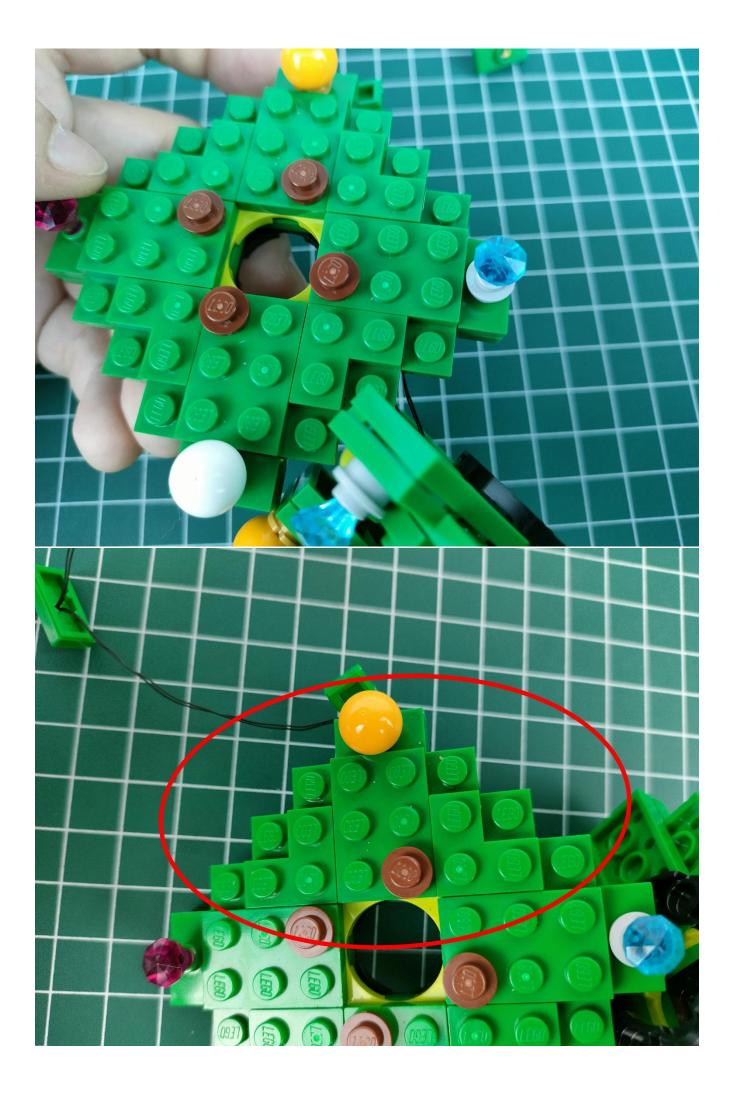

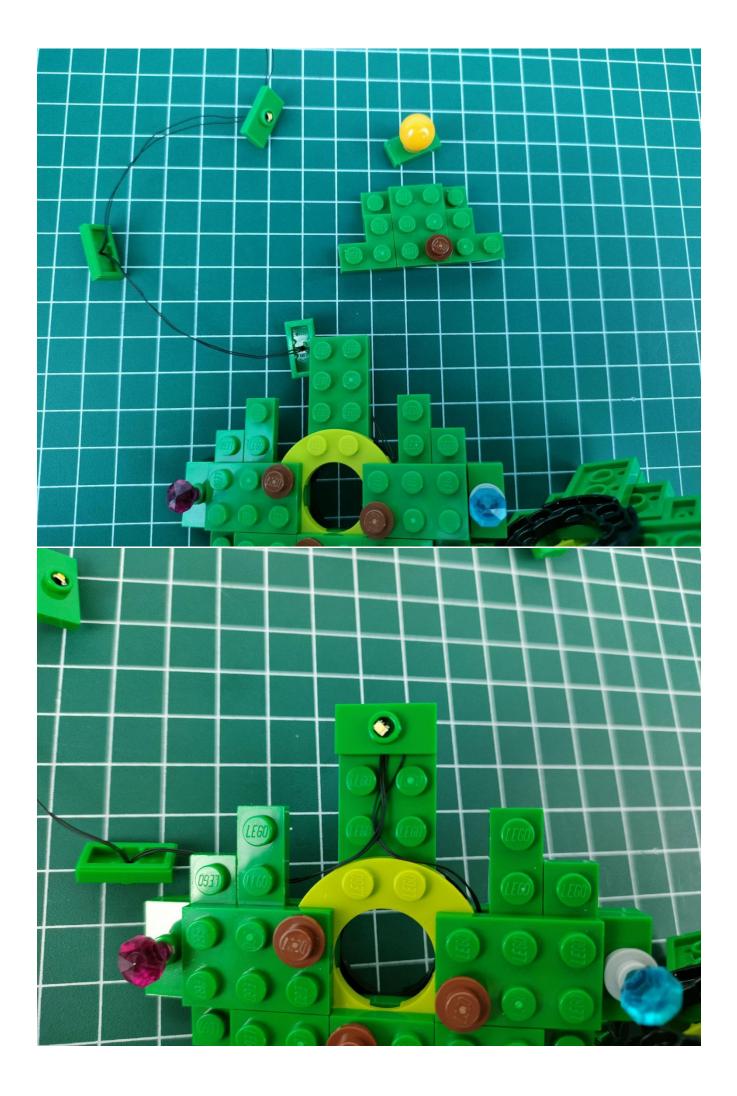


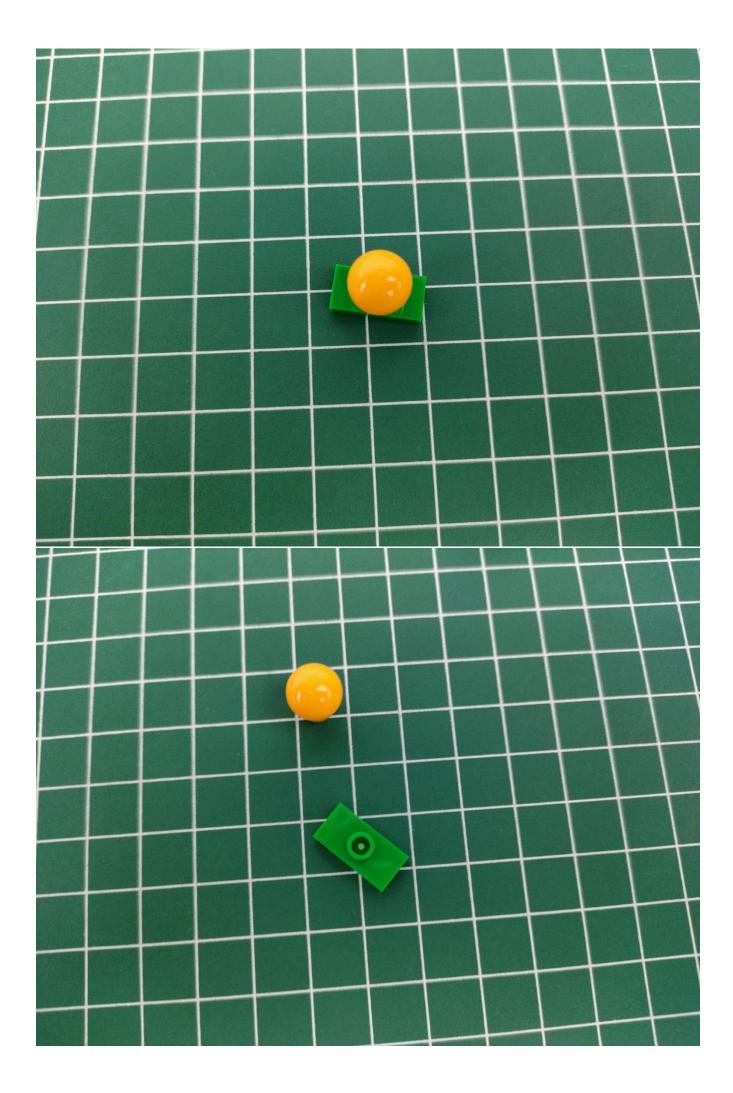


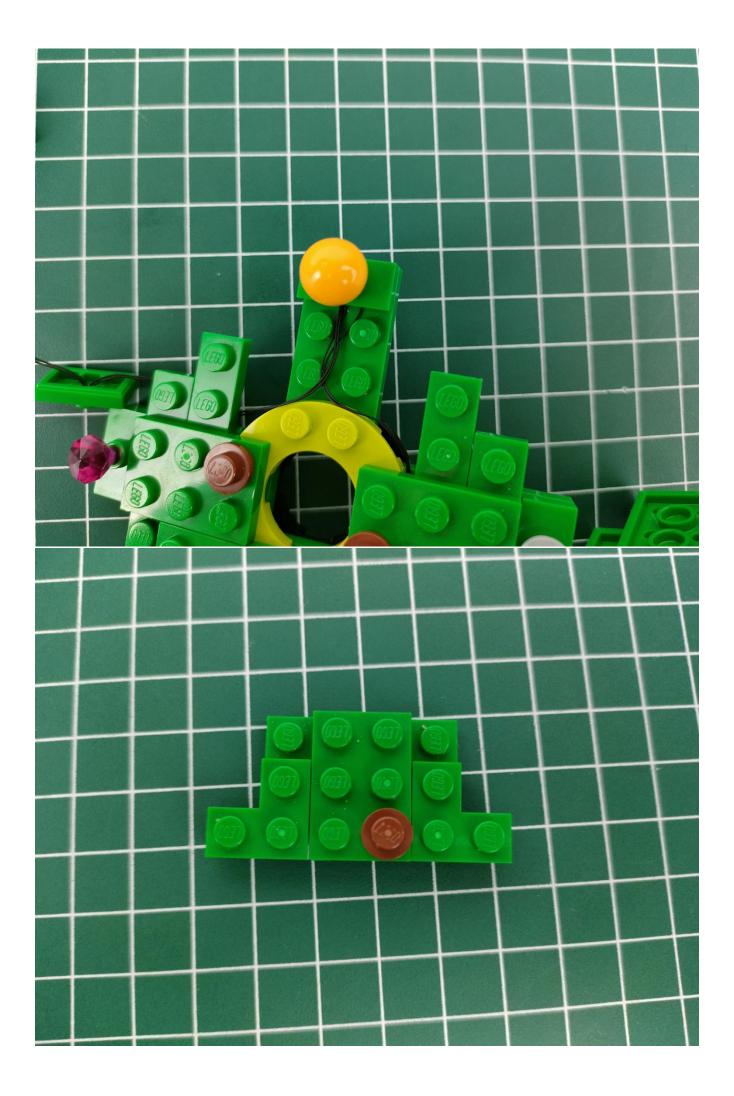


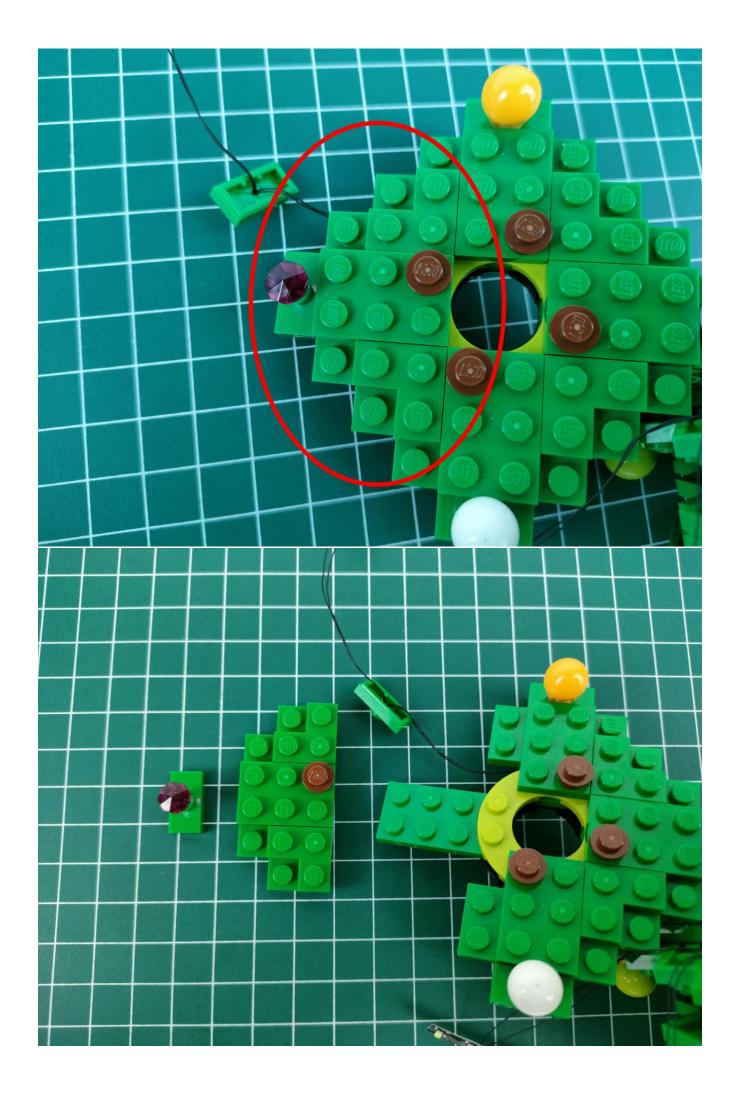





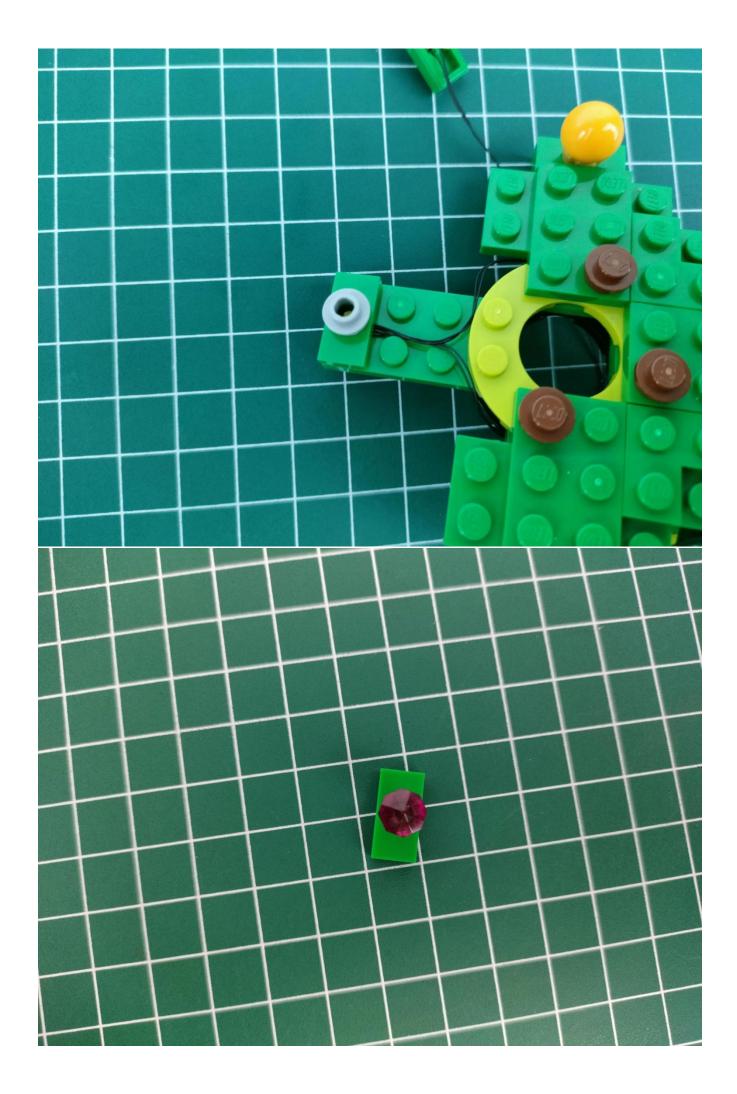


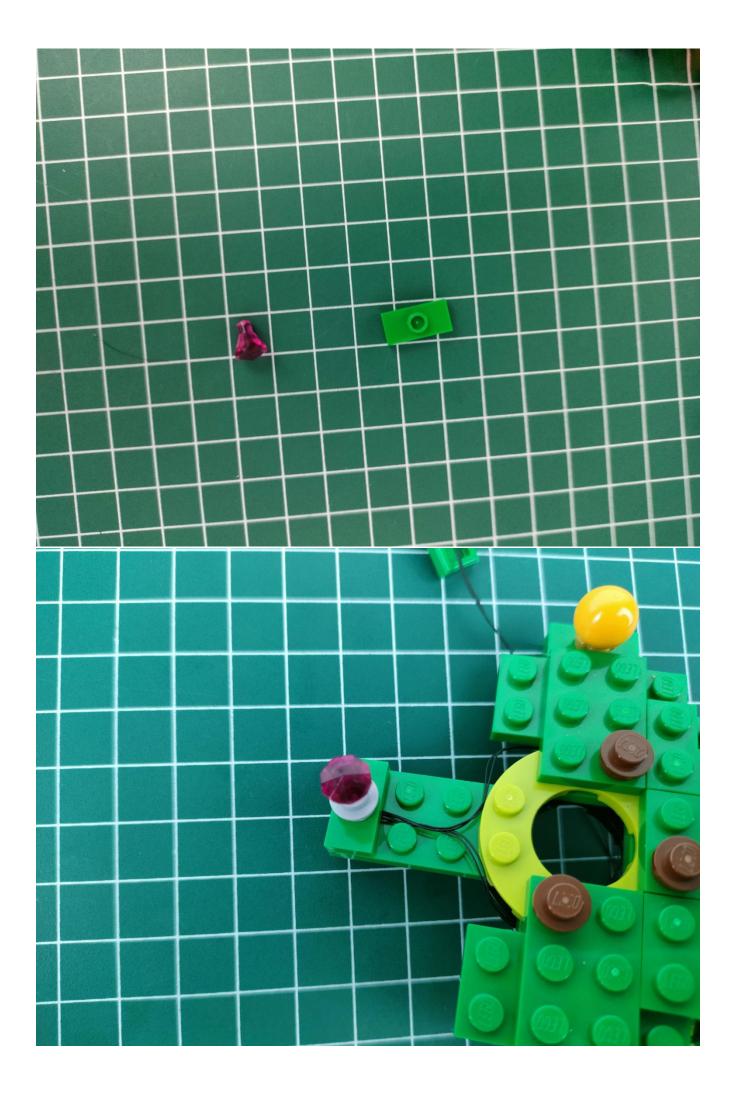


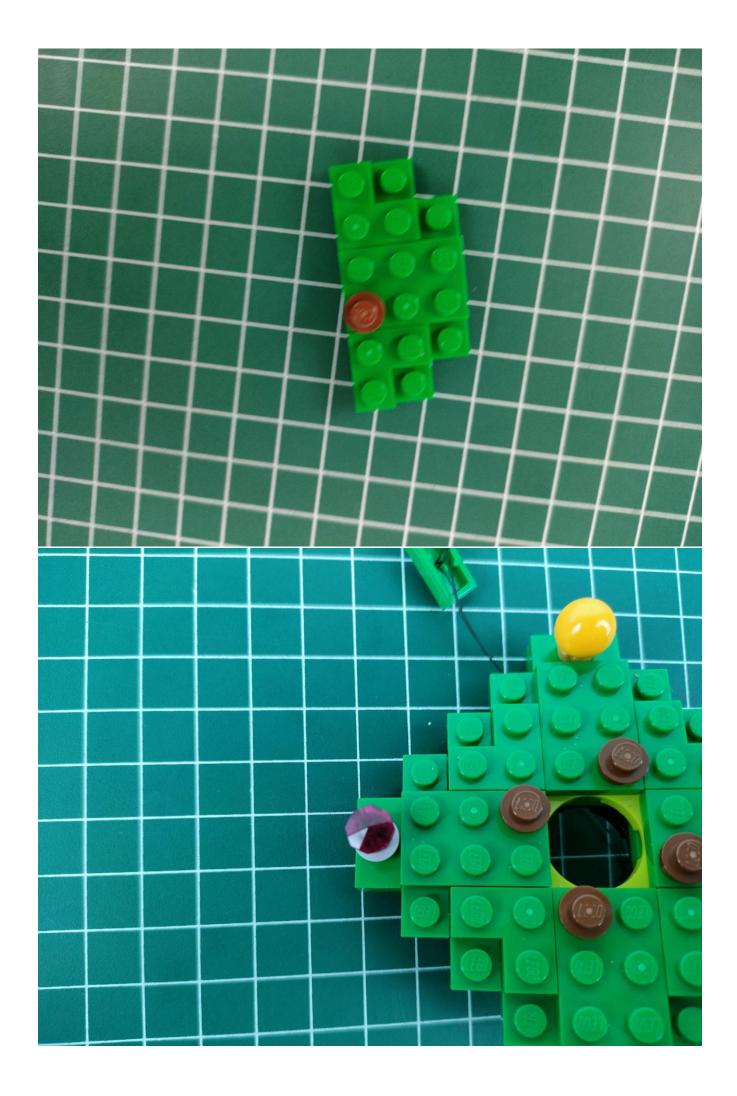


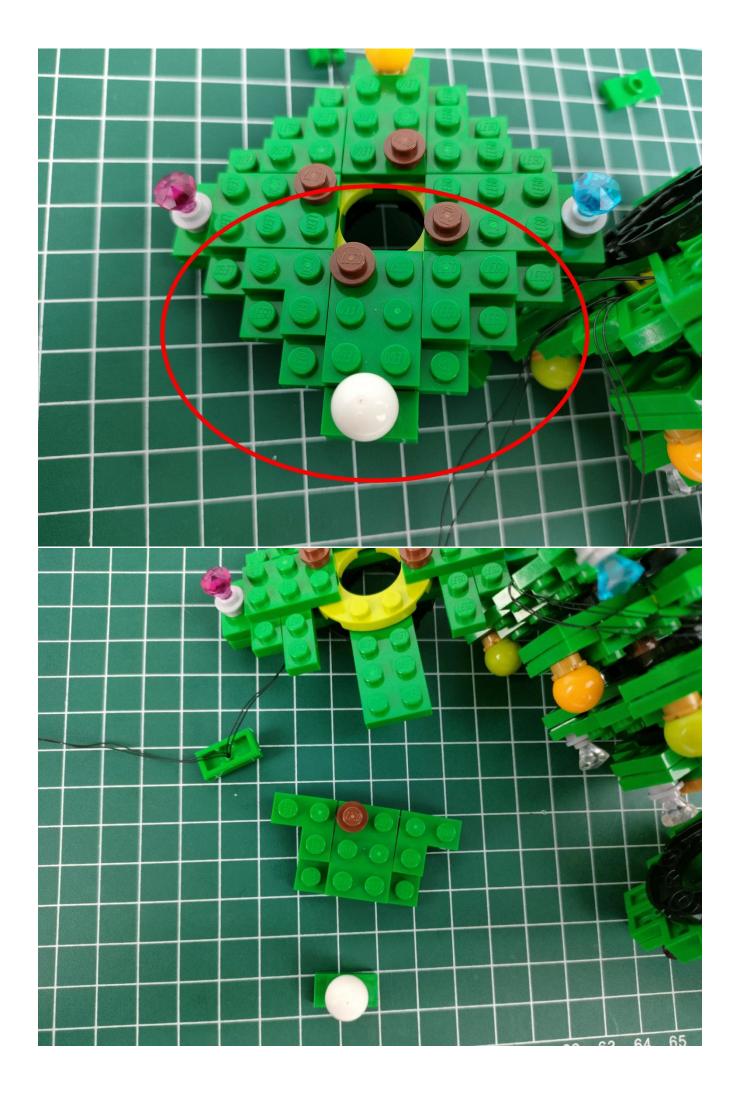


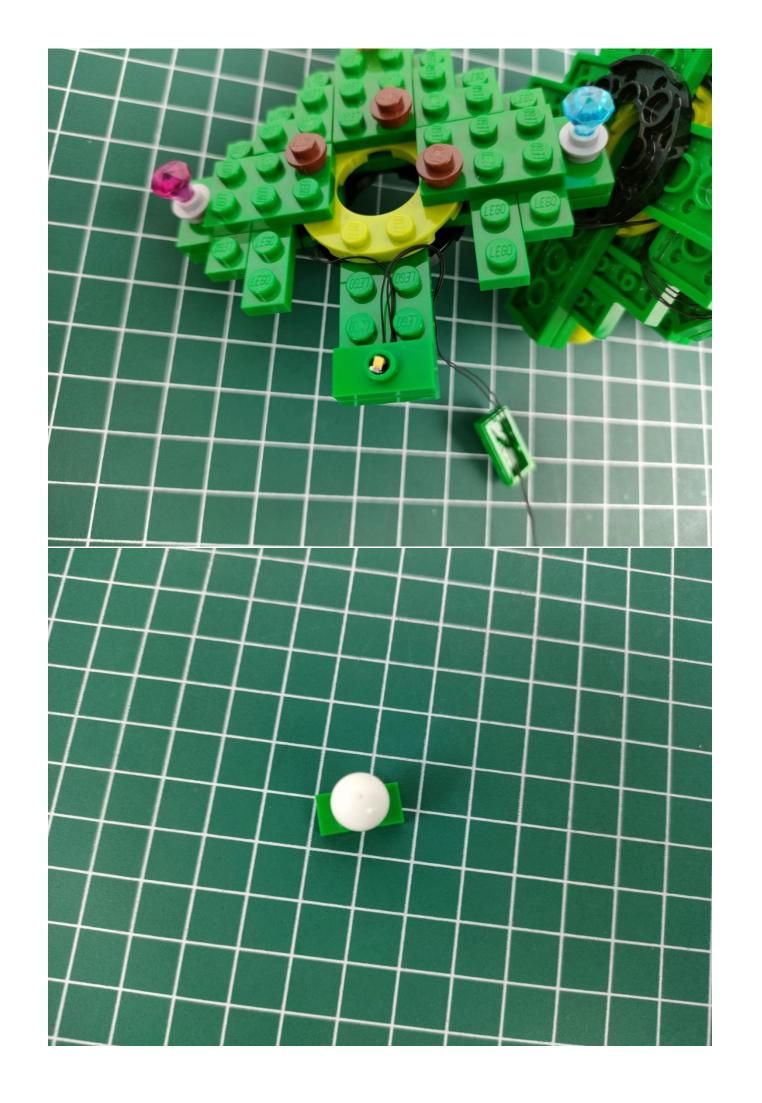


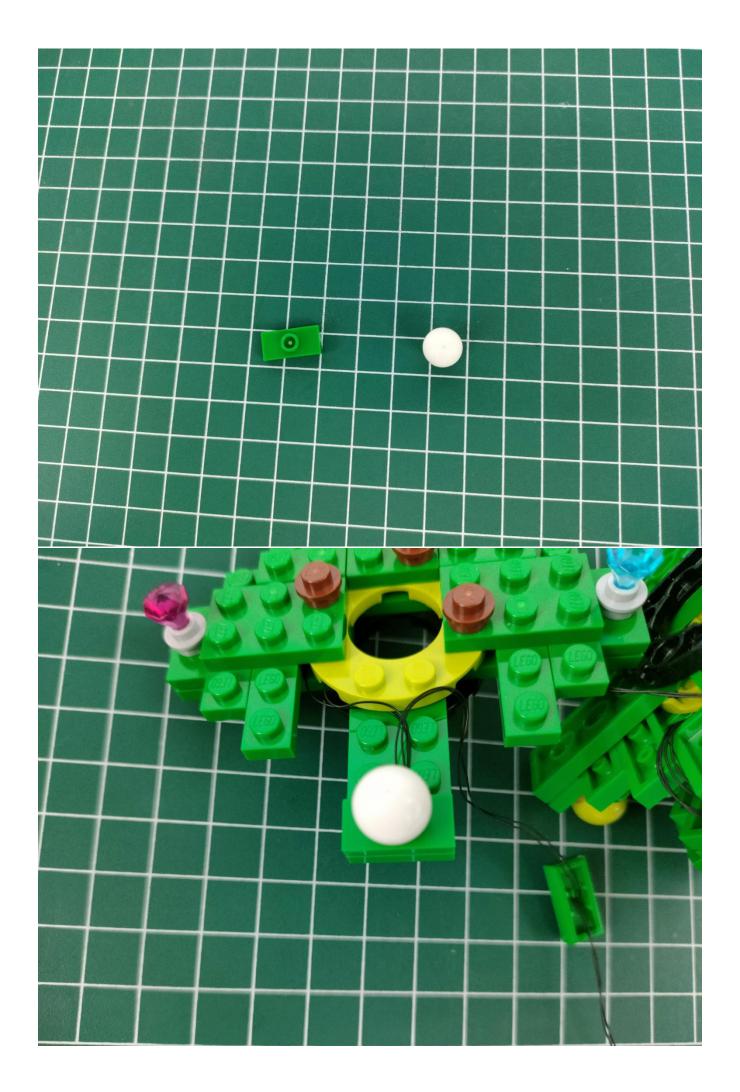


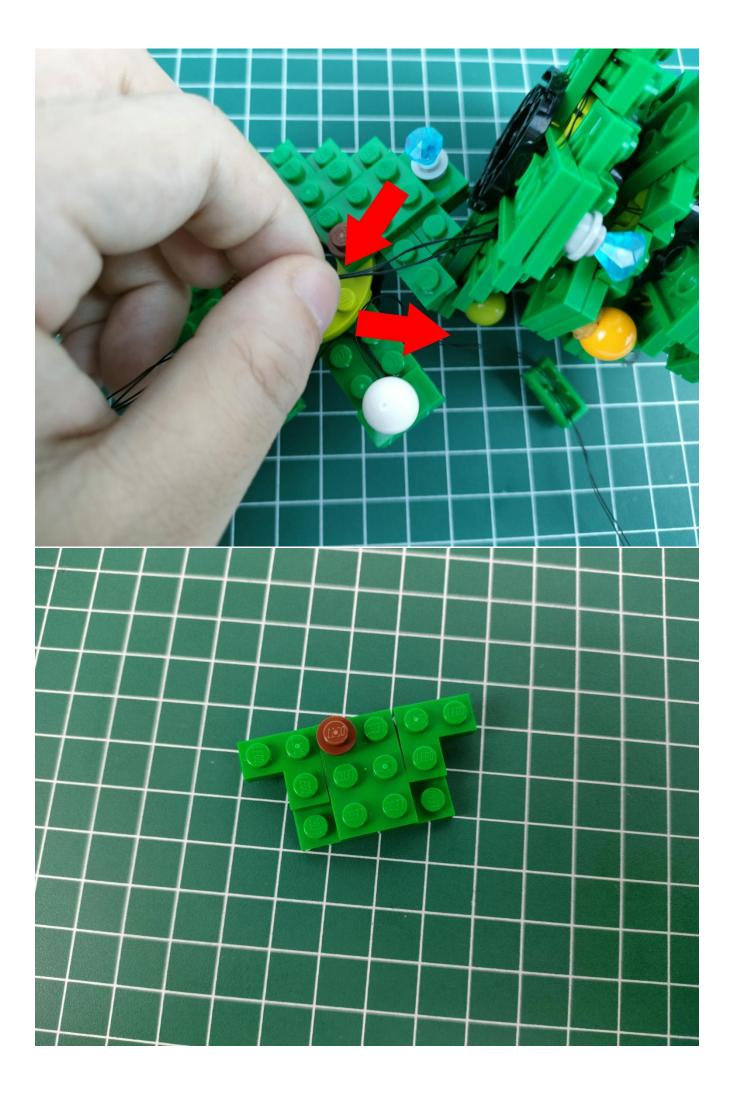


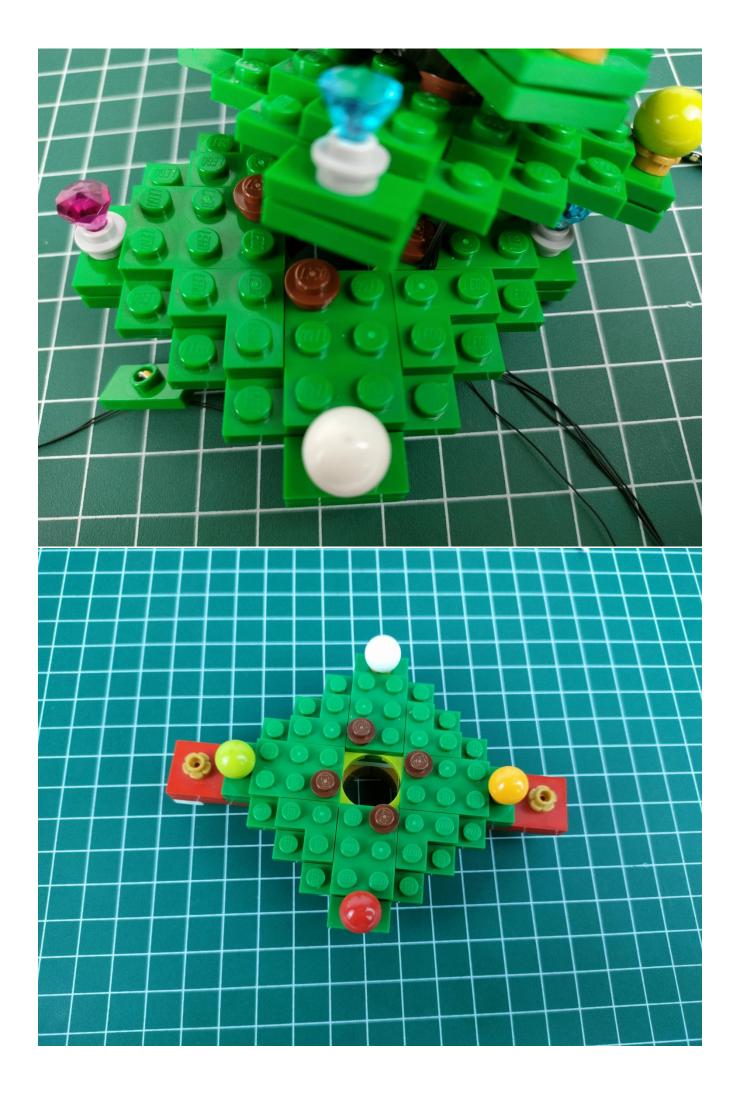


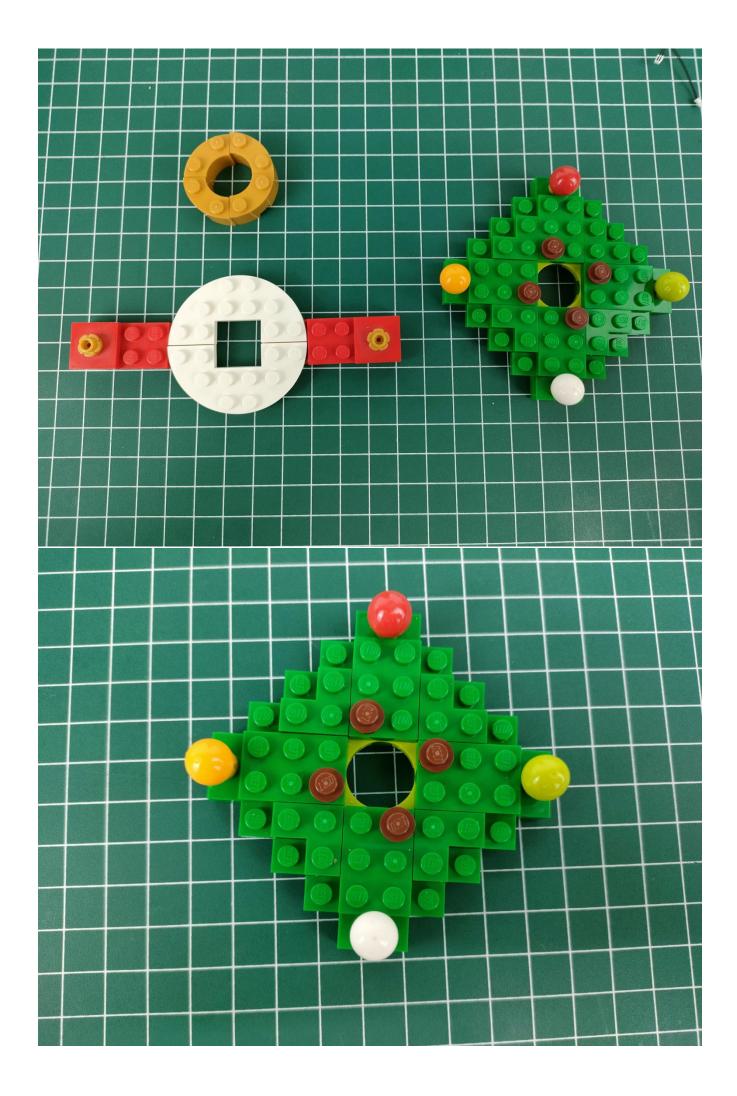


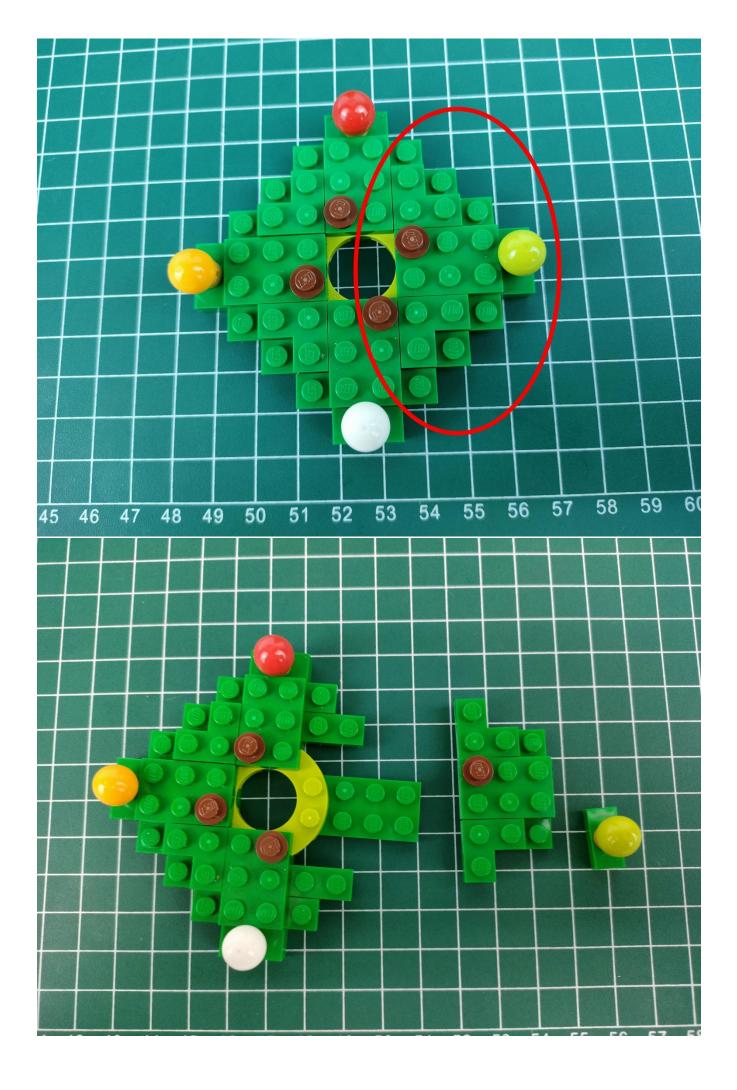


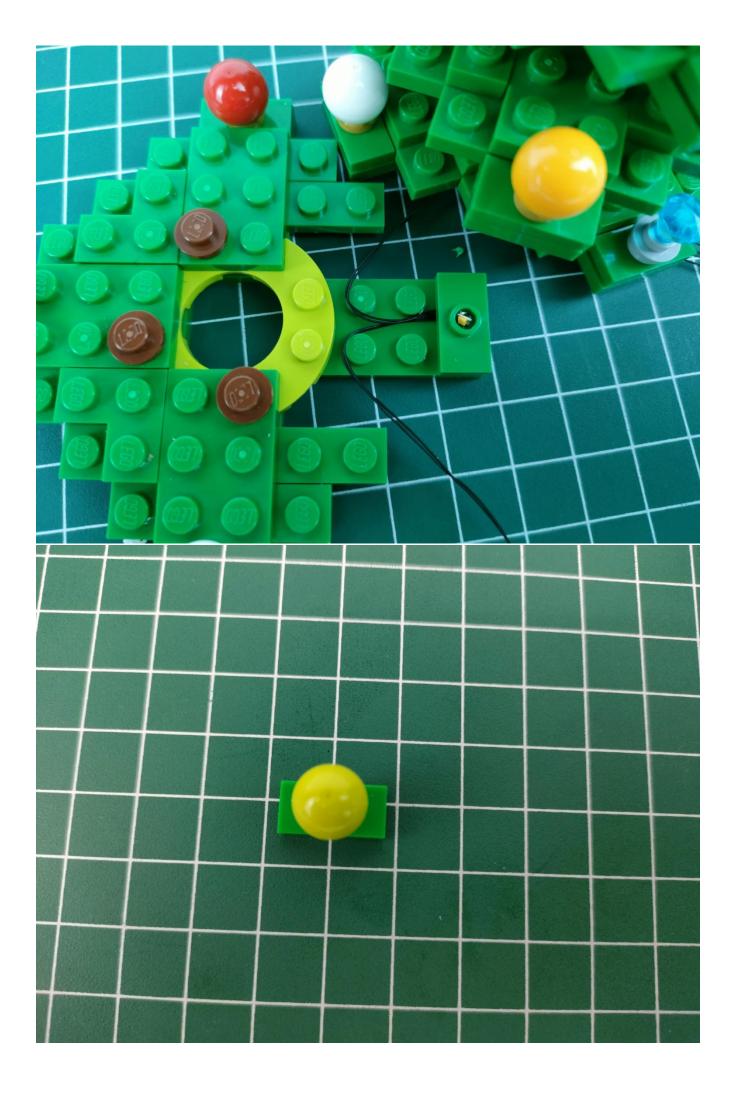


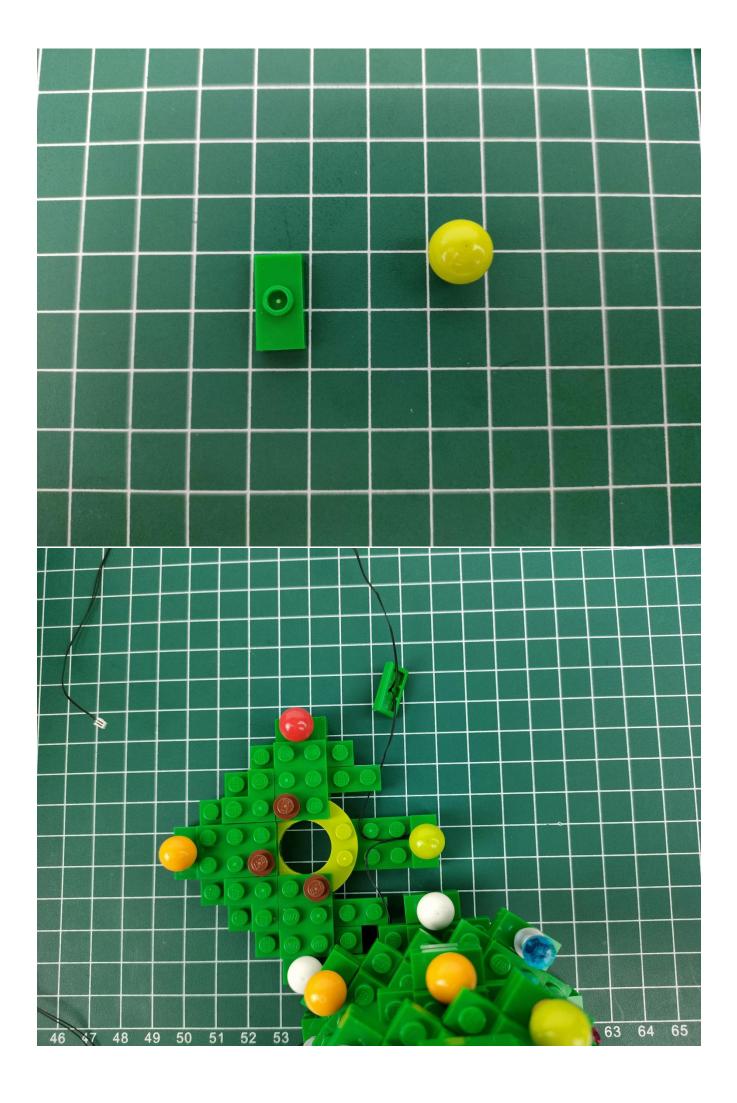


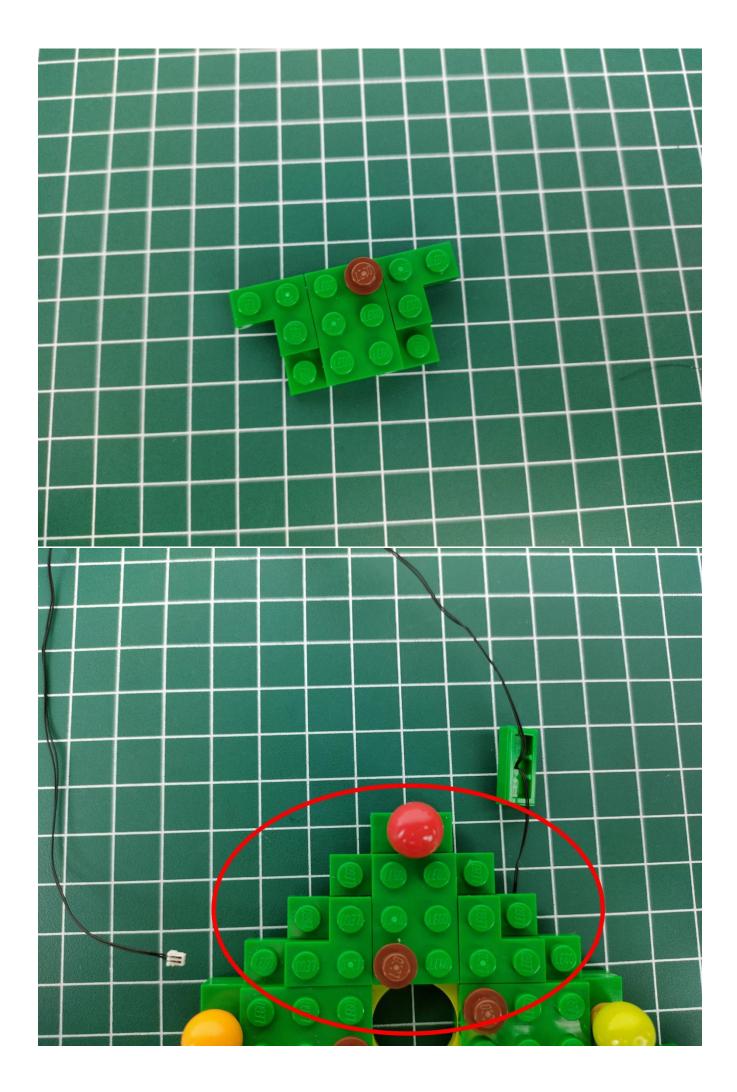


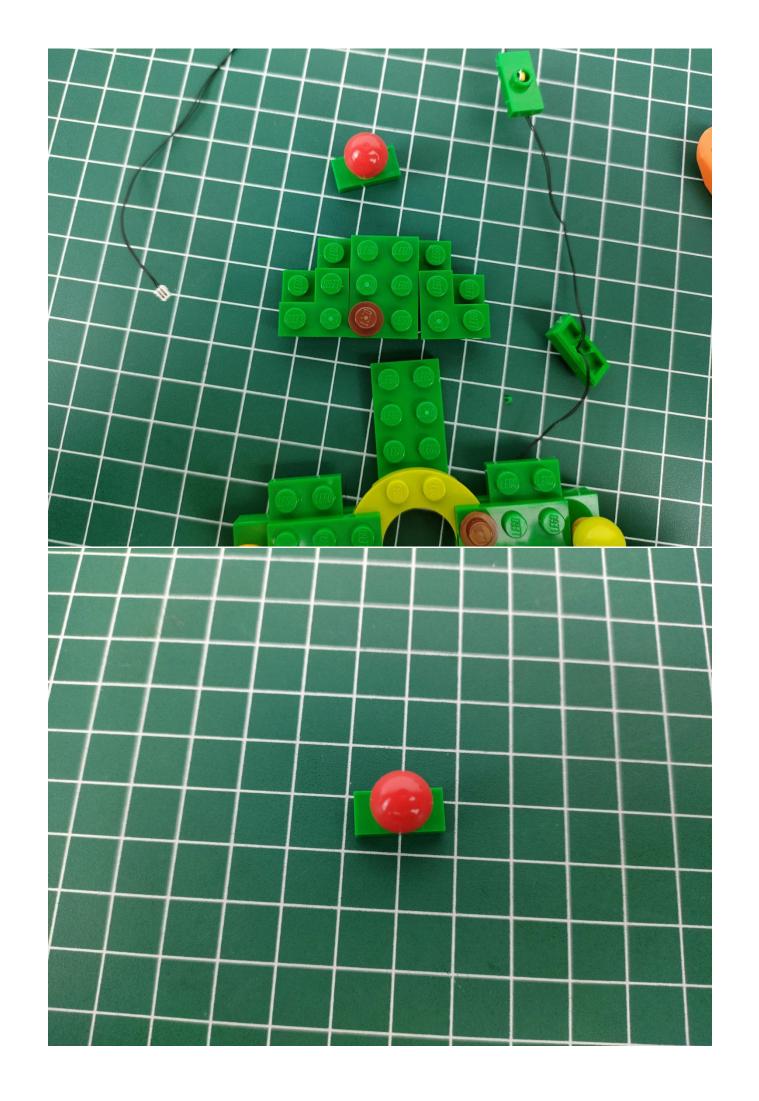


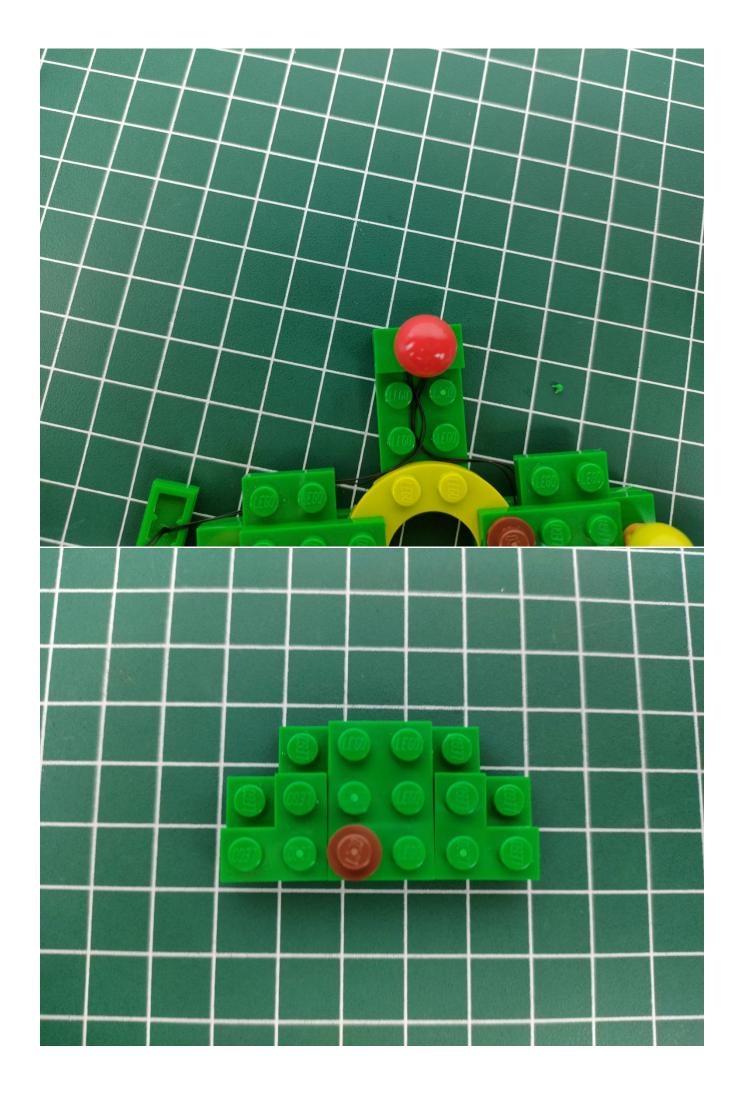


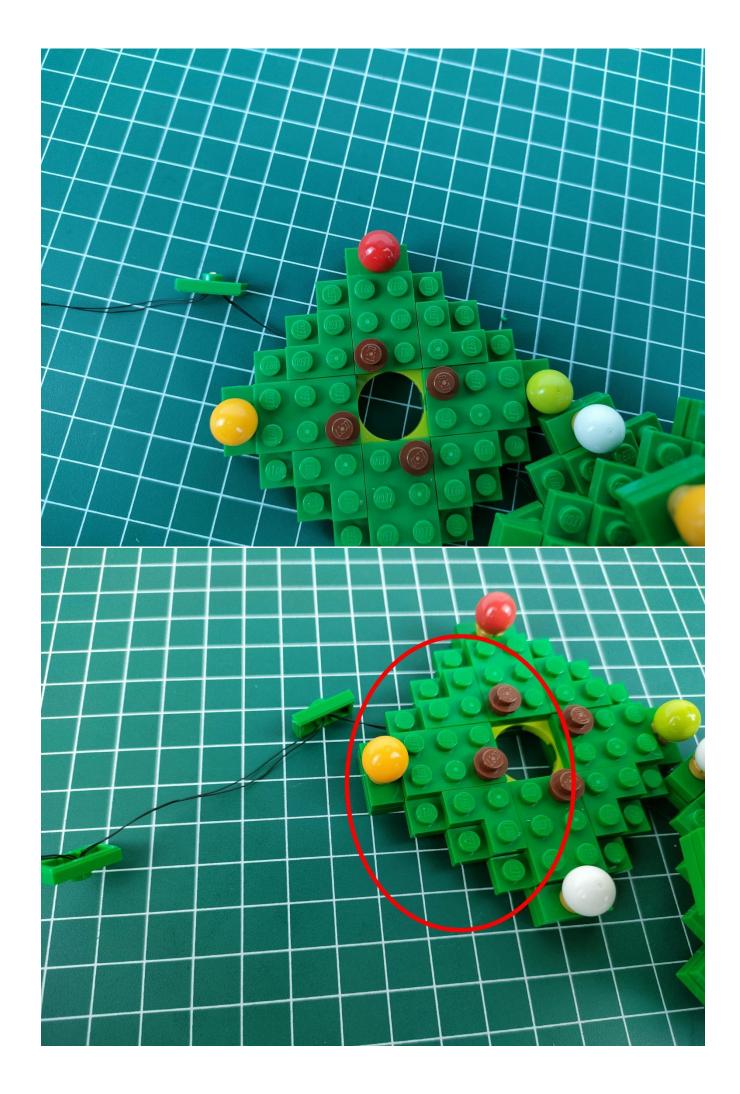


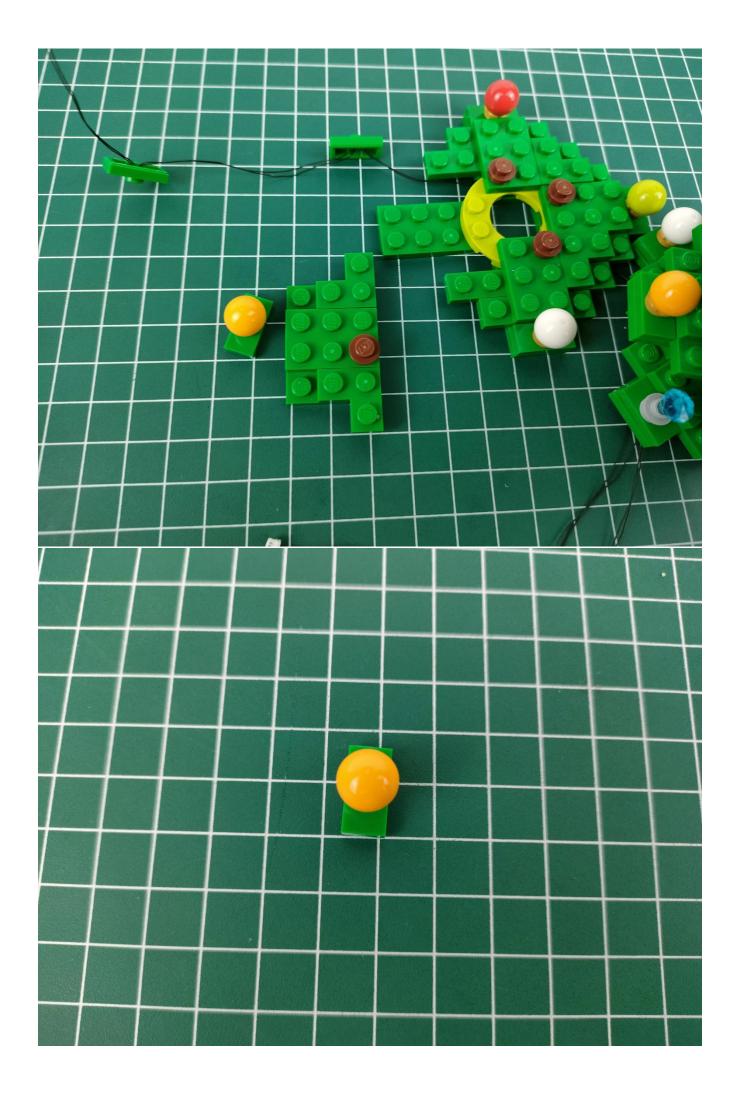

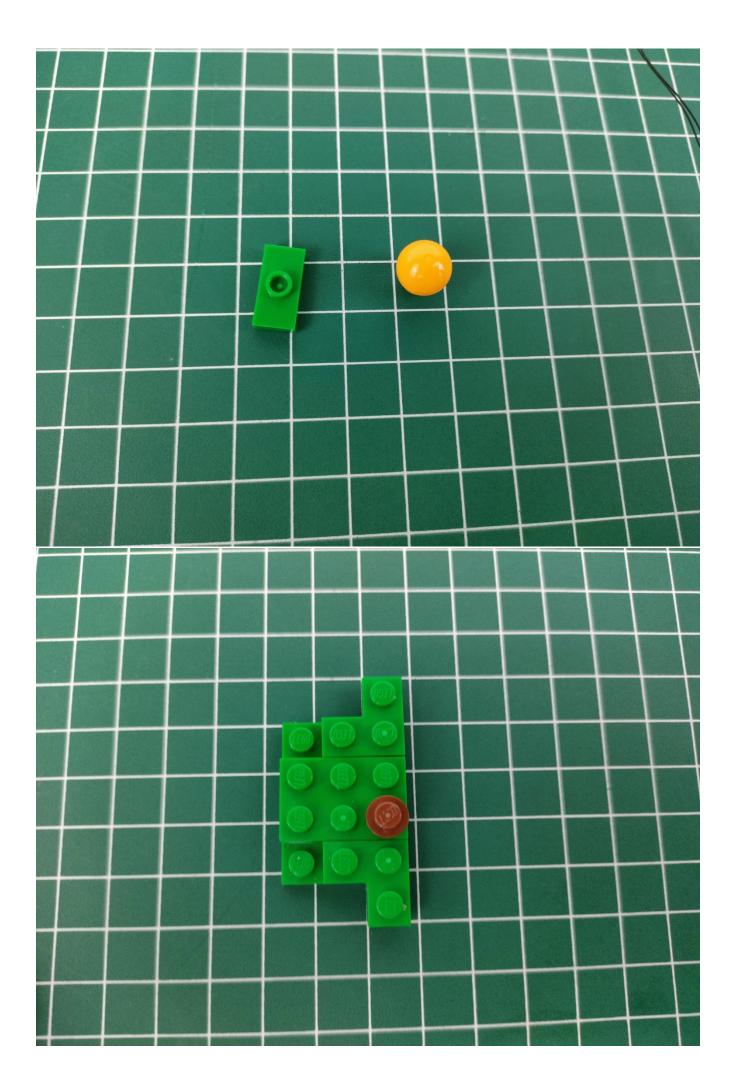


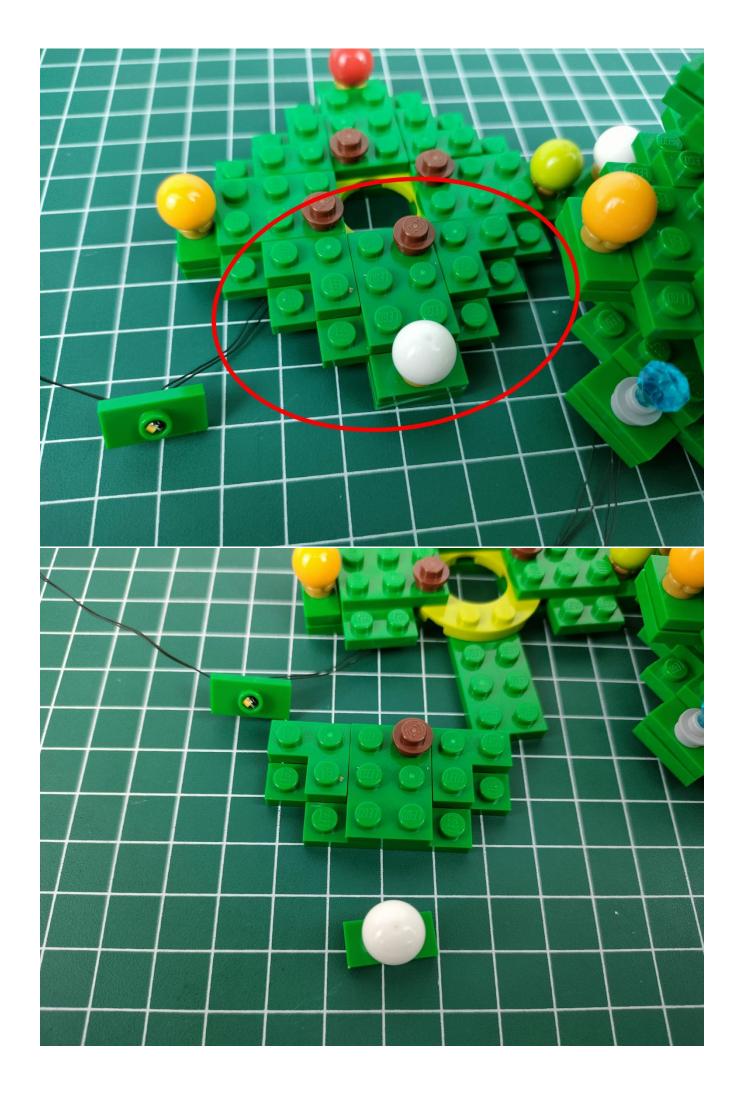


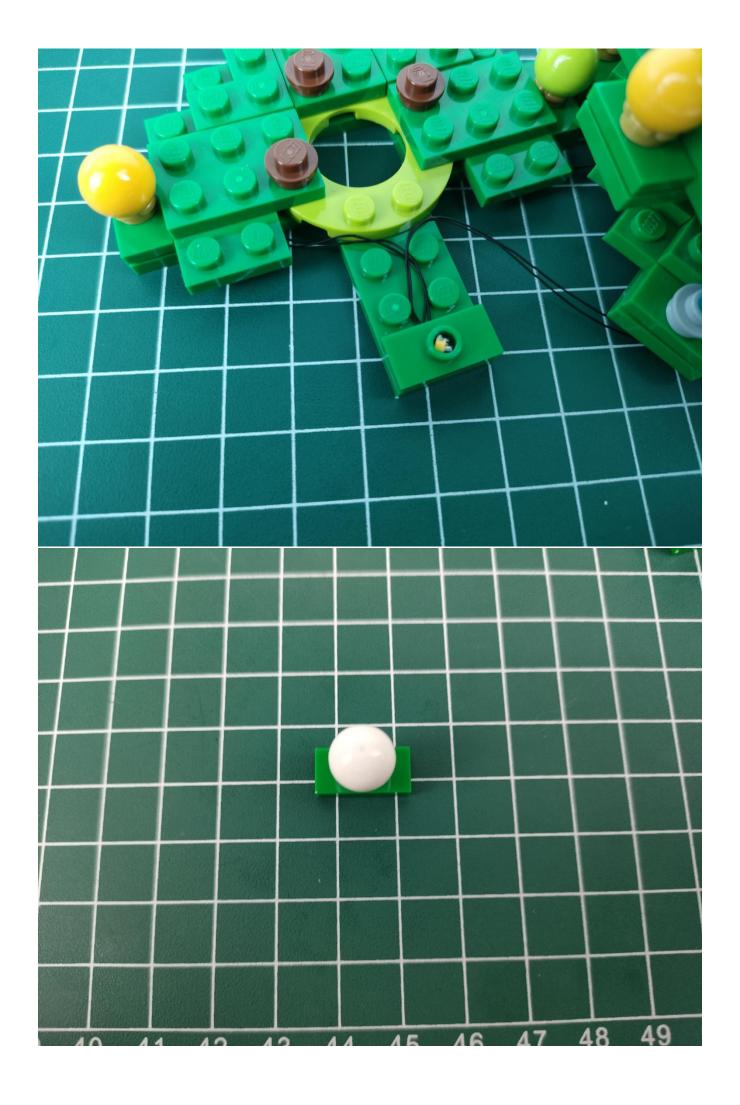


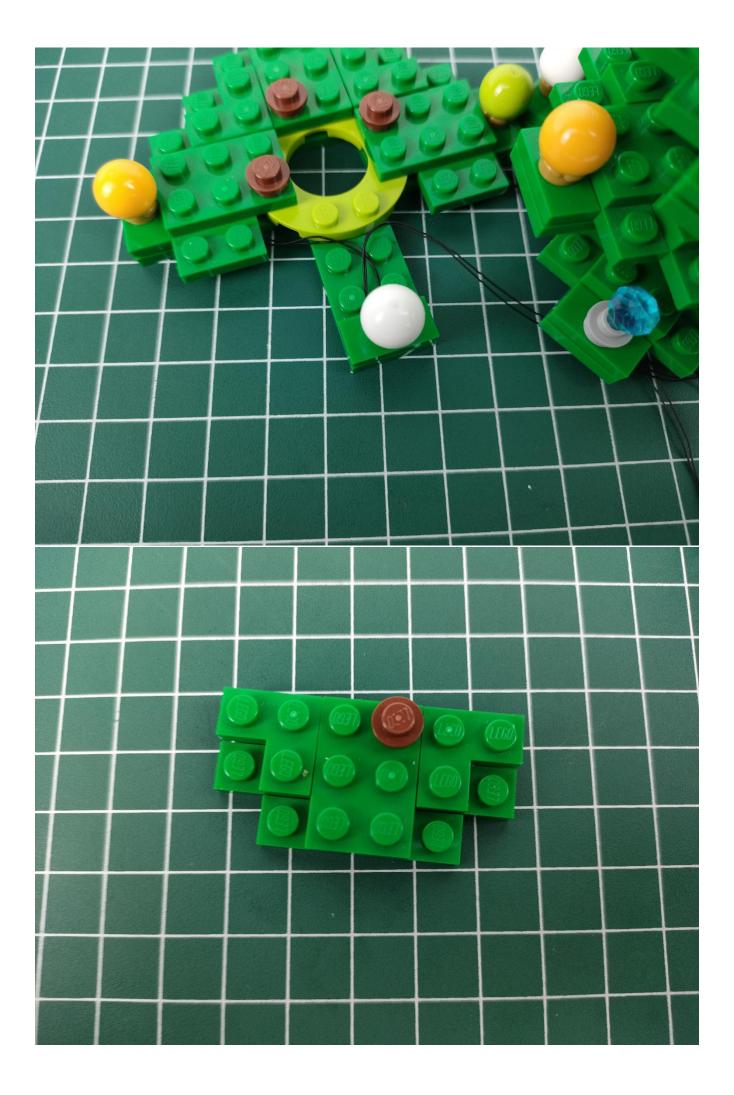





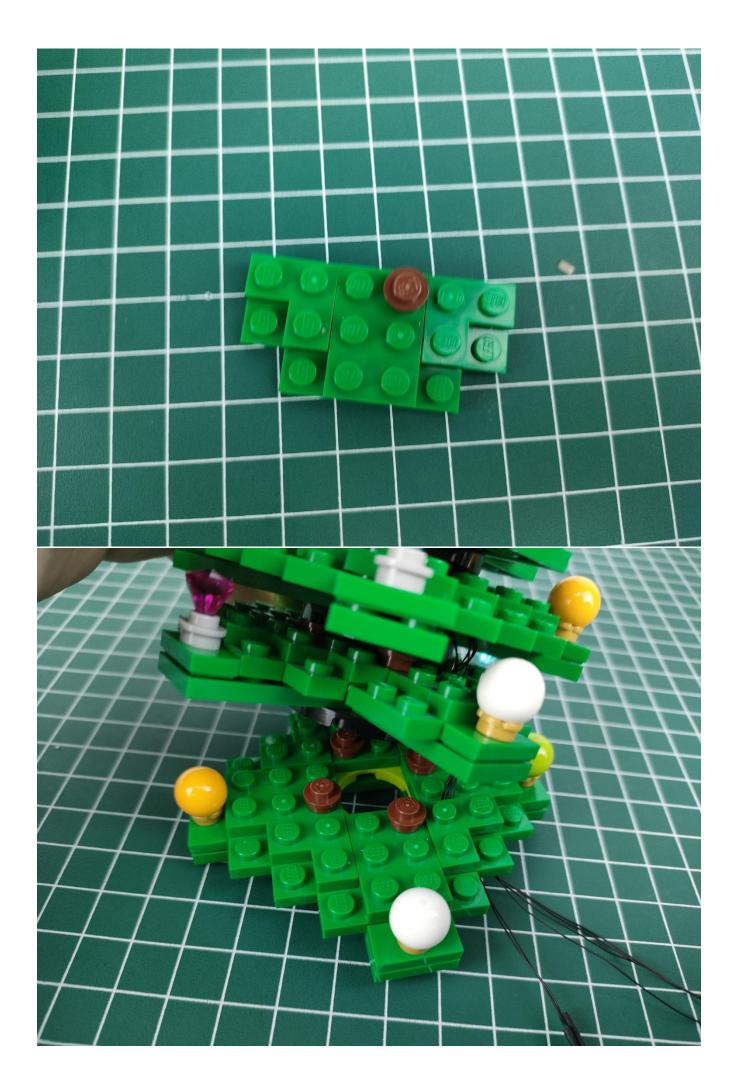


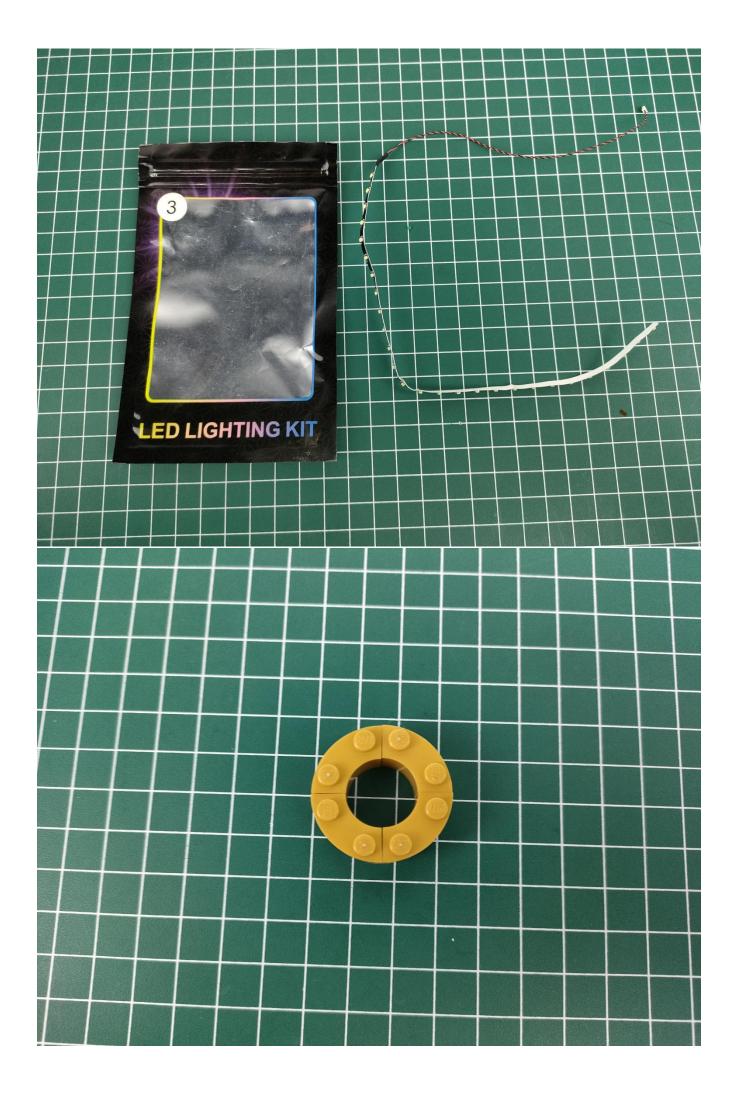

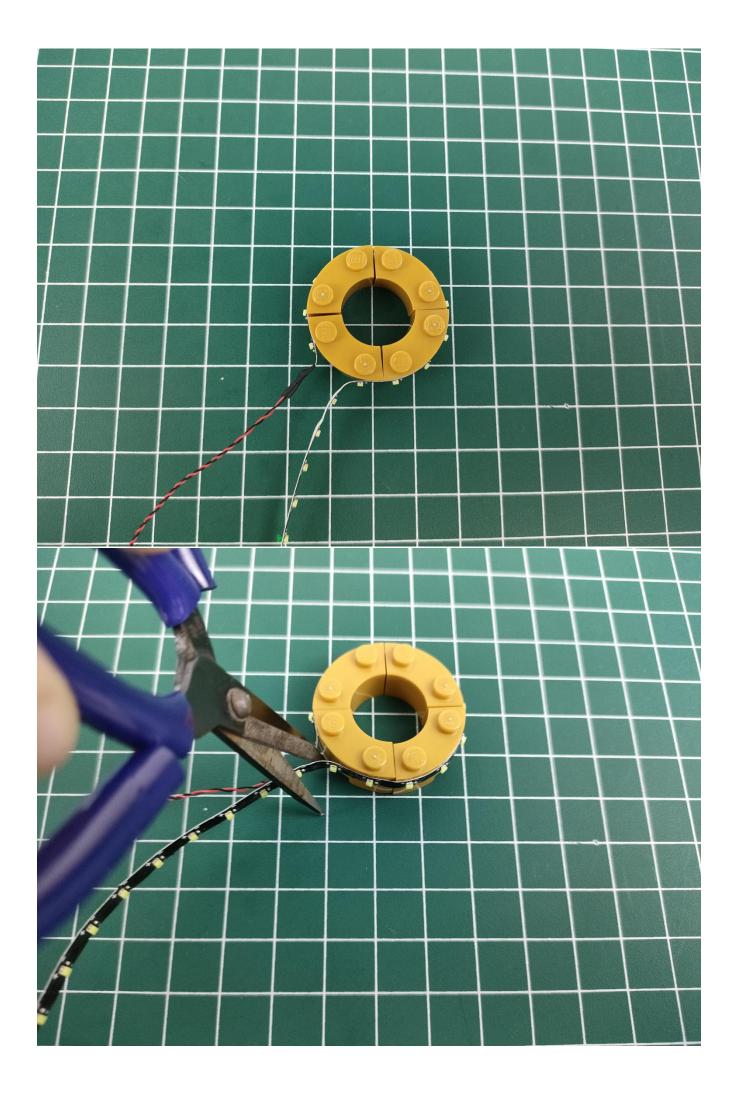

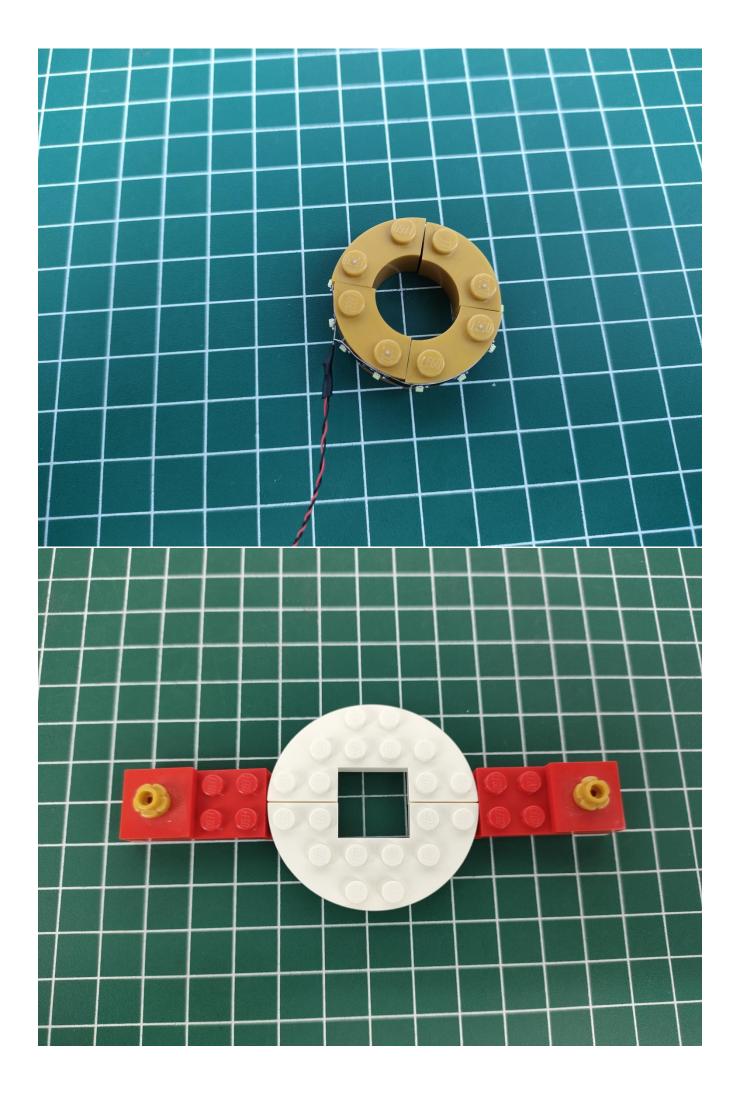

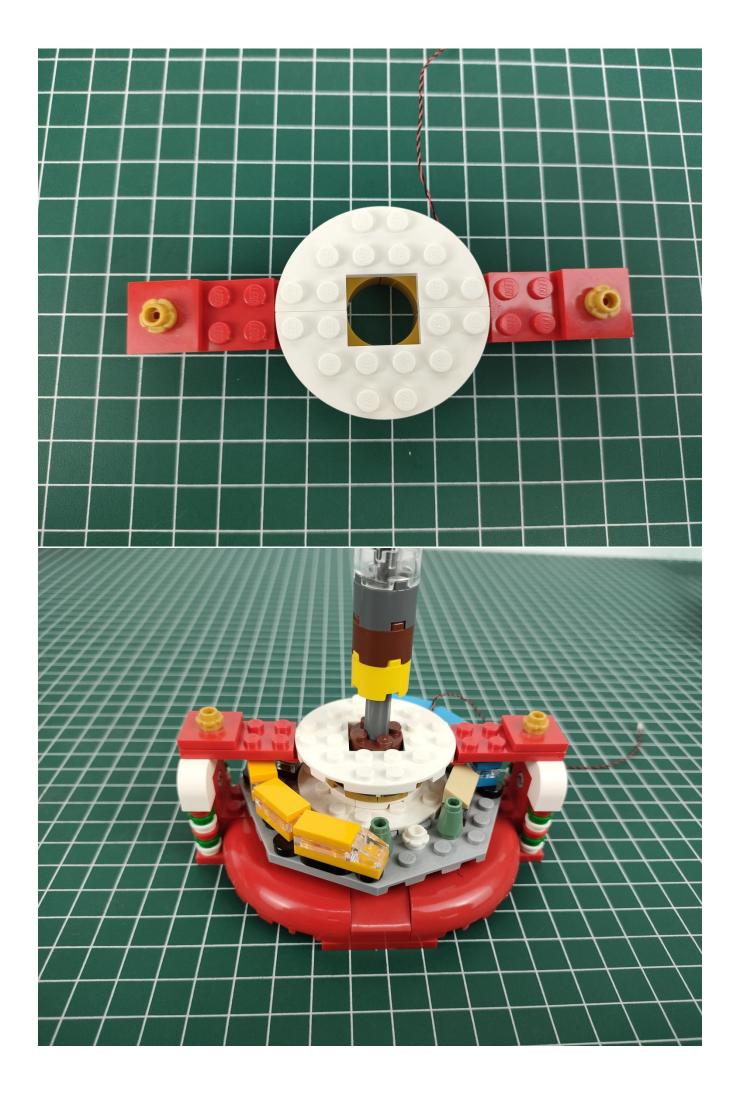

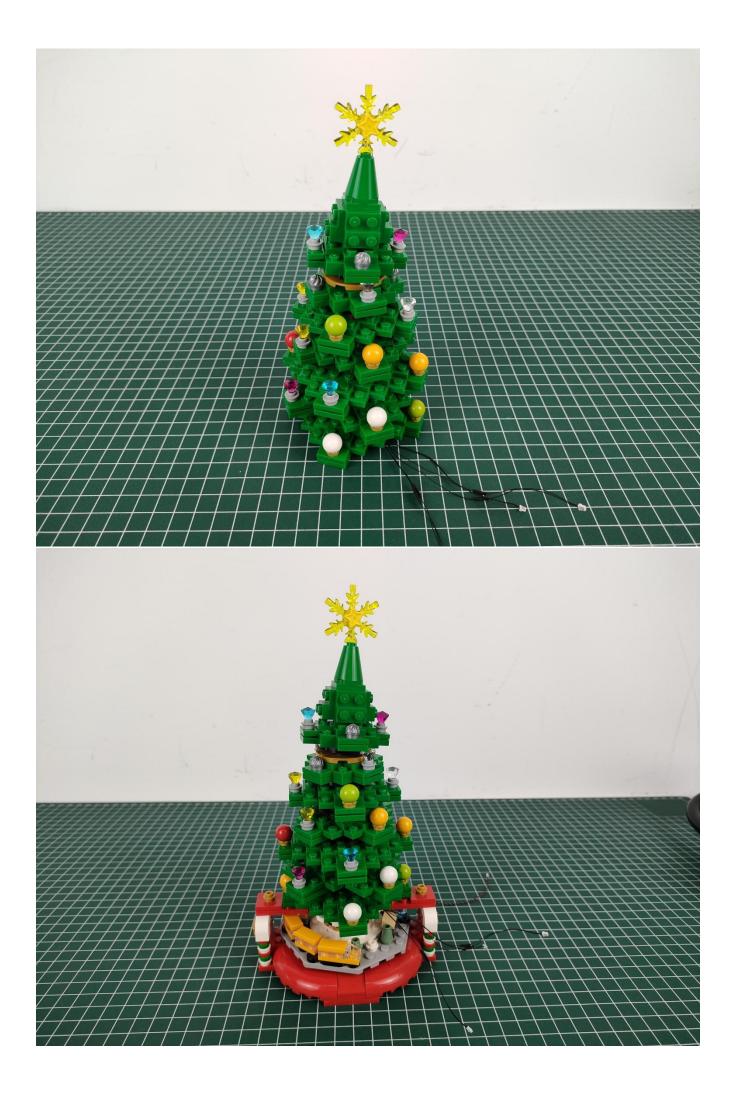













Please pay attention to the use of the interface. The interface is small. Please use it carefully: the = number of the 2P interface is aligned with the = number of the expansion board. The equal sign on the expansion board refers to the two solder joints on the outside, not the two inside the jack Metal pin.








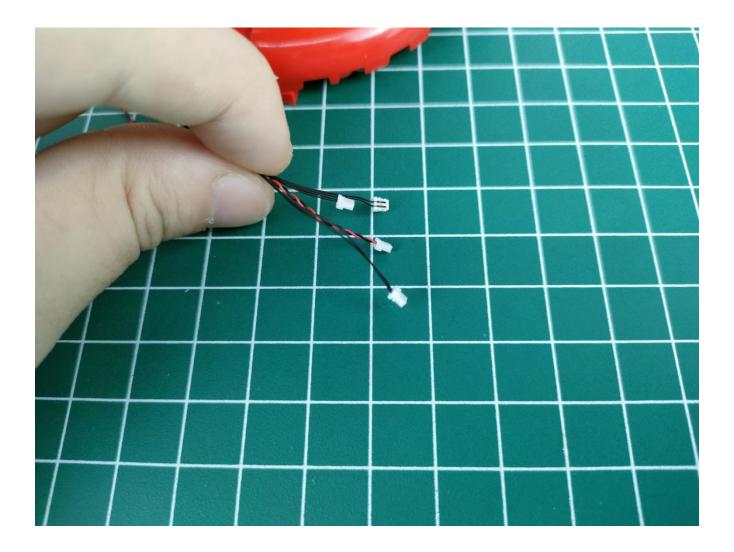

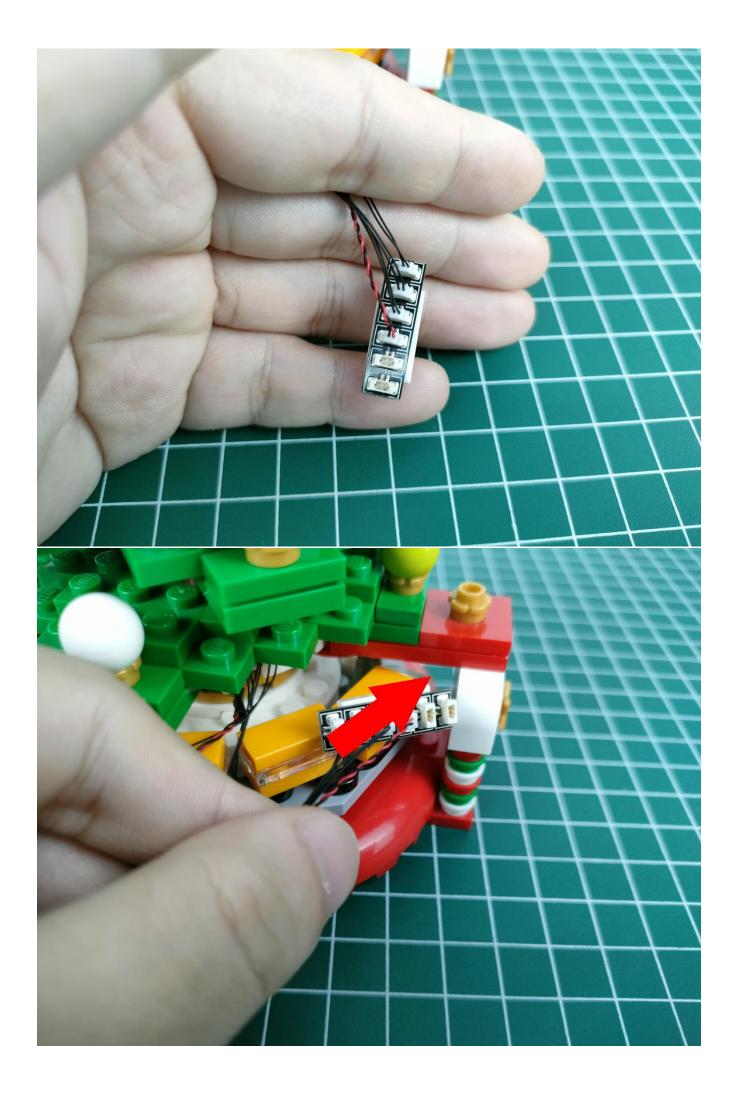





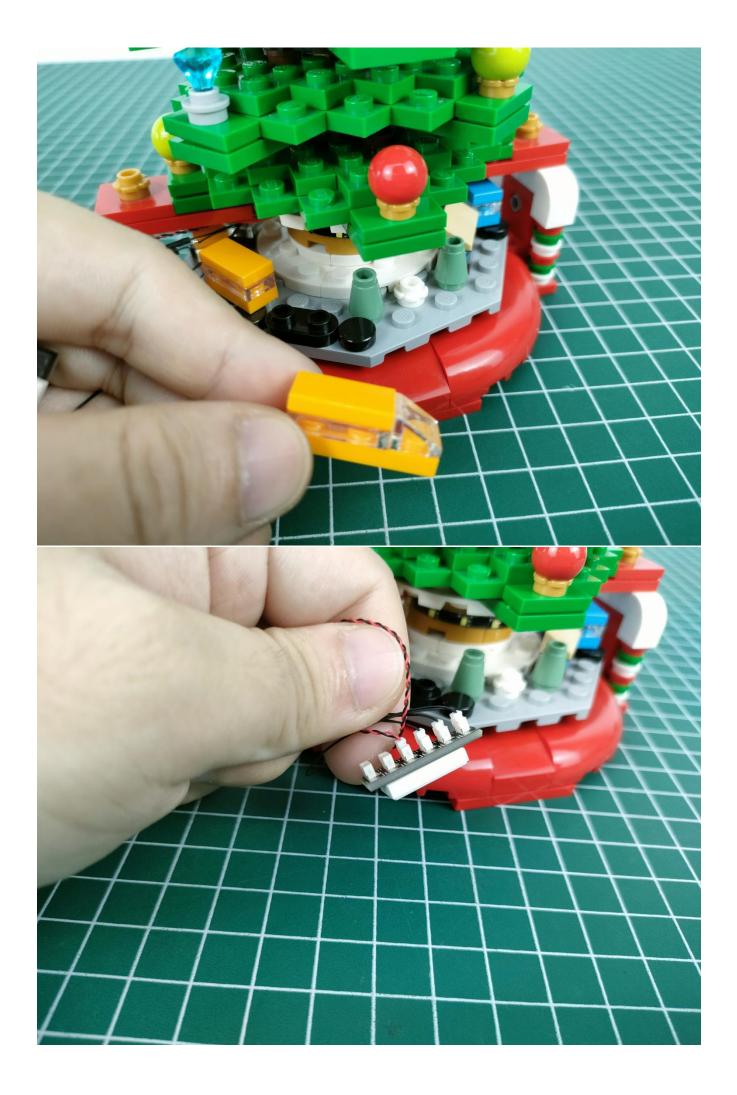











The installation is complete.



The above are ideas and instructions provided by our designers. Please move on:

- 1: Do you have any suggestions about the material and quality of our products?
- 2: Do you have any suggestions on the installation instructions and the degree of difficulty of the installation?
- 3: If you have better installation method and ideas, please contact us in time.