21329 Fender Stratocaster

LED lighting Kit (Sound and Light Remote Control Version)

LG130/GC130

Instructions for installing this kit:



Step 1

Test:

This product has 5 bags, and the battery box is a gift. (Without battery)



Take out the parts in bag 4. (the parts used in this article are all samples, and may be slightly different from the finished product, please forgive me).




Take out an 4-seater expansion board from the No. 3 bag.




The power supplies that can be used with the USB power cord are as follows.


USB connectors to connect devices

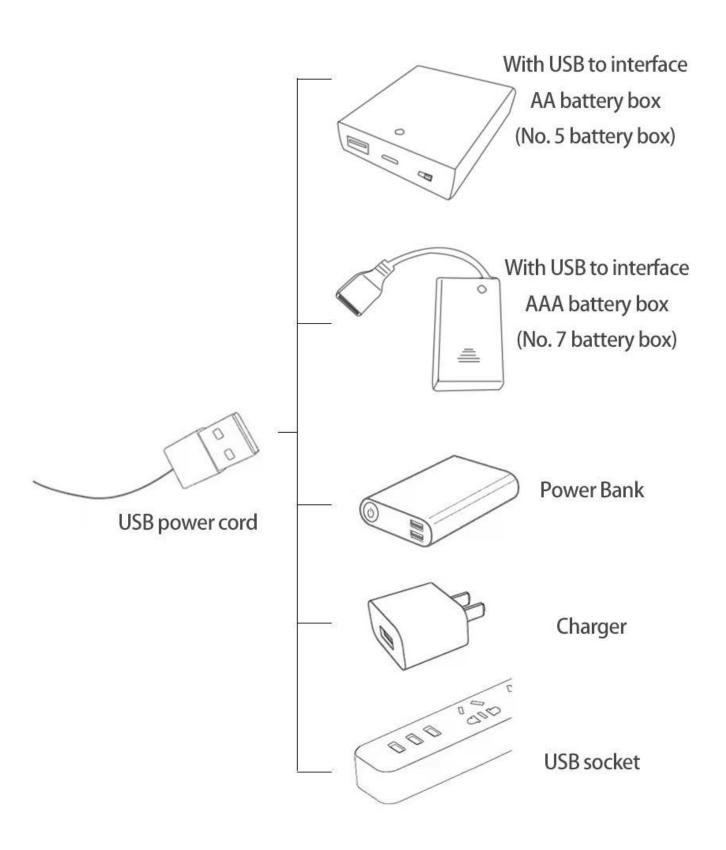


Tear off the seal of the expansion board.

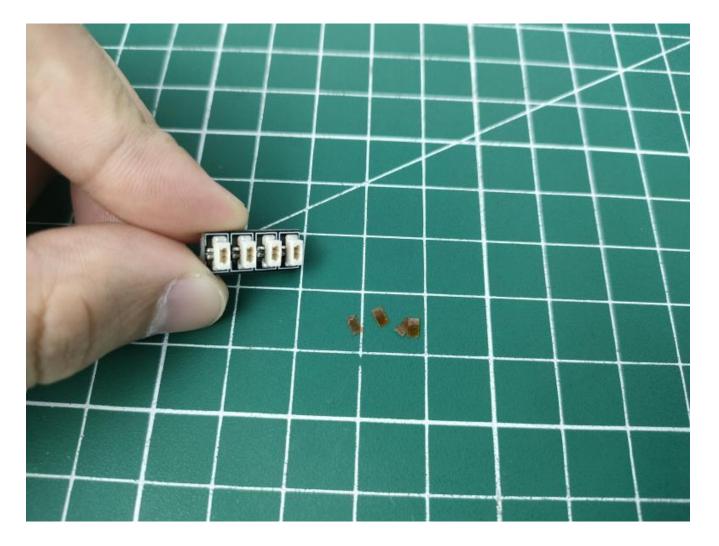


Please pay attention to the use of the interface. The interface is small. Please use it carefully: the = number of the 2P interface is aligned with the = number of the expansion board. The equal sign on the expansion board refers to the two solder joints on the outside, not the two inside the jack Metal pin.







Connect the USB power cord to the expansion board.

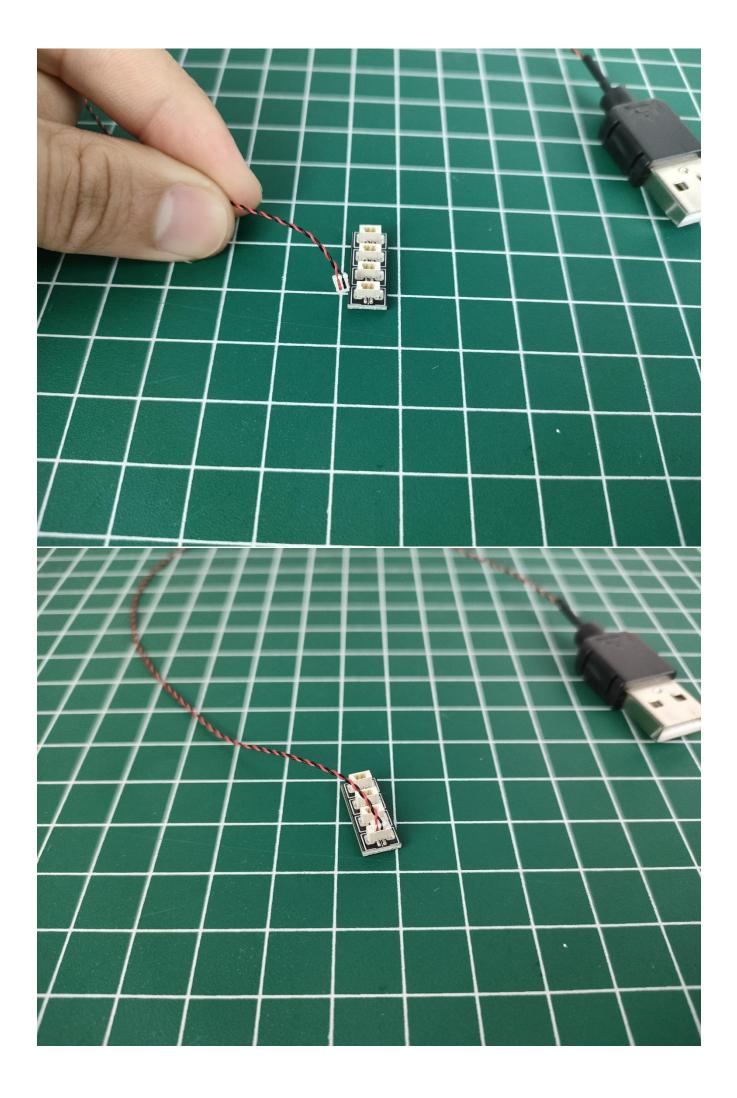


The other side of the USB power cord is connected to the mobile power supply (power supply is self-provided).



Take out the lighting from the No. 1 bag.



Connect them to the expansion board. Test whether the lighting is normal, if there is any abnormality, please contact us in time.

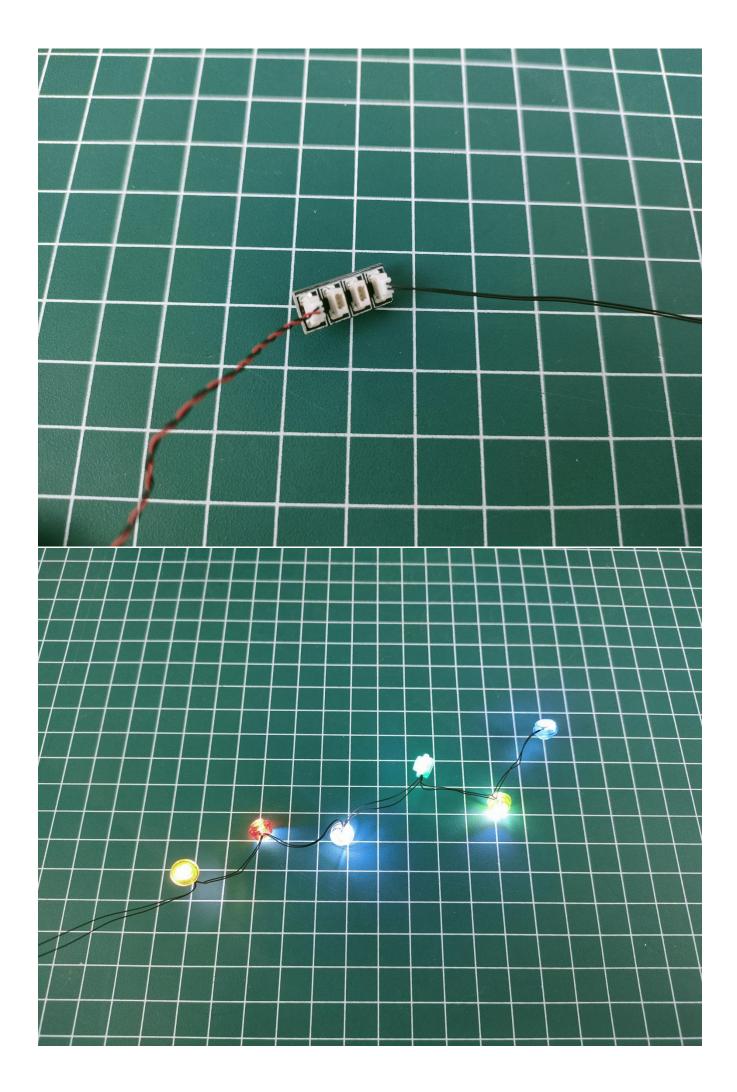


After the test is complete, unplug the lighting from the expansion board. Put the non-abnormal lighting parts back into the original bag first.

In order to avoid not lighting up after installation, the lighting in other bags should be tested in the same way before installation.



Note:


Please be careful when installing. The lamp wire is relatively slender and cannot be pressed on the raised position of the building block. It should pass along the gap, otherwise the lamp wire will be pinched.

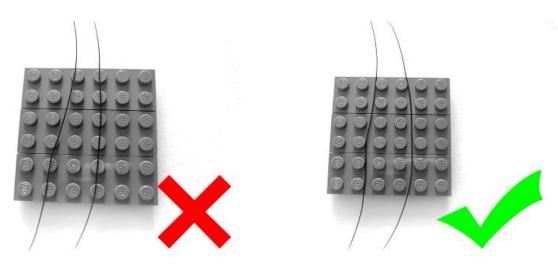



start installation:







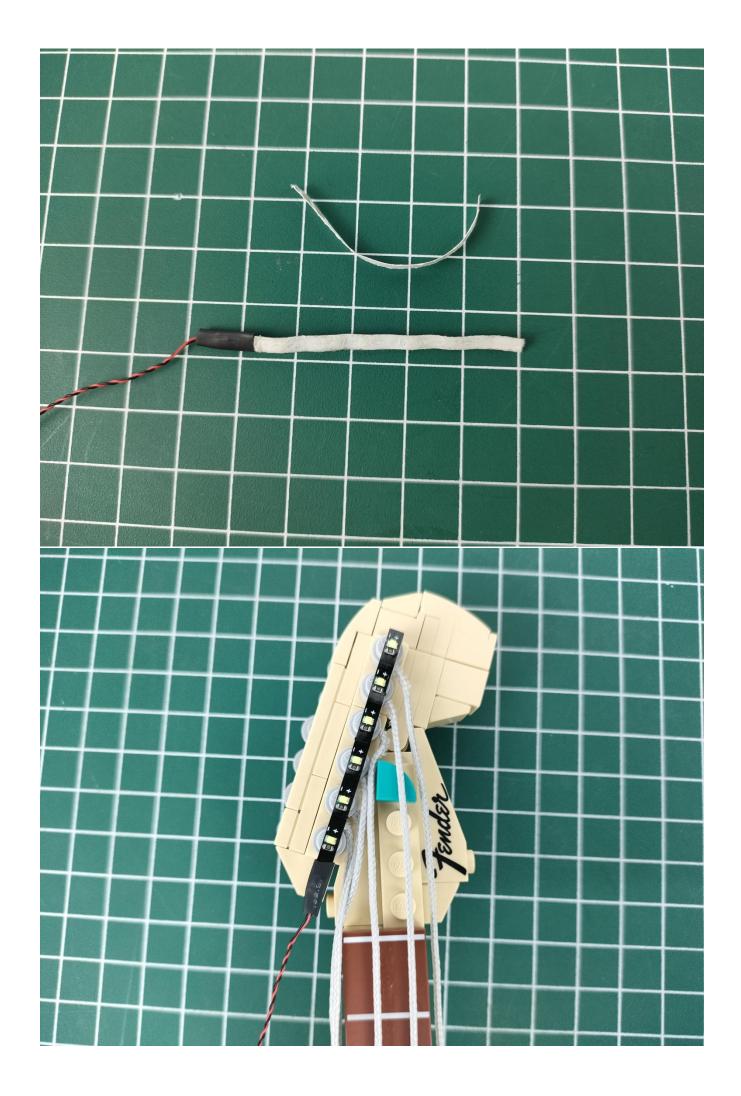


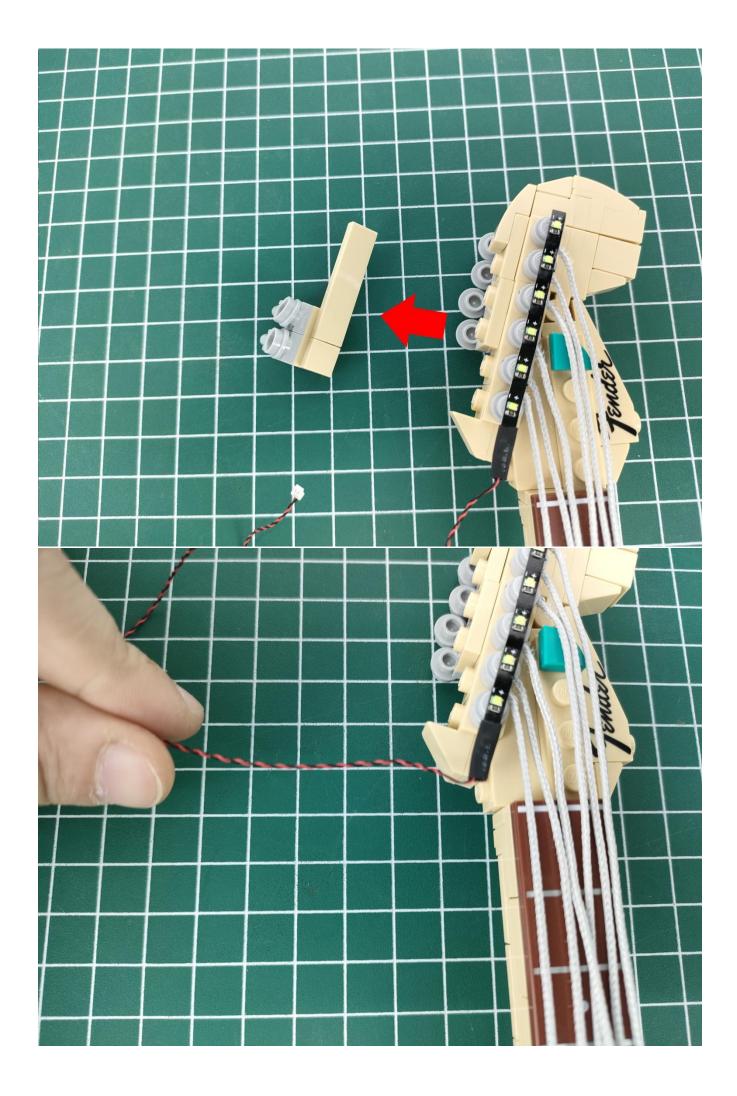


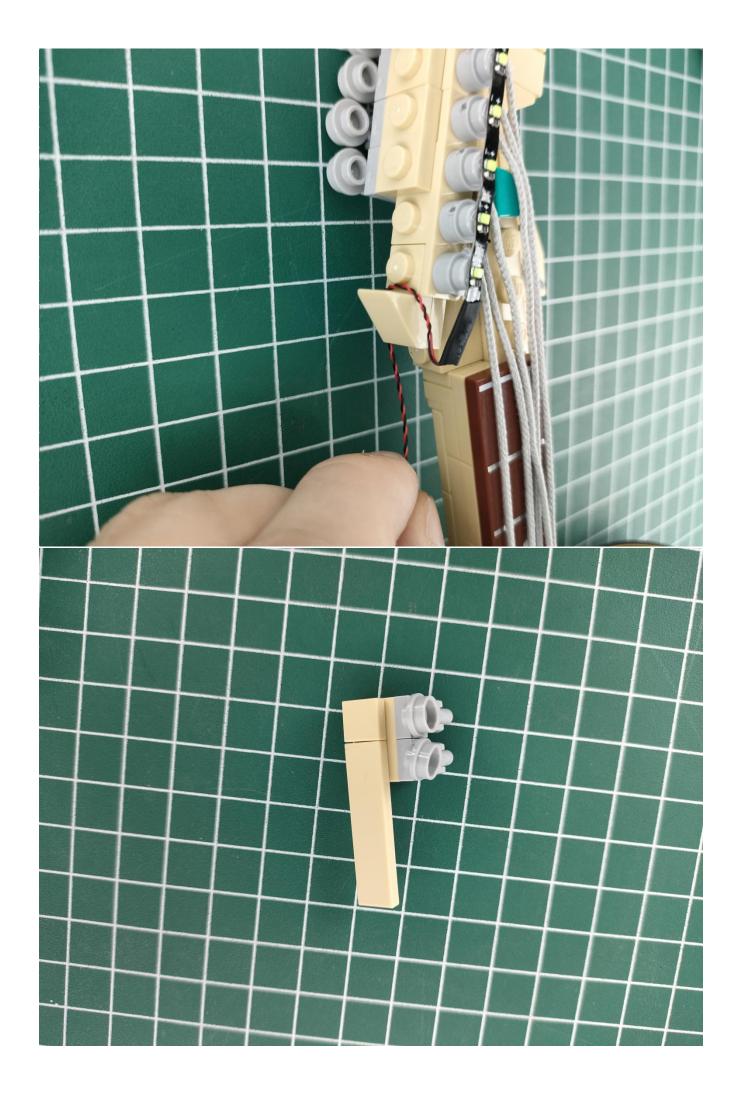


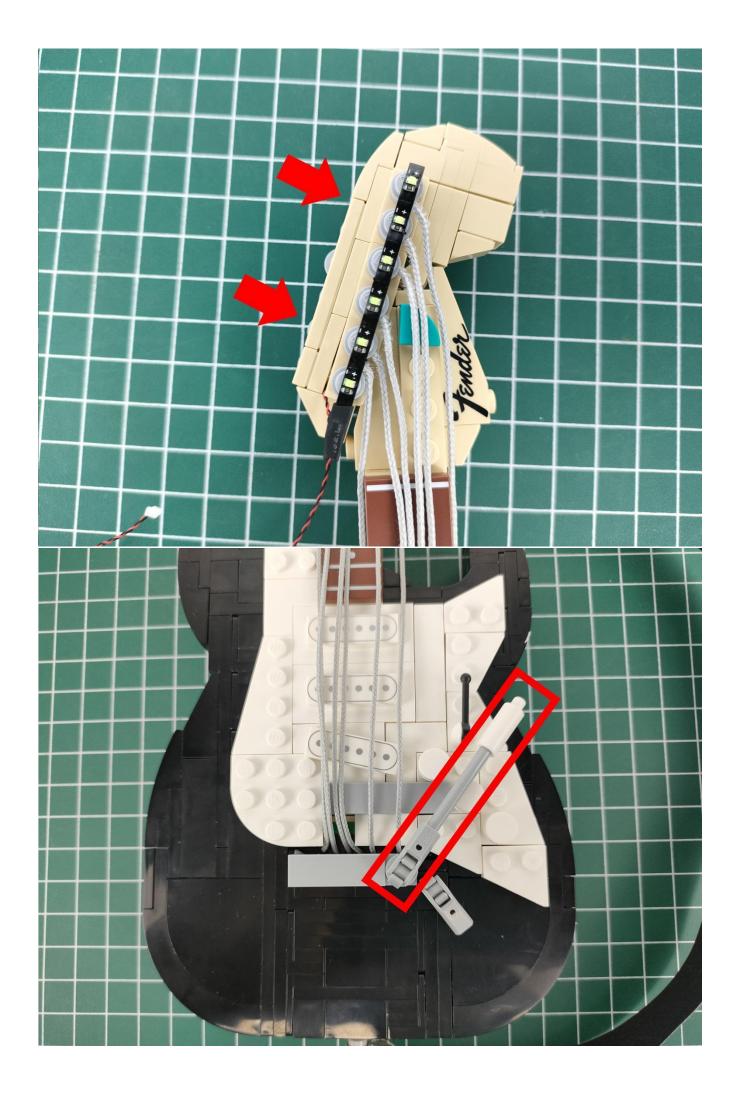


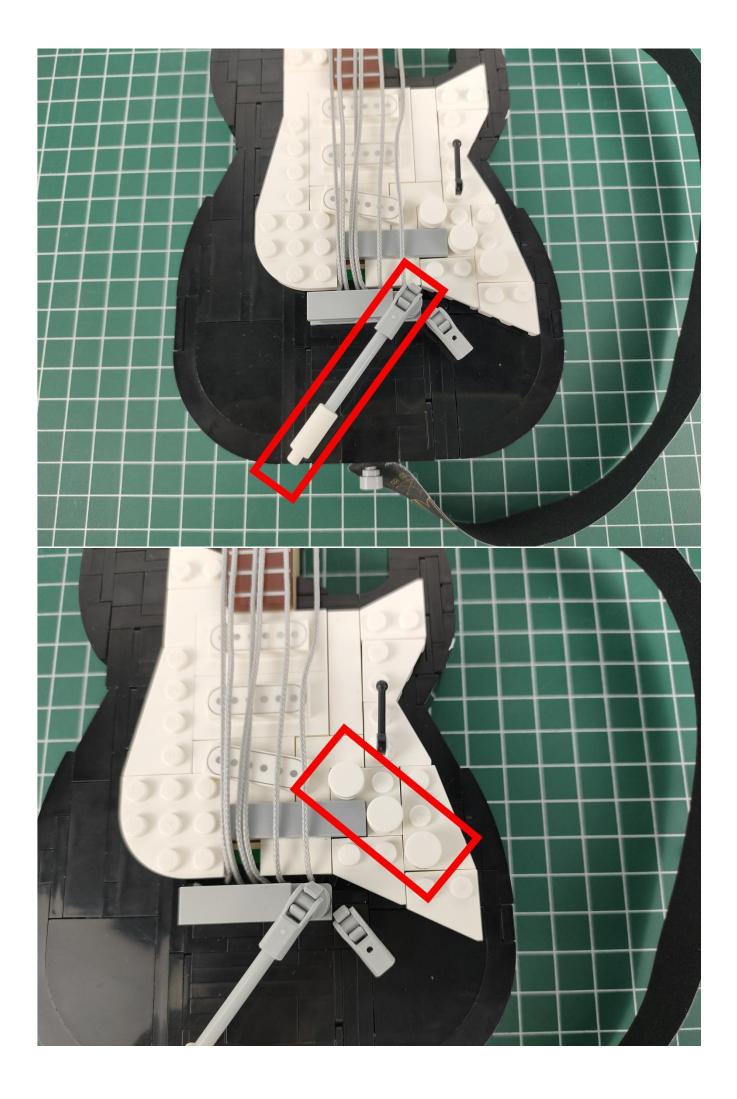


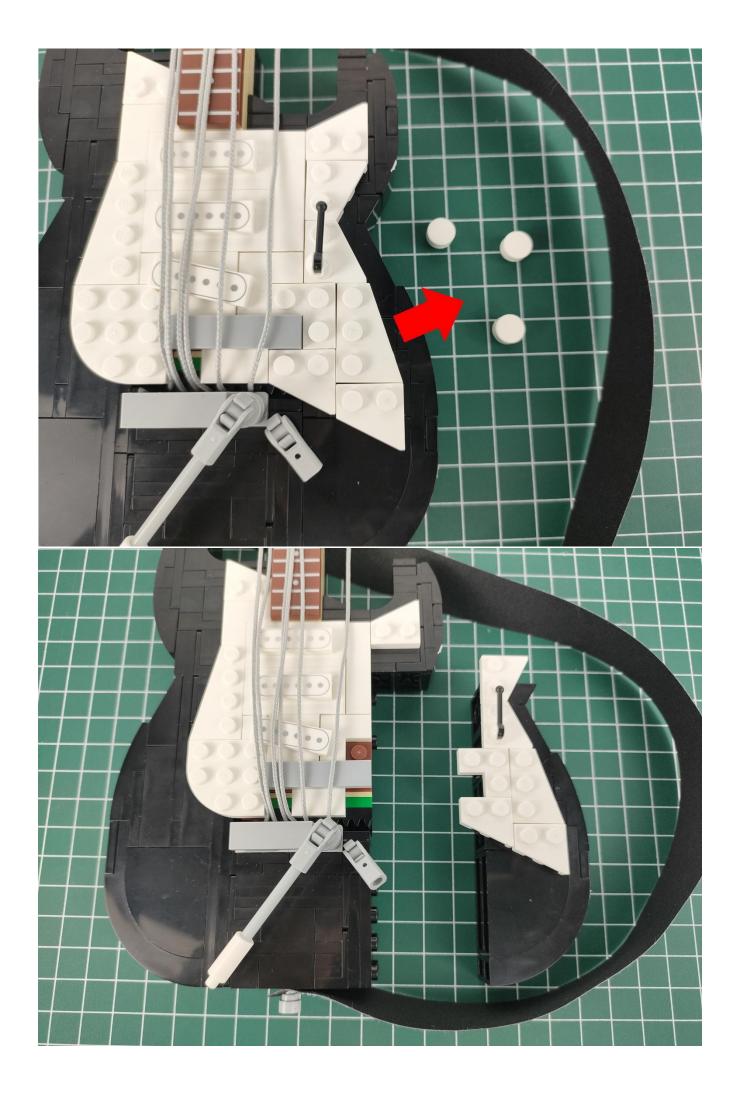

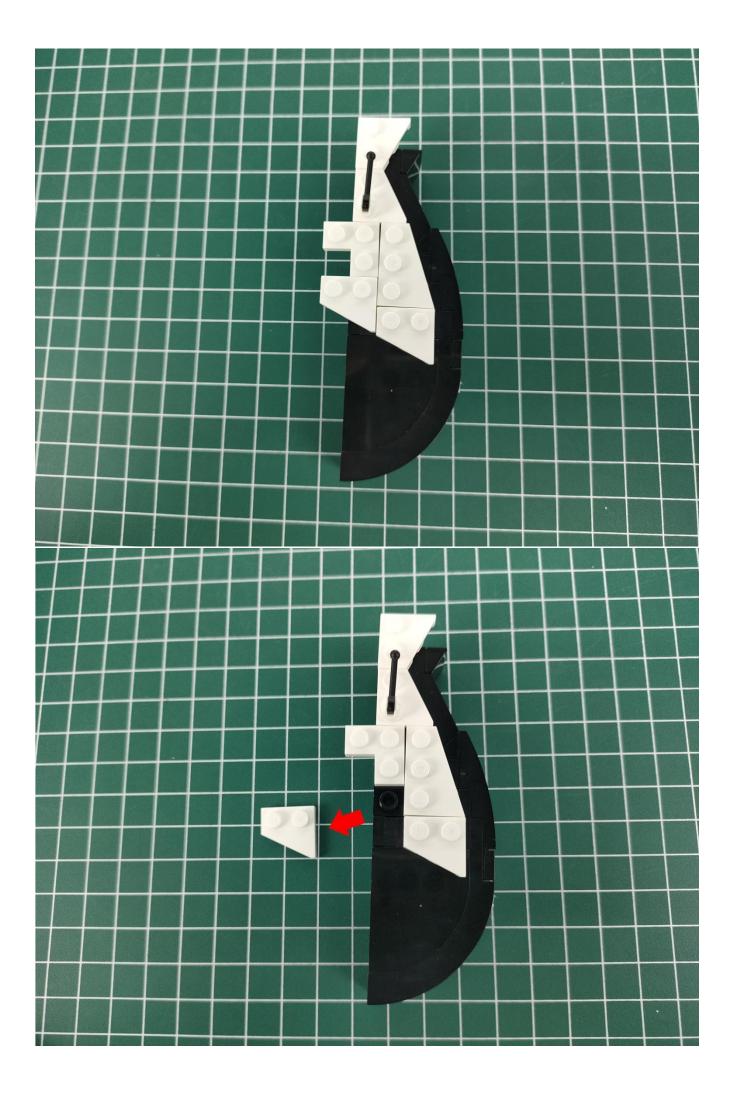

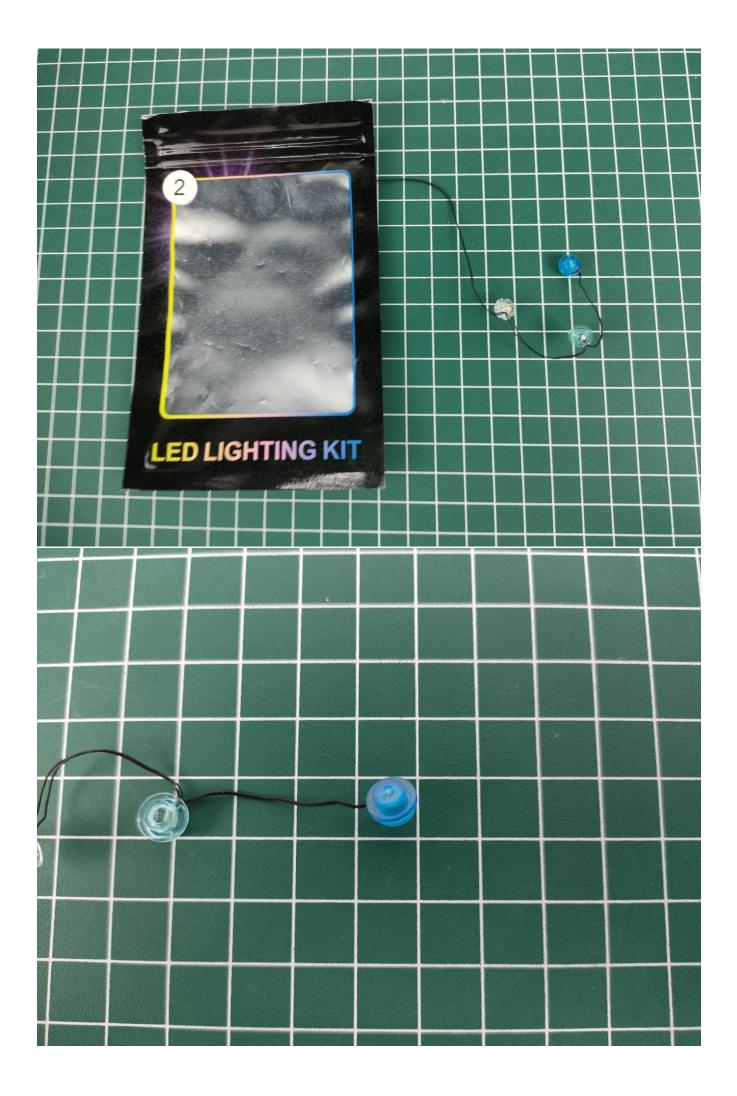


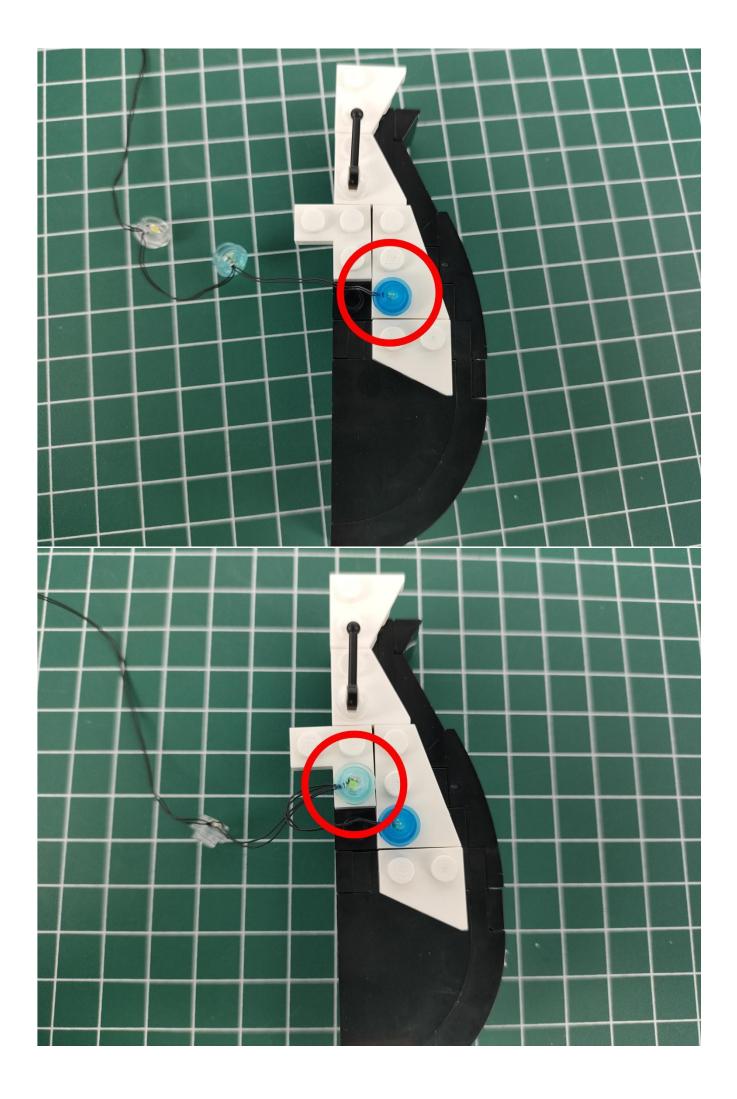


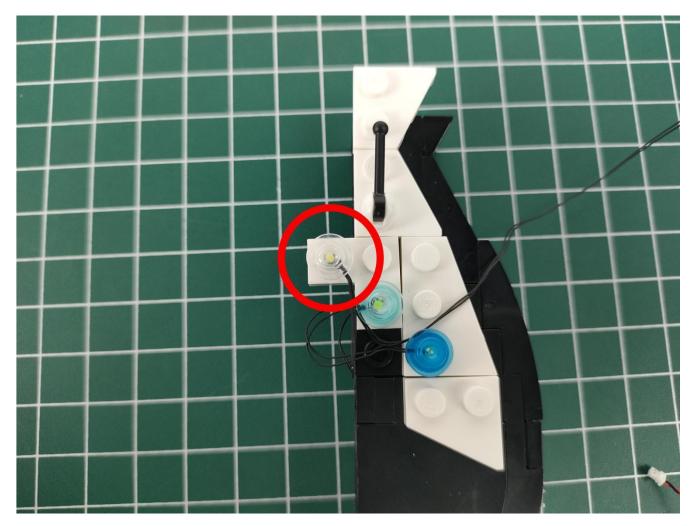


Note:

Please be careful when installing. The lamp wire is relatively slender and cannot be pressed on the raised position of the building block. It should pass along the gap, otherwise the lamp wire will be pinched.

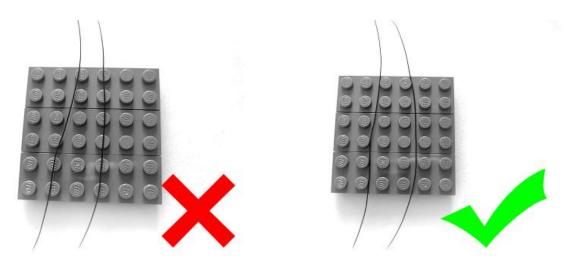


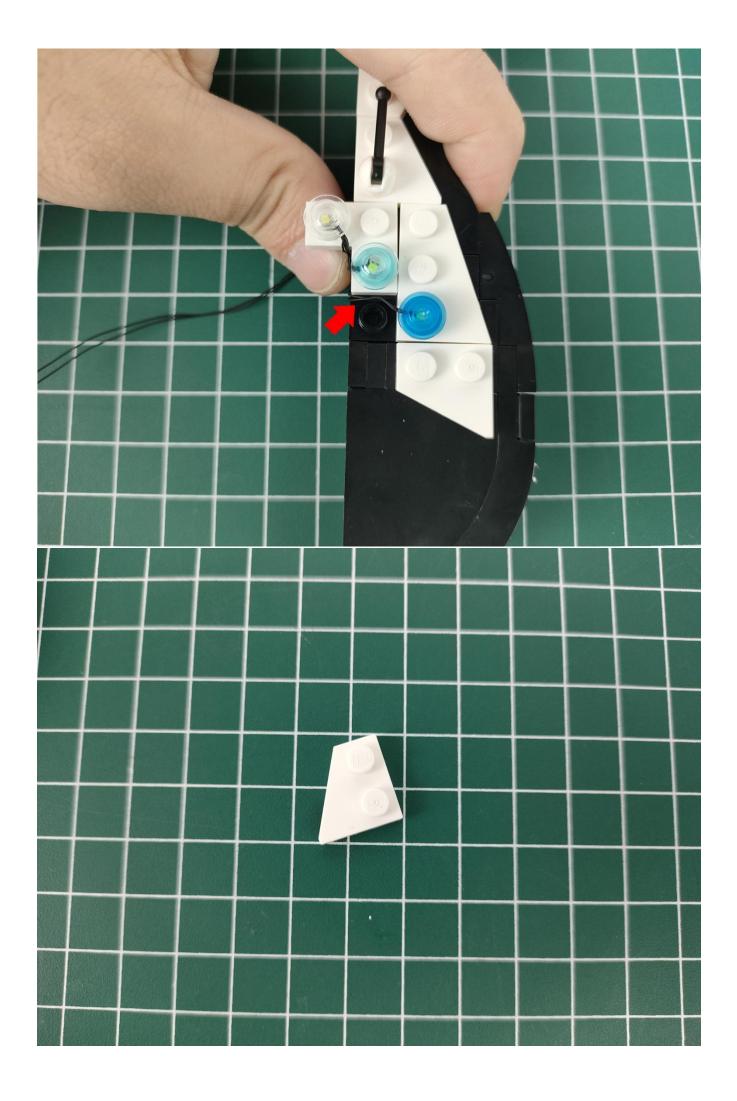


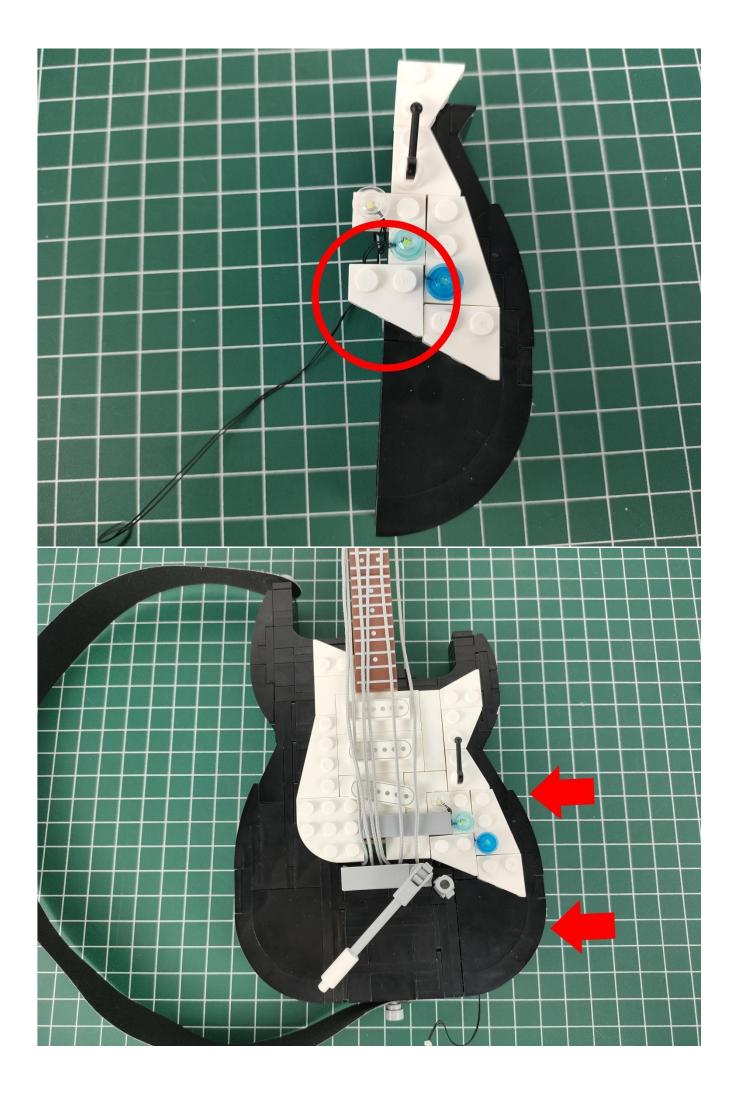


Take out the two colorful flashing light strips from the No. 3 bag (the color of the light pellets is white and transparent when it is not powered on).




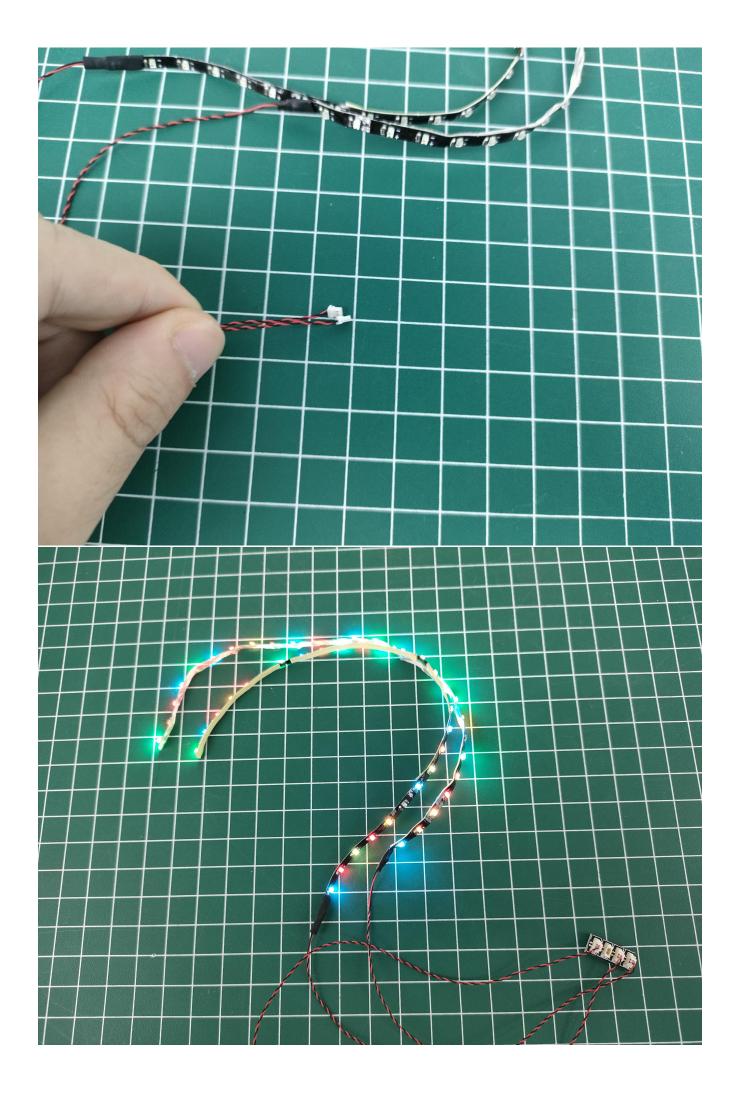


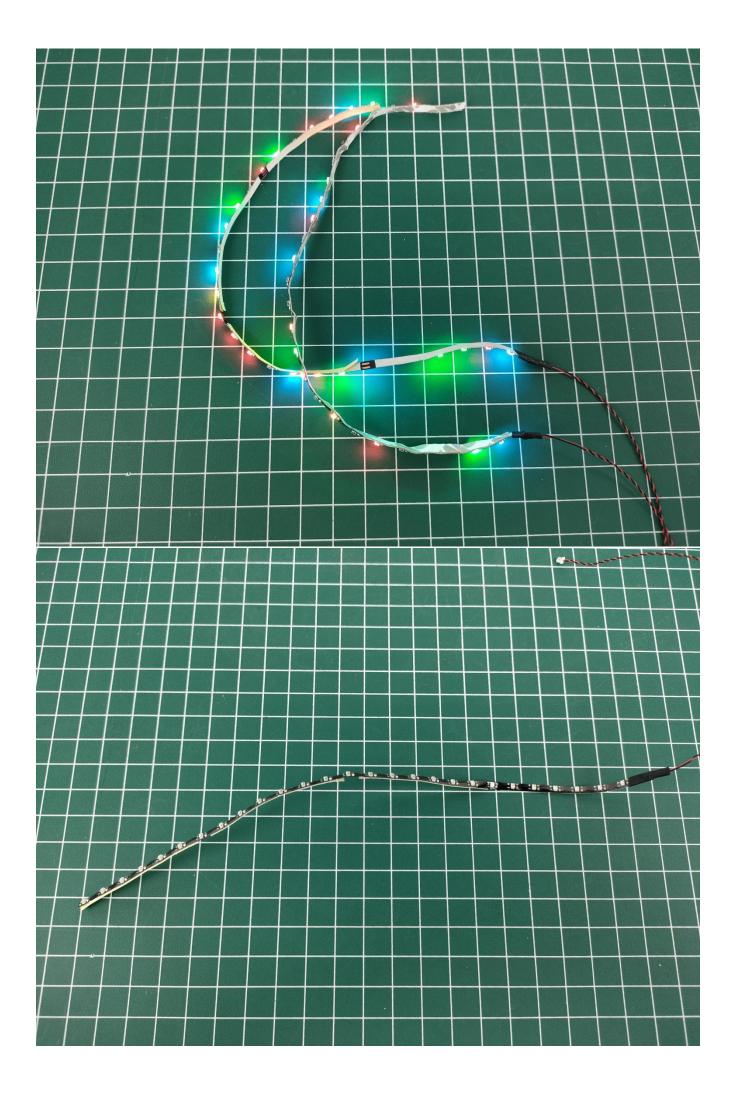



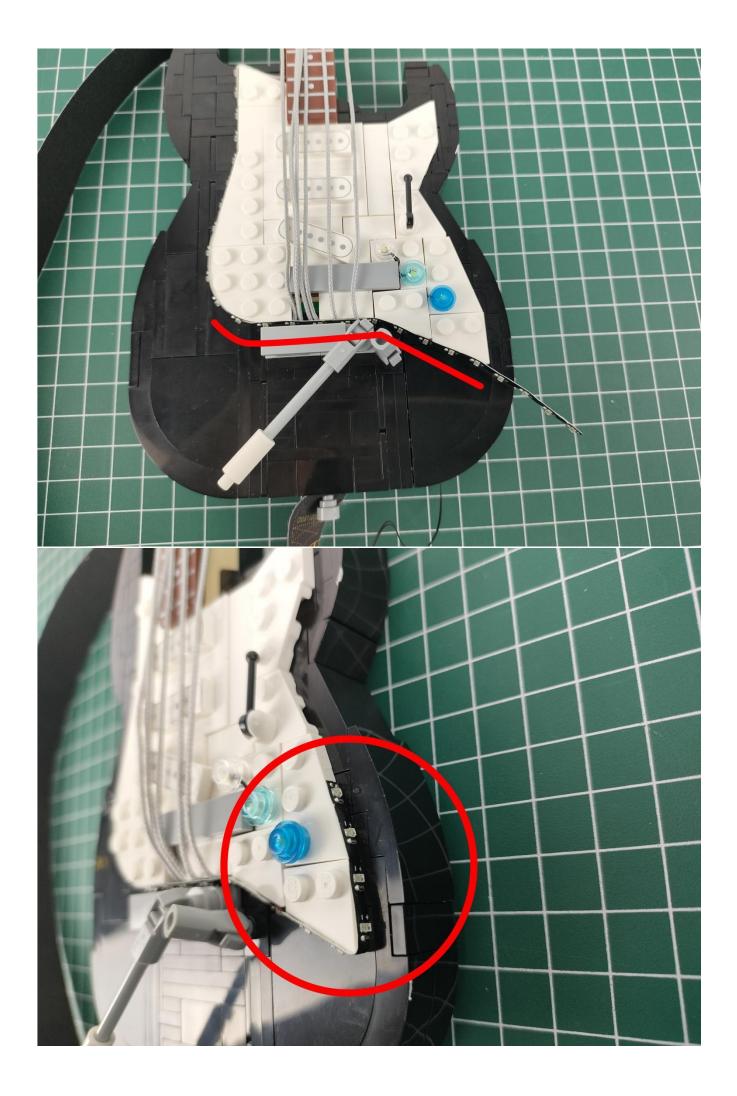

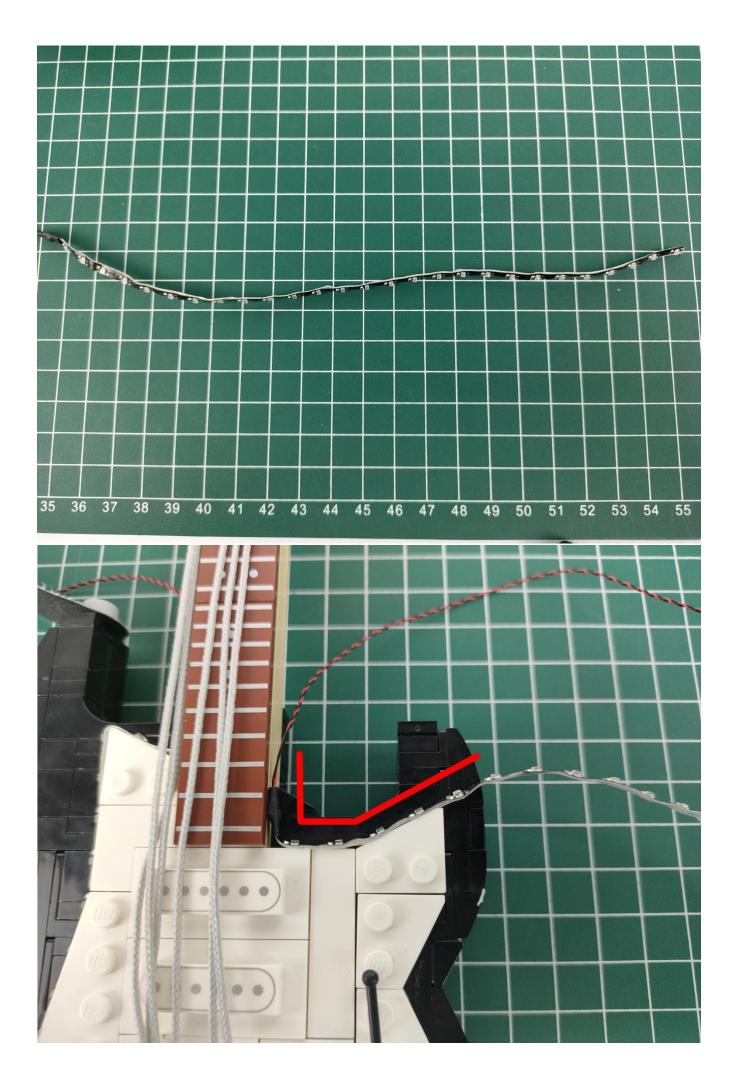


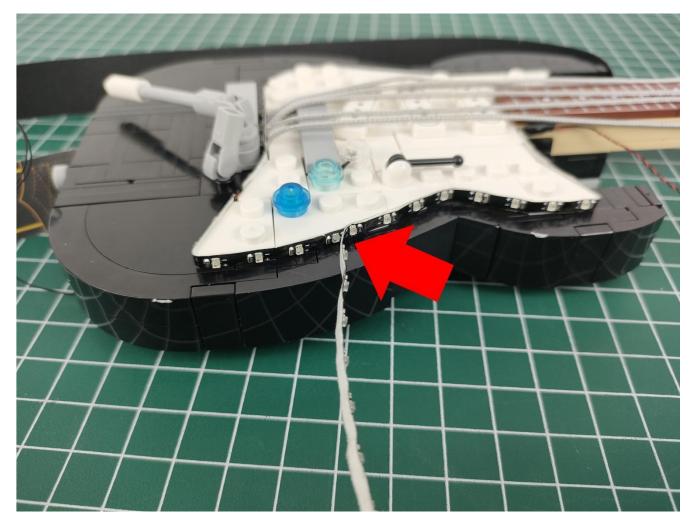



Use scissors to cut off the excess.







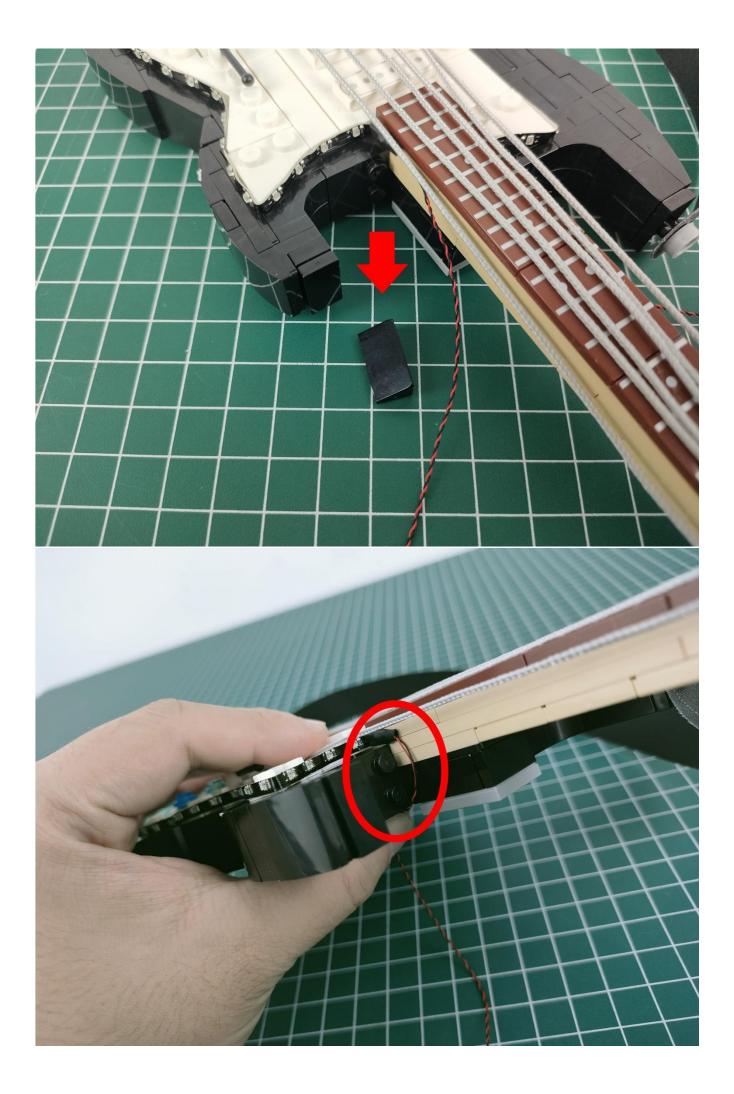

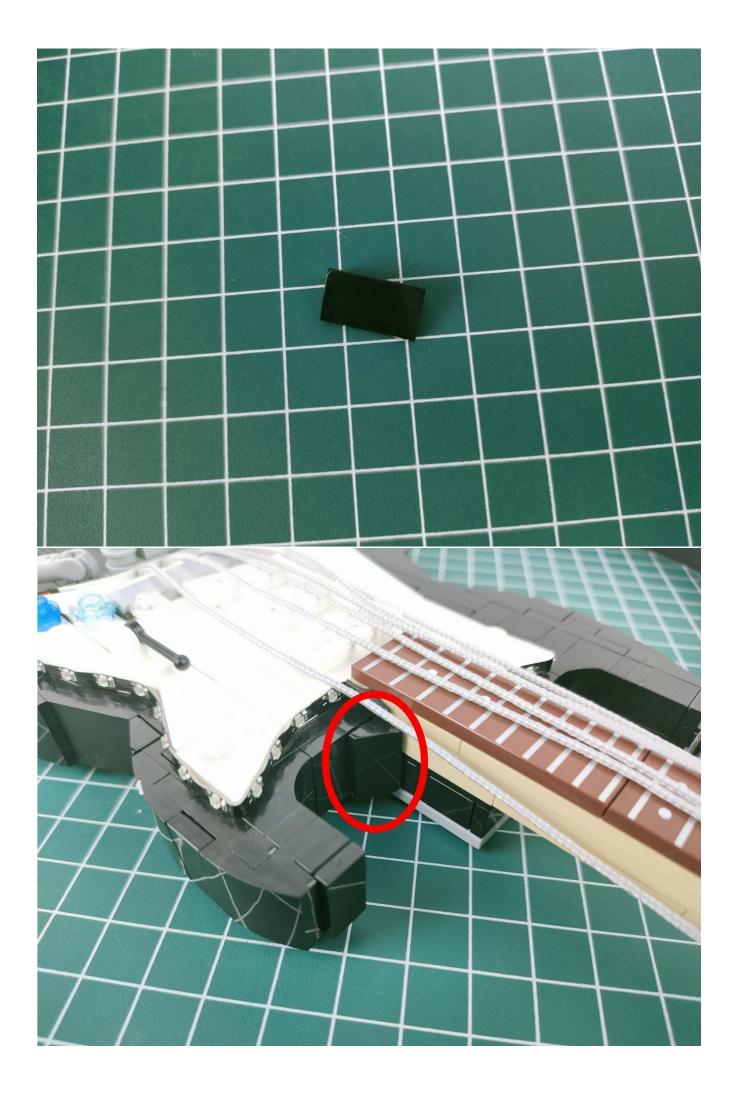


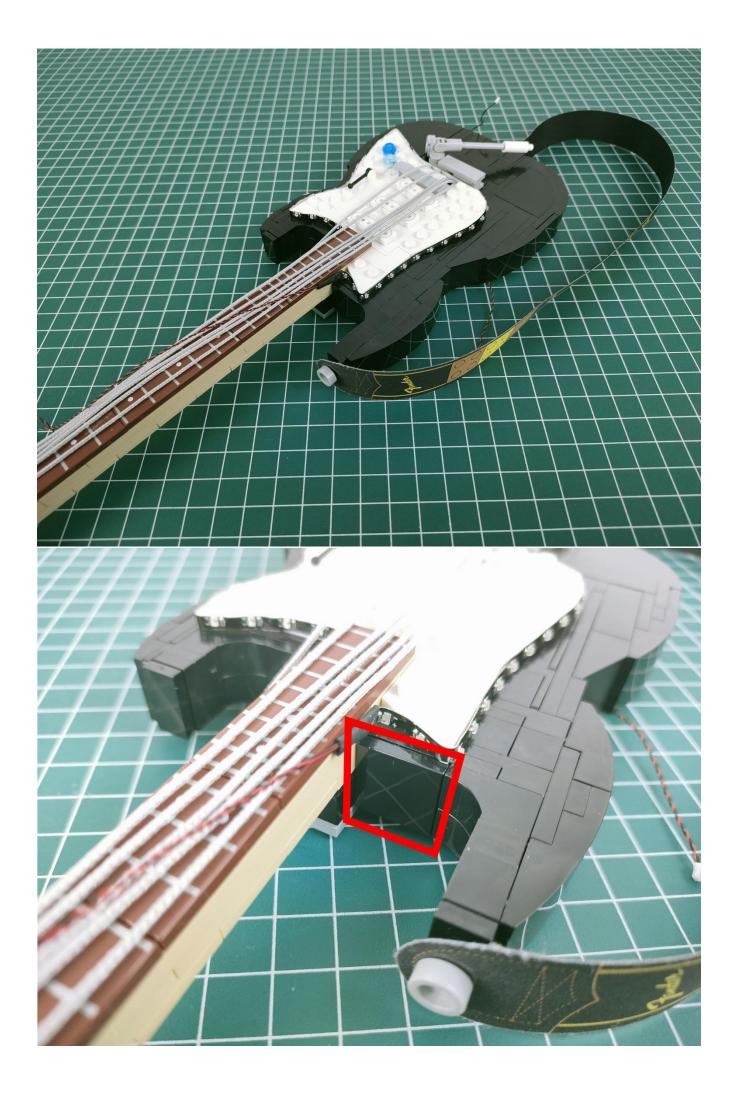


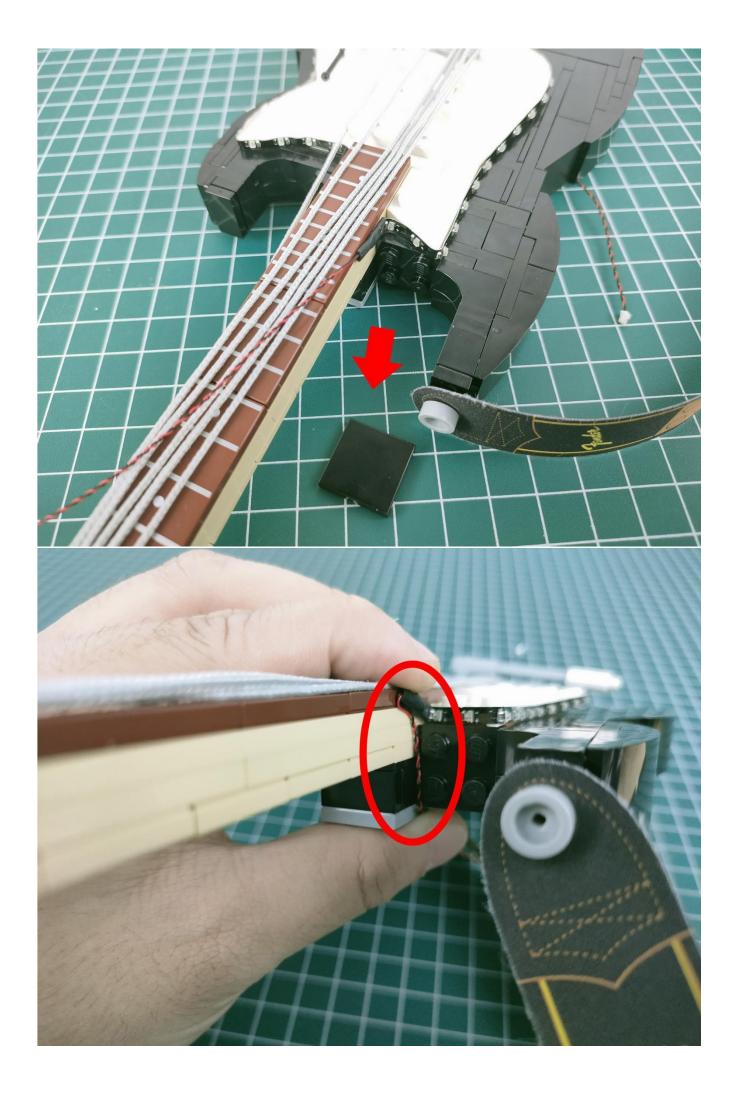


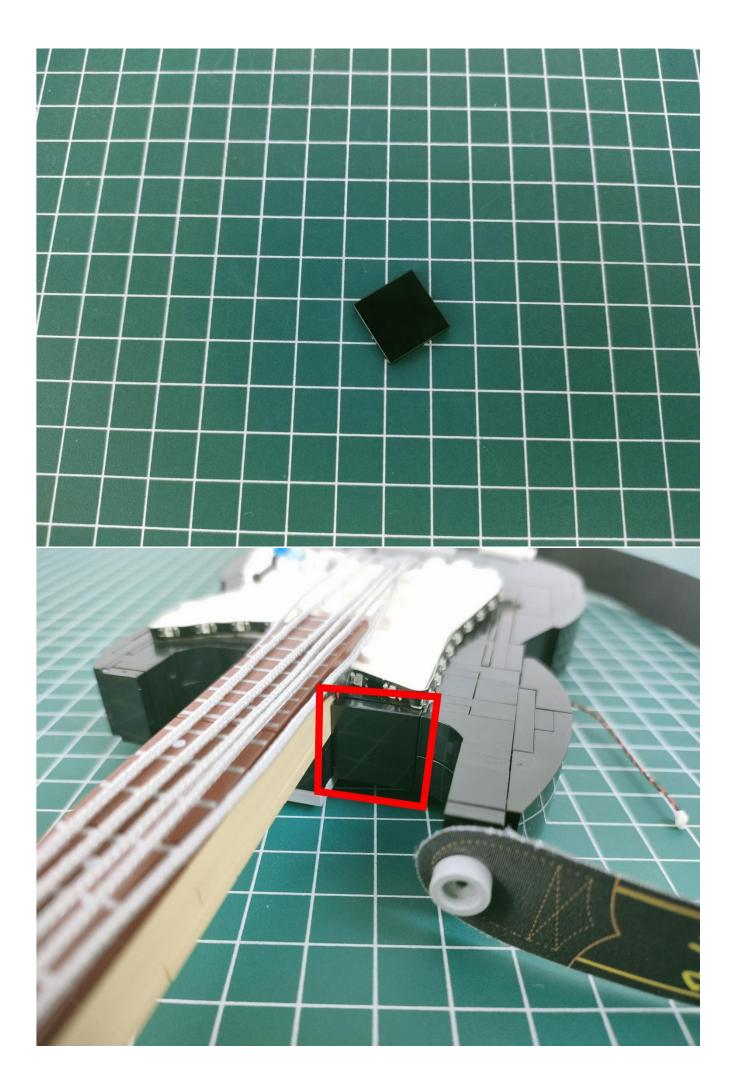




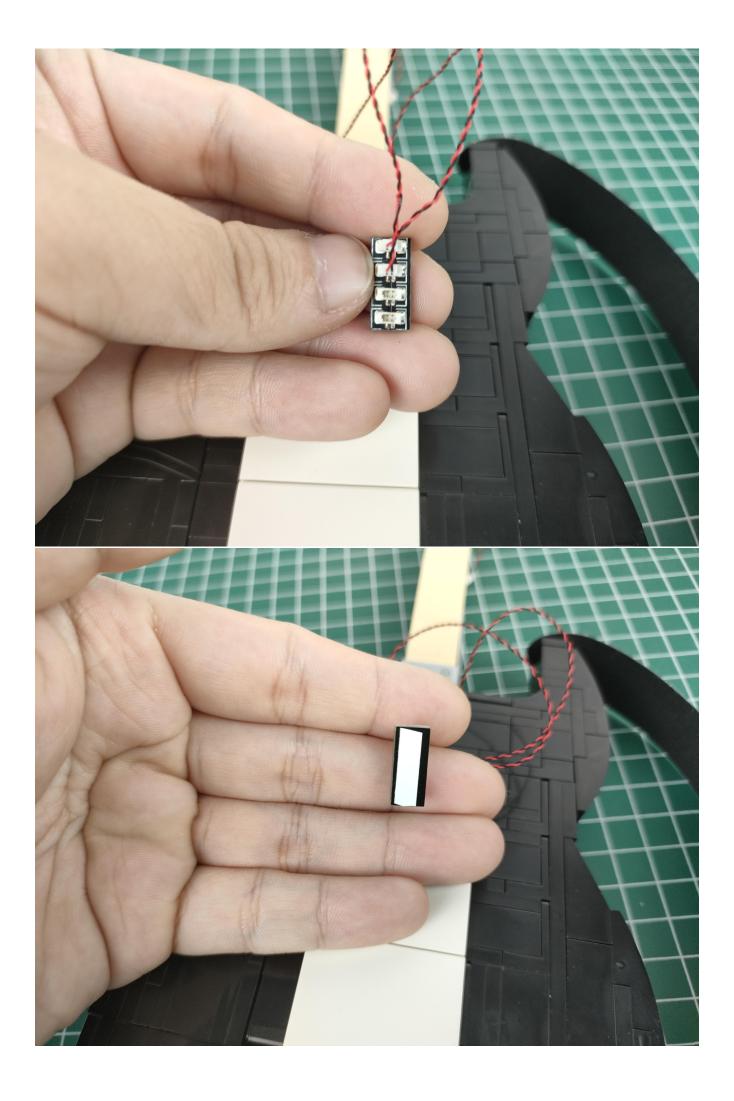

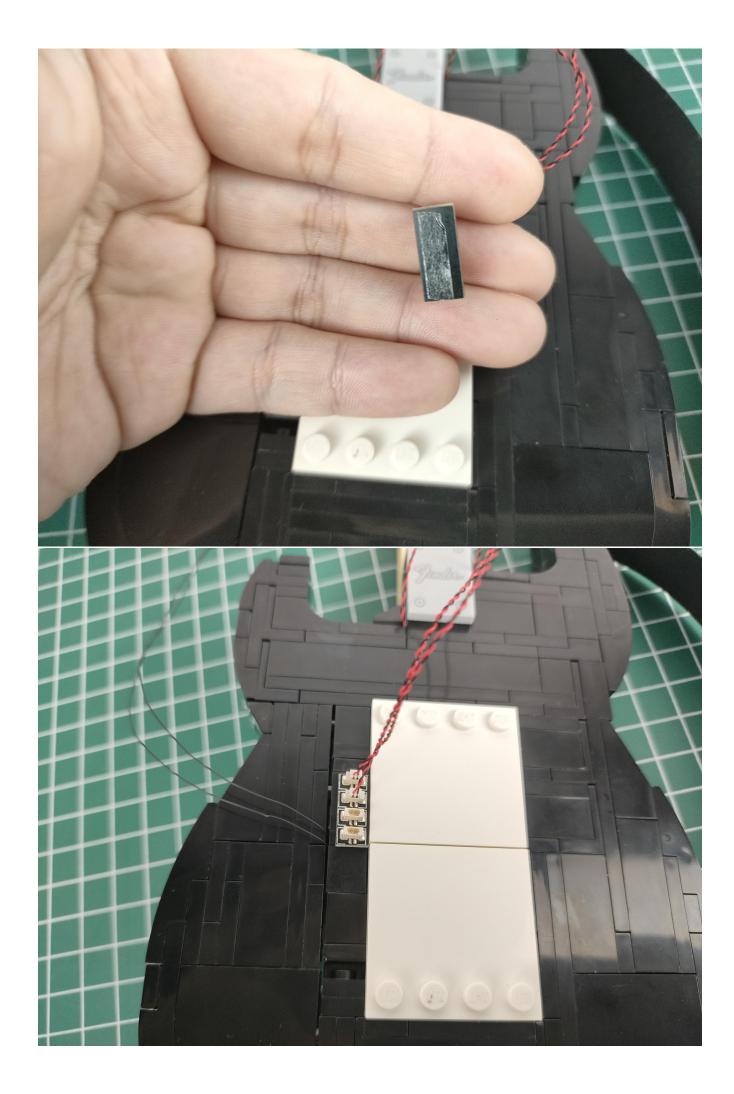


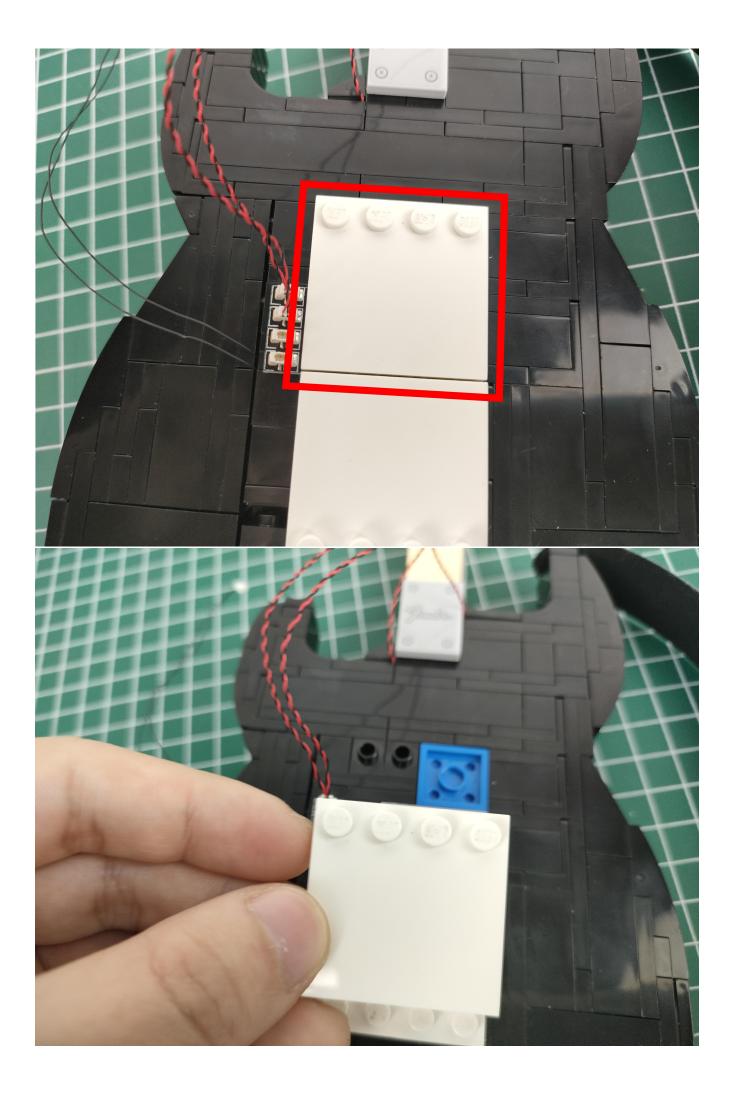


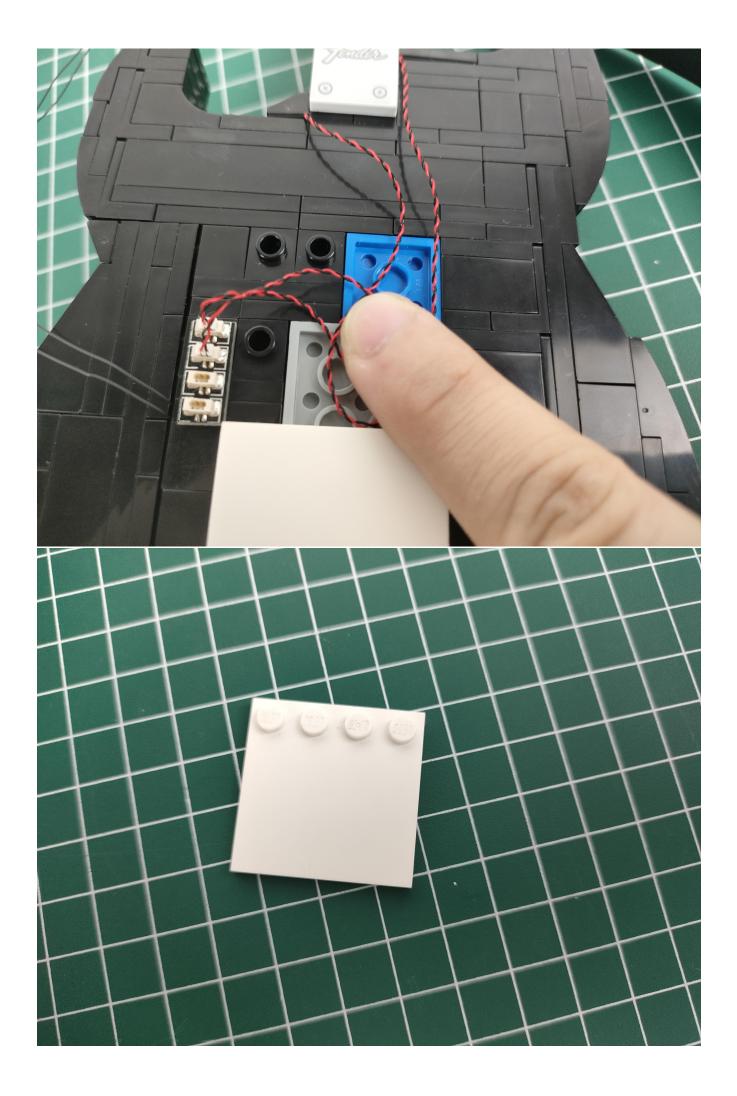






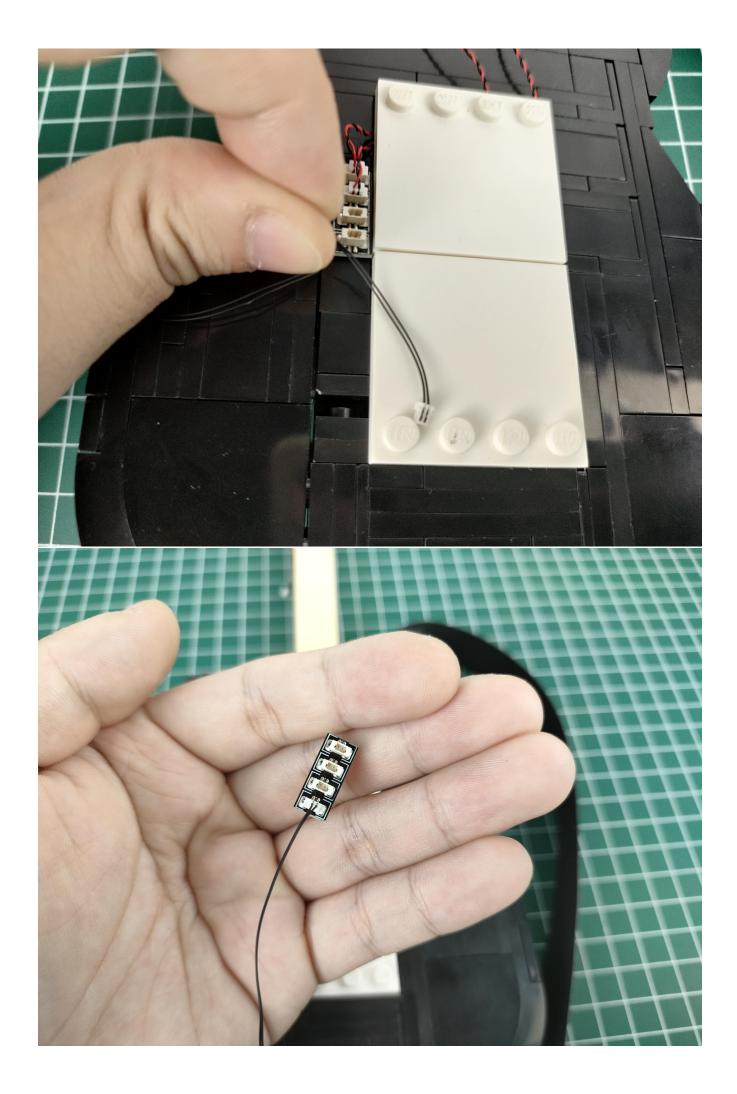


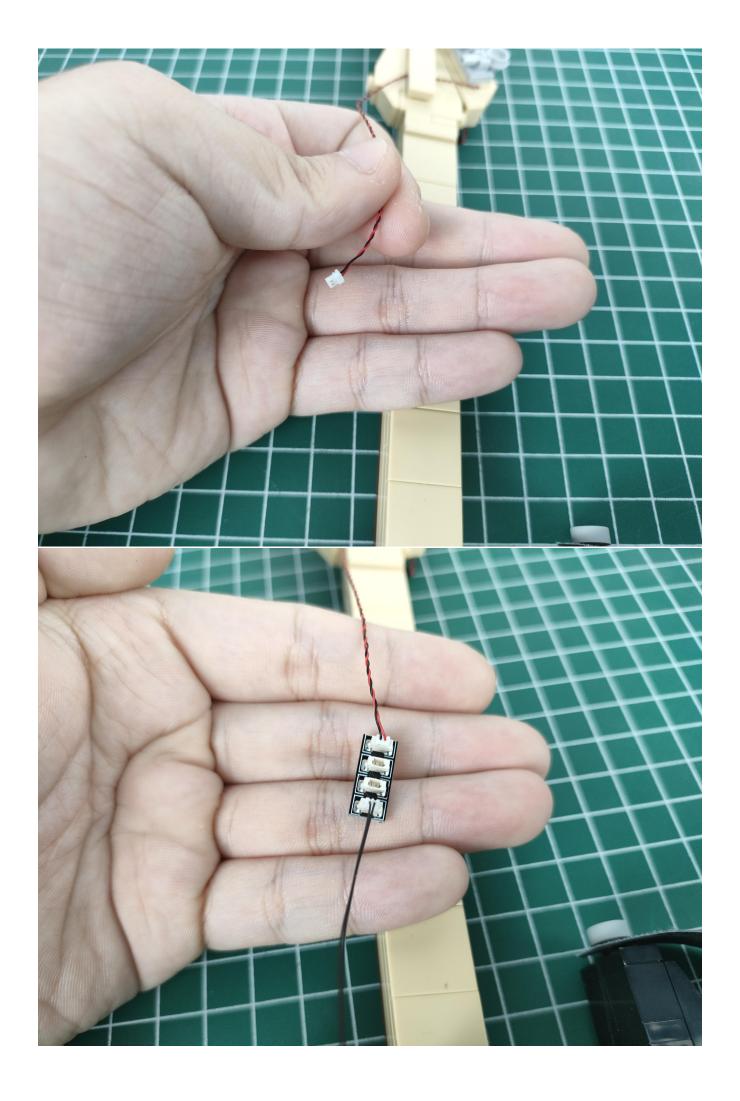








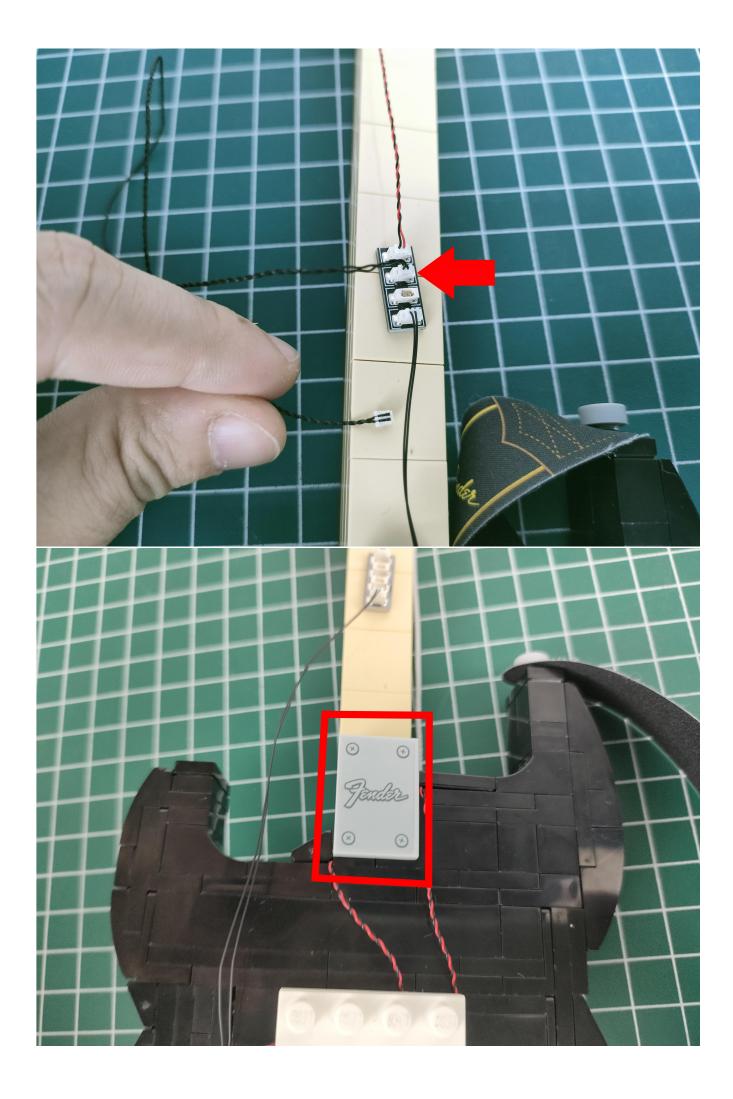


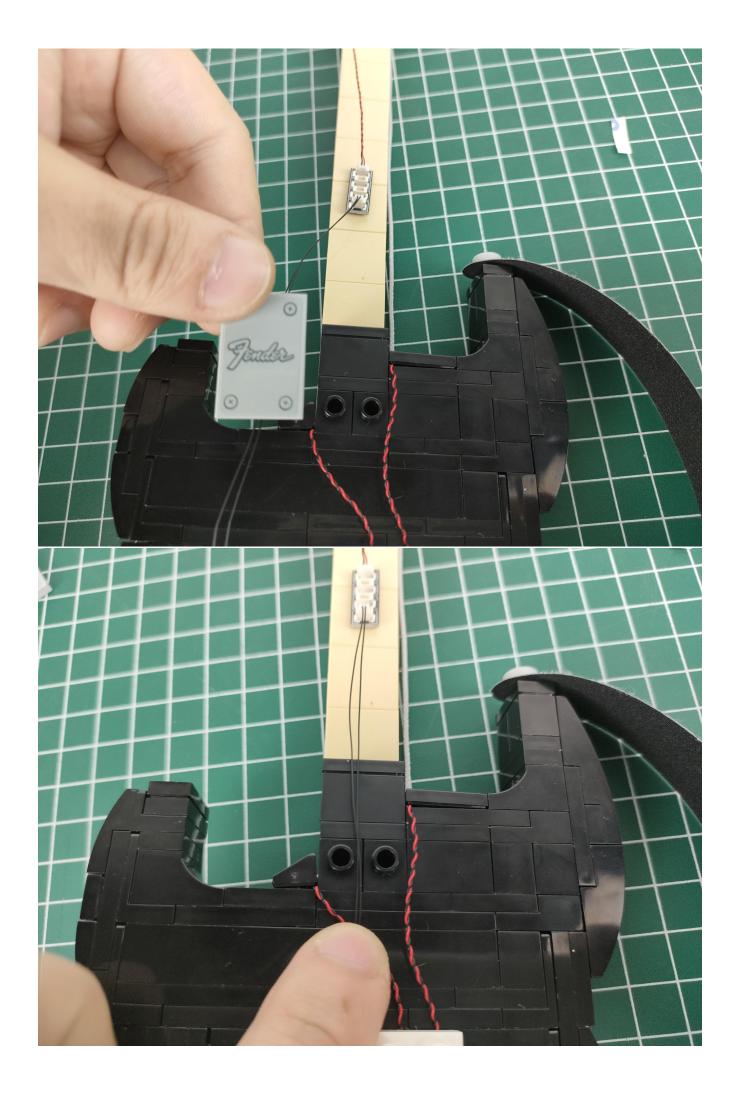

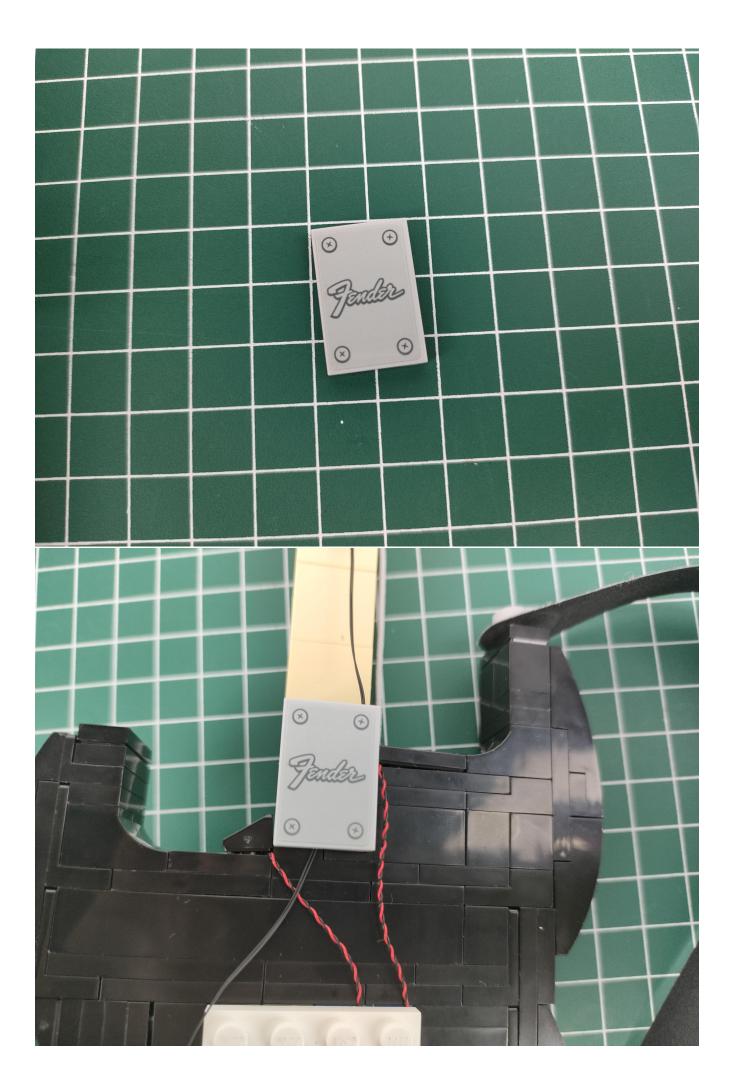

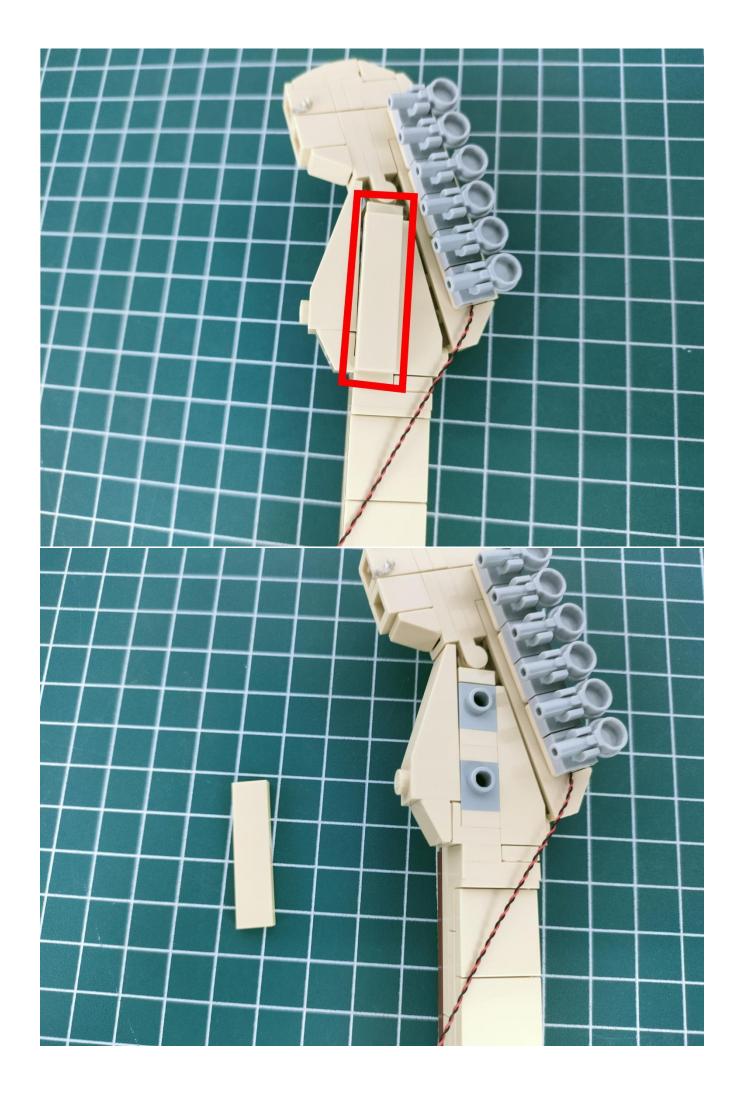

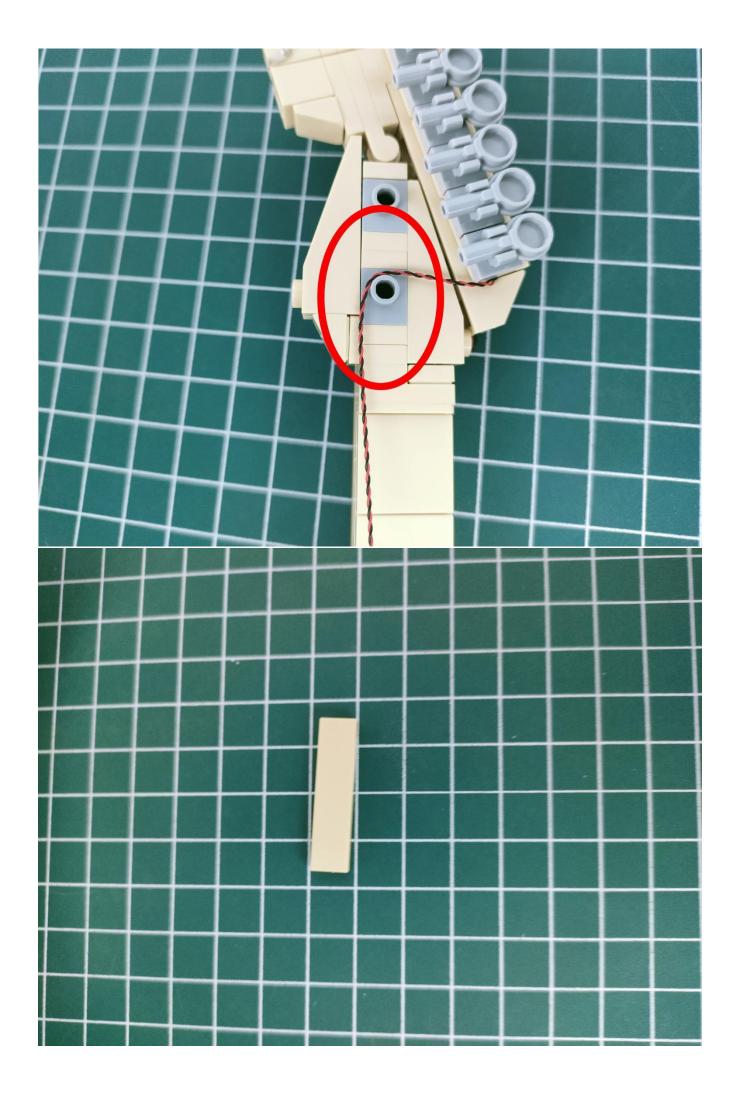


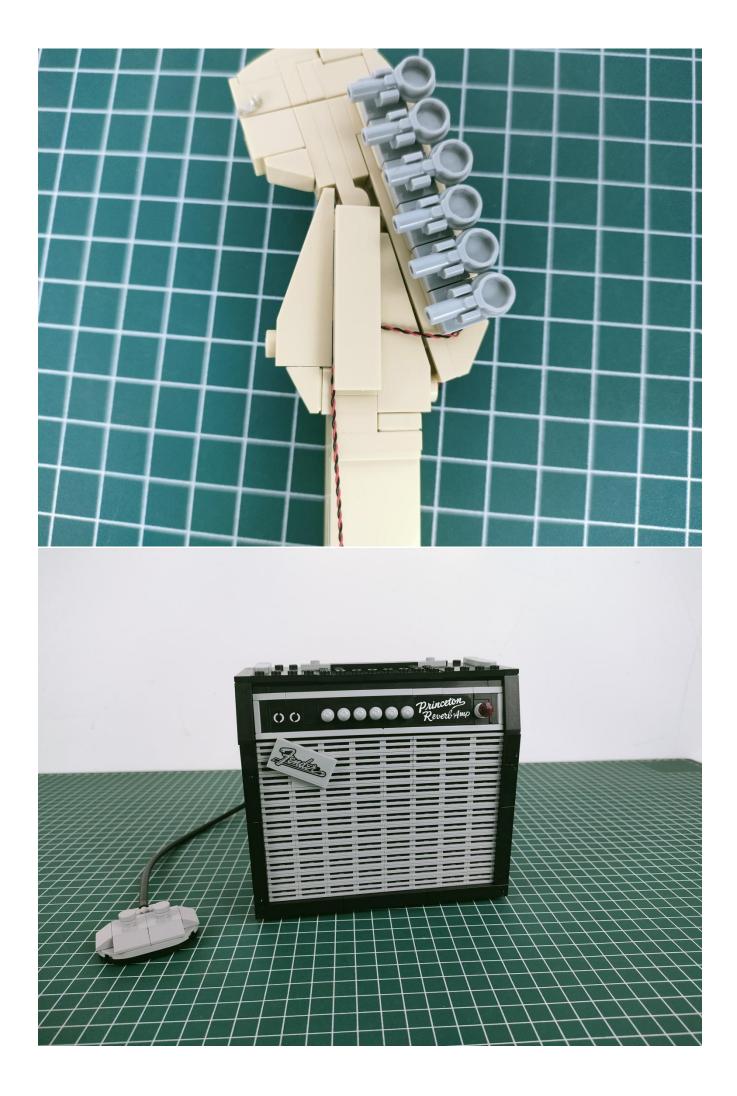










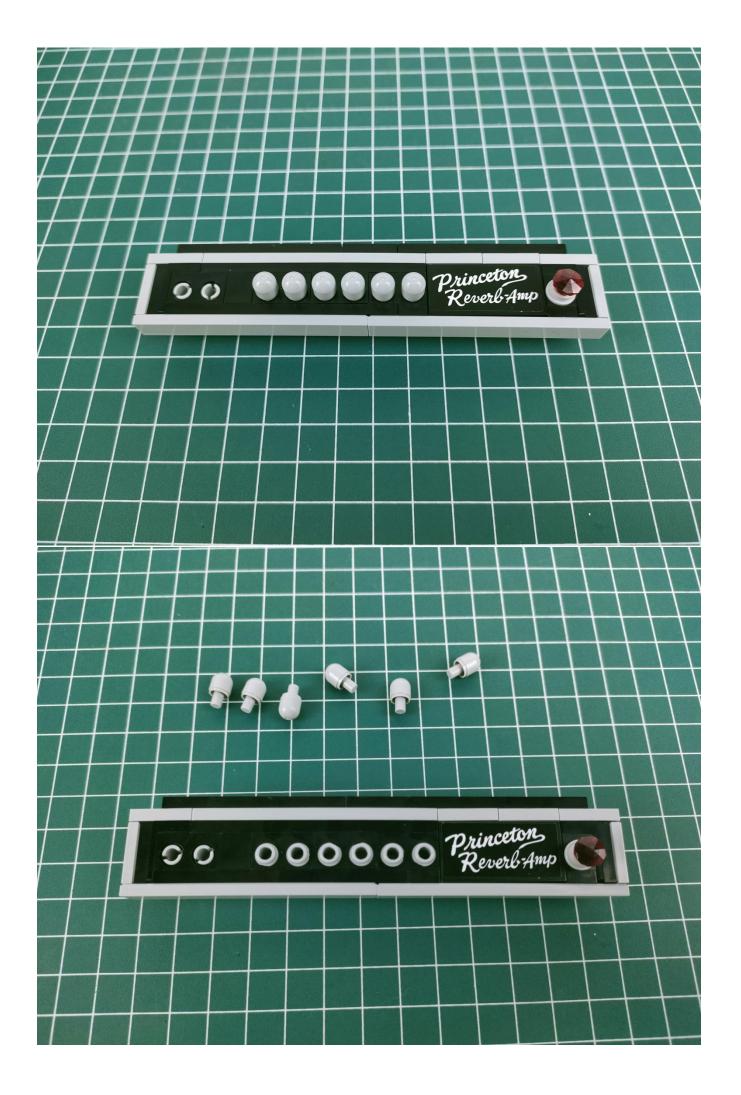

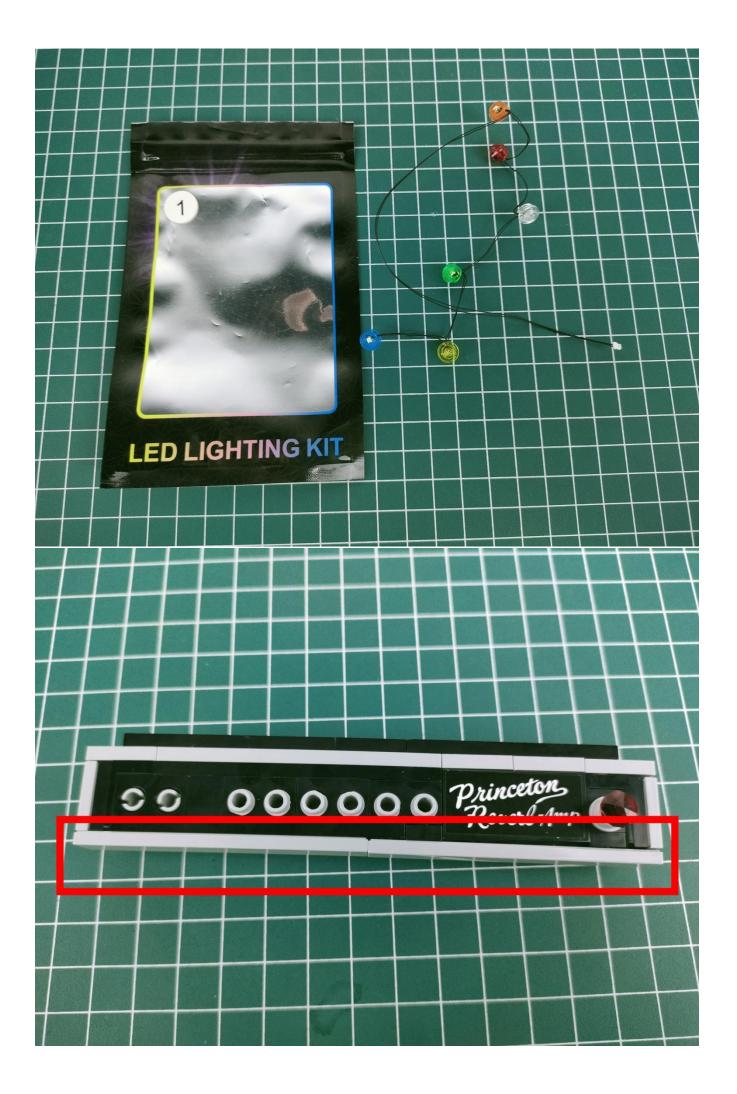

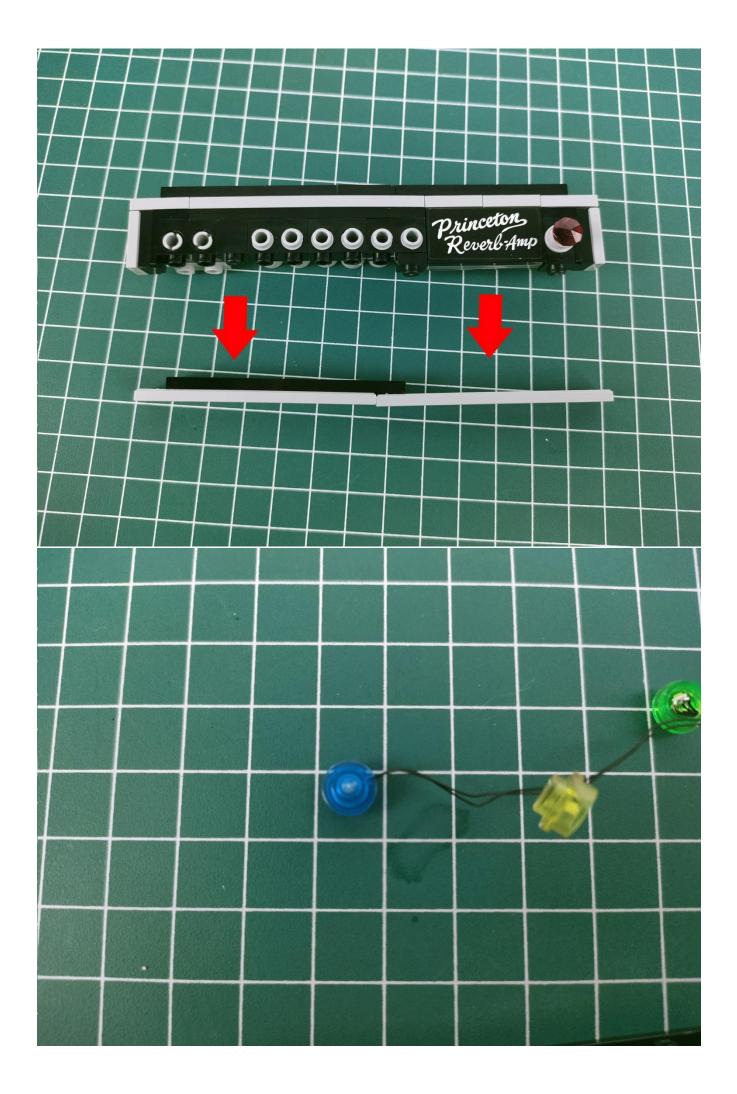


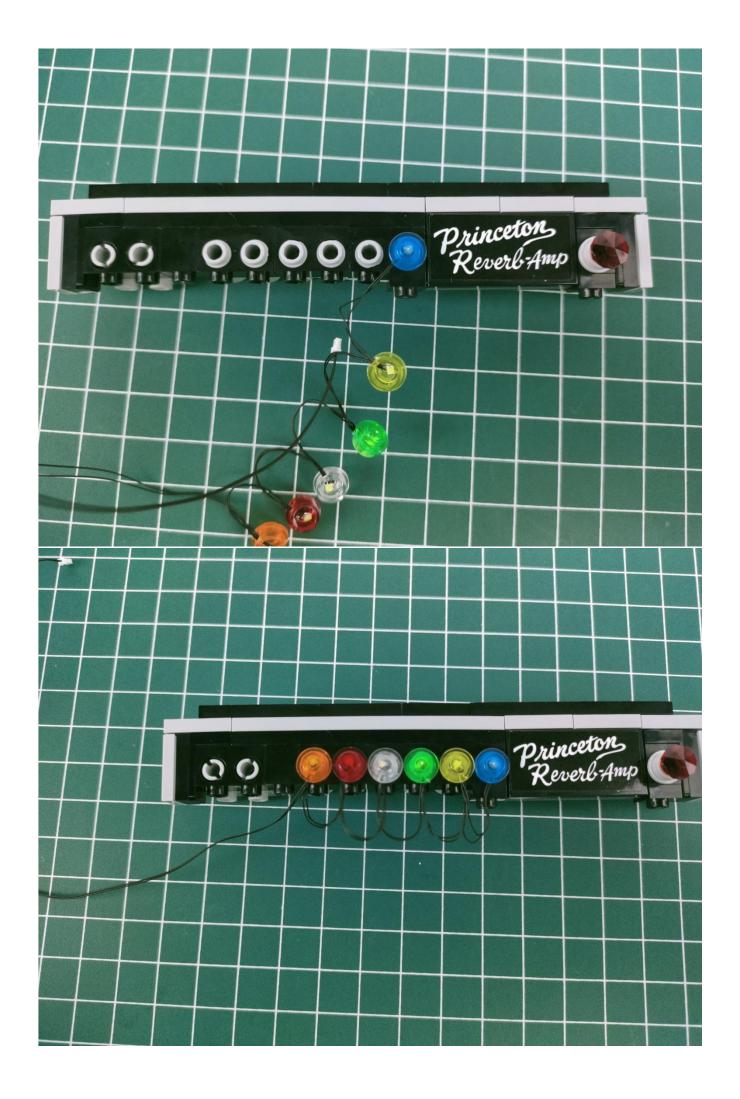










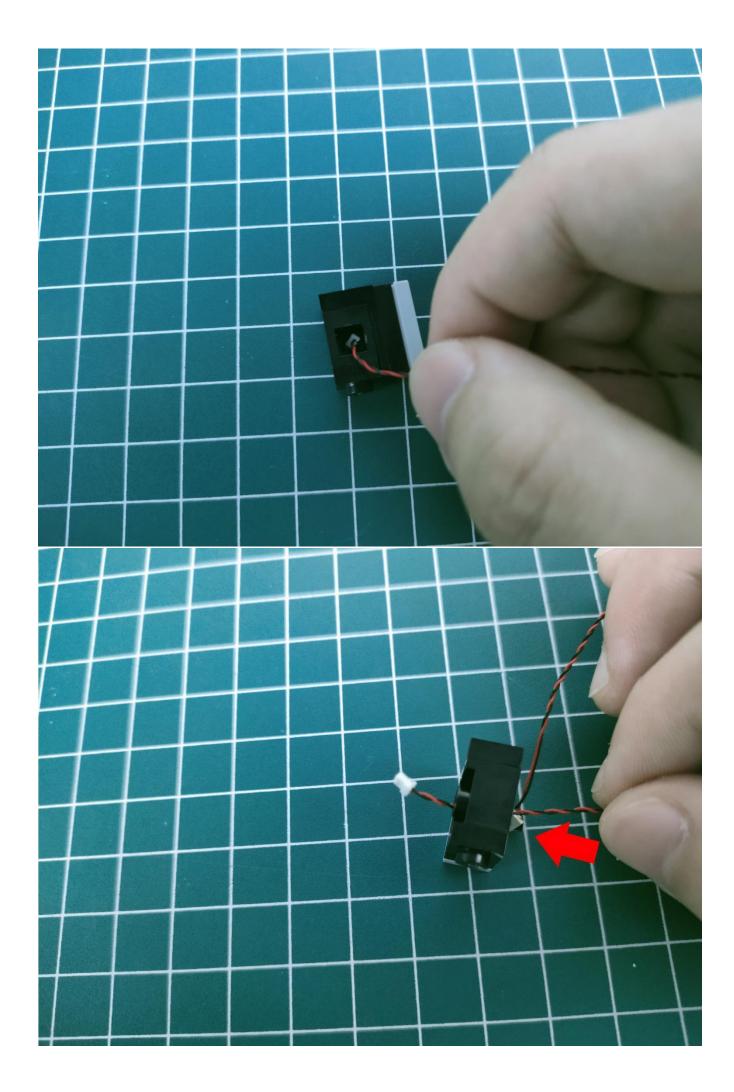

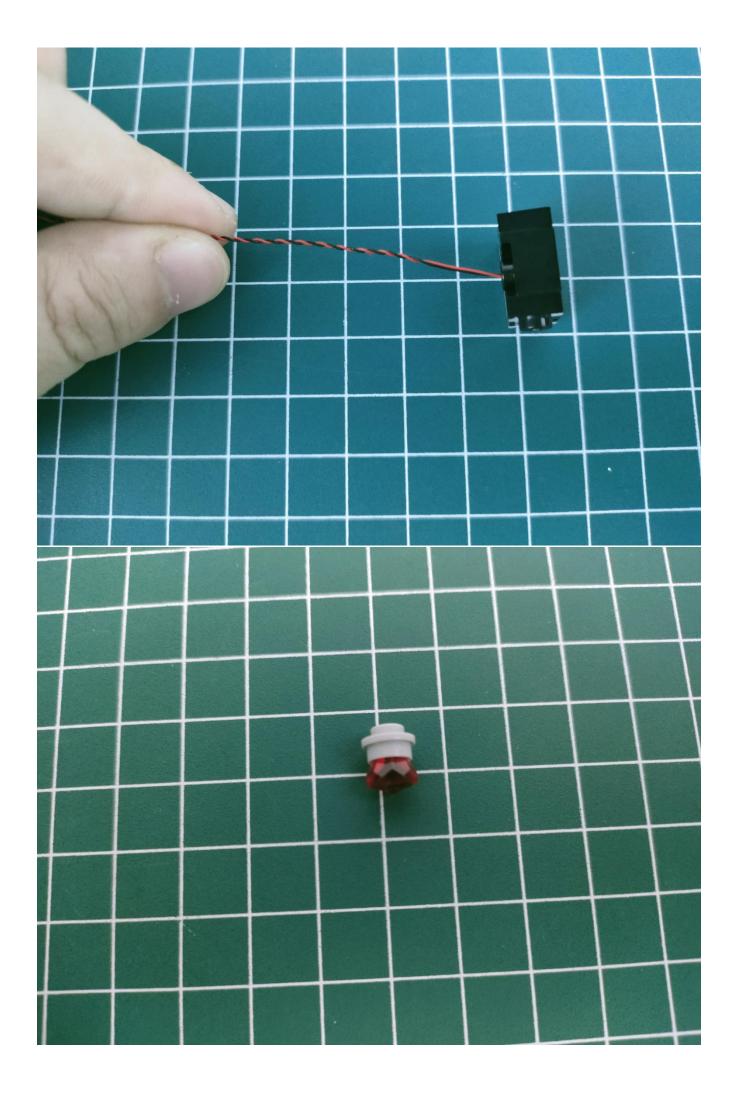


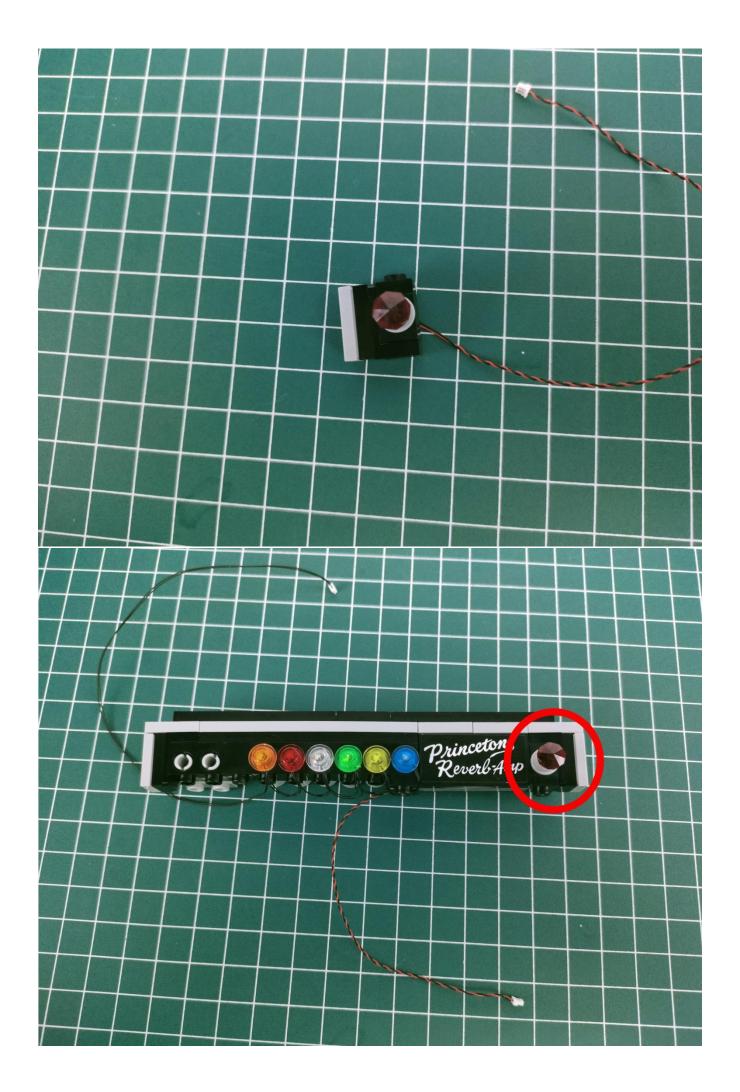


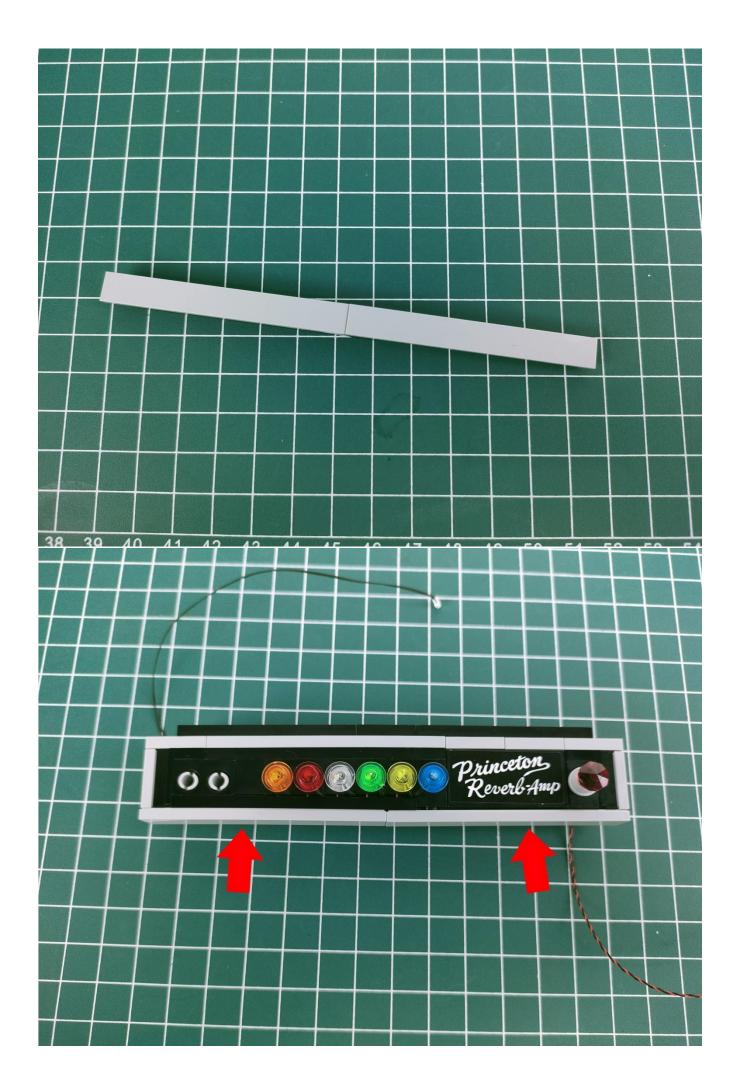







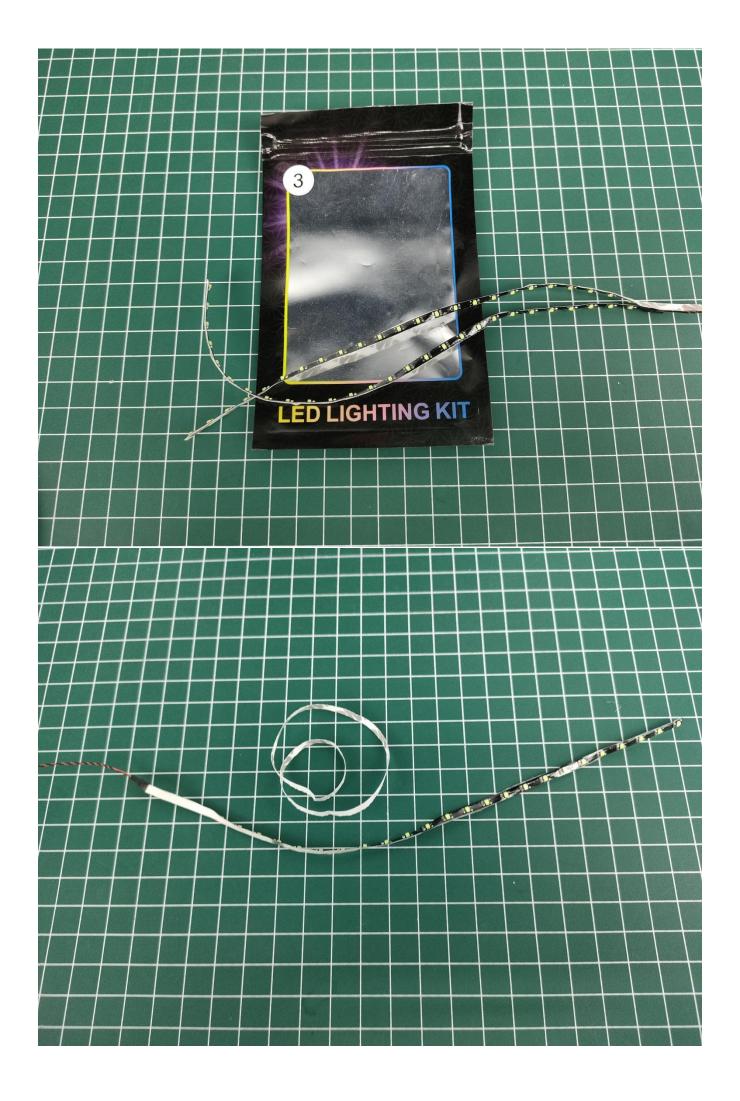

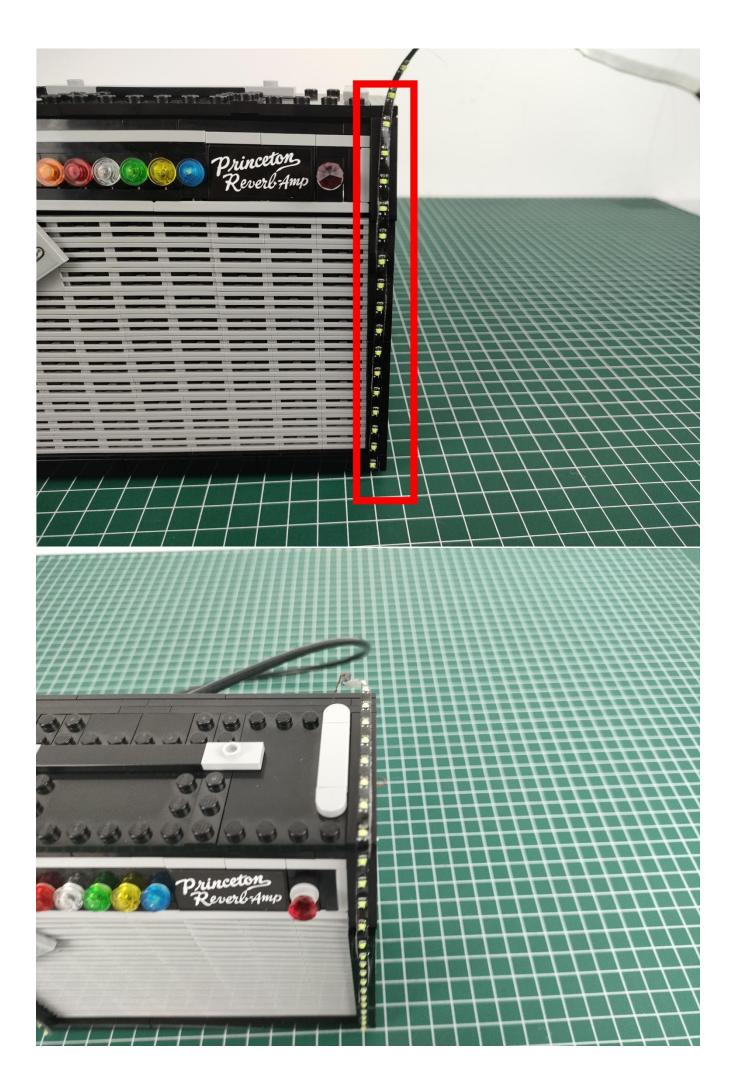




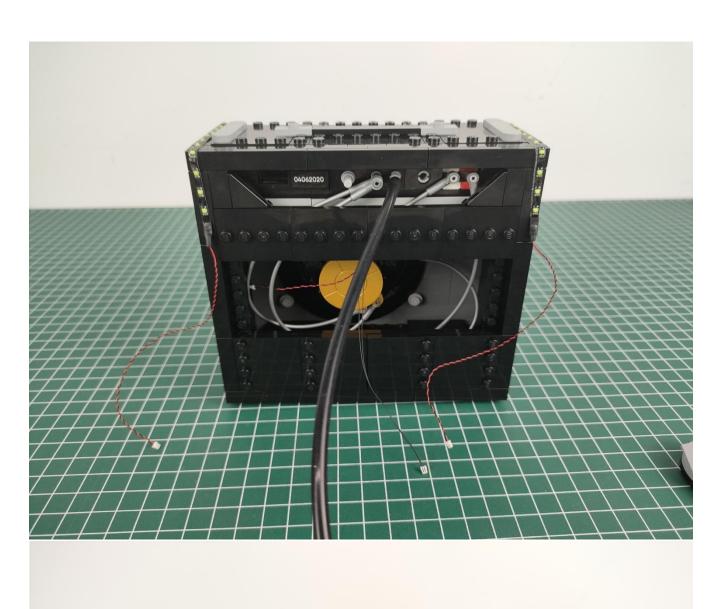

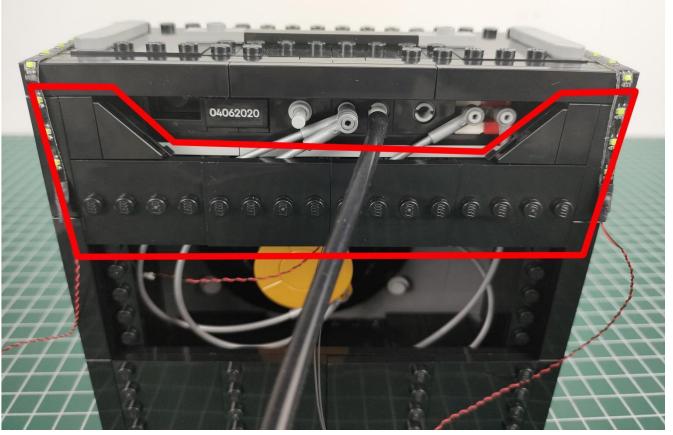






The two lighting wires inside are connected to the 4-seater expansion board.

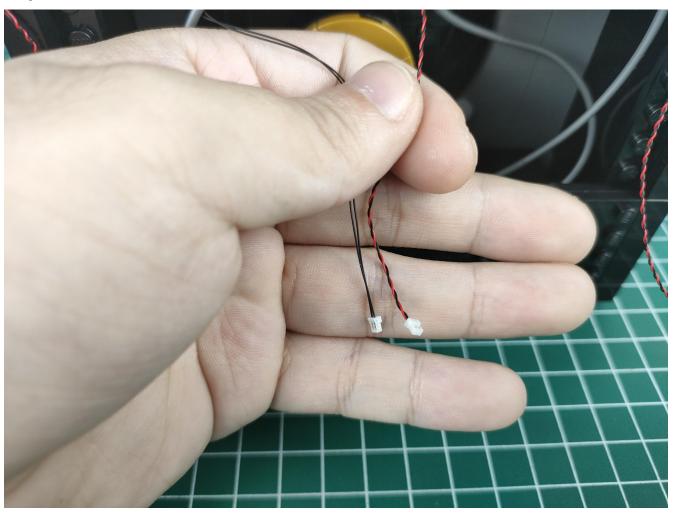




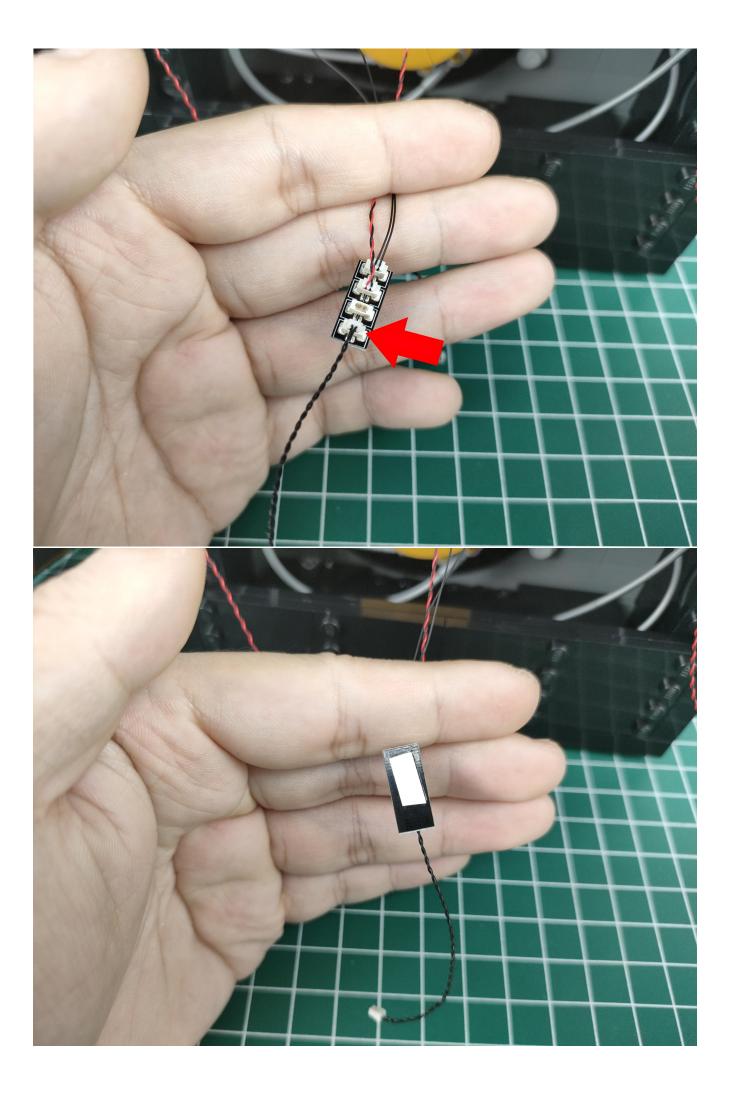

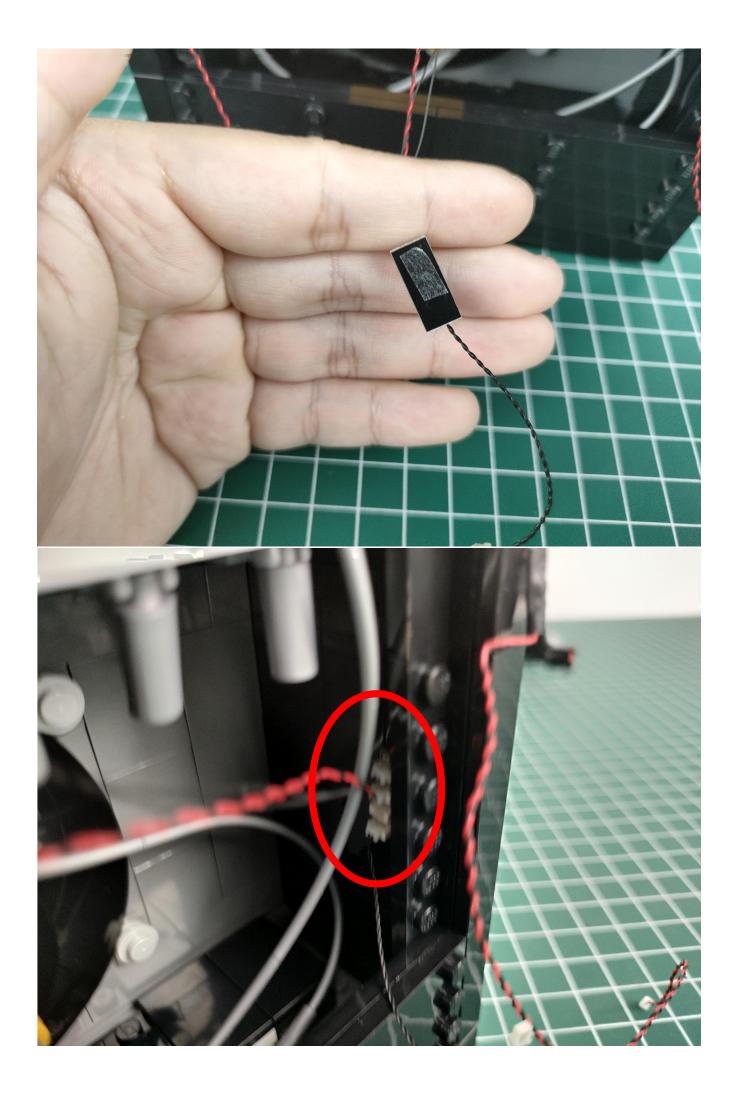


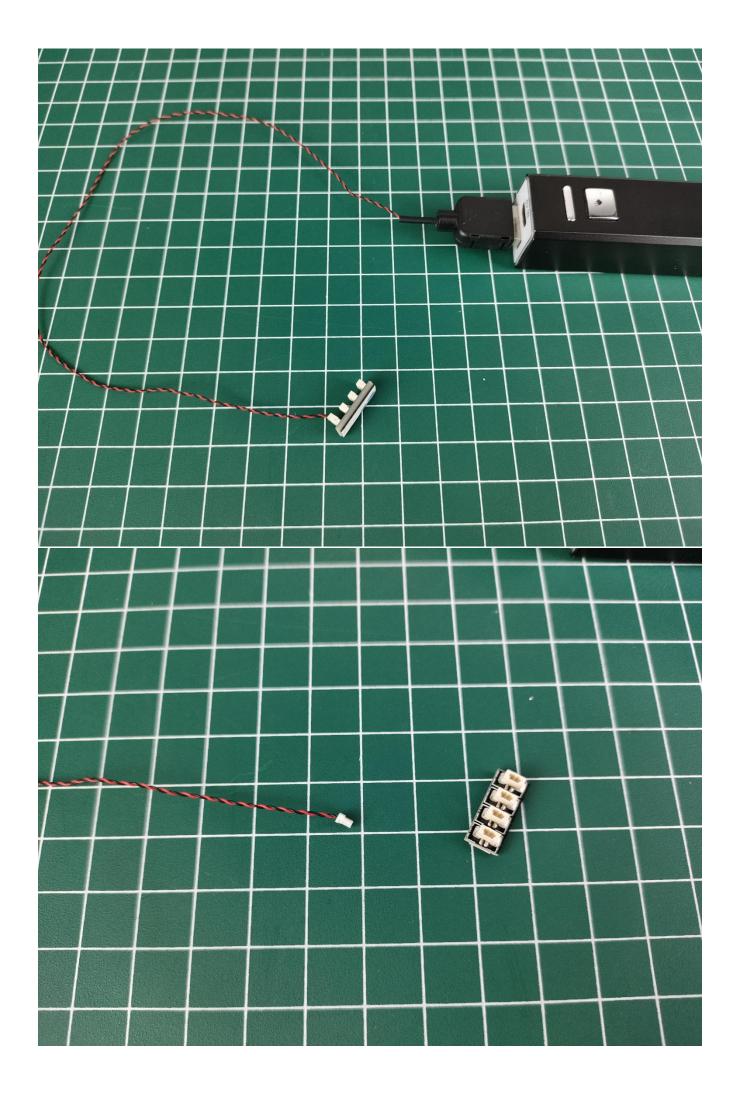

The light strip wires on both sides are connected to the 4 expansion boards.

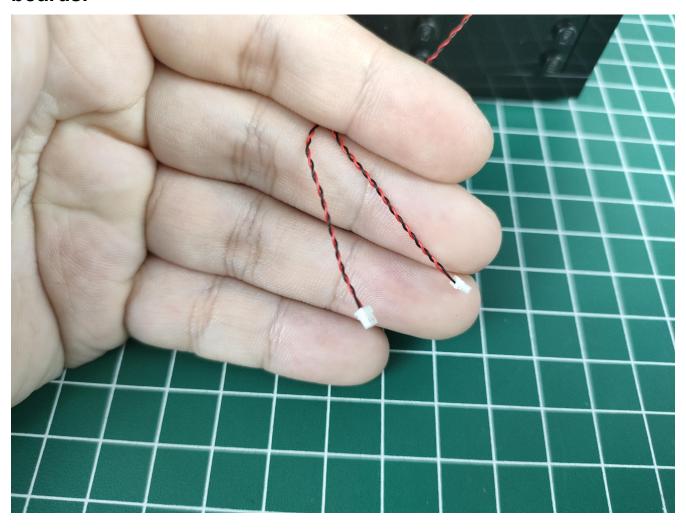



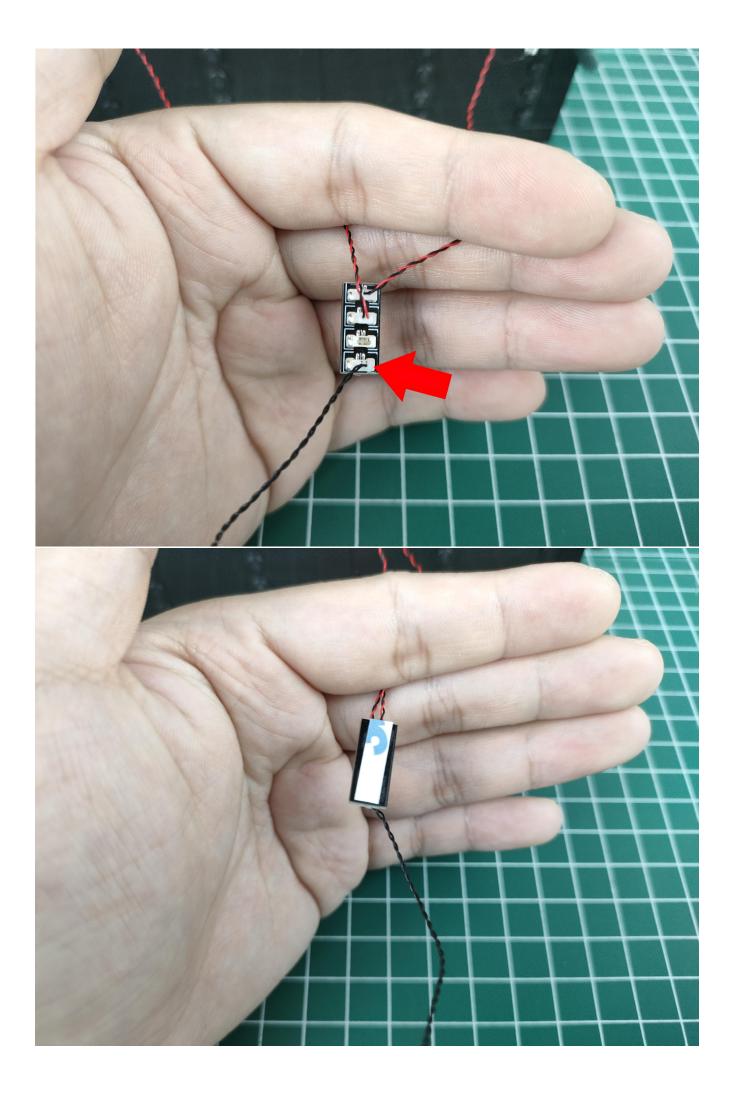



Sound and light remote control function description

This remote control contains the following parts in total



Introduction of each labeled part and socket:

- 1: This cable is used to connect the module to the computer. (One end of this cable connected to the computer, and the other connected to the G port. You can change the music in the storage disk to any music in the computer, and then use the remote control to play the music)
- 2: Sound and light remote control
- 3: Signal receiving and output module
- 4: Speaker for playing sound
- A: Switch of A
- B: Switch of B
- C: Switch of C
- D: Switch of D
- E: Power input port (only this socket can be used as a power input port)
- F: The connection port between the module and the speaker (4). Only connect speakers, not other components)
- G: Data cable and module connection port (G cannot be used as a power input port, it can only be used to transfer music files)





NEW FUNCTION DESCRIPTION
N: ALL LIGHTING BRANCHES ARE FULLY OPEN
FF: ALL LIGHTING BRANCHES ARE CLOSED
: OPEN/CLOSE A BRANCH
: OPEN/CLOSE B BRANCH
: OPEN/CLOSE C BRANCH
: OPEN/CLOSE D BRANCH
5: TURN ON BLINKING FOR THE LAST OPEN CHANNEL
LN: START BREATHING FOR THE LAST OPENED PATH
: INCREASE BLINKING/BREATHING RATE
: REDUCE FLICKER/BREATHING RATE
+: INCREASE BRIGHTNESS
-: REDUCE BRIGHTNESS
: BURST MODE
+: VOLUME INCREASE
-: VOLUME DOWN


Precautions:


- 1. The new remote control lighting is divided into 4 channels, which can be controlled individually
- 3. Music and lighting can be turned off separately




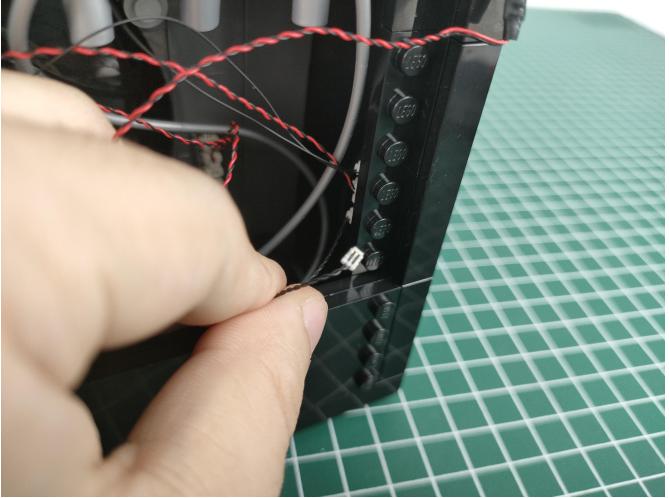


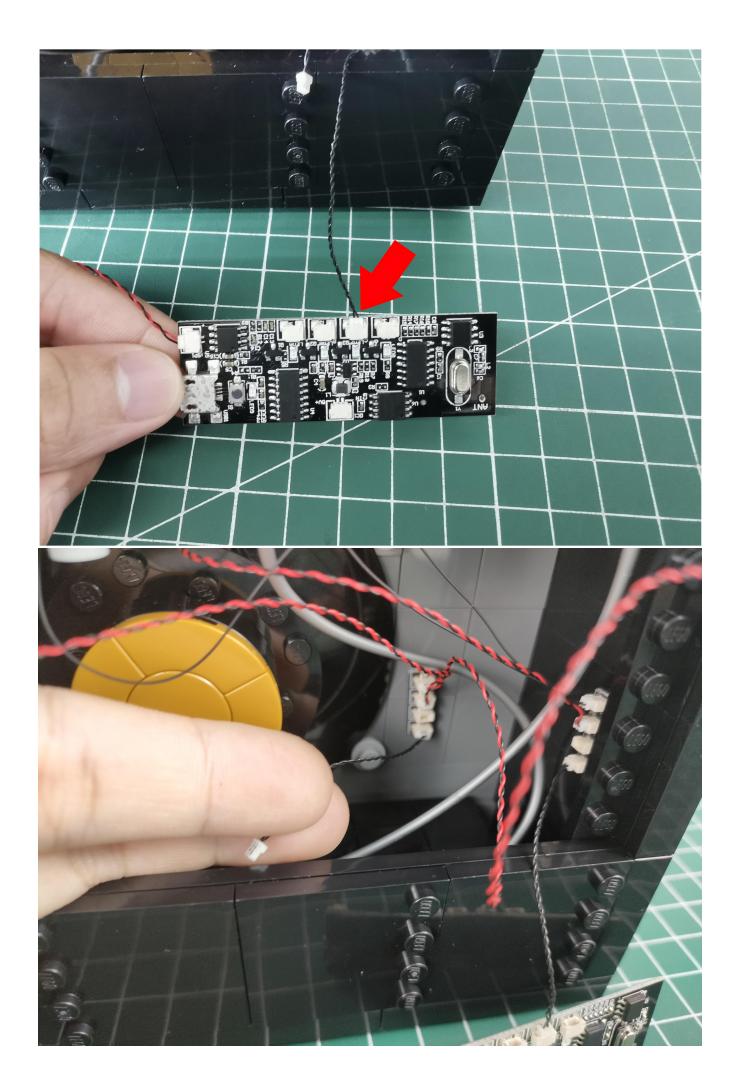

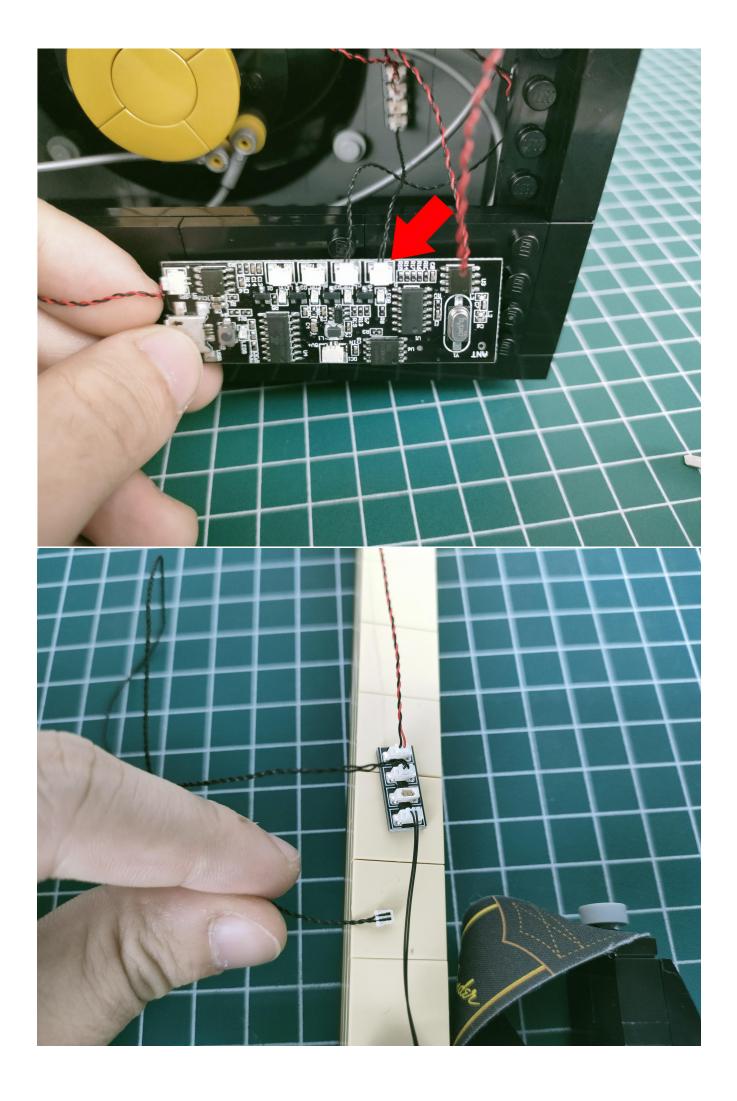


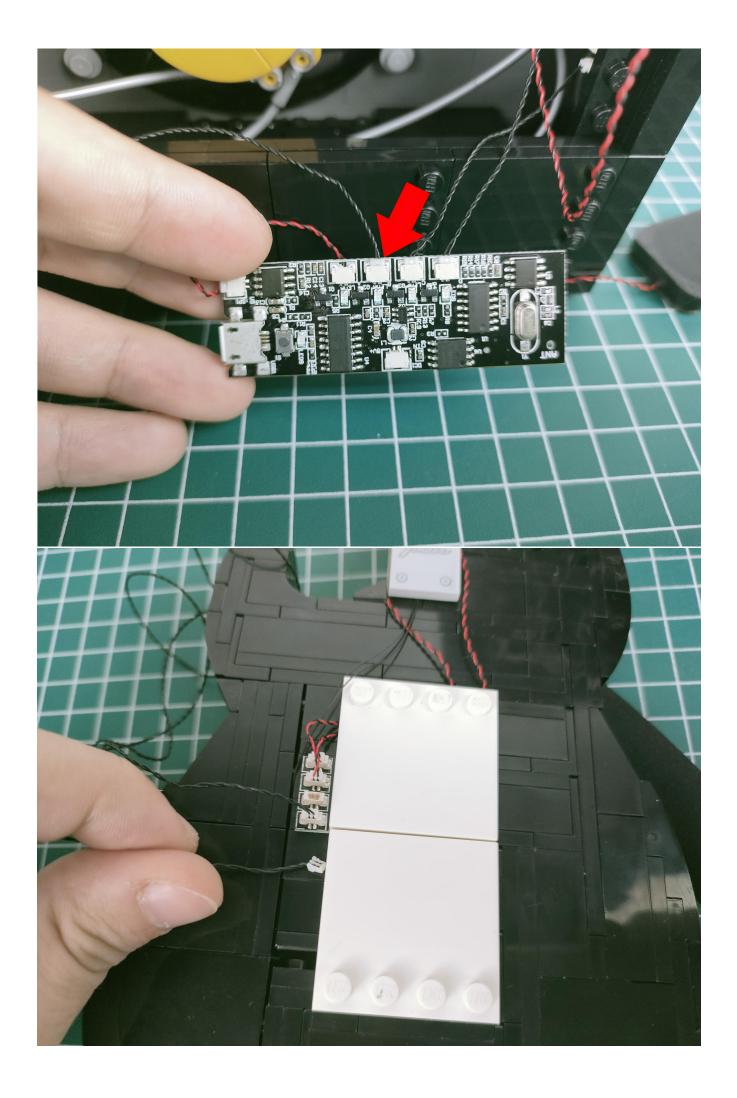


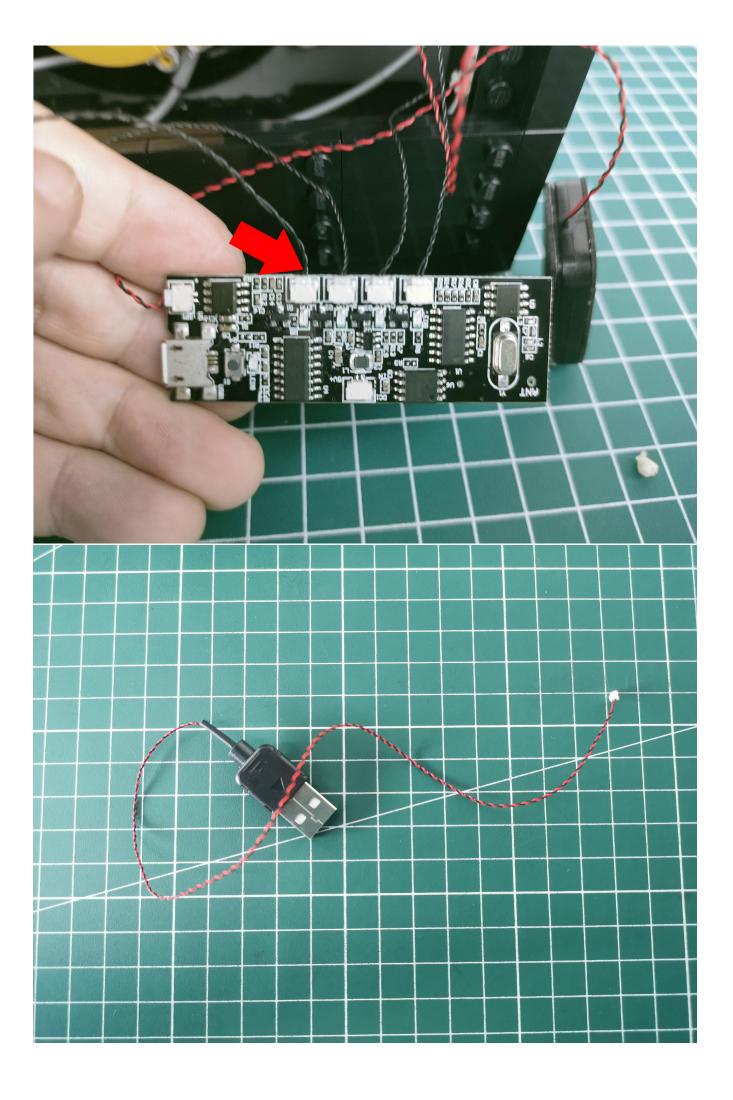

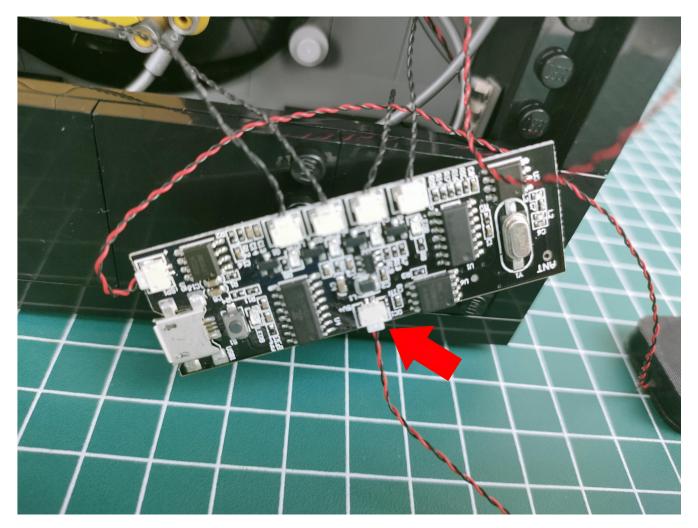

Hide the module and speakers in the model.

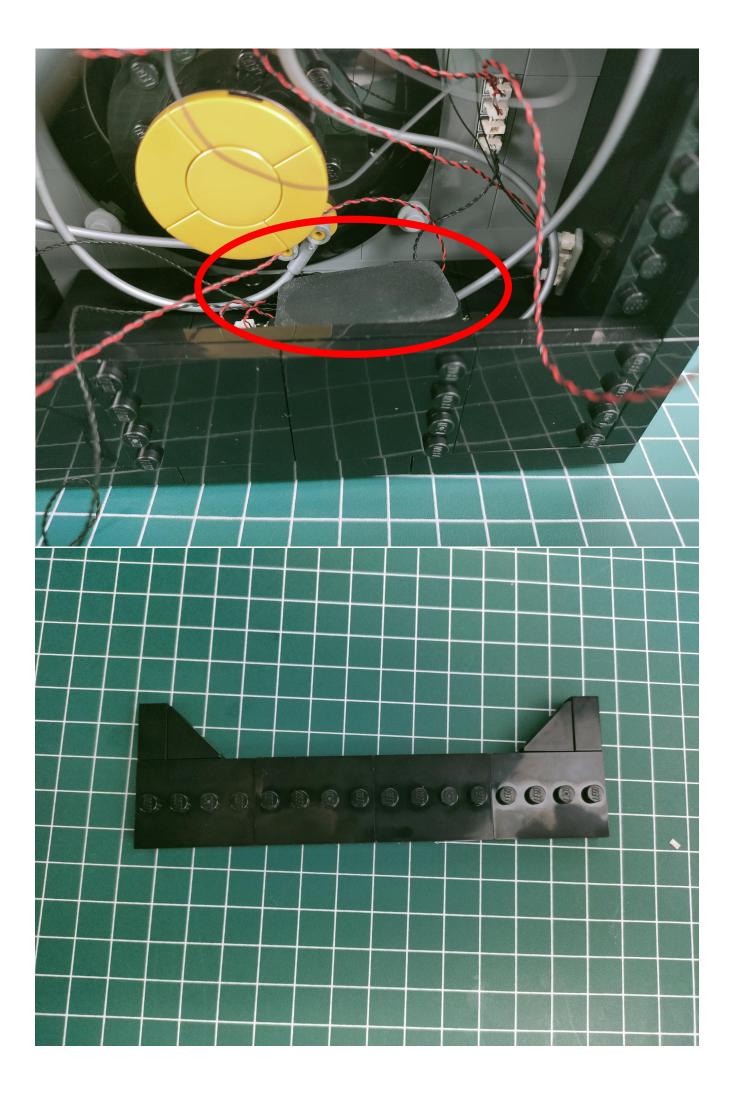

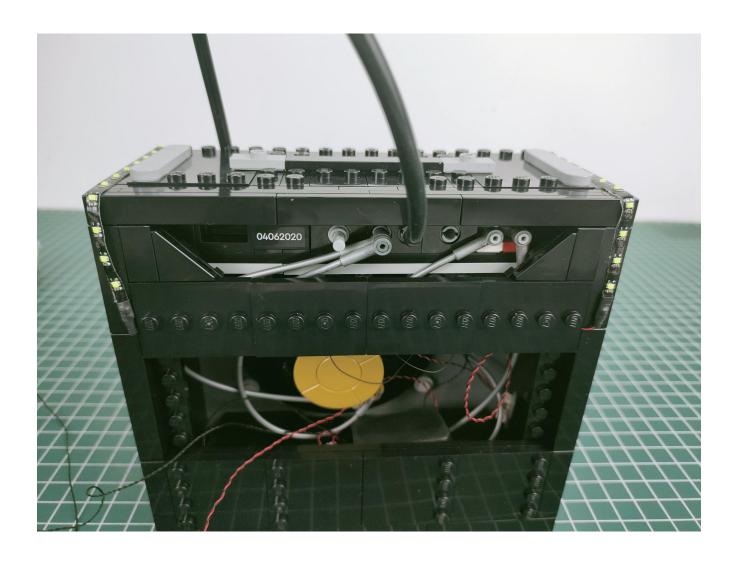

Sound and light remote control function description

This remote control contains the following parts in total



Introduction of each labeled part and socket:

- 1: This cable is used to connect the module to the computer. (One end of this cable connected to the computer, and the other connected to the G port. You can change the music in the storage disk to any music in the computer, and then use the remote control to play the music)
- 2: Sound and light remote control
- 3: Signal receiving and output module
- 4: Speaker for playing sound
- A: Switch of A
- B: Switch of B
- C: Switch of C
- D: Switch of D
- E: Power input port (only this socket can be used as a power input port)
- F: The connection port between the module and the speaker (4). Only connect speakers, not other components)
- G: Data cable and module connection port (G cannot be used as a power input port, it can only be used to transfer music files)



	NEW FUNCTION DESCRIPTION
ON:	ALL LIGHTING BRANCHES ARE FULLY OPEN
OFF:	ALL LIGHTING BRANCHES ARE CLOSED
A: OI	PEN/CLOSE A BRANCH
B: O	PEN/CLOSE B BRANCH
C: O	PEN/CLOSE C BRANCH
D: 0	PEN/CLOSE D BRANCH
FS: T	URN ON BLINKING FOR THE LAST OPEN CHANNEL
BLN:	START BREATHING FOR THE LAST OPENED PATH
†: II	NCREASE BLINKING/BREATHING RATE
↓: R	EDUCE FLICKER/BREATHING RATE
# +:	INCREASE BRIGHTNESS
₽-:	REDUCE BRIGHTNESS
4 : I	BURST MODE
4:	VOLUME INCREASE
वी- :	

Precautions:

- 1. The new remote control lighting is divided into 4 channels, which can be controlled individually
- 3. Music and lighting can be turned off separately

The installation is complete.



The above are ideas and instructions provided by our designers. Please move on:

- 1: Do you have any suggestions about the material and quality of our products?
- 2: Do you have any suggestions on the installation instructions and the degree of difficulty of the installation?
- 3: If you have better installation method and ideas, please contact us in time.