76900 Koenigsegg Jesko LED lighting Kit (Standard Version) LG52

Instructions for installing this kit:




All parts and components used in the manual are samples, and the pictures may be different from the actual ones, and the installation will not be affected under normal circumstances. If there is a problem, please contact us in time.

Power supply mode: USB power cord (please bring your own power supply).

It can be energized through a USB battery box (please pay attention to the positive and negative poles of the battery), power bank, mobile phone charger or USB socket. The normal voltage is 3-5V.

USB connectors to connect devices

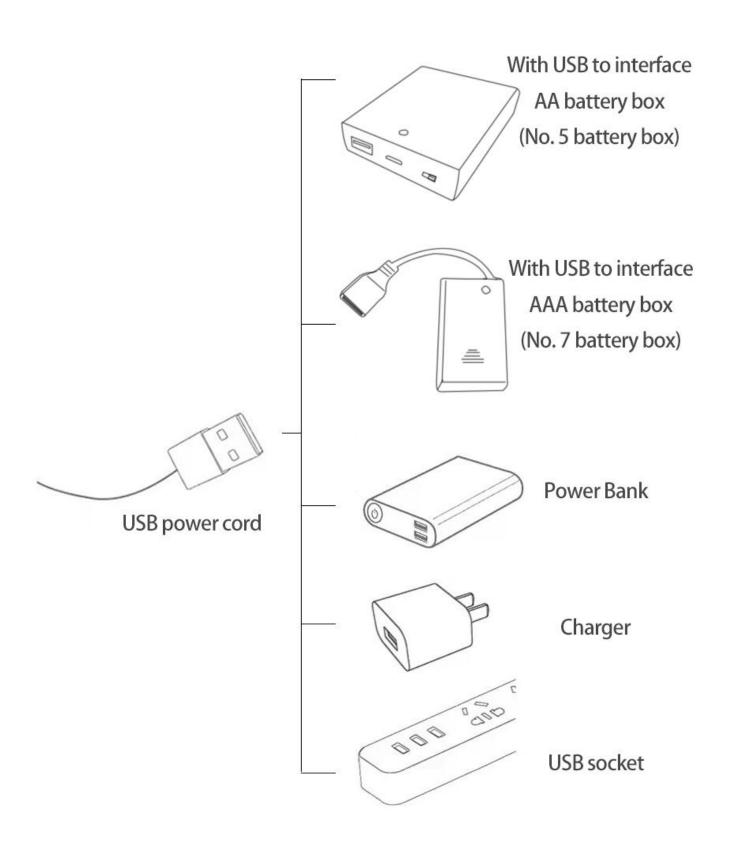

There are a total of 2 bags of this product, and Flat Battery Pack is a gift. (The battery is not

provided in this product, please bring your own)



Open the bag from the place where the red line is drawn, don't tear it from the middle, so as not to damage the lighting




Lighting test:

Take out the accessories inside (accessories include: 1 Flat Battery Pack, 1 30CM USB power cord, 1 2-Port Expansion Boards). The following power supply methods use Flat Battery Pack (please bring your own battery).




Take out 1 Flat Battery Pack.

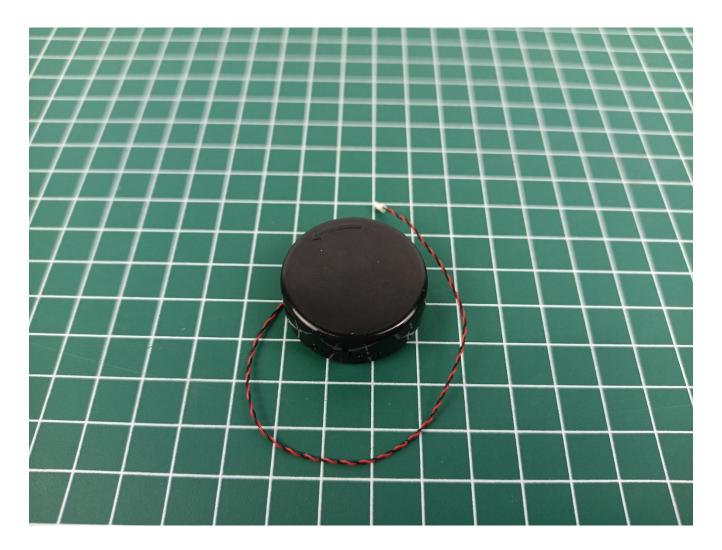

Open the power cover on the Flat Battery Pack.




The battery is installed as shown in the figure. (Please bring your own batteries, pay attention to the positive and negative poles.)

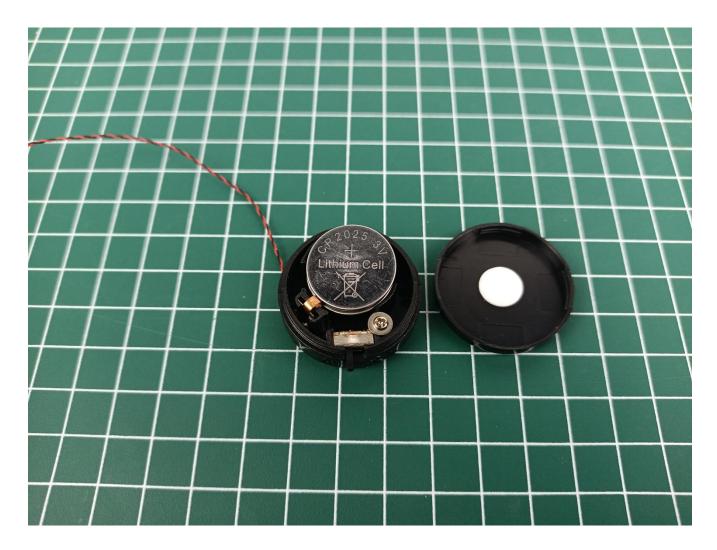


Restore the power cover.




Take out 1 2-Port Expansion Boards.

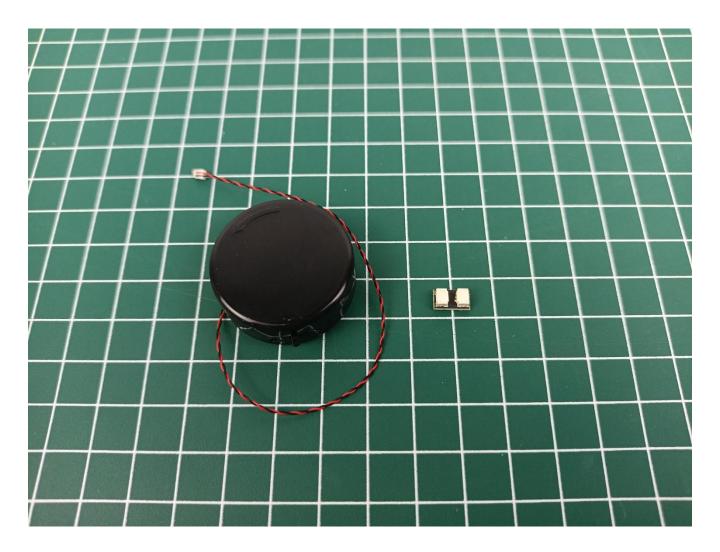


The two are connected through the interface, the connection method is as follows.

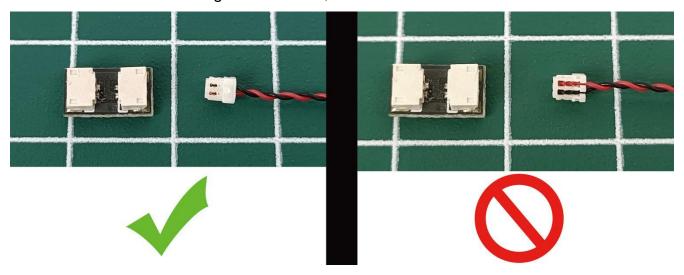


Connect the Flat Battery Pack to the 2-Port Expansion Boards.

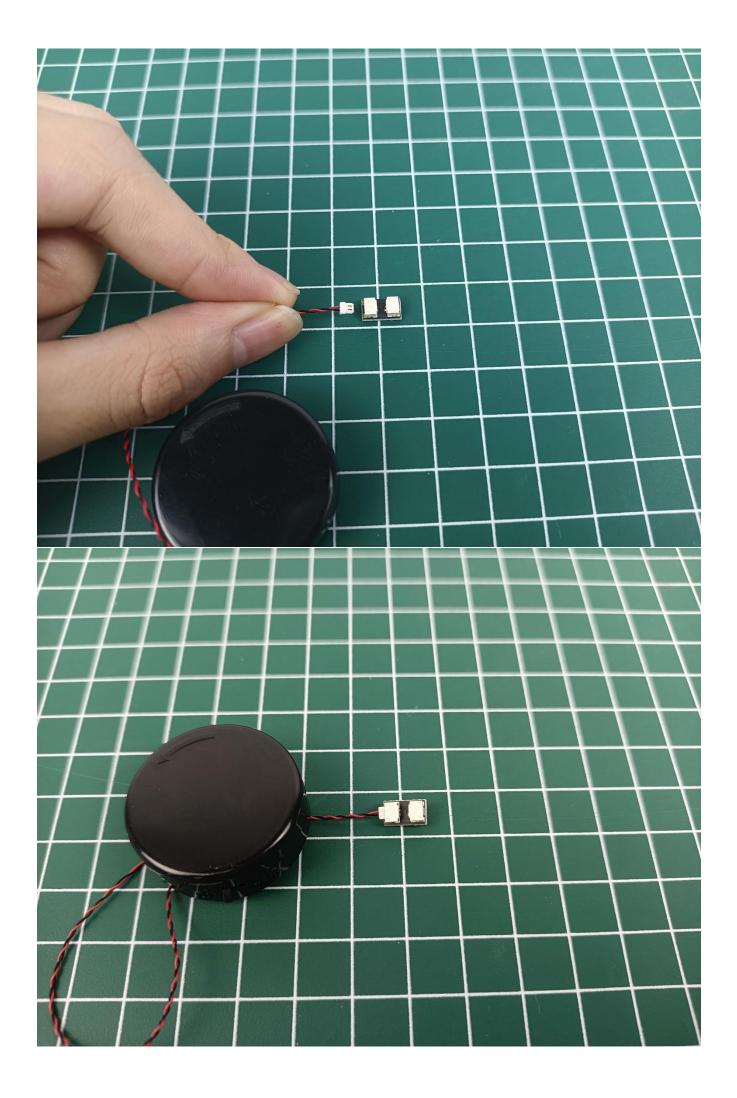

Take out the lighting from the bag marked "1".

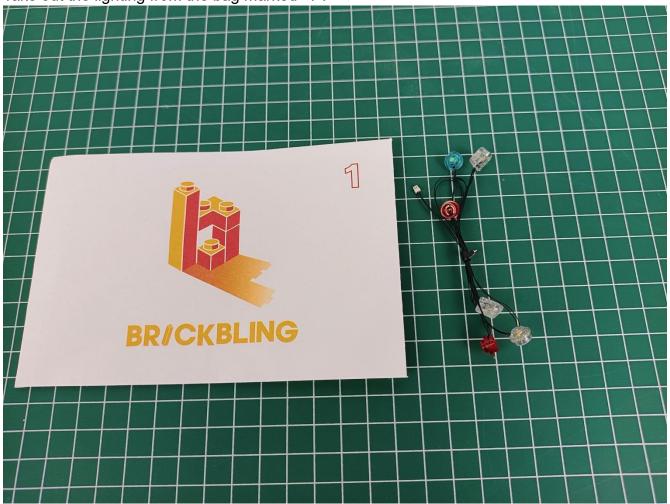


Connect the lighting to the 2-Port Expansion Boards.

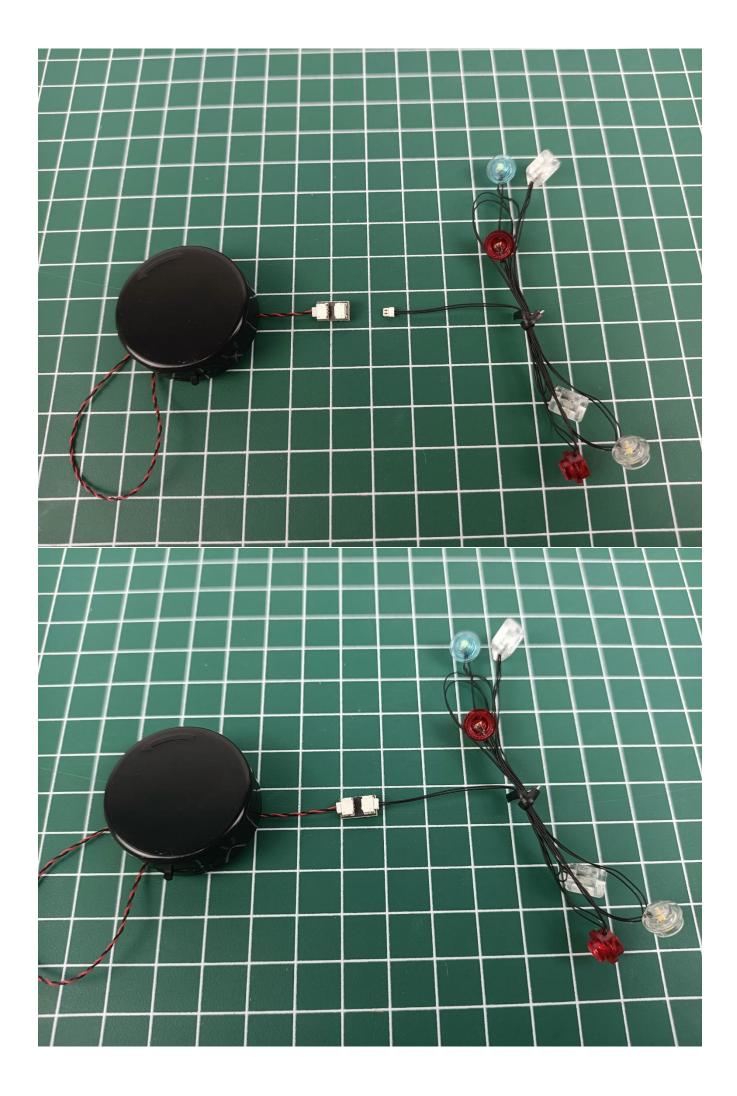


Turn on the power switch of the Flat Battery Pack to test whether the lighting is abnormal.


Check the lighting. If there is any abnormality, please contact us in time!

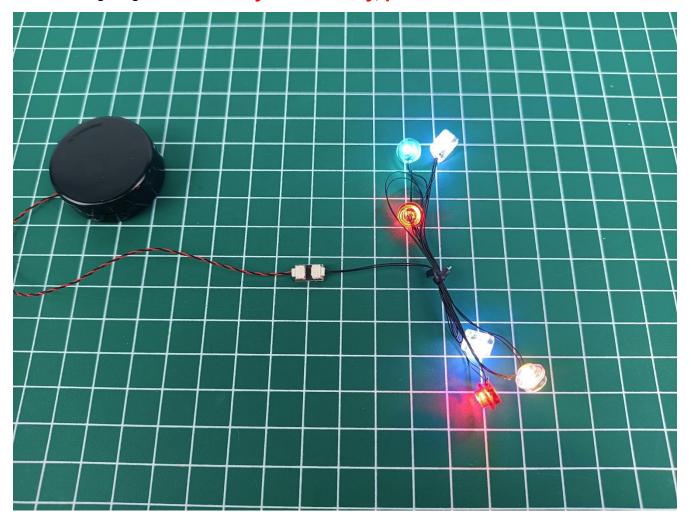

Turn off the power switch of the Flat Battery Pack.

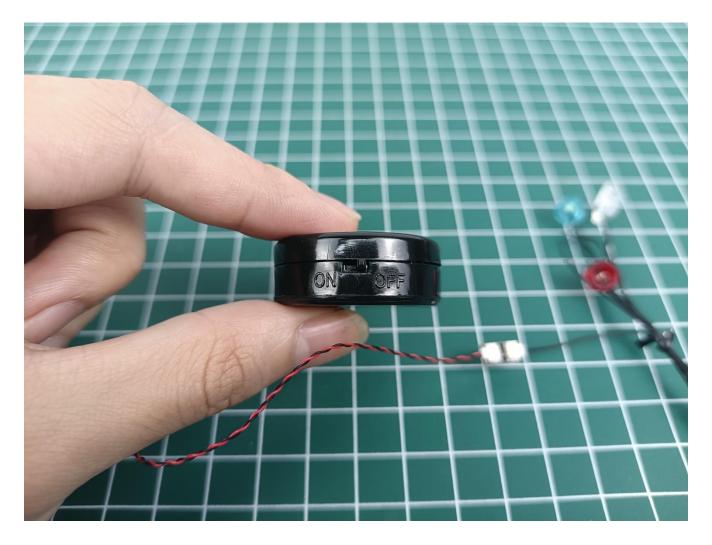


Separate Flat Battery Pack from 2-Port Expansion Boards.

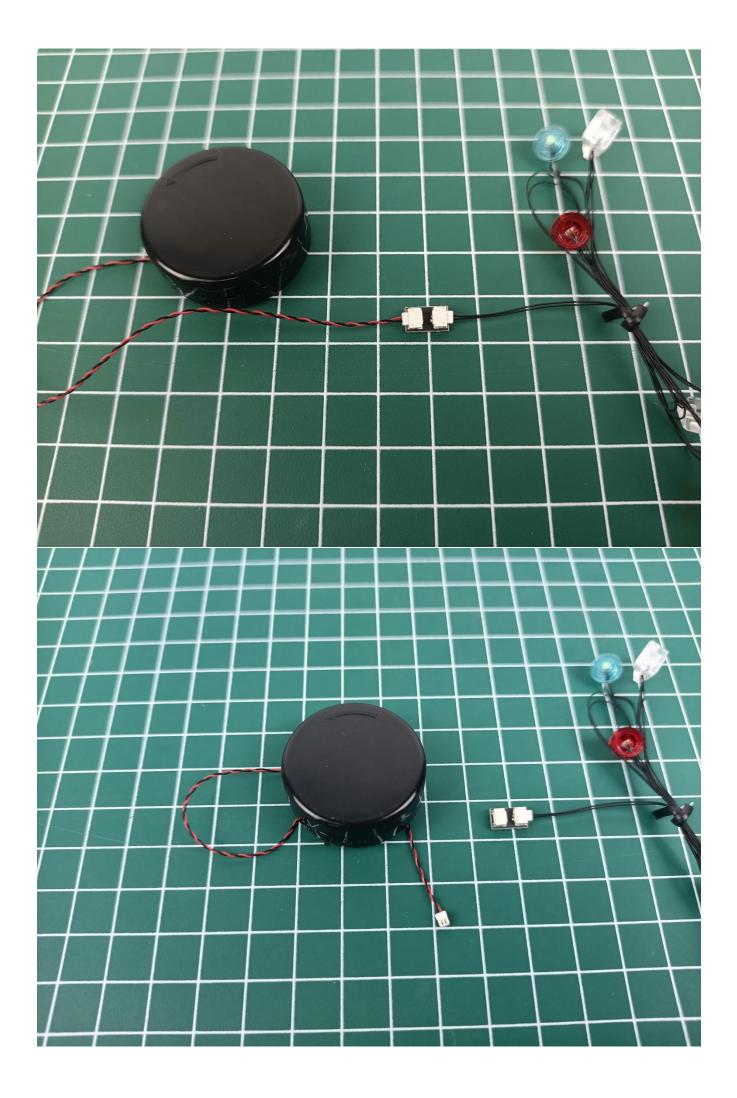




Take out the 30CM USB power cord.

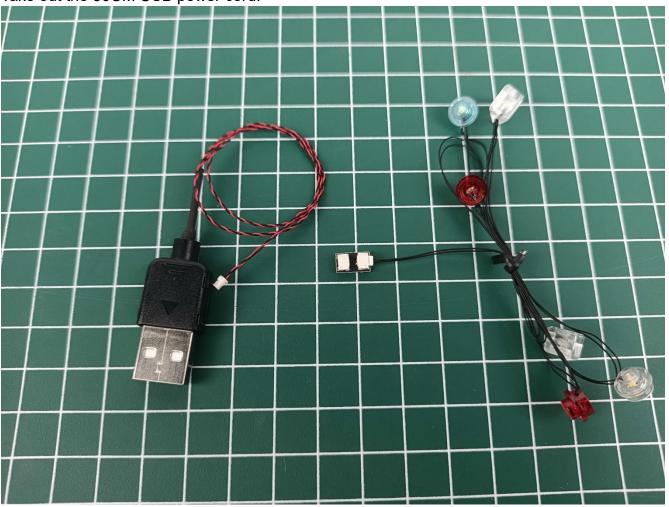

Connect 30CM USB power cord to 2-Port Expansion Boards.

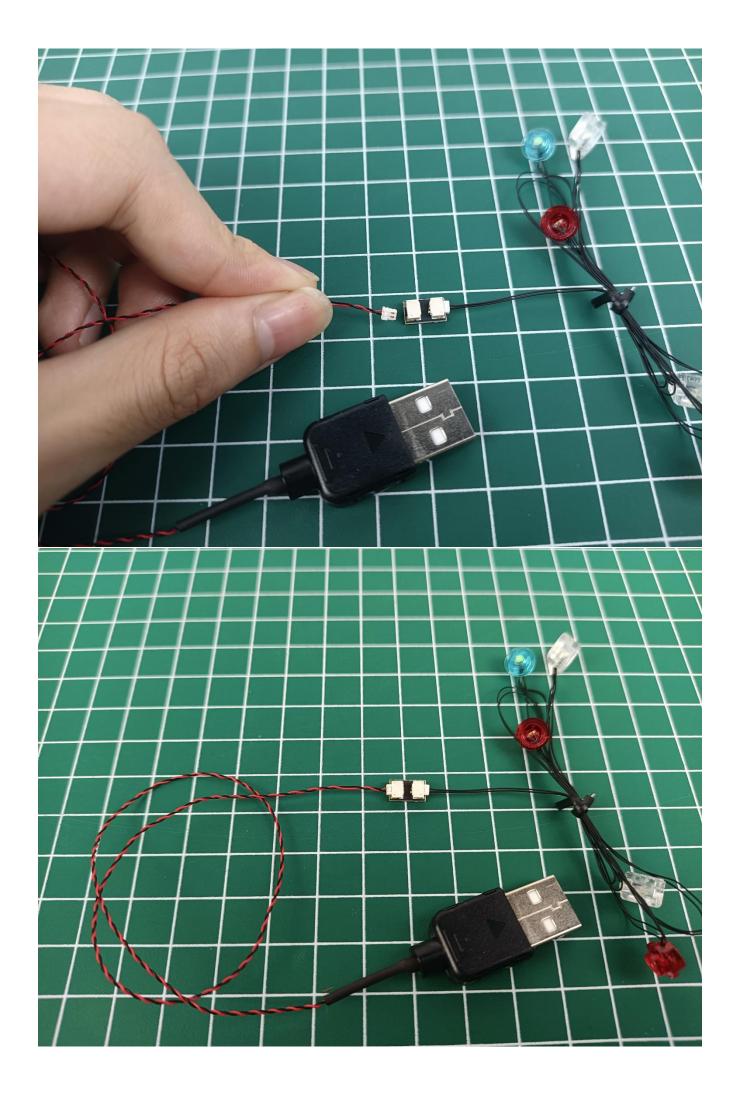


Take out the charging and connect the 30CM USB power cord to the power bank (please bring your

own power bank).






Power on for lighting test.

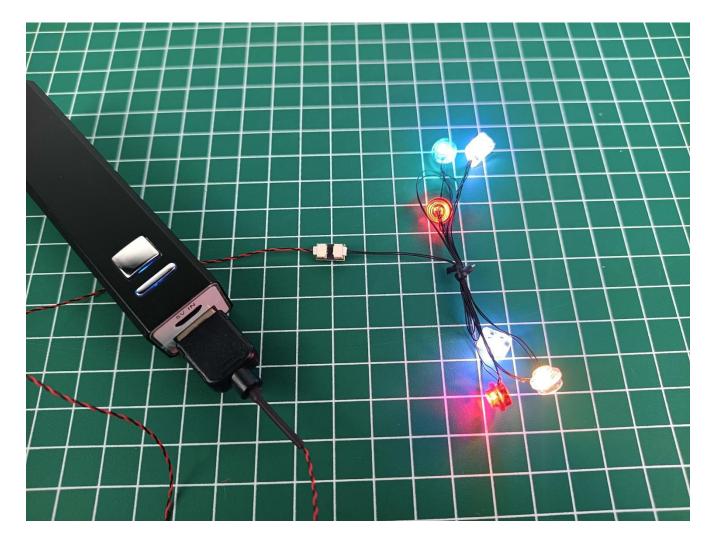

Separate all parts.

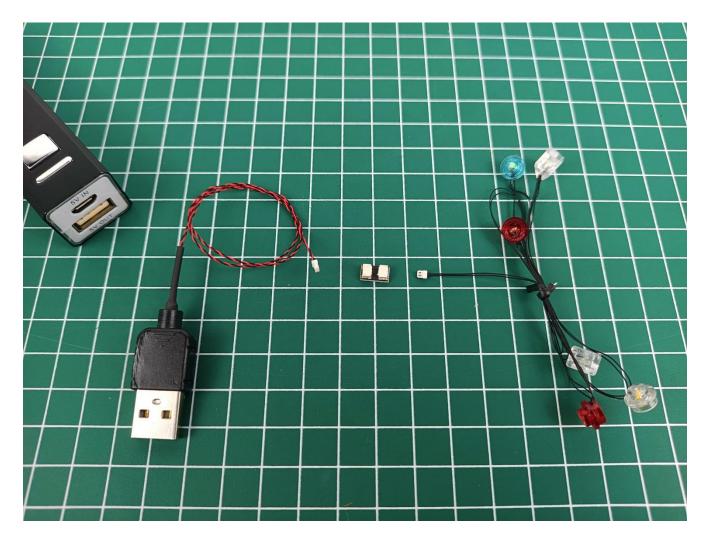


Put the lights back in the "1" bag to prevent loss.





Put the 30CM USB power cord and 2-Port Expansion Boards back in place to prevent loss. 电源袋 Power Package 电源袋 Power Package BRICKBLING


start installation:




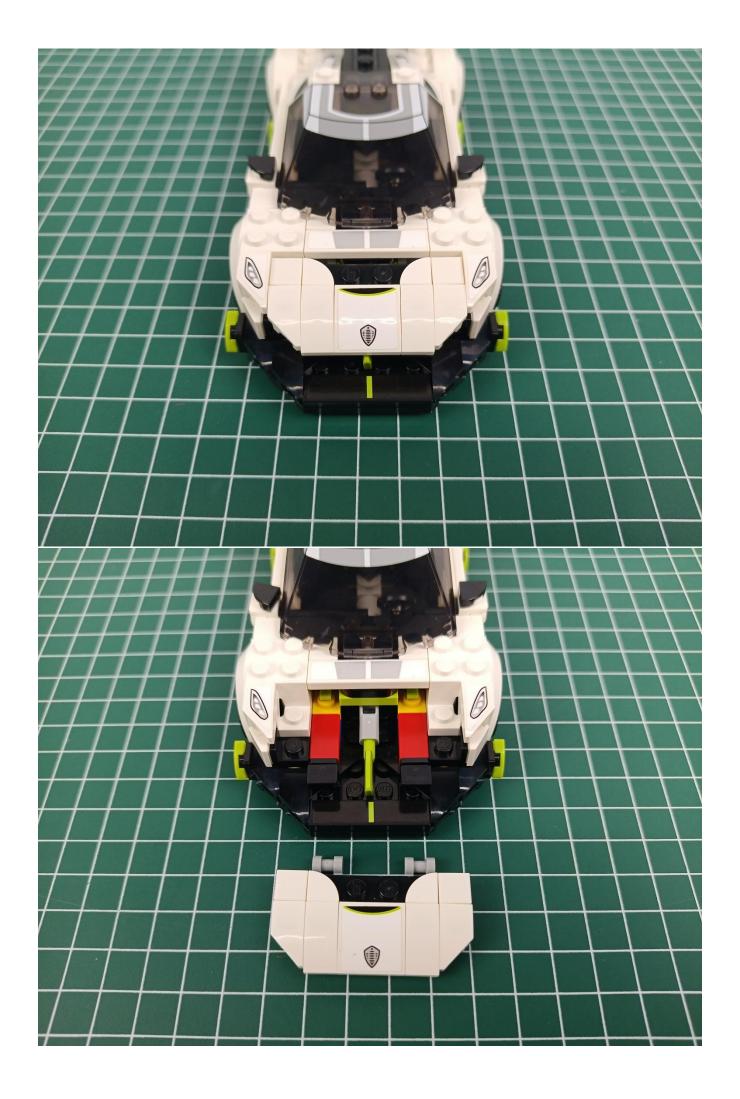


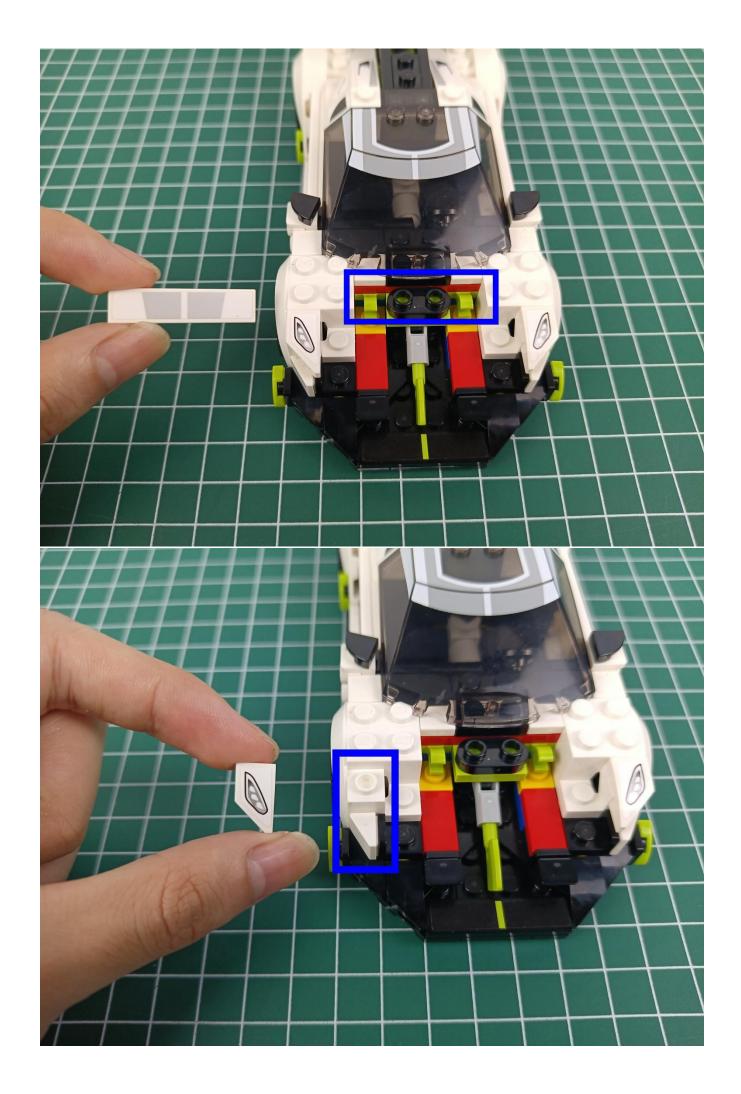


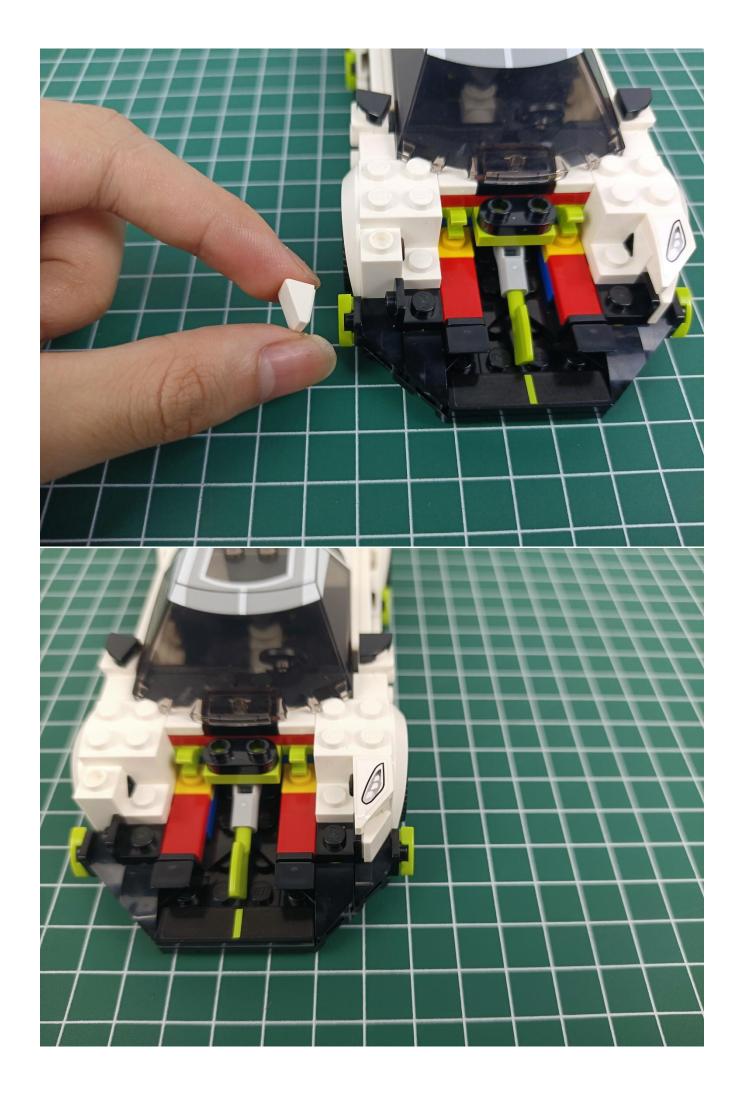


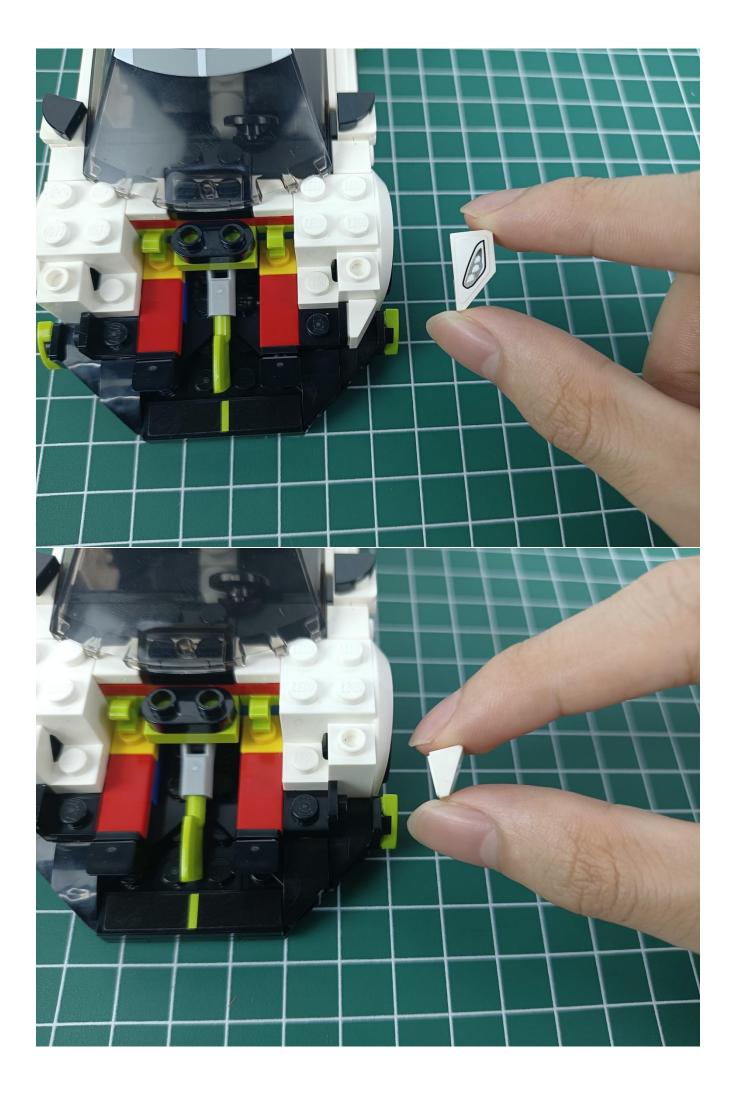


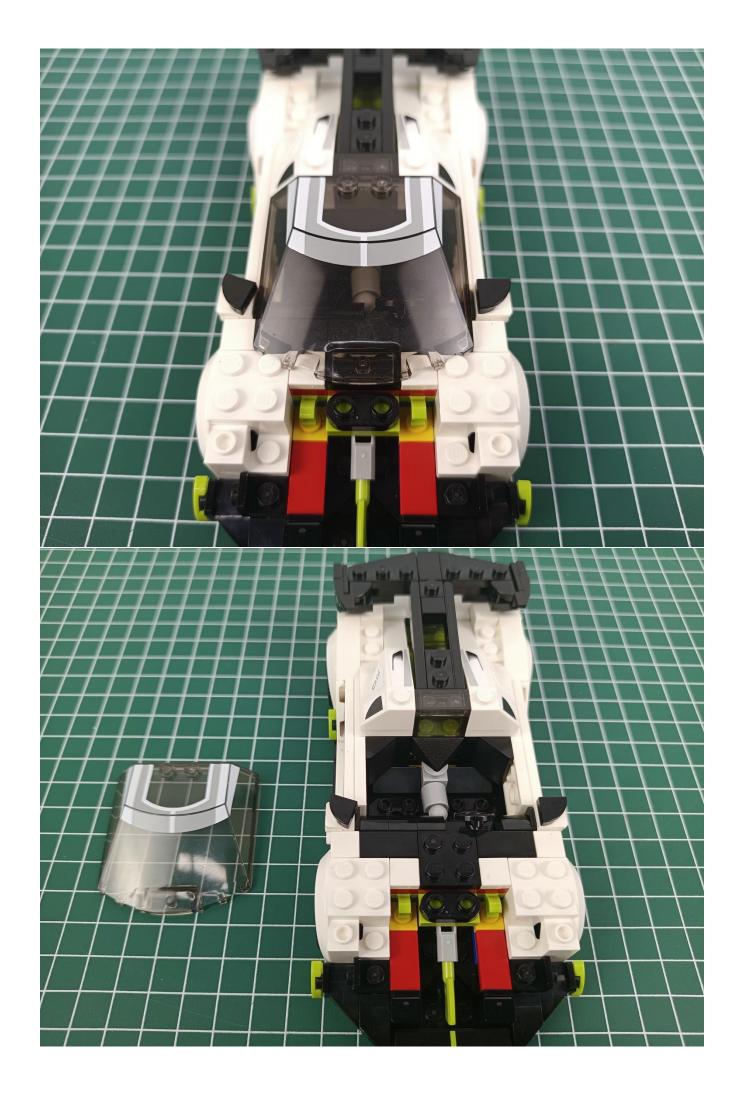


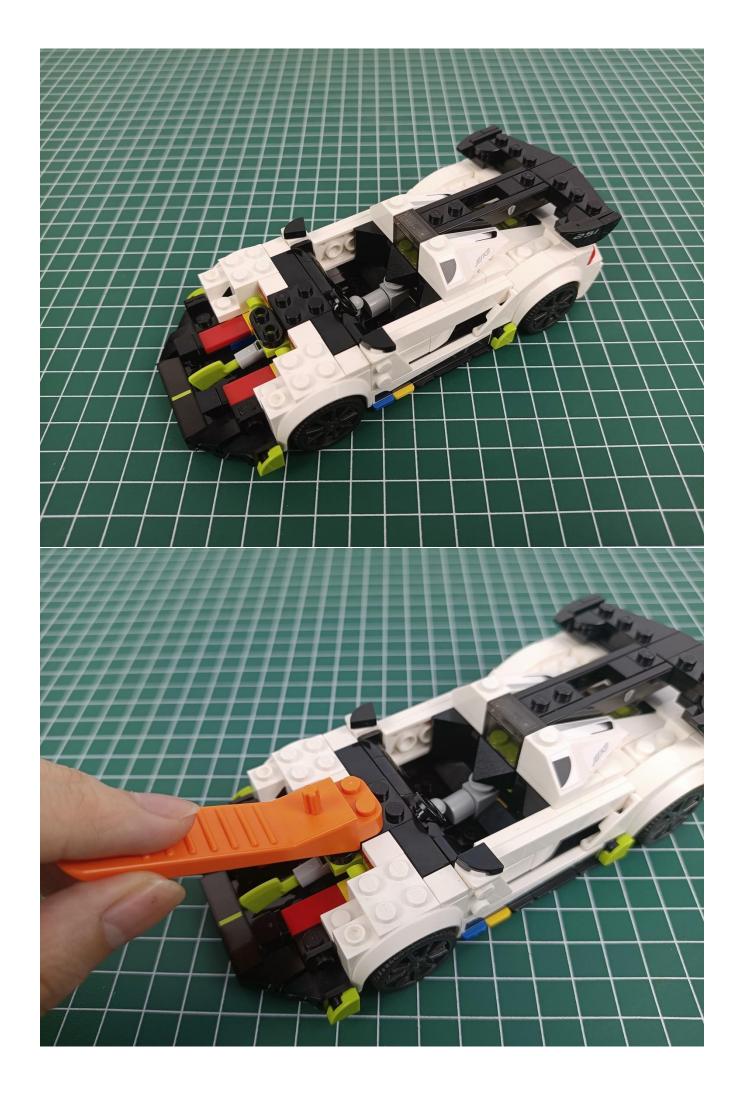


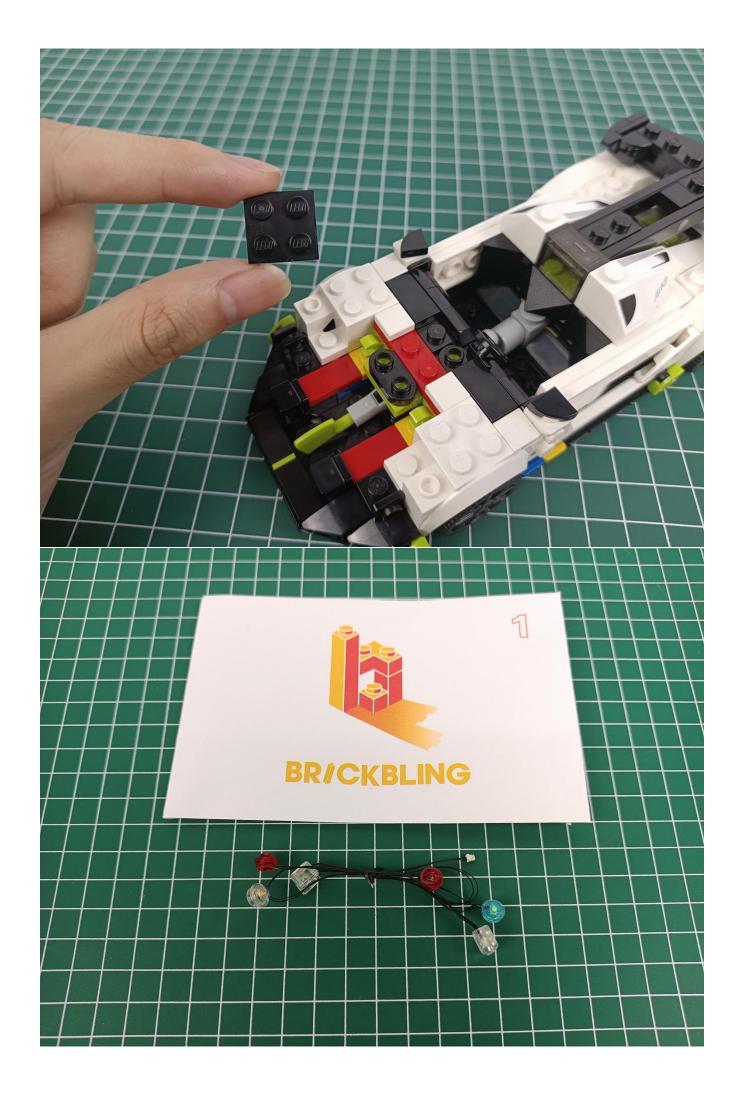


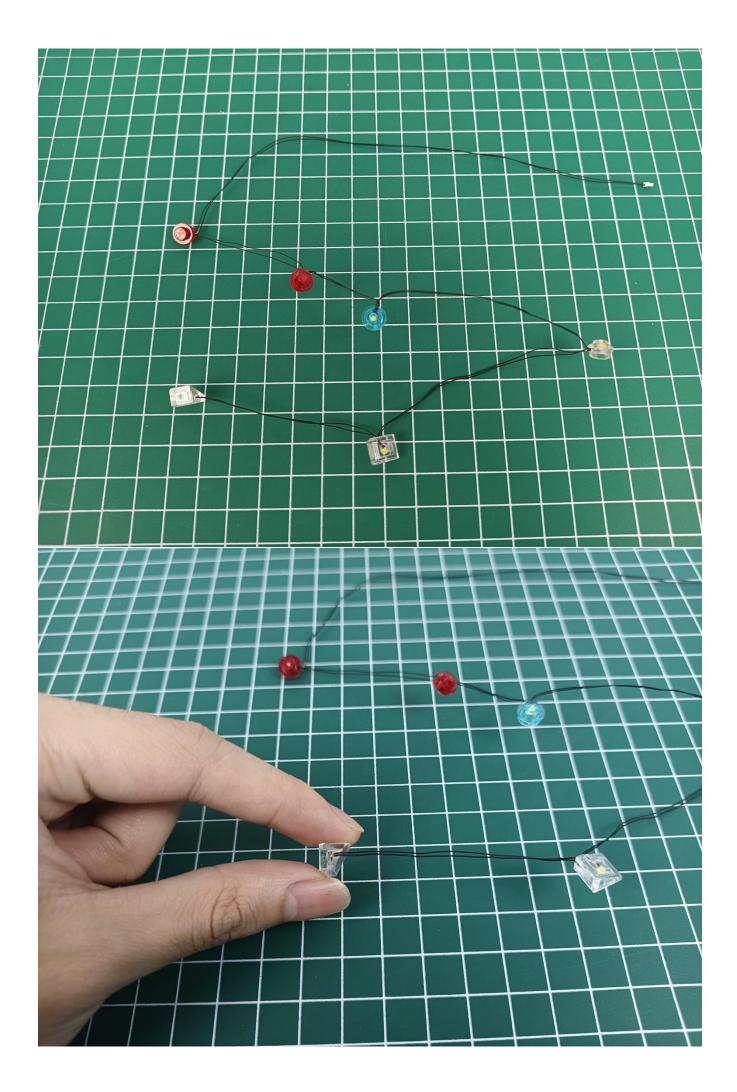


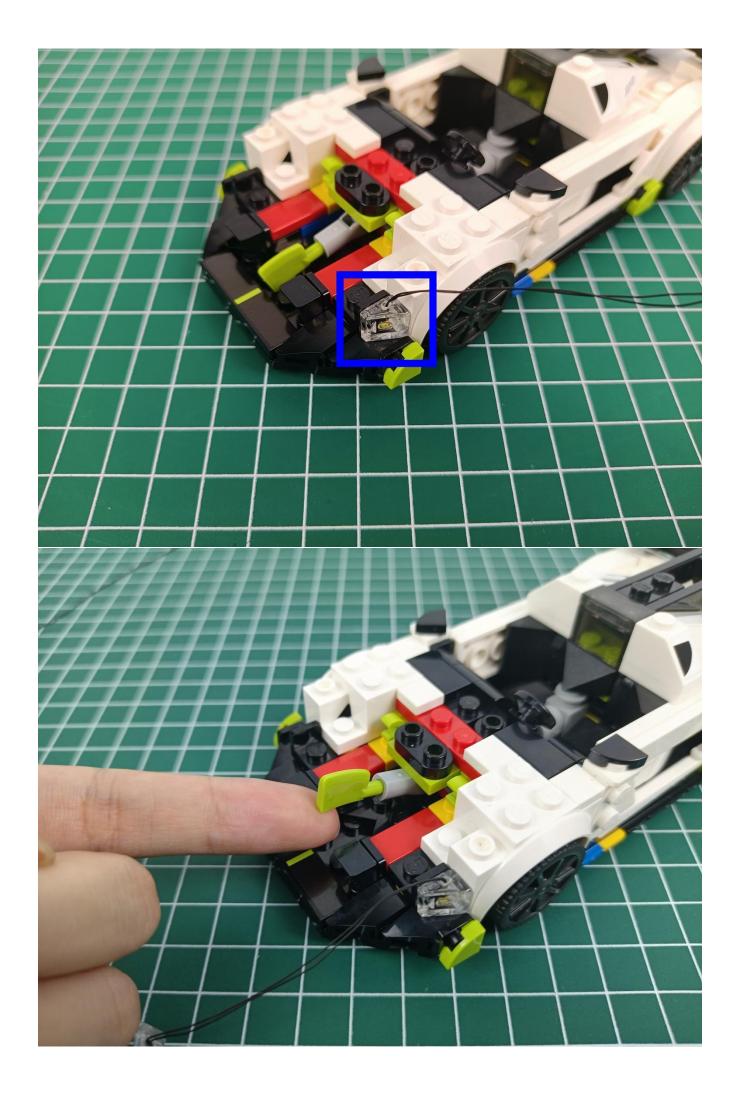


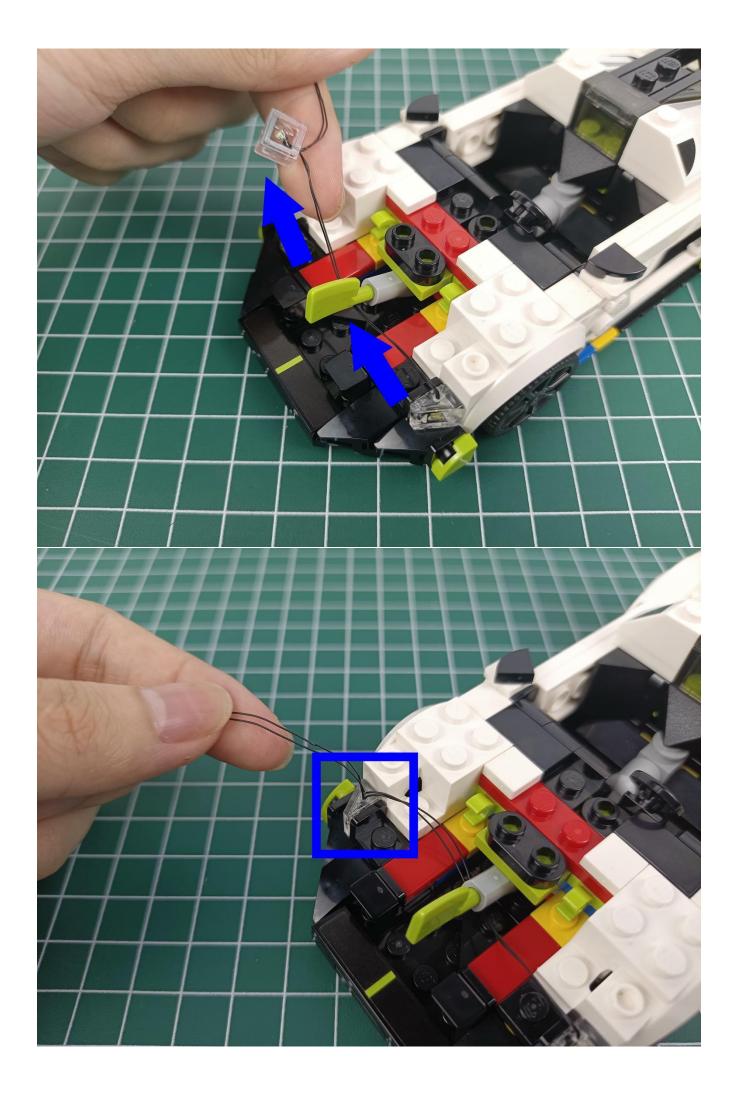


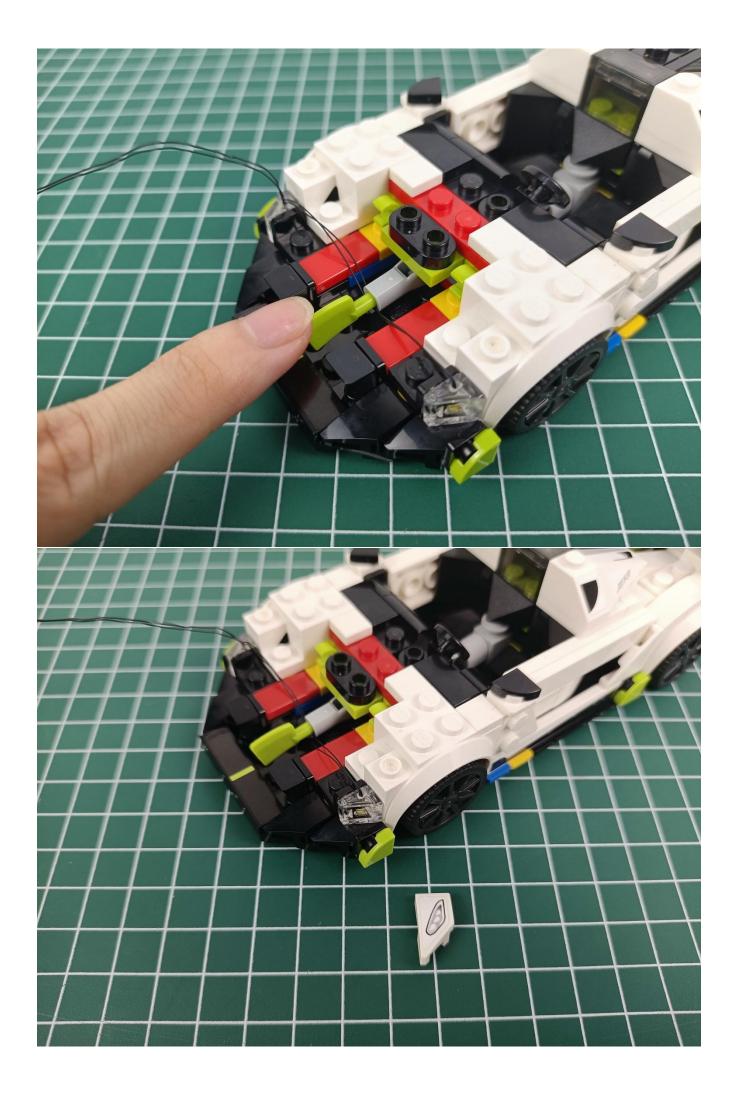


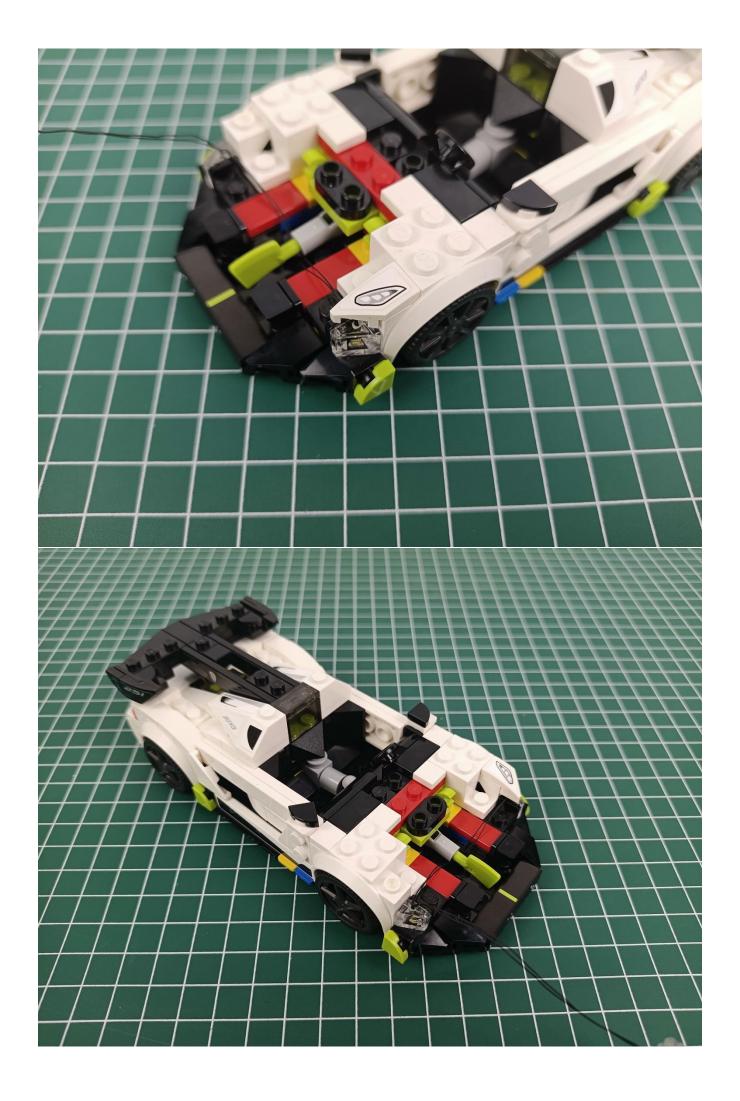


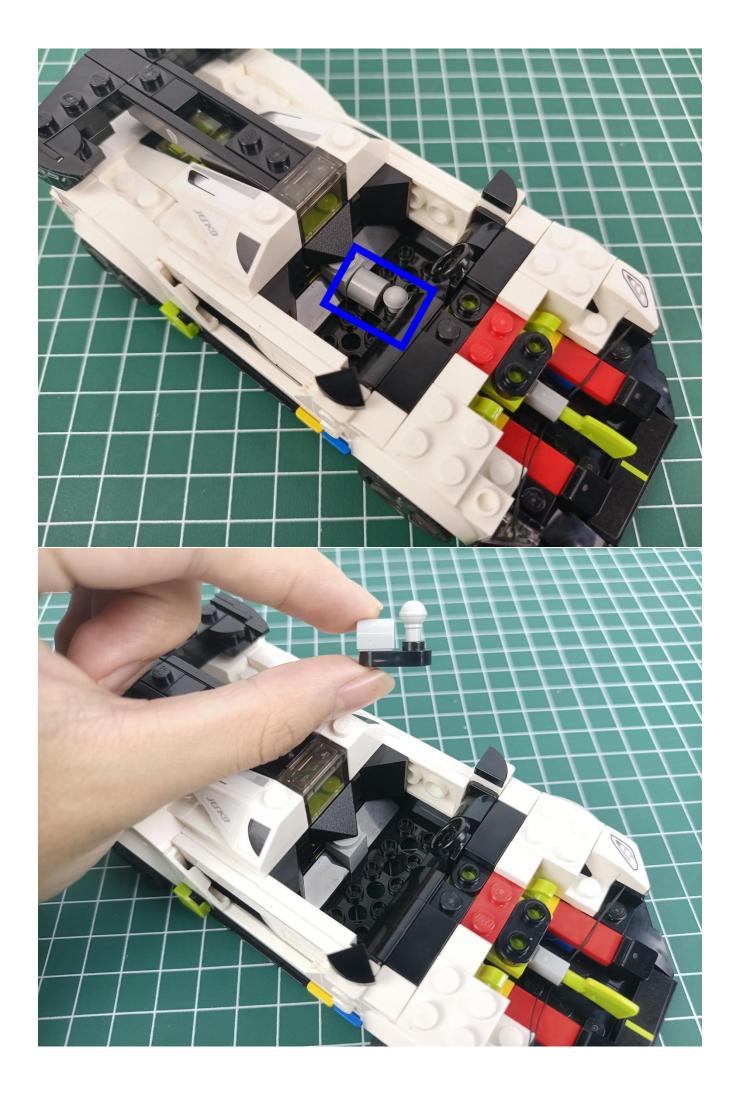


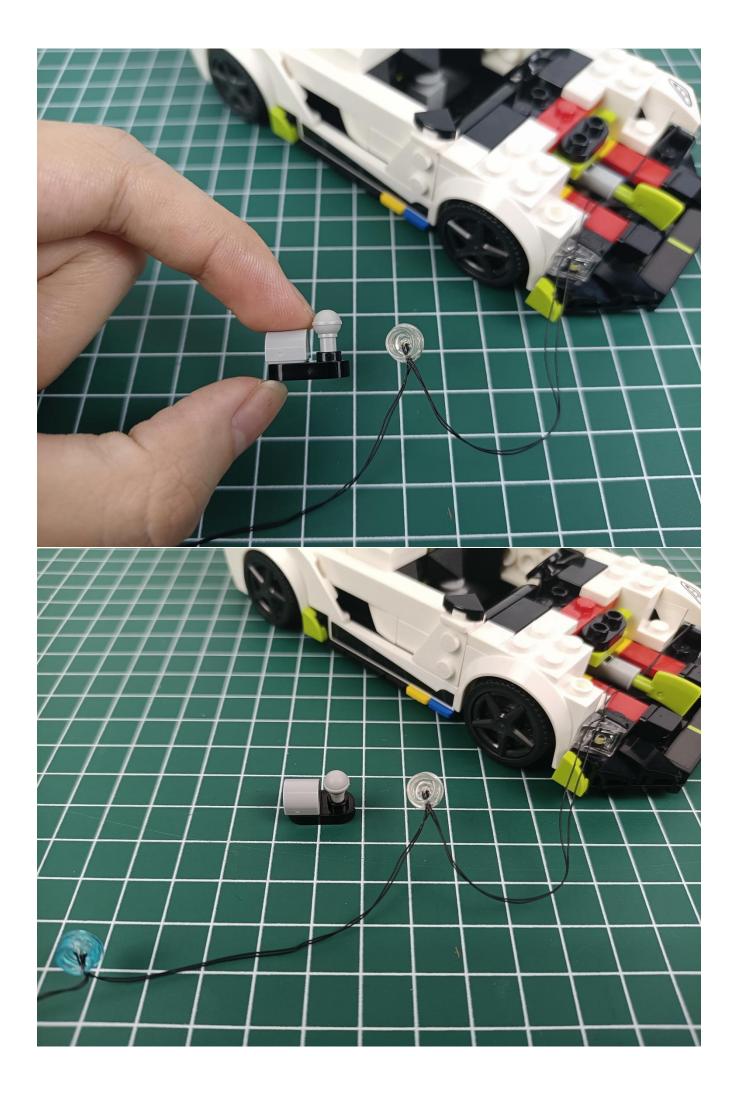


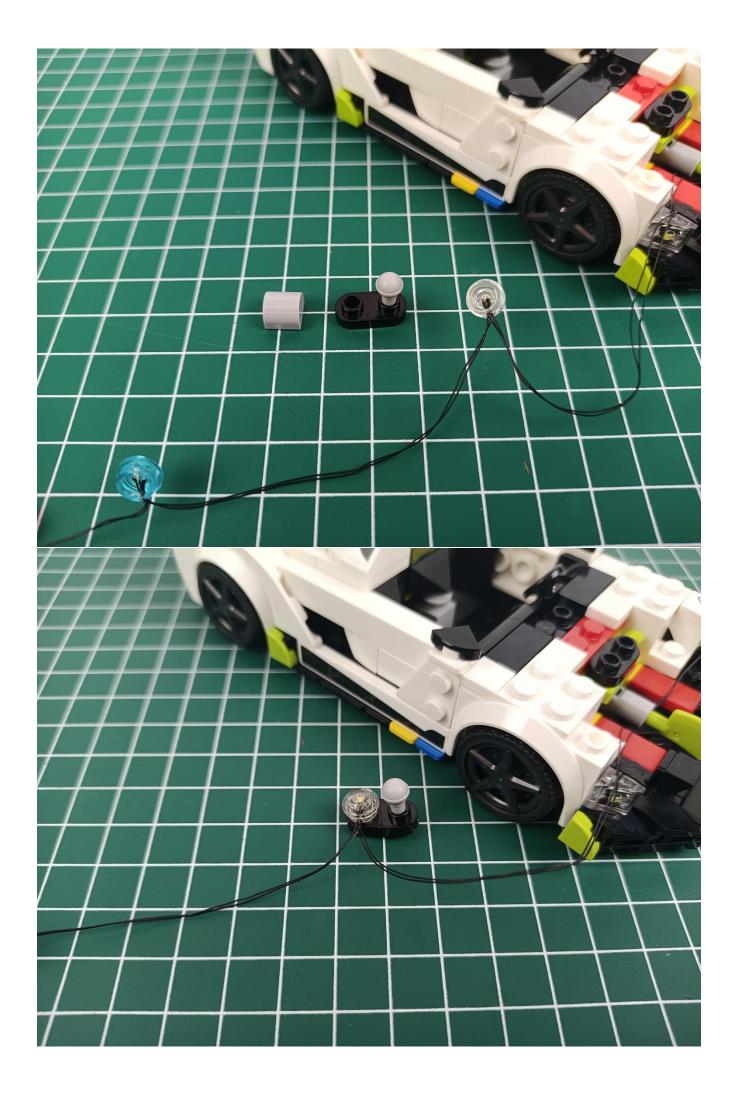


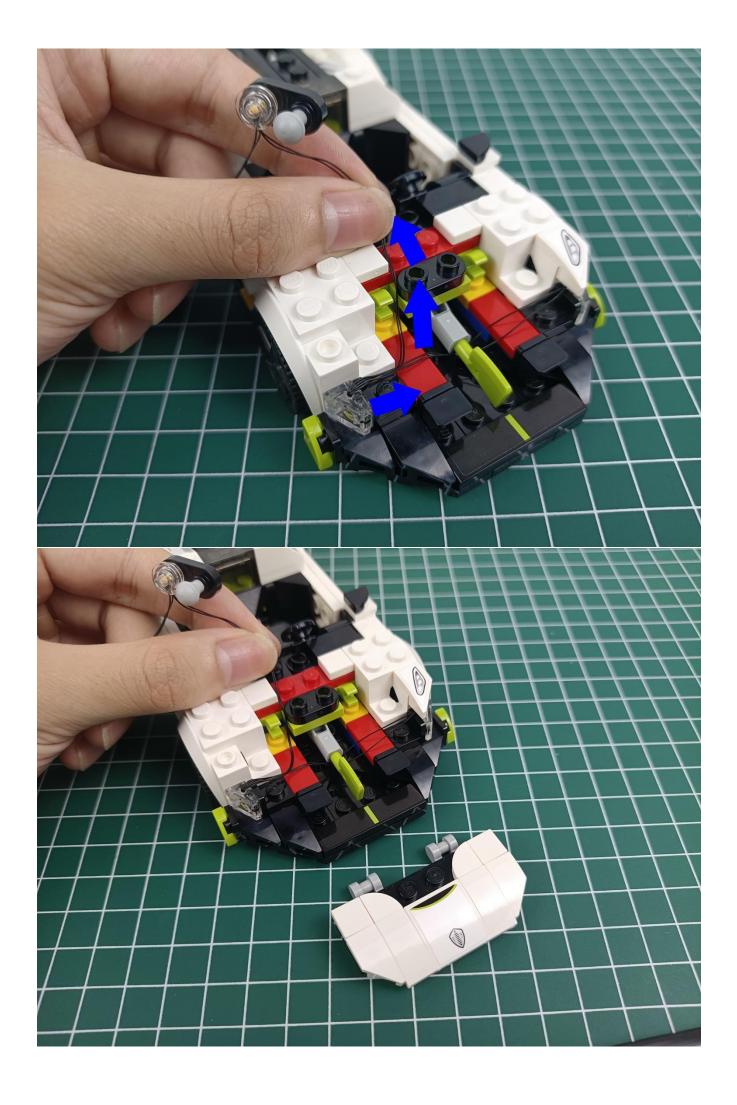


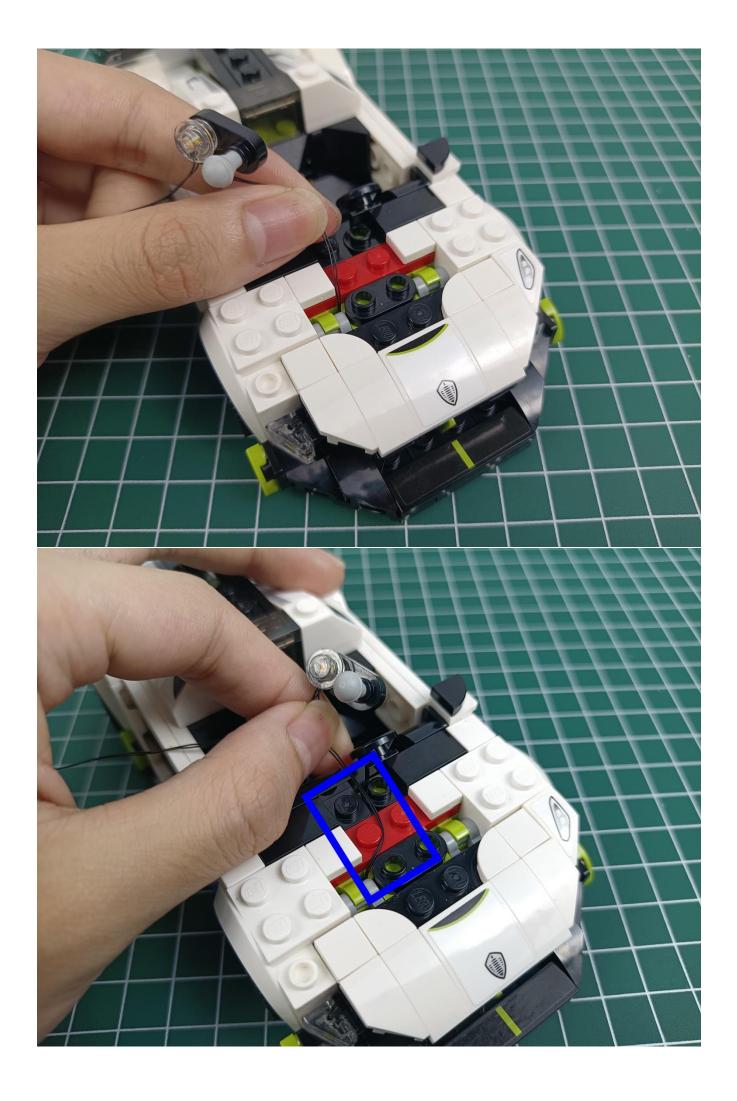


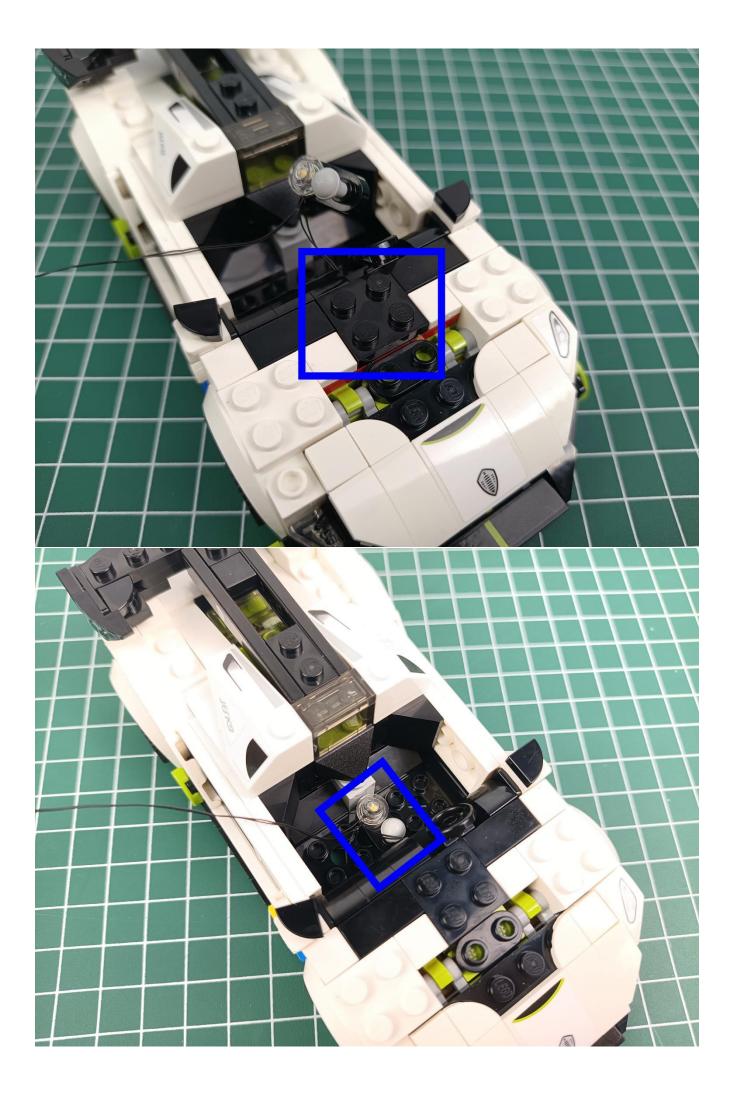


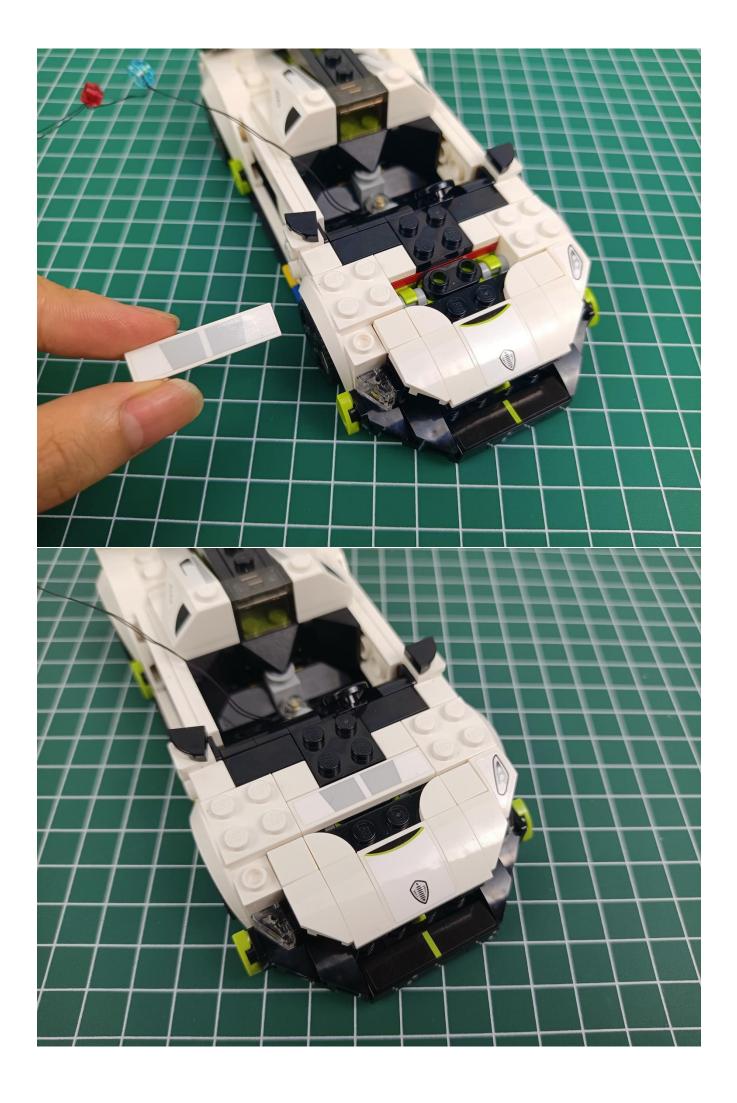


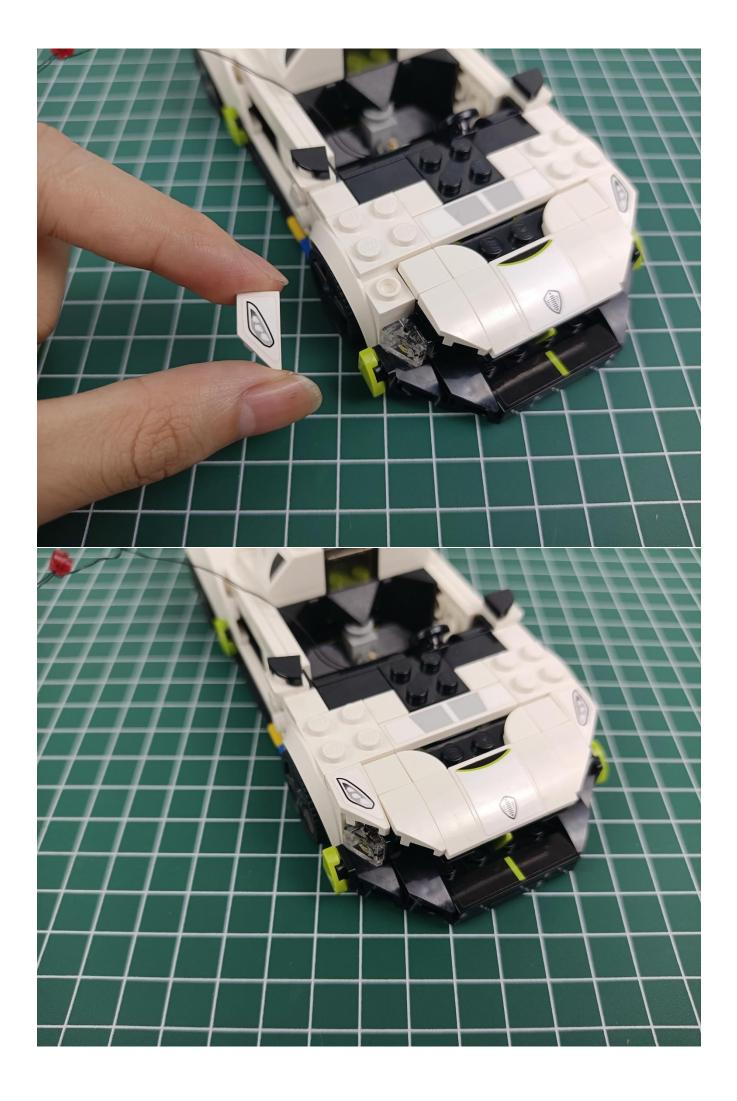


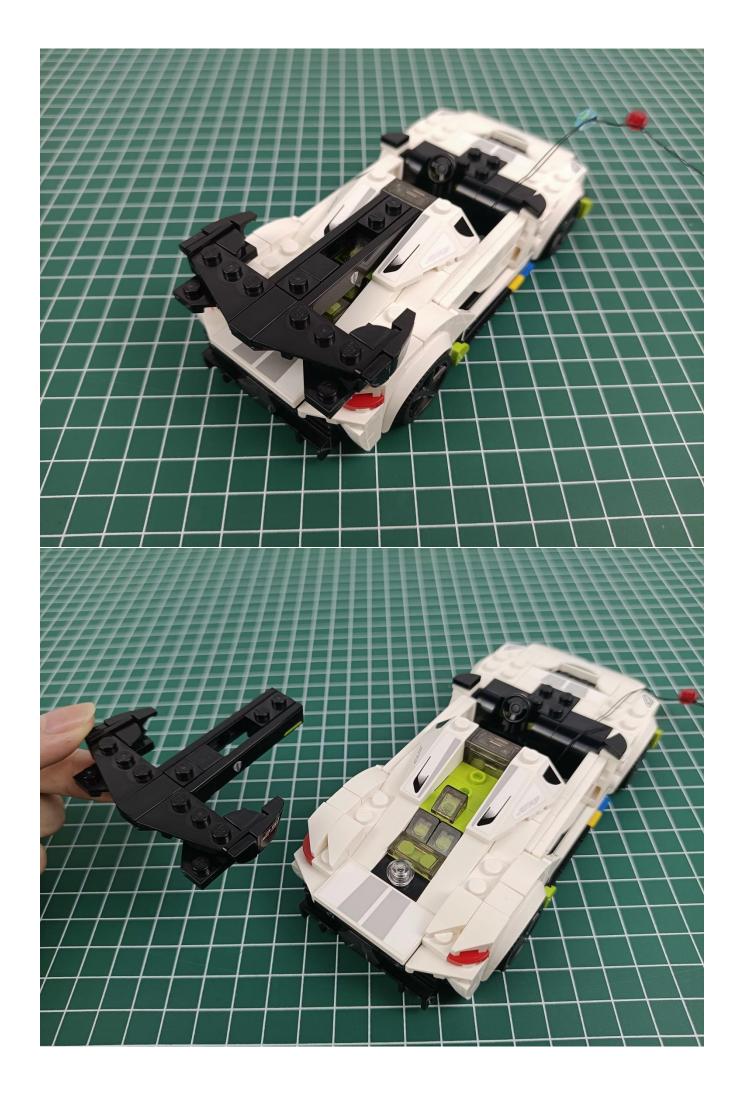

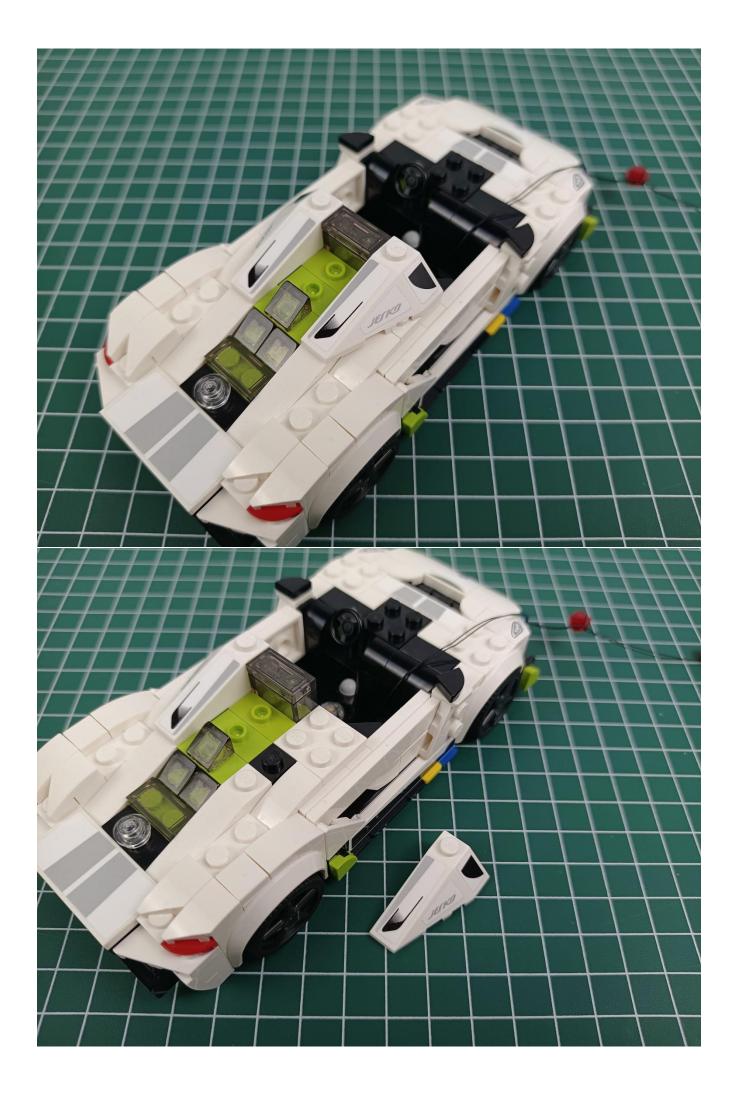

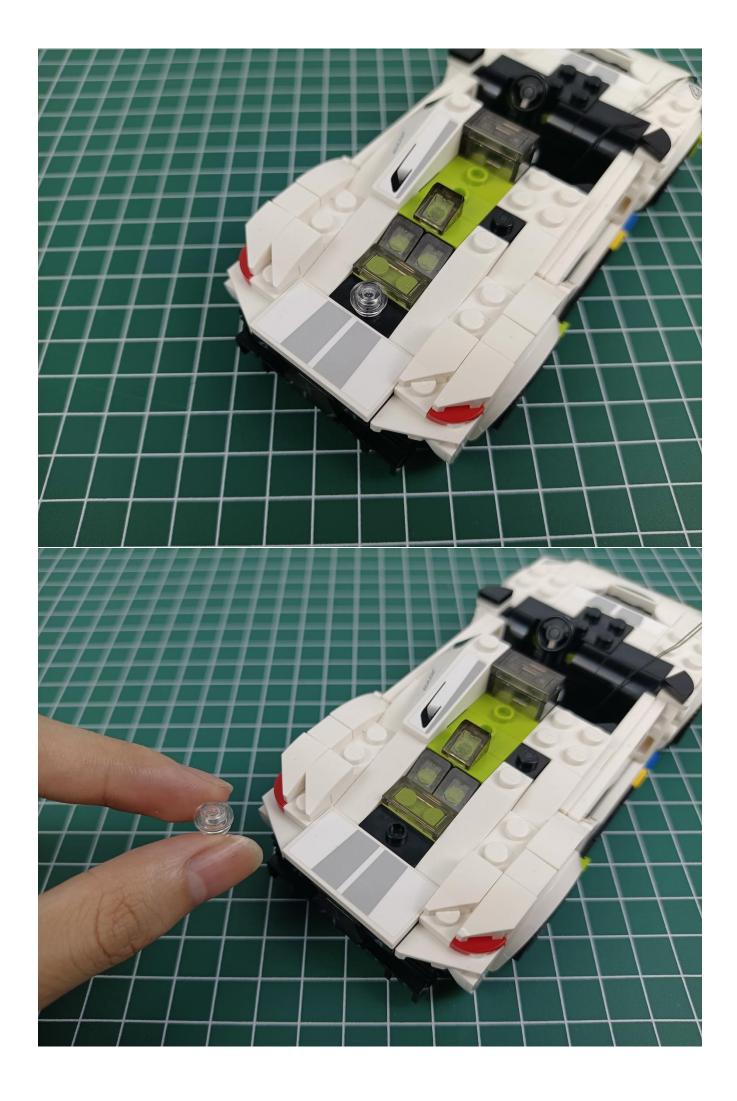


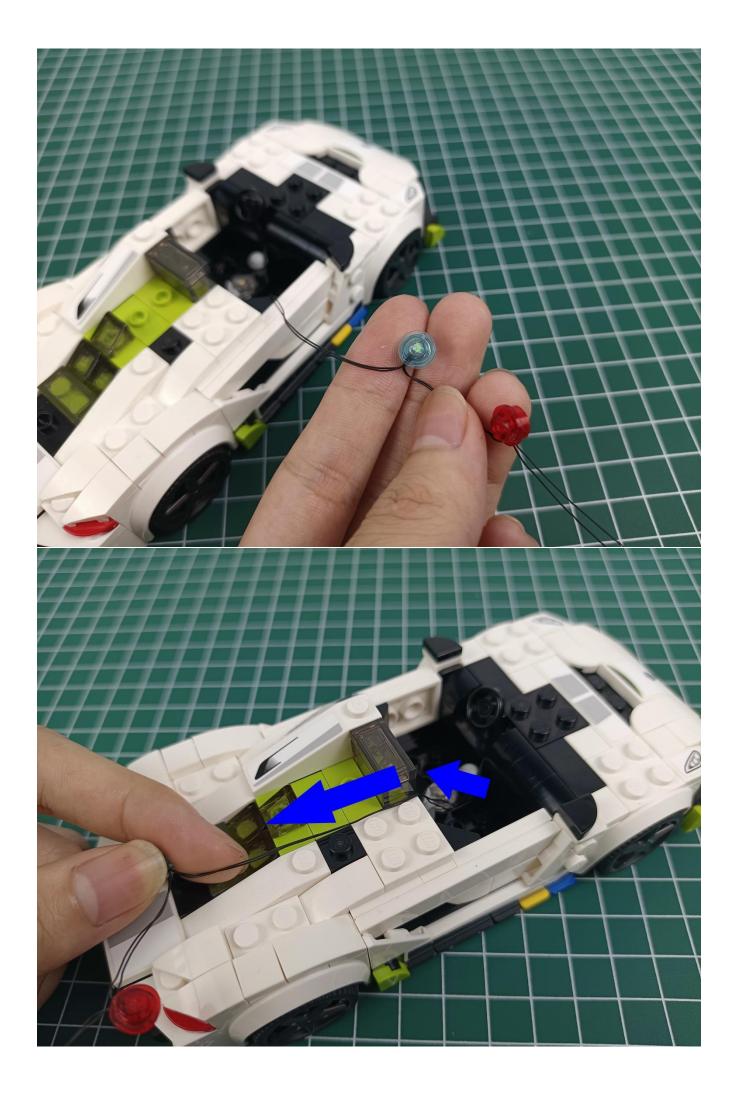


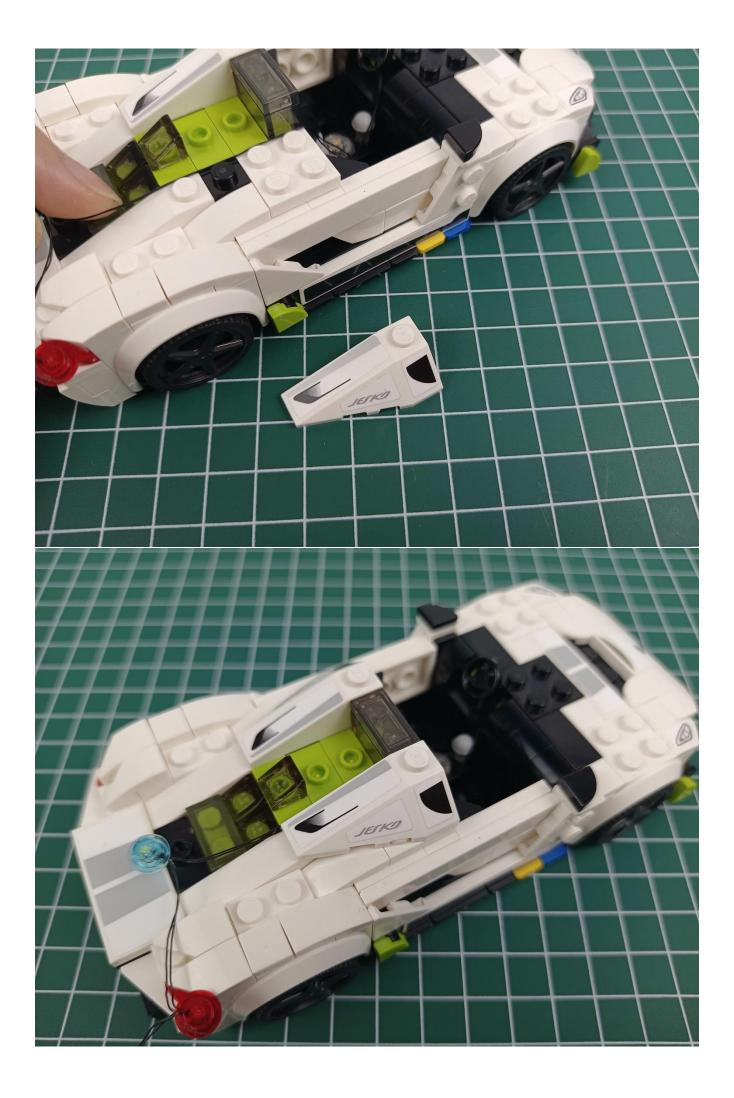








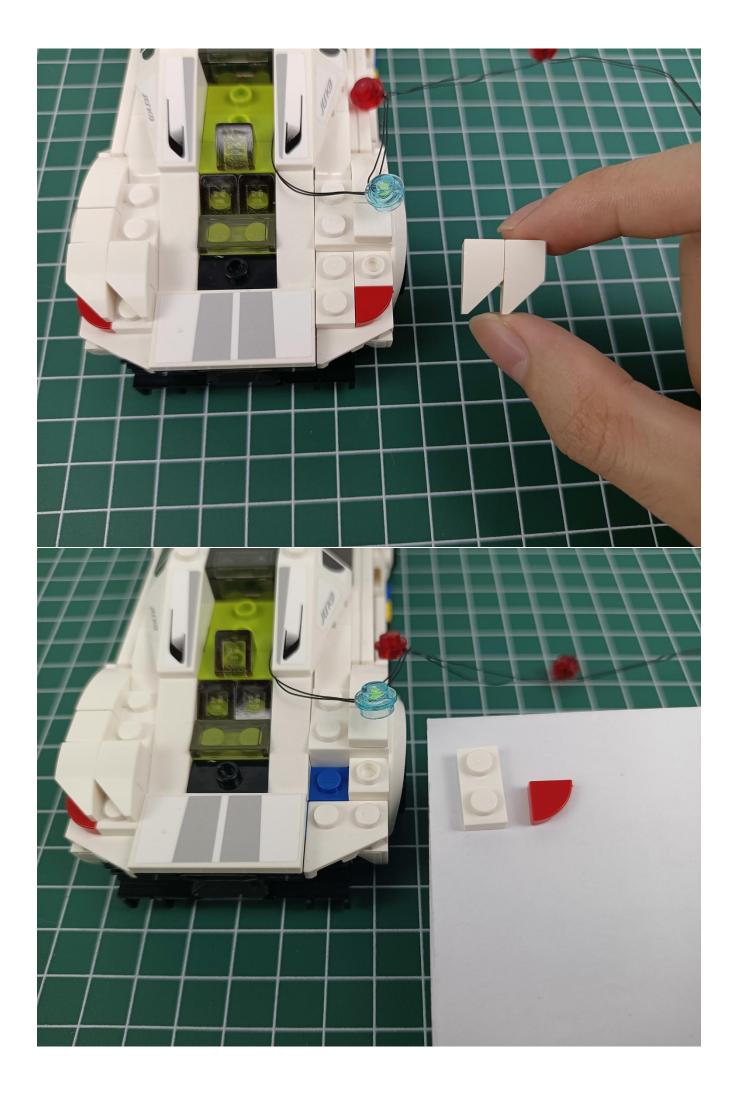


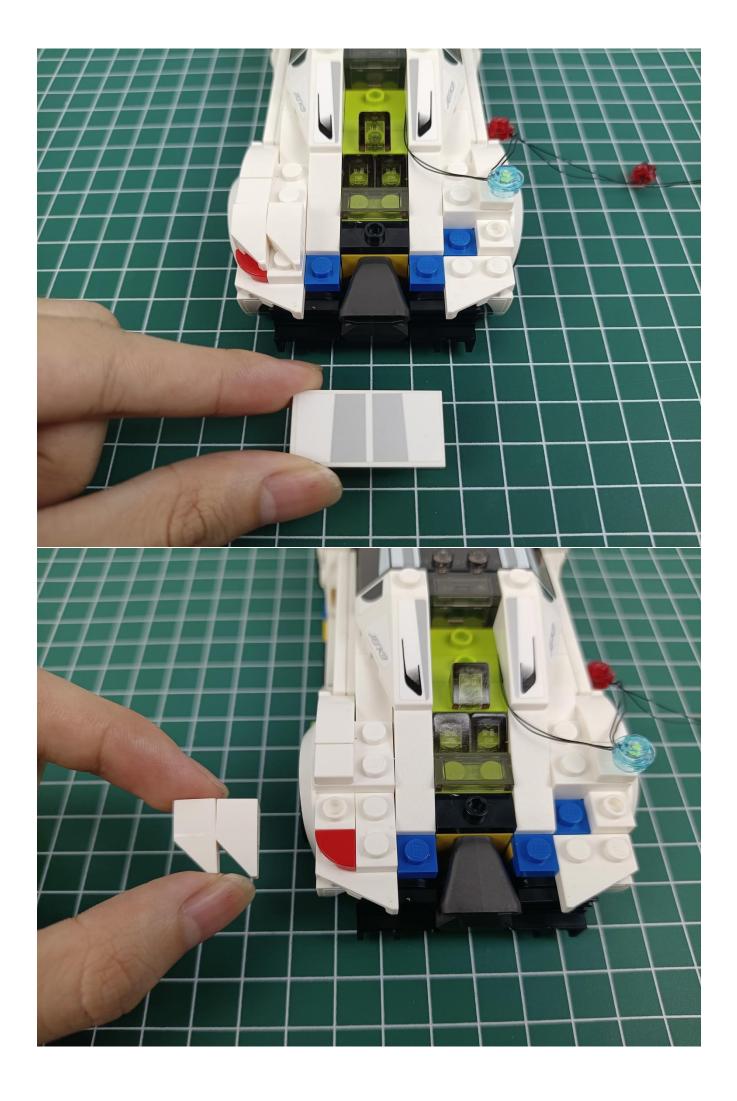

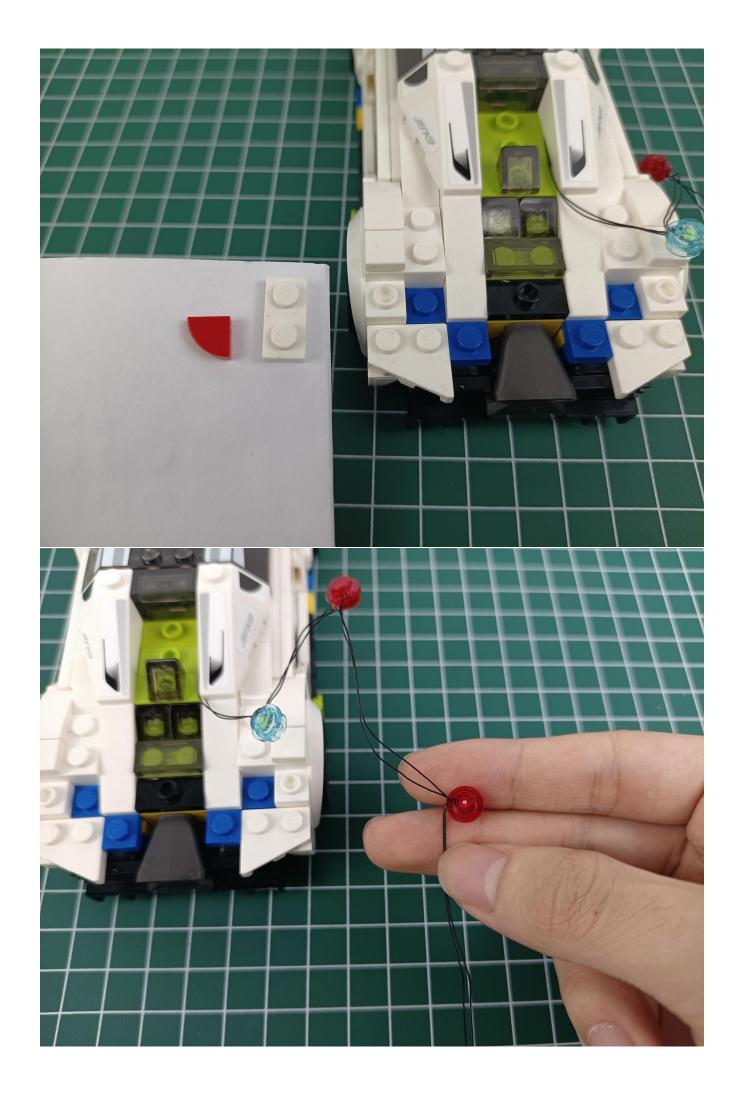


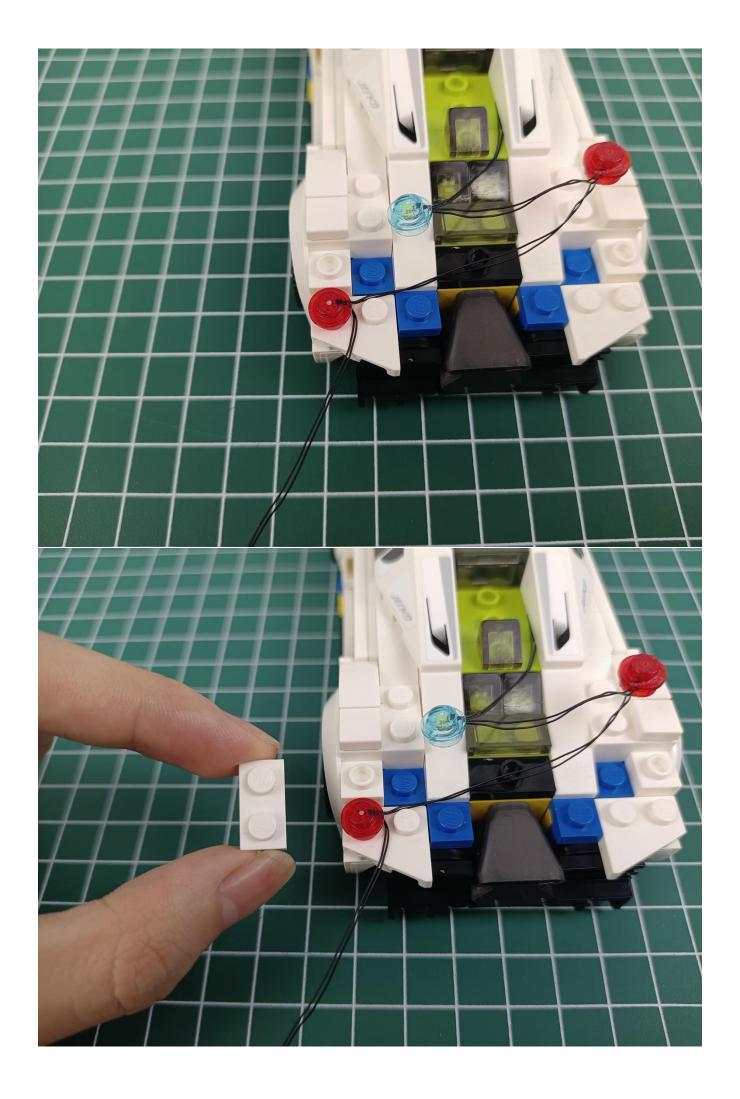


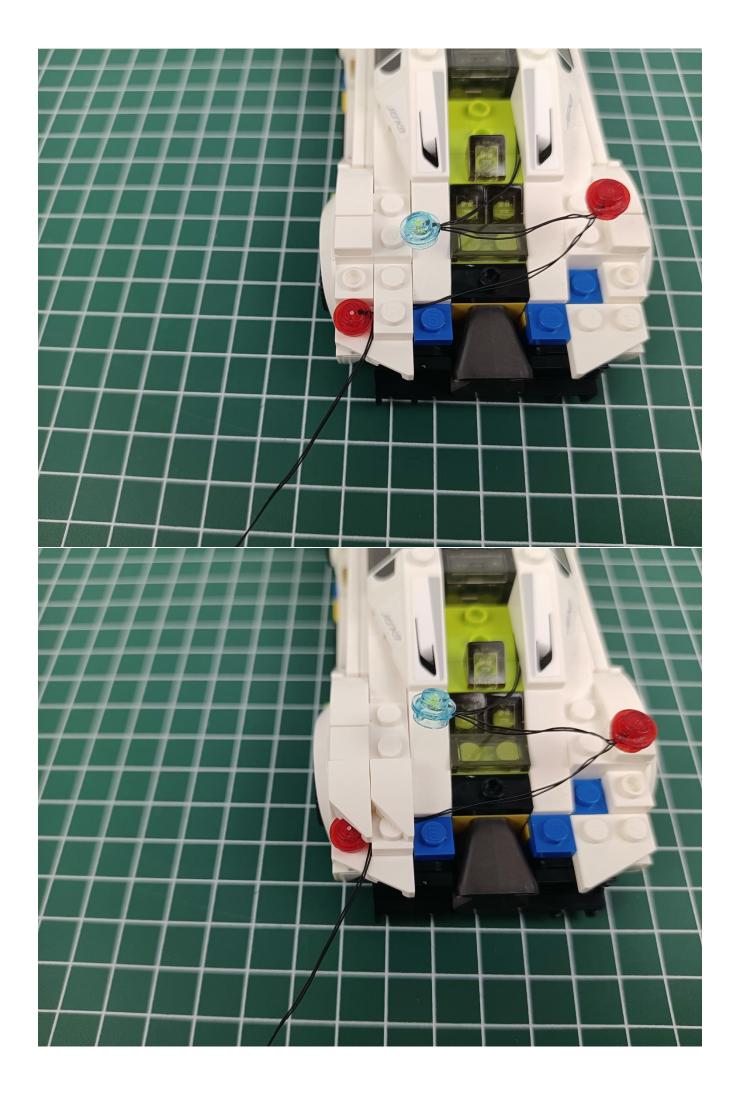

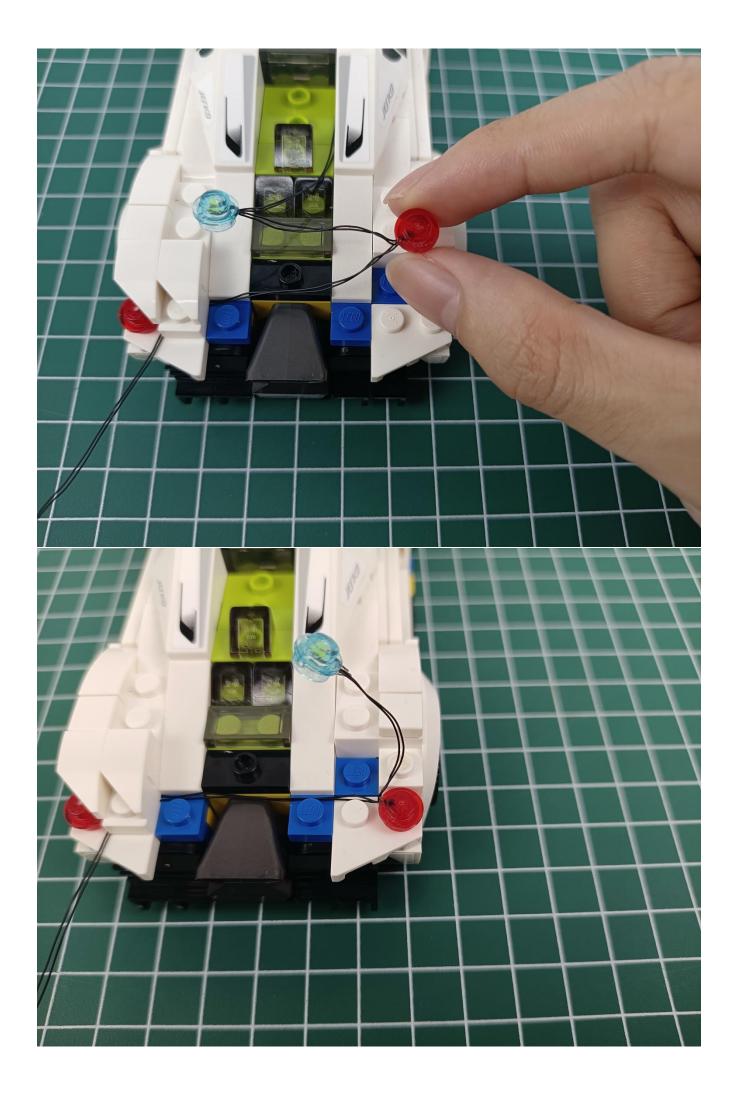





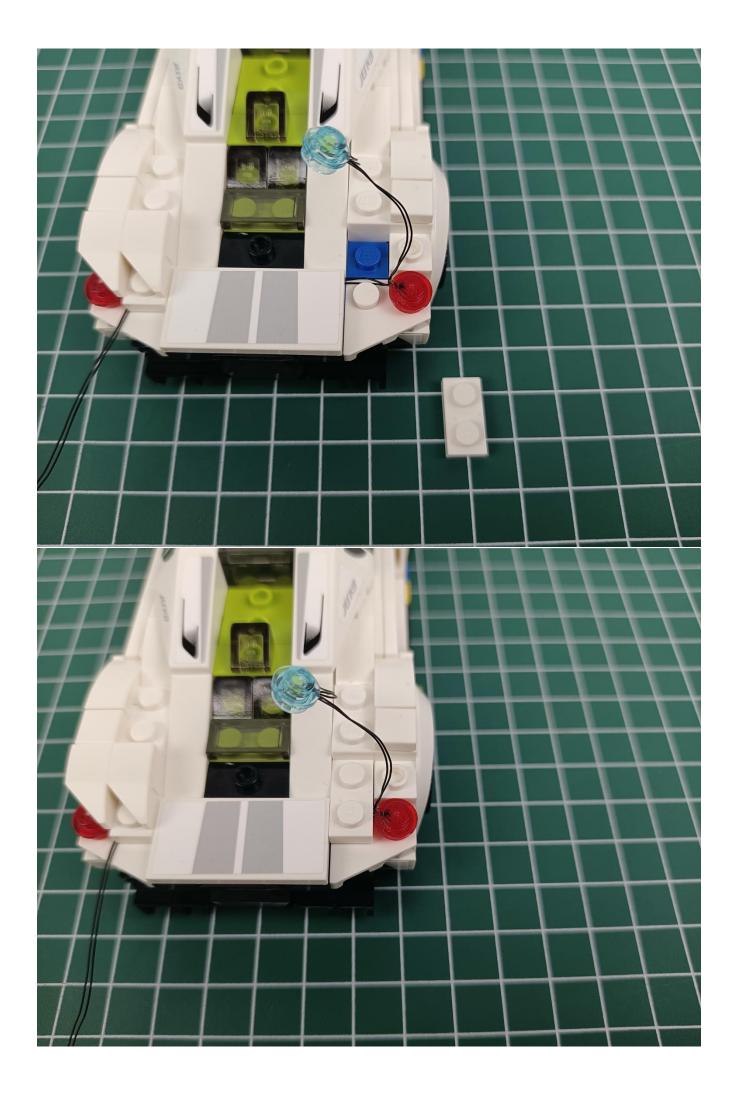


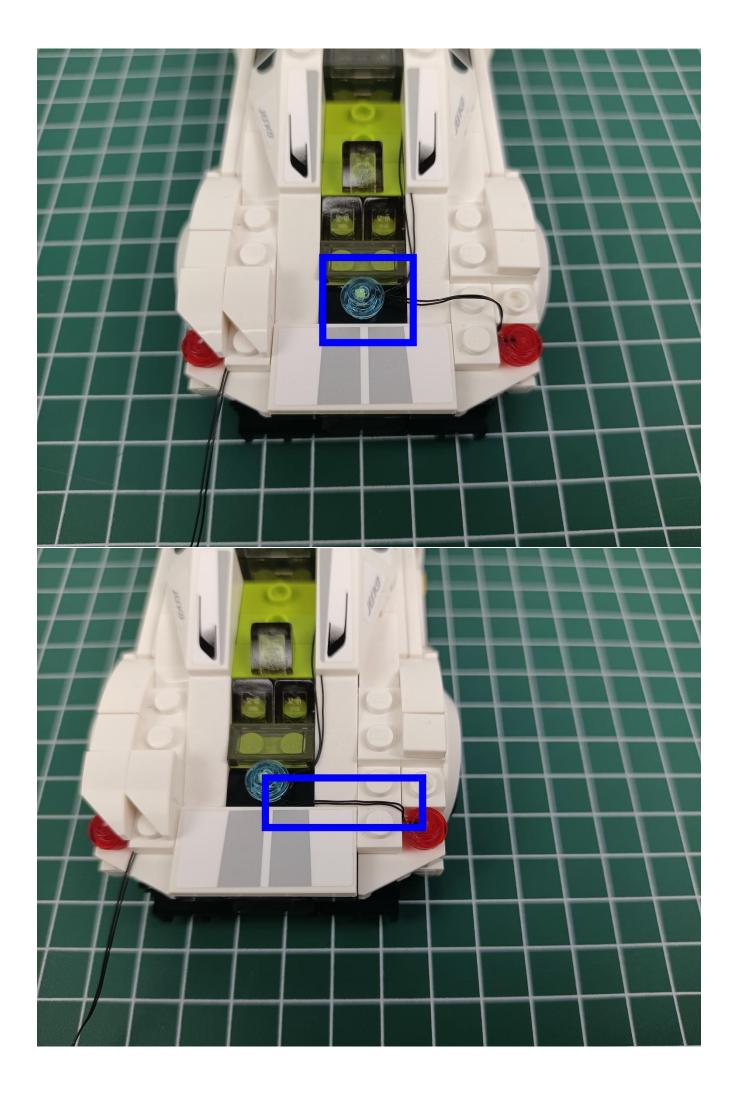




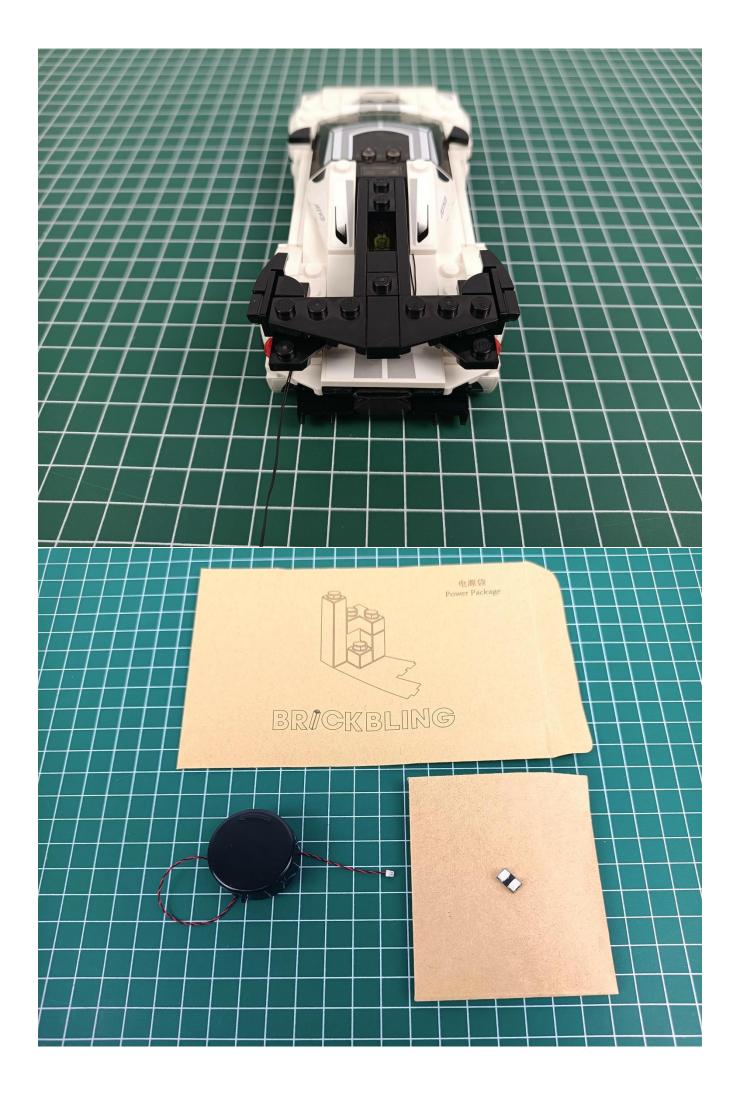


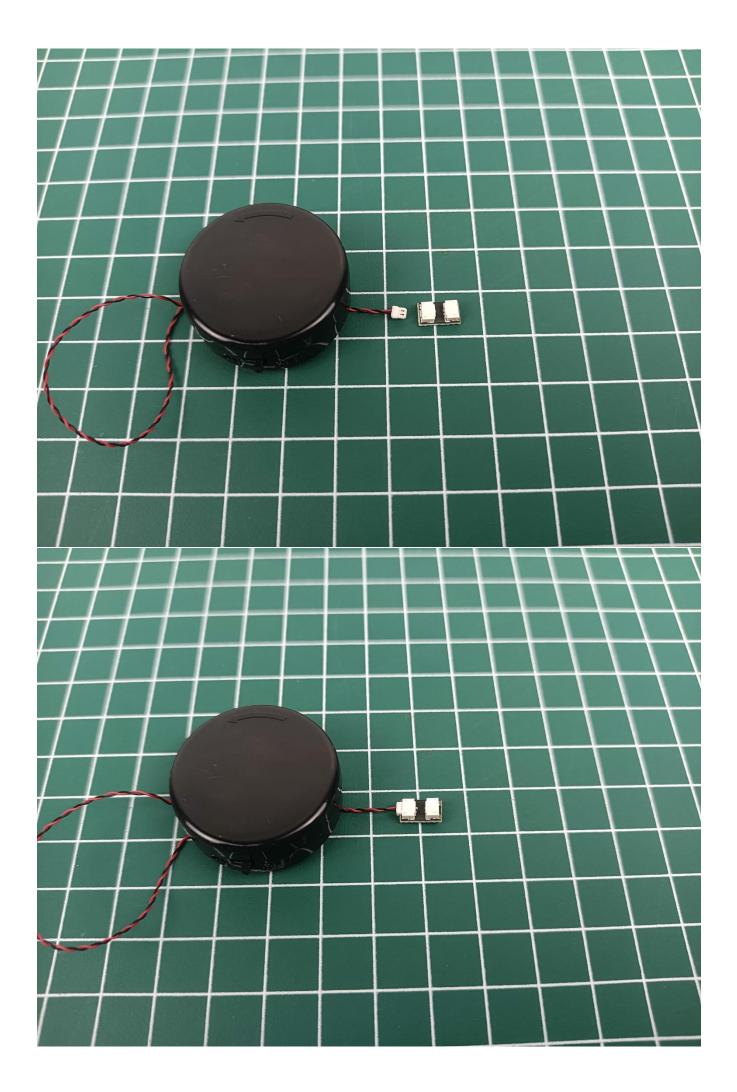

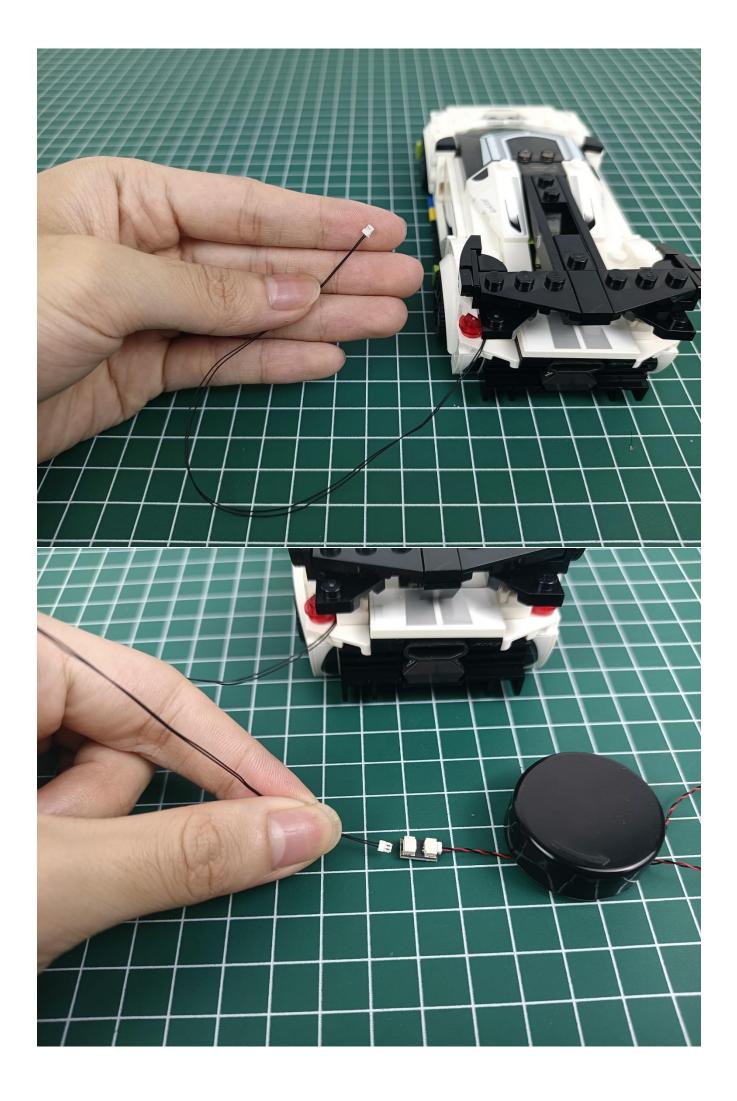

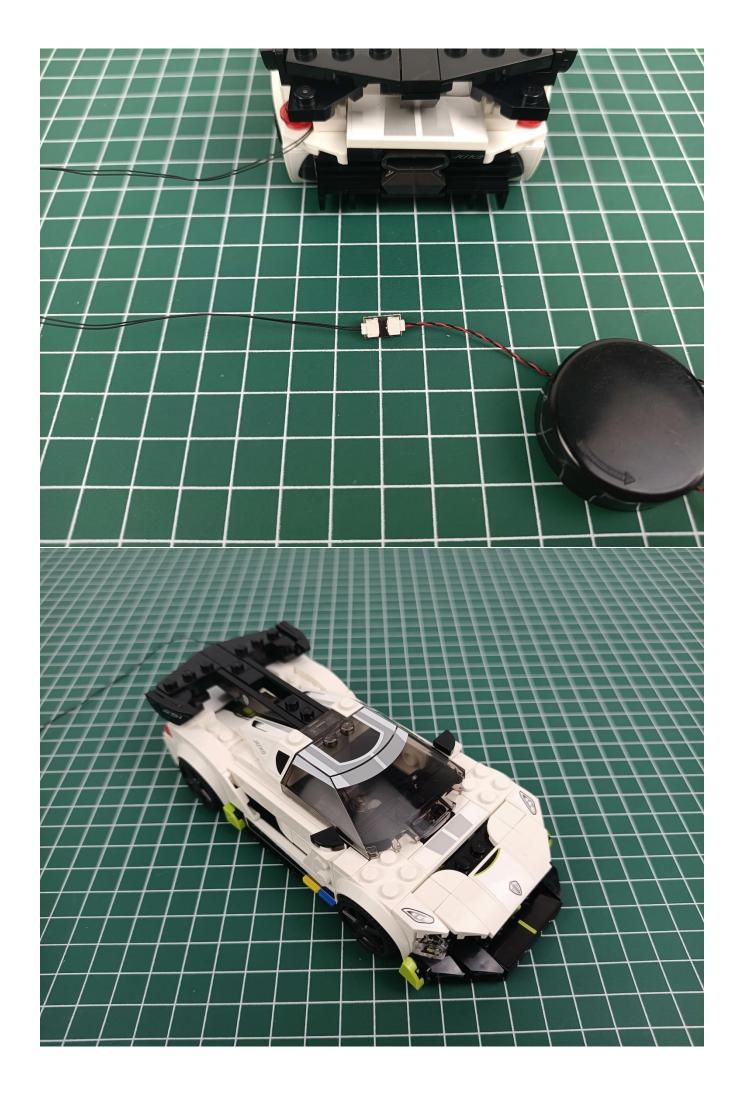

The installation is complete.

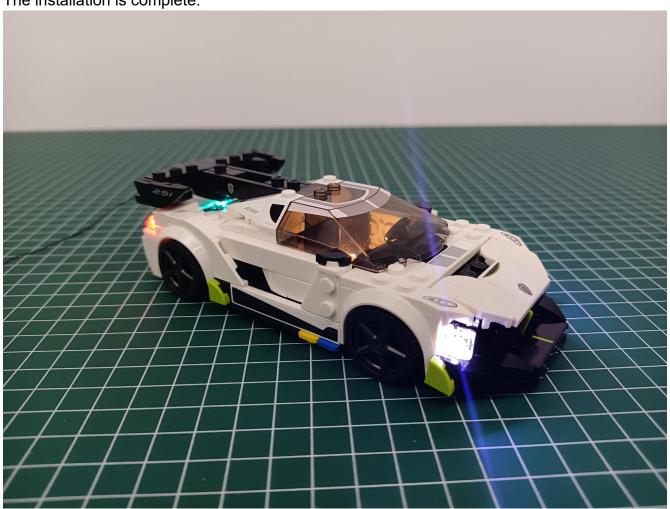

The above are ideas and instructions provided by our designers. Please move on:

- 1: Do you have any suggestions about the material and quality of our products?
- 2: Do you have any suggestions on the installation instructions and the degree of difficulty of the installation?
- 3: If you have better installation method and ideas, please contact us in time.