

6374338 Happy Pirate Ship LED lighting Kit (Standard Version) LG8


Instructions for installing this kit:



Power supply mode: USB power cord (please bring your own power supply).

It can be energized through a USB battery box (please pay attention to the positive and negative poles of the battery), power bank, mobile phone charger or USB socket. The normal voltage is 3-5V.

USB connectors to connect devices

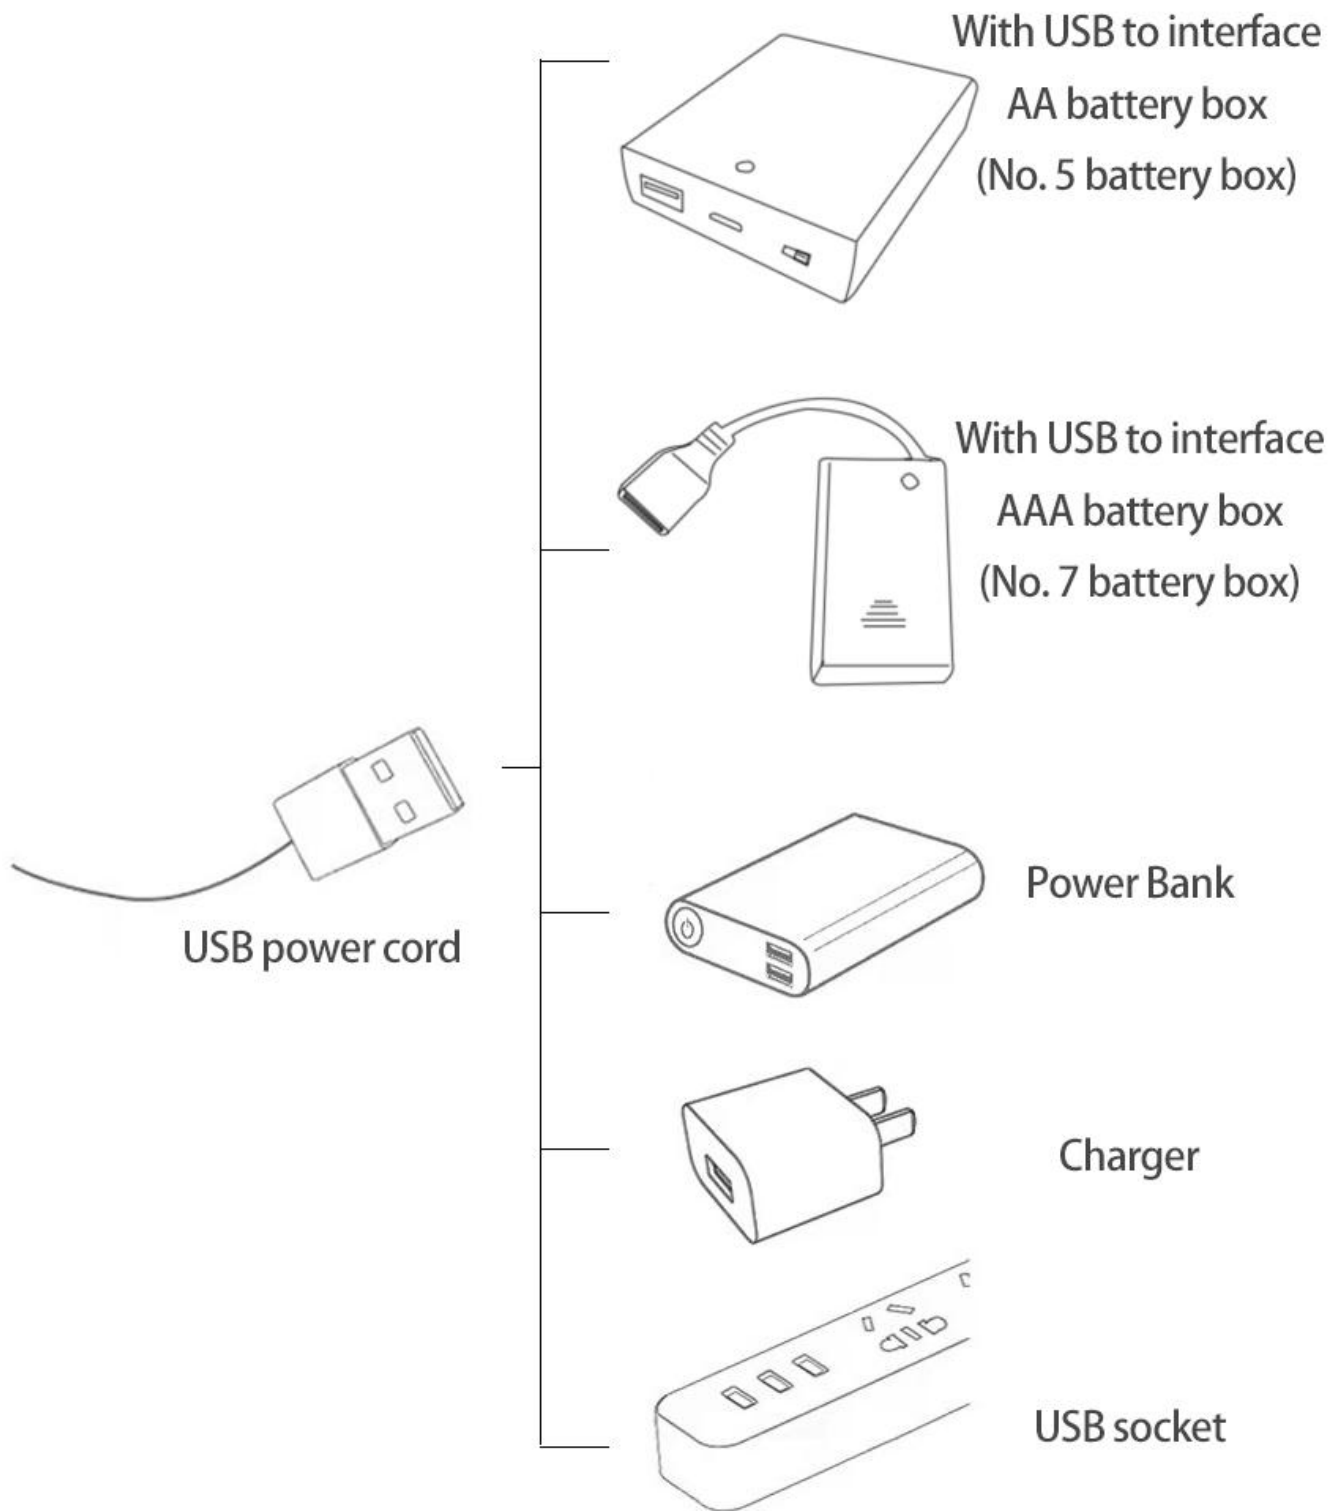

There are 2 bags in total.






Lighting test:


Take out the No. 2 bag and take out all the parts.




Introduction

Image	Name	Introduction
 A black USB power cable with a red braided cord and a USB-A connector.	USB Power Cable	Mainly used to provide electricity, Used in power supply mode A
 A black flat battery pack with a red wire and a black wire.	Flat Battery Pack	Mainly used to provide electricity, Used in power supply mode A
 A small expansion board with several orange and black components.	Expansion Boards	Mainly used to provide electricity, Used in power supply mode A


This demonstration uses a round button battery, put the USB power cord back into the bag to prevent loss. If there is no battery, you can choose the USB power cord to supply power, and the connection method is the same as the round button.

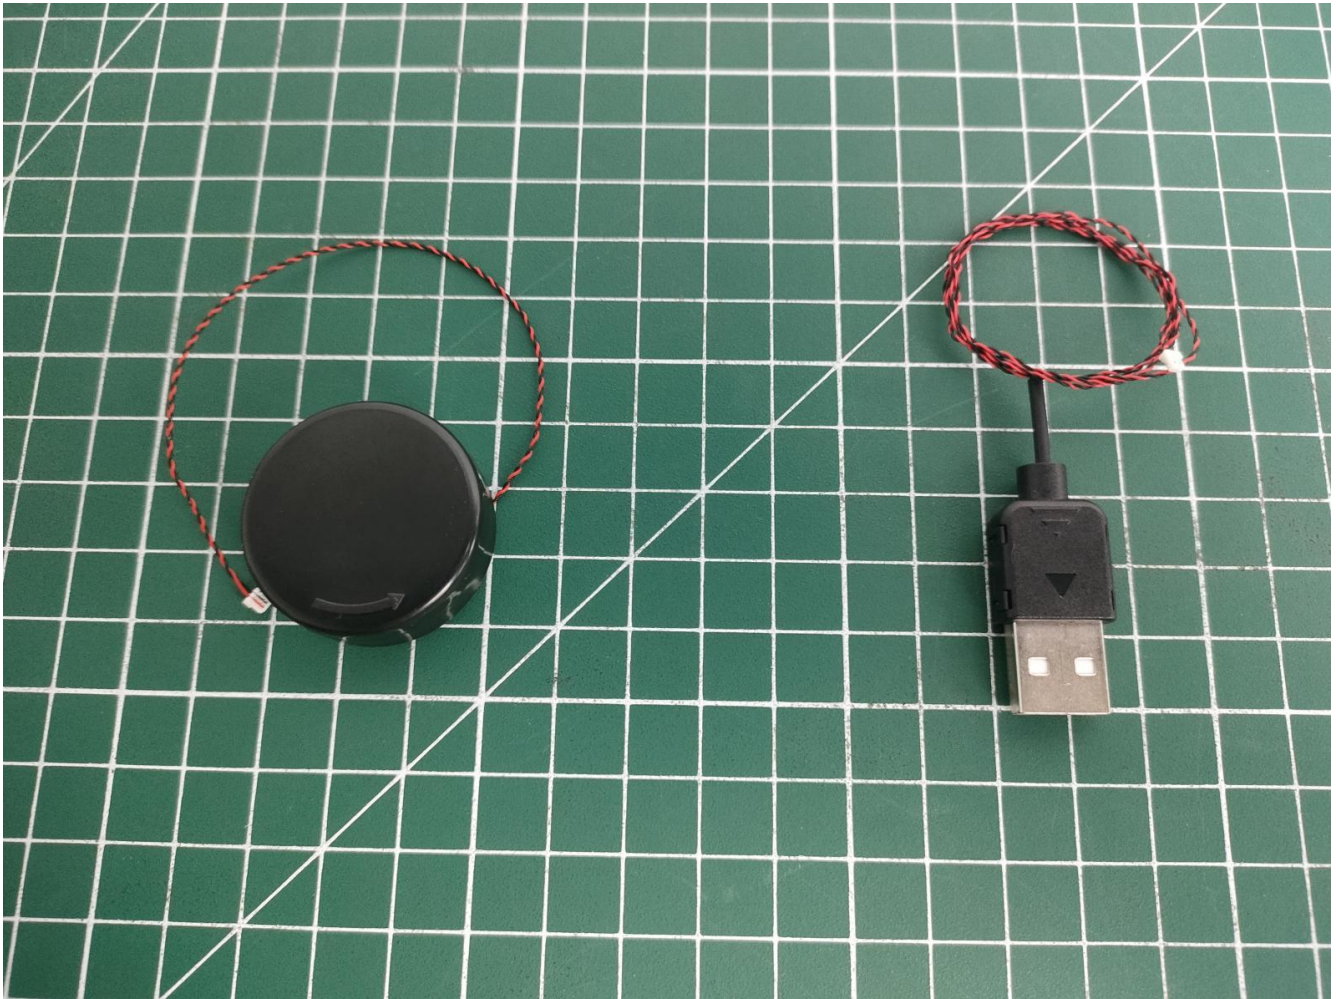


Twist the round button battery box in the direction of the arrow

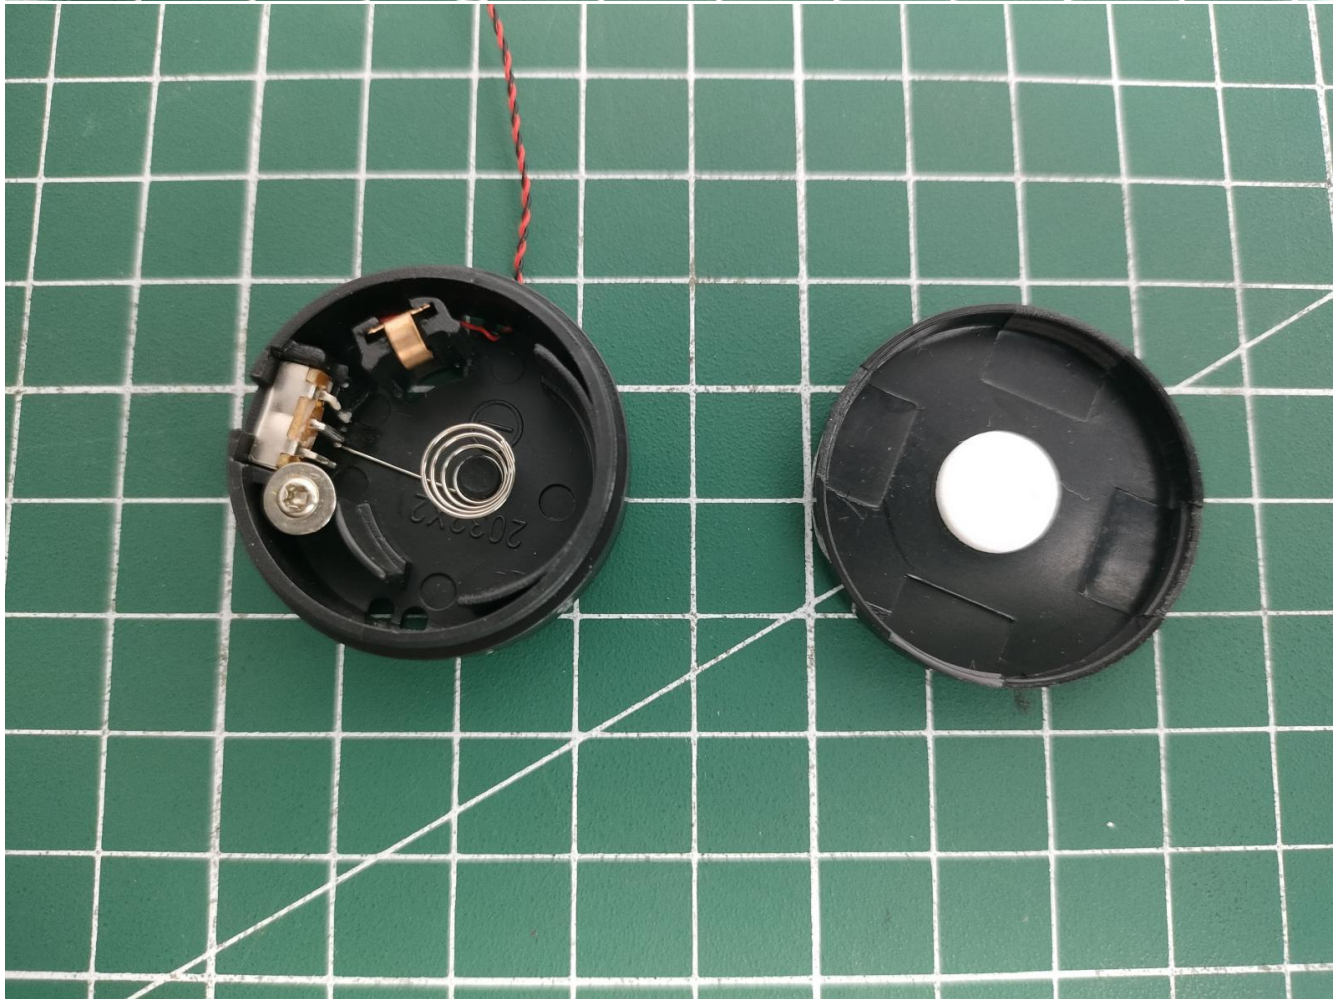


Take out 2 round batteries, put them in the round battery box, close the battery box



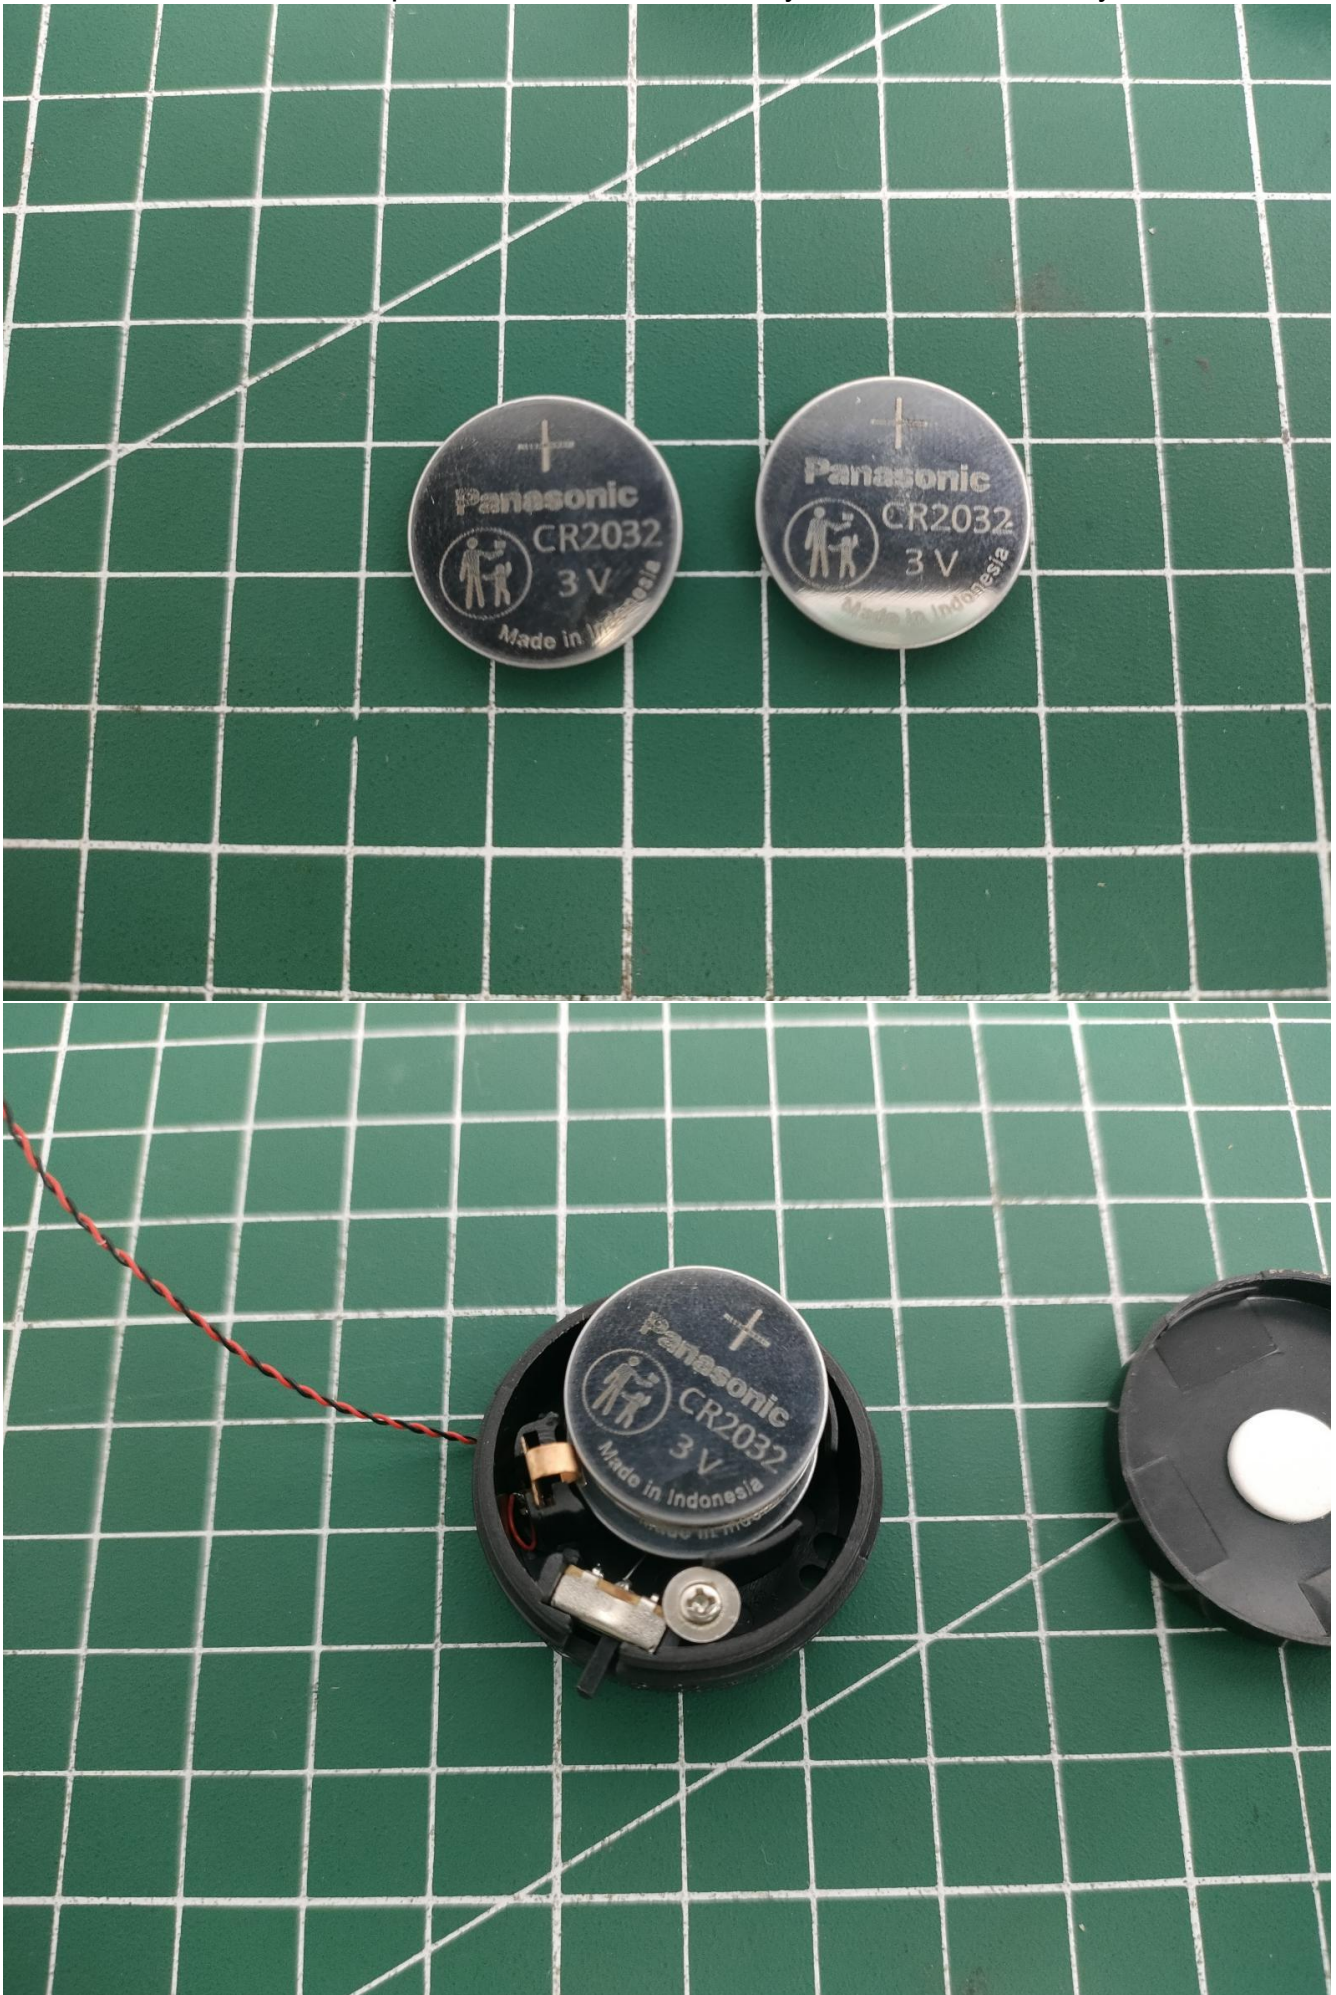


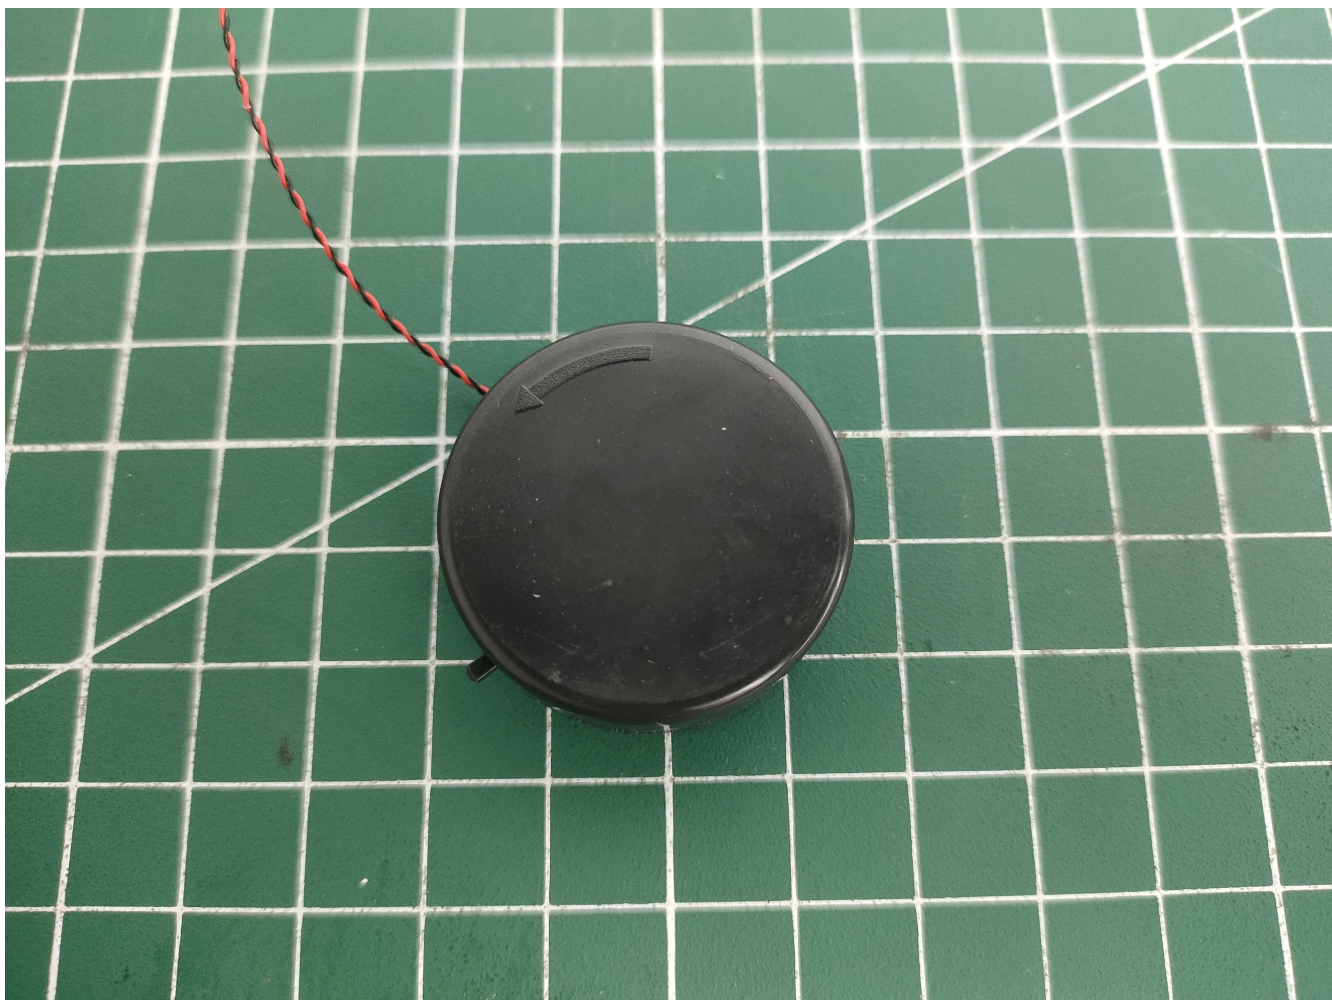


Connect the power cord of the round button battery box to the expansion board

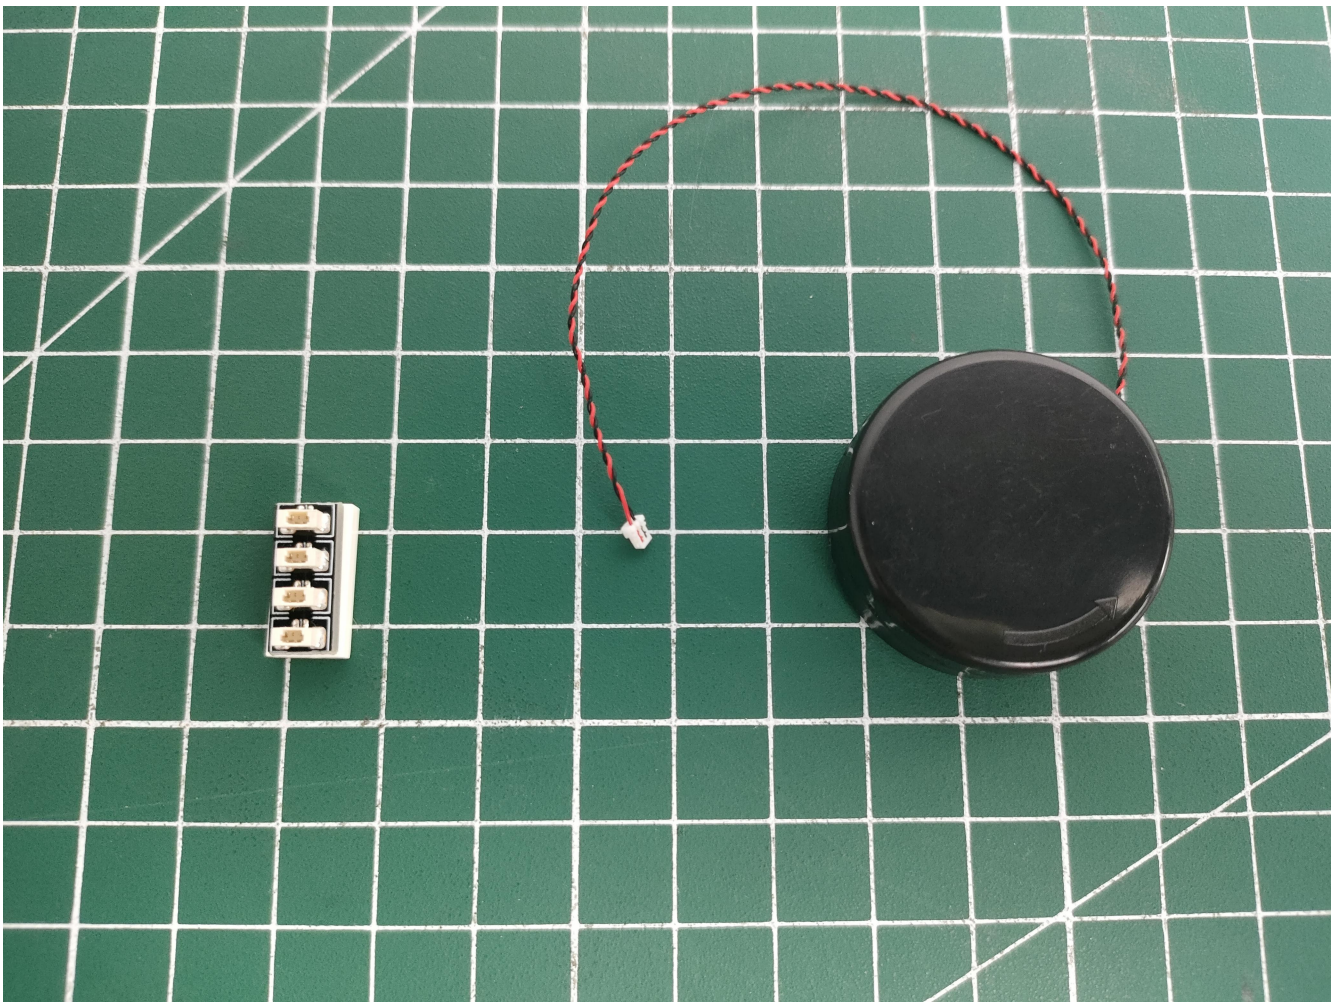

Please pay attention to the way the interface is used. The interface is small, please use it carefully:
the = sign of the 2P interface is aligned with the = sign of the expansion board

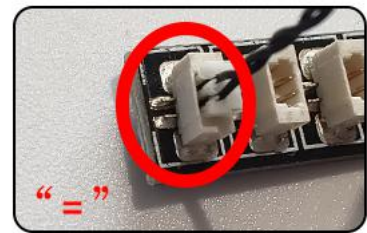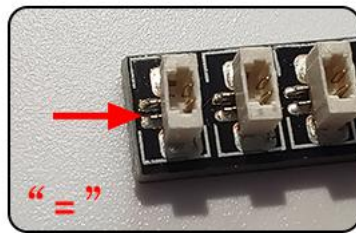
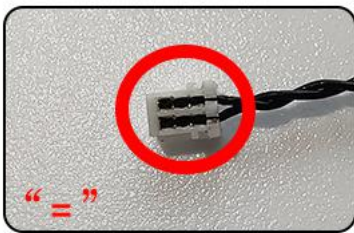


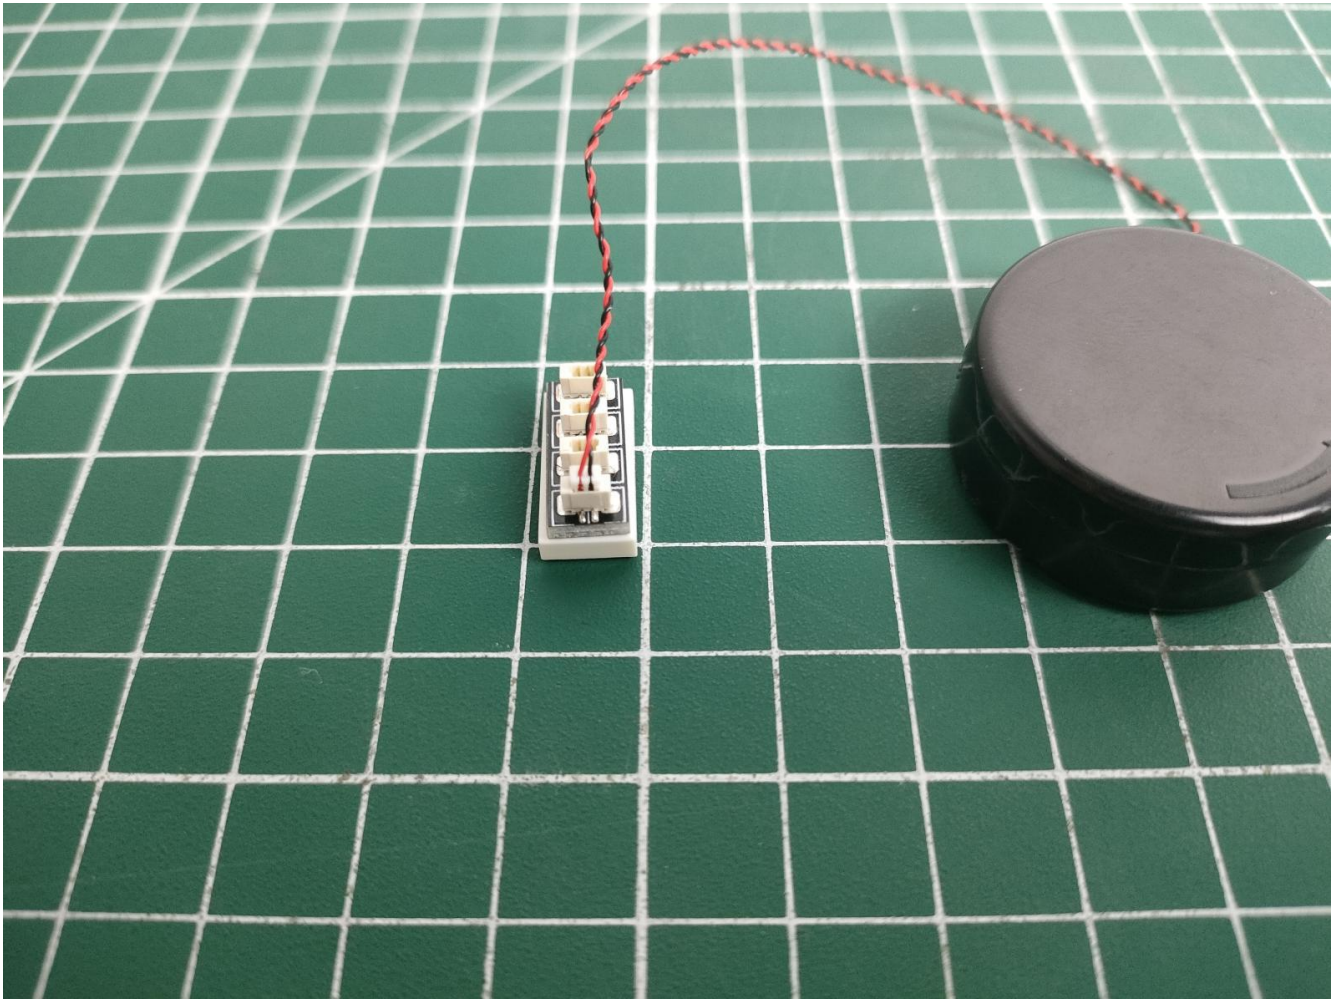


Take out the lighting from bag number 1.




The lighting is connected to the expansion board, power-on test.

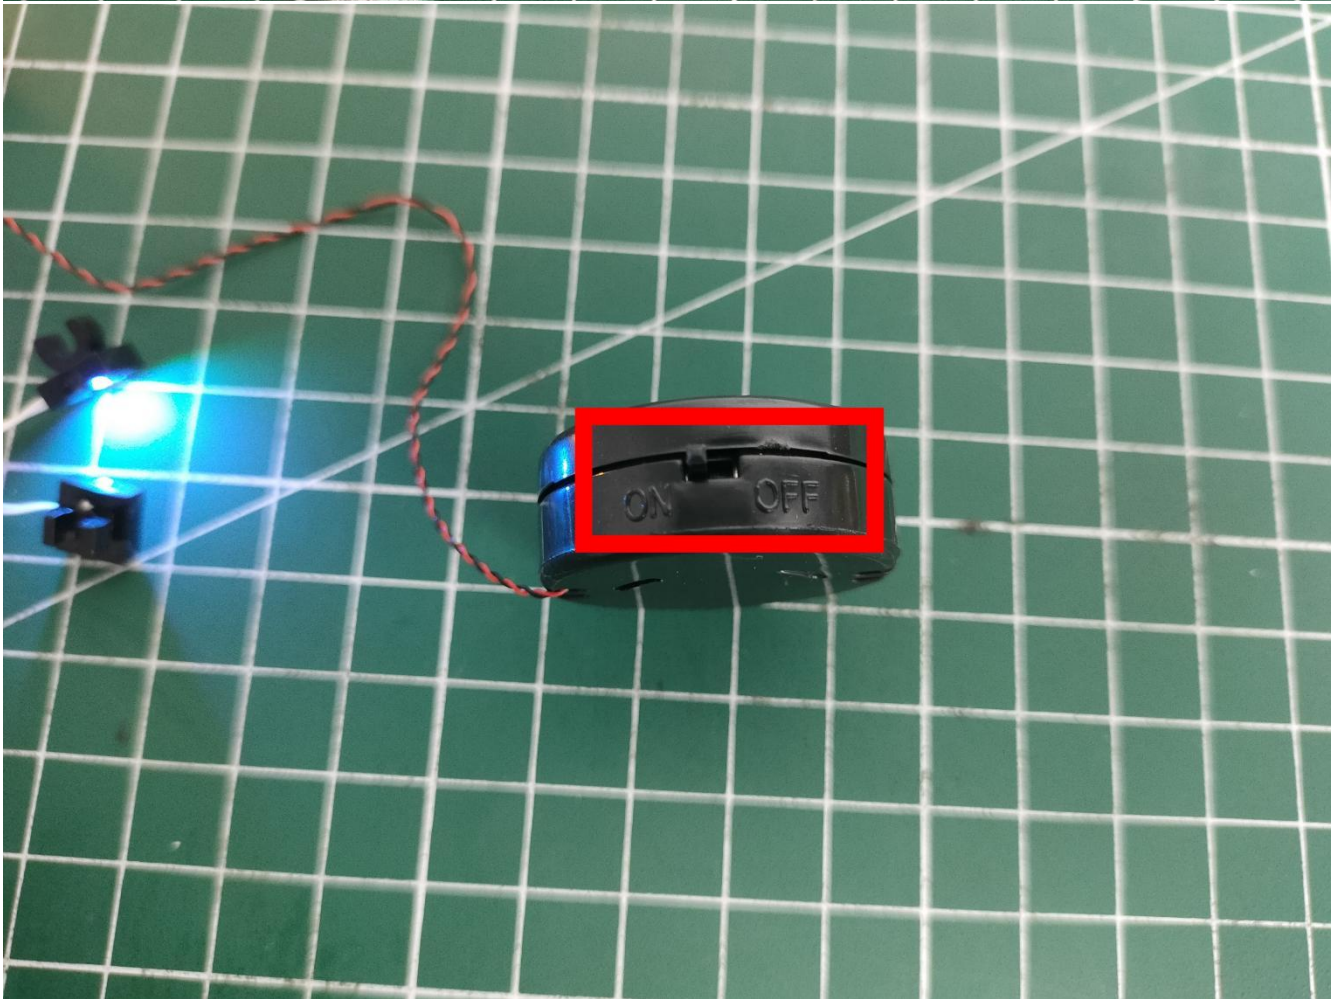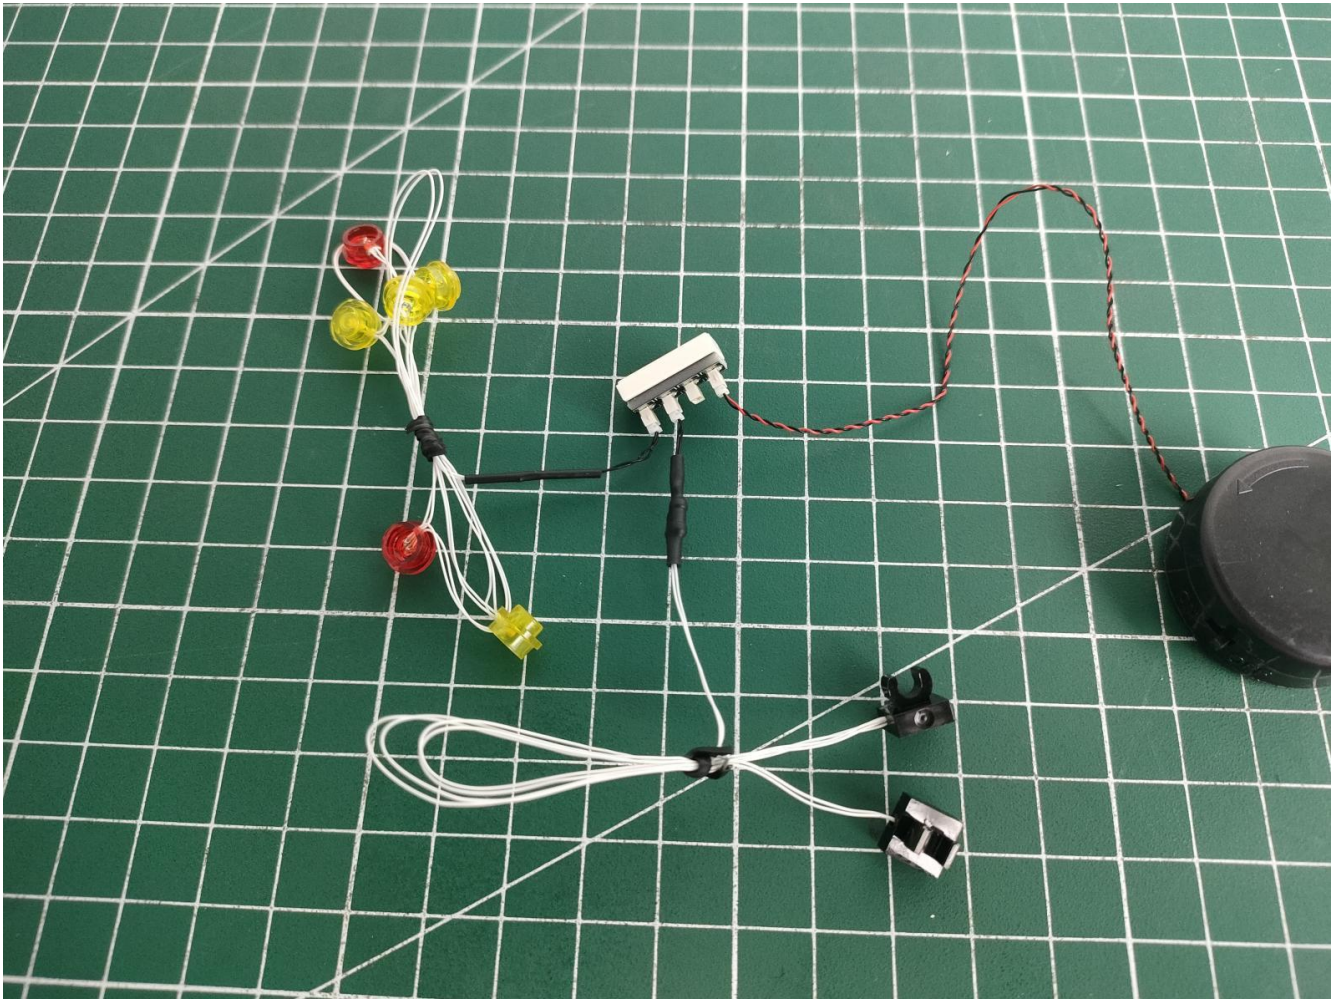

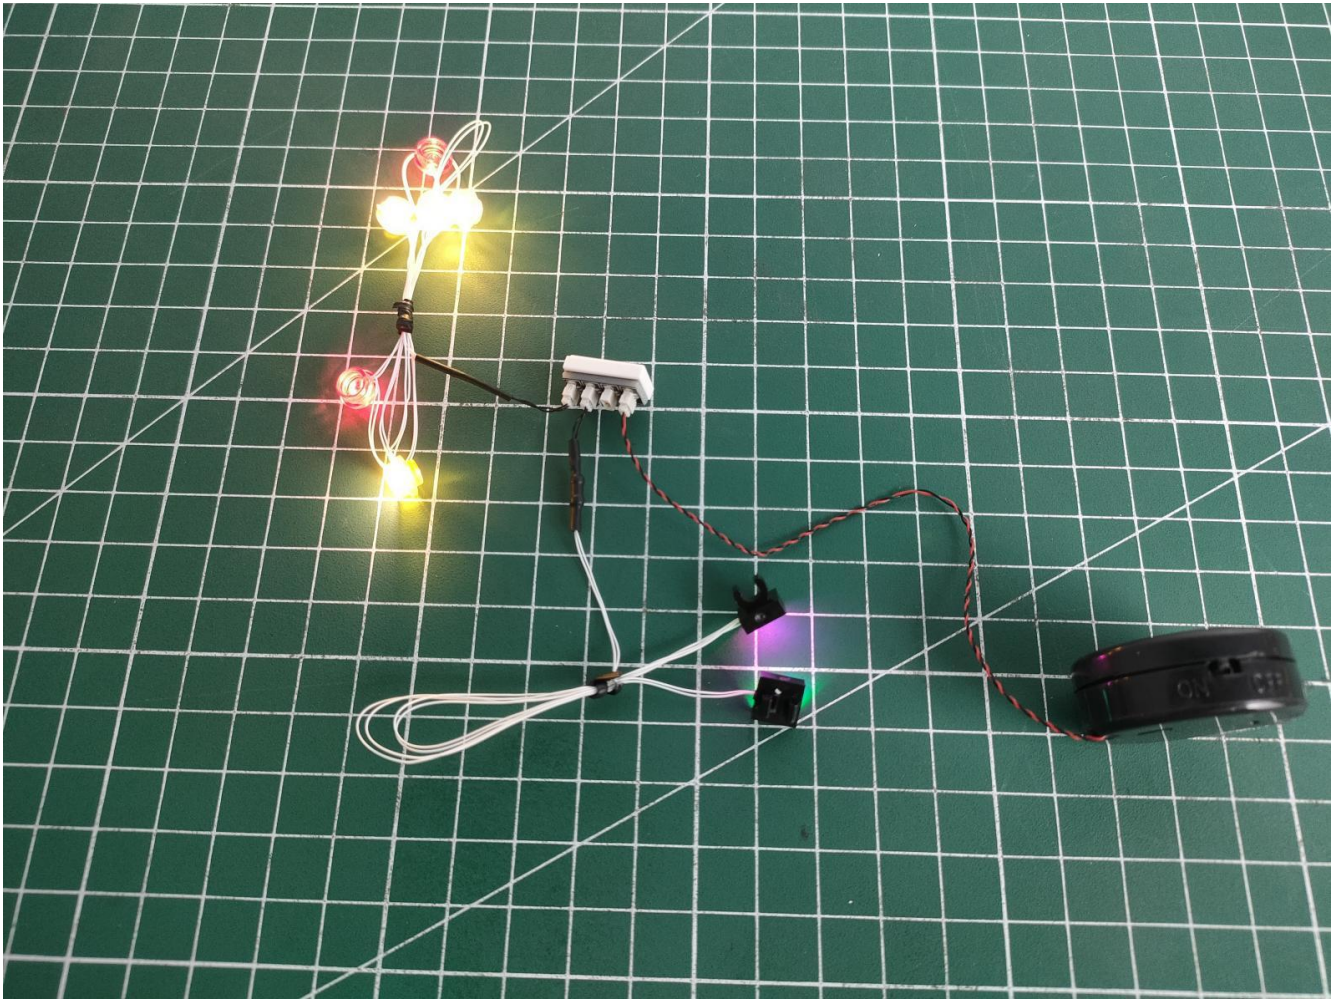



If something abnormal happens, please contact us in time!



After the test is completed, all parts are separated and placed aside, waiting for installation and use.


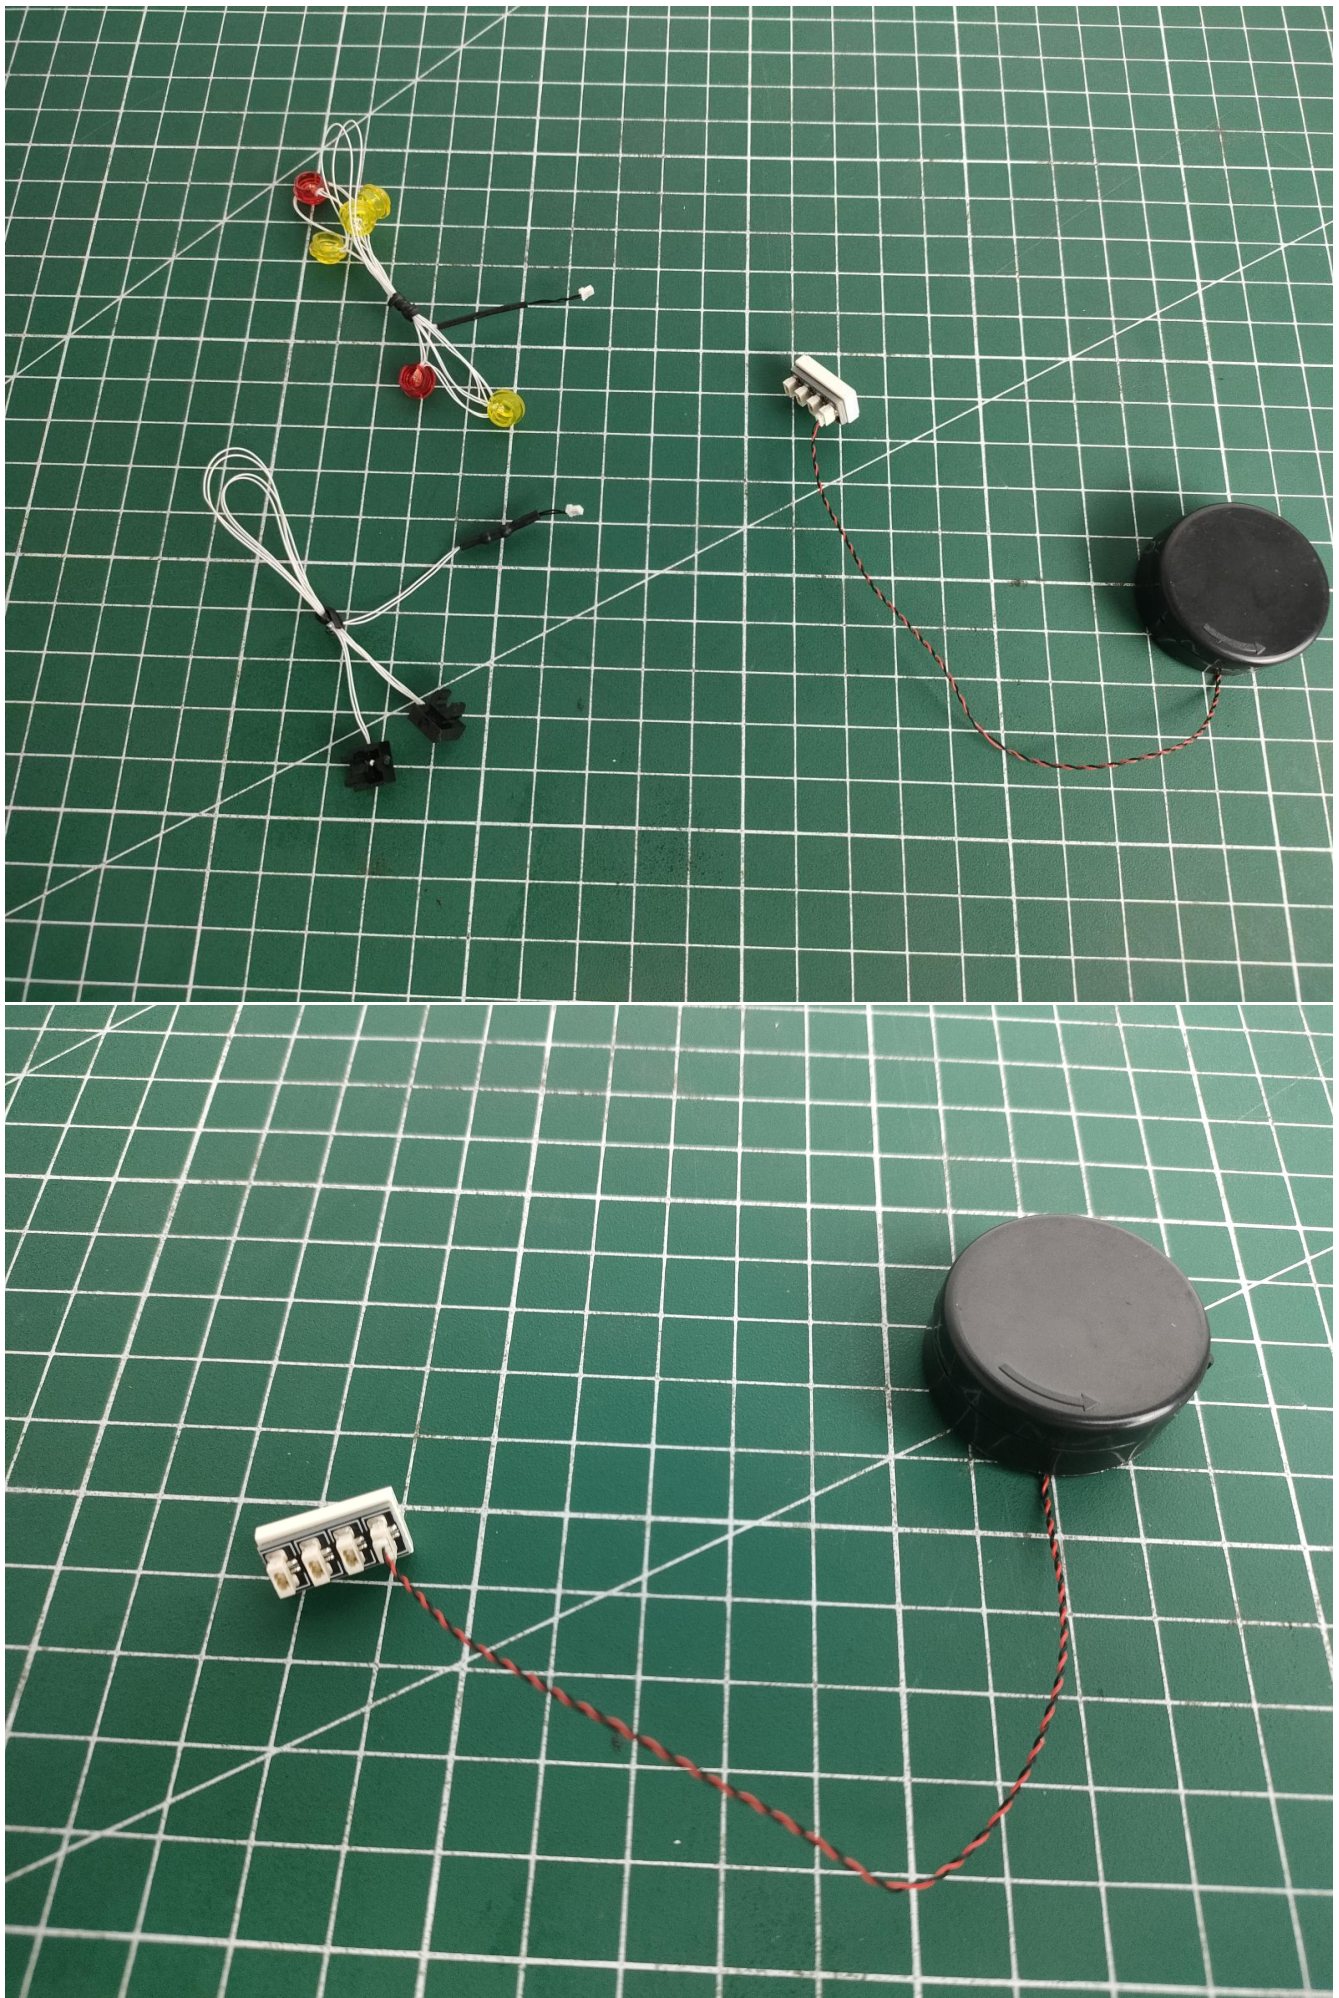




Start Installation:





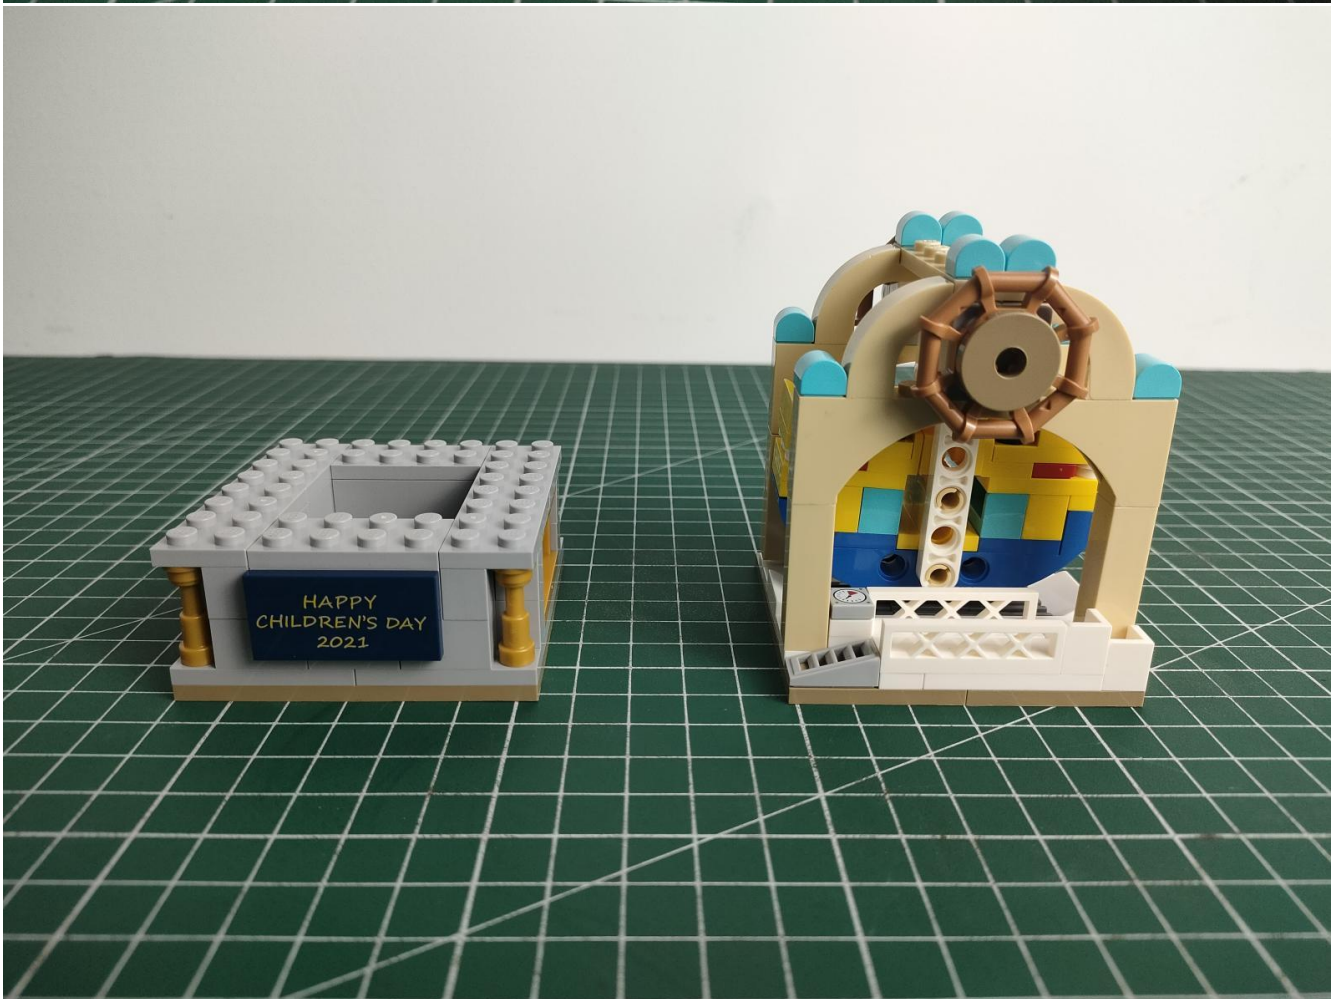
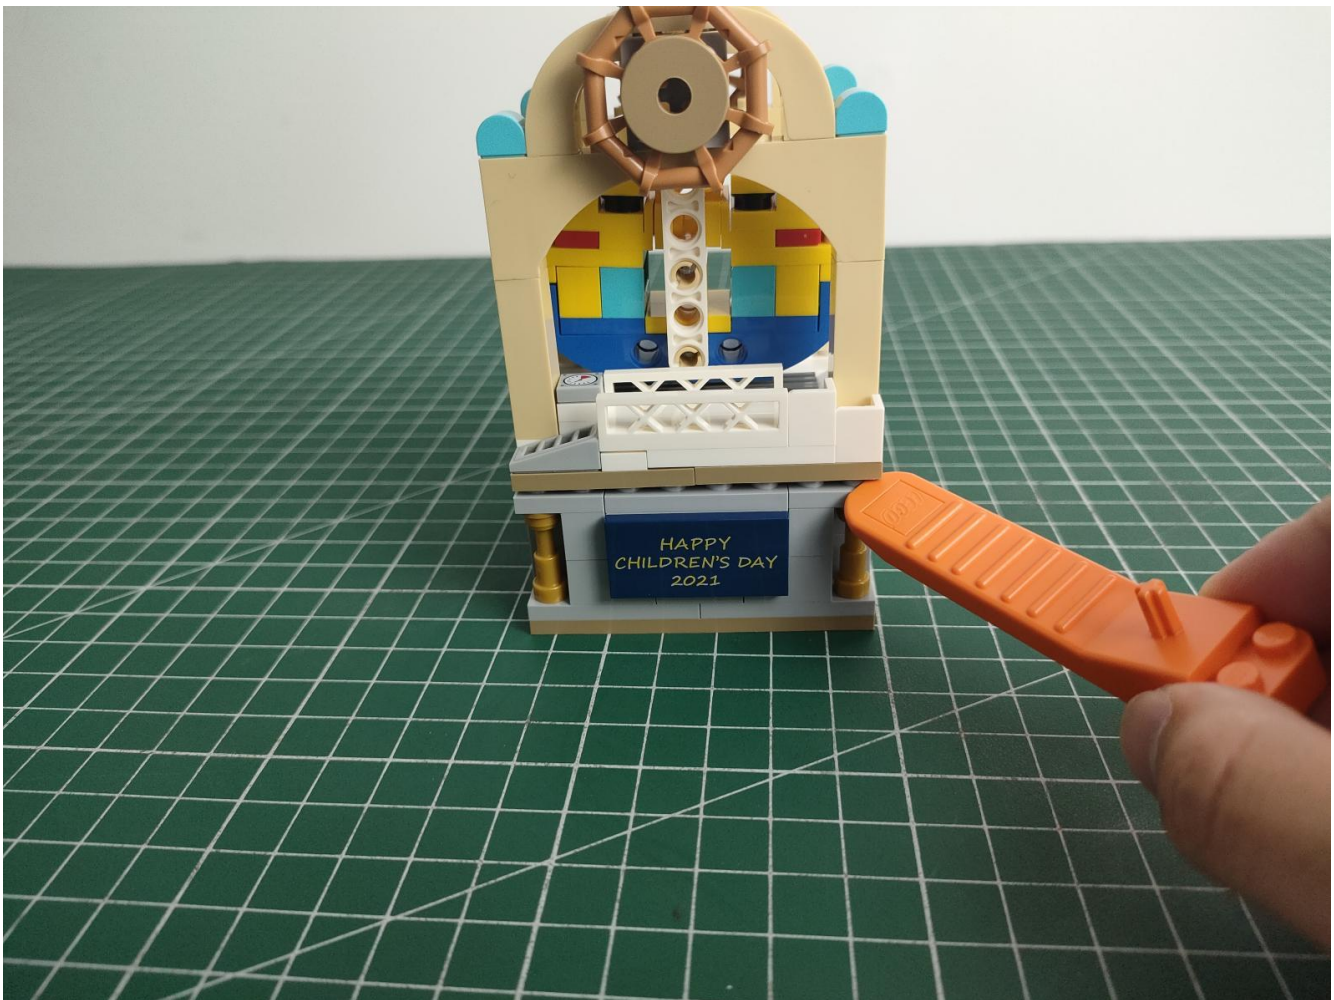


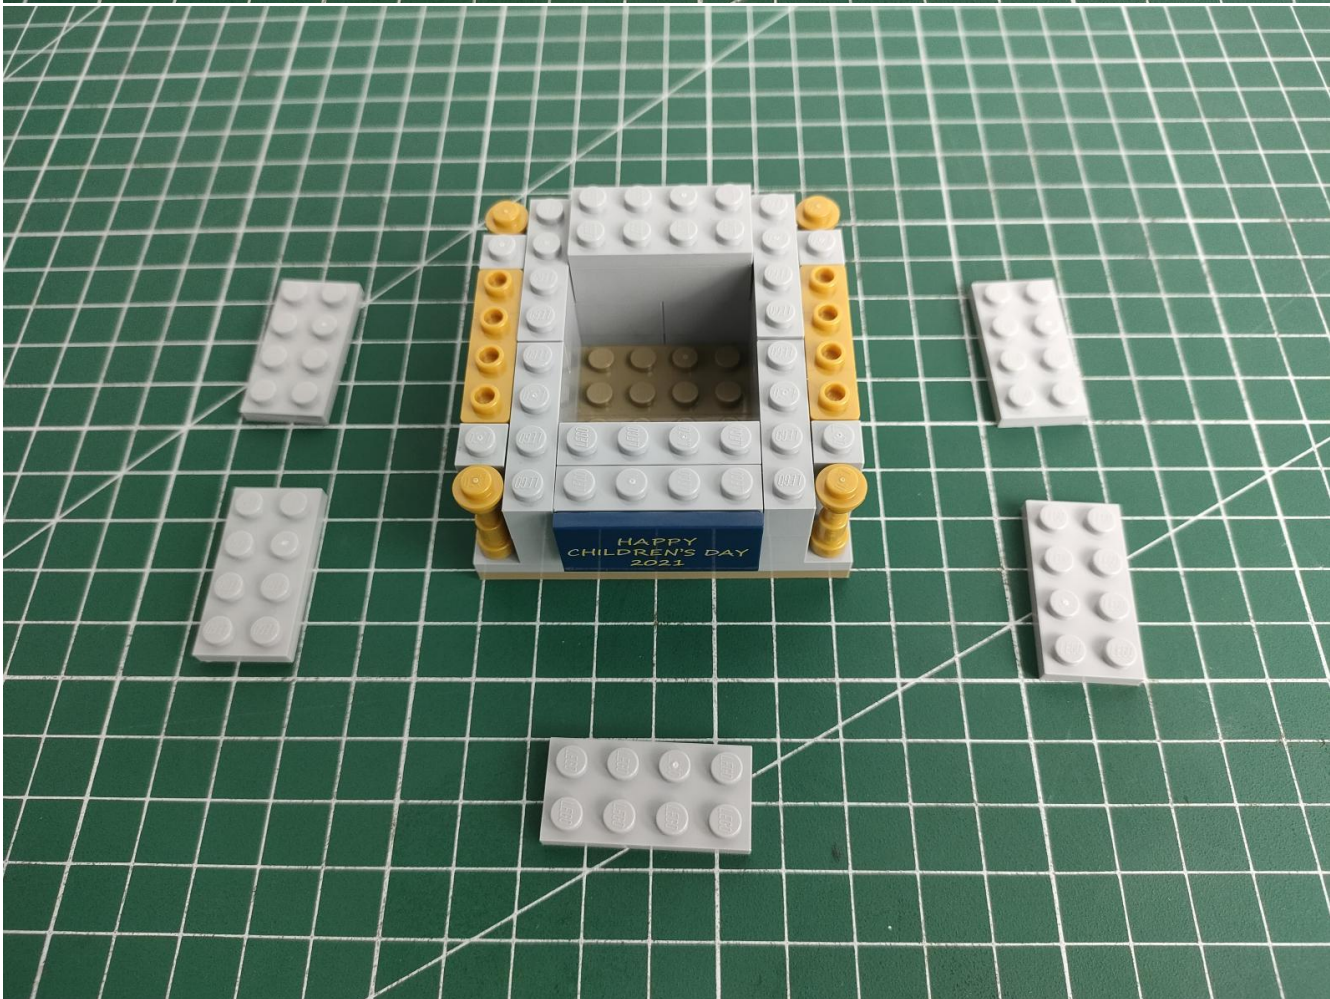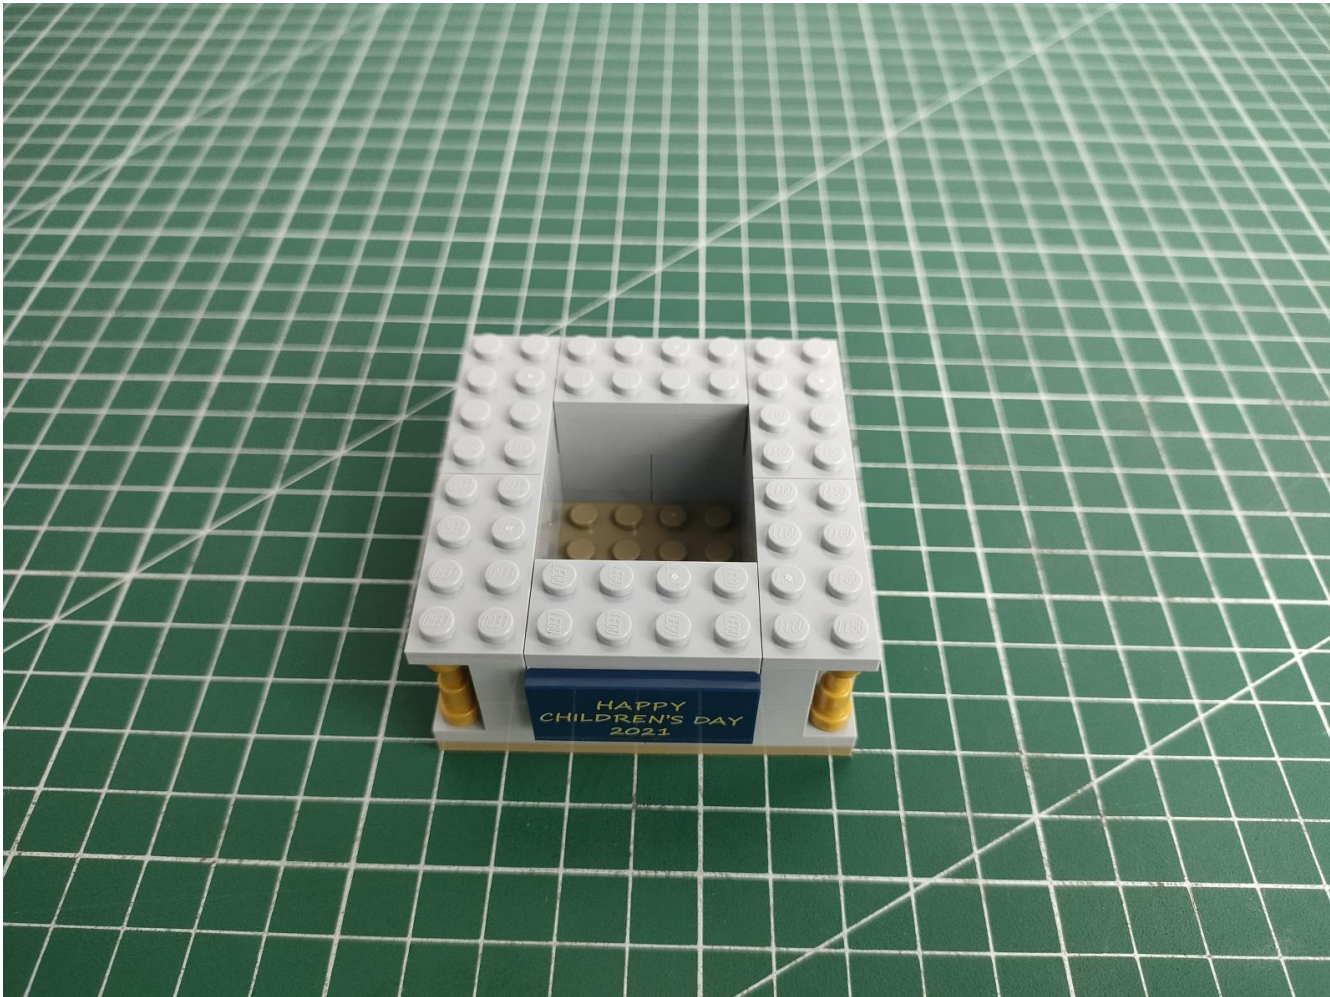



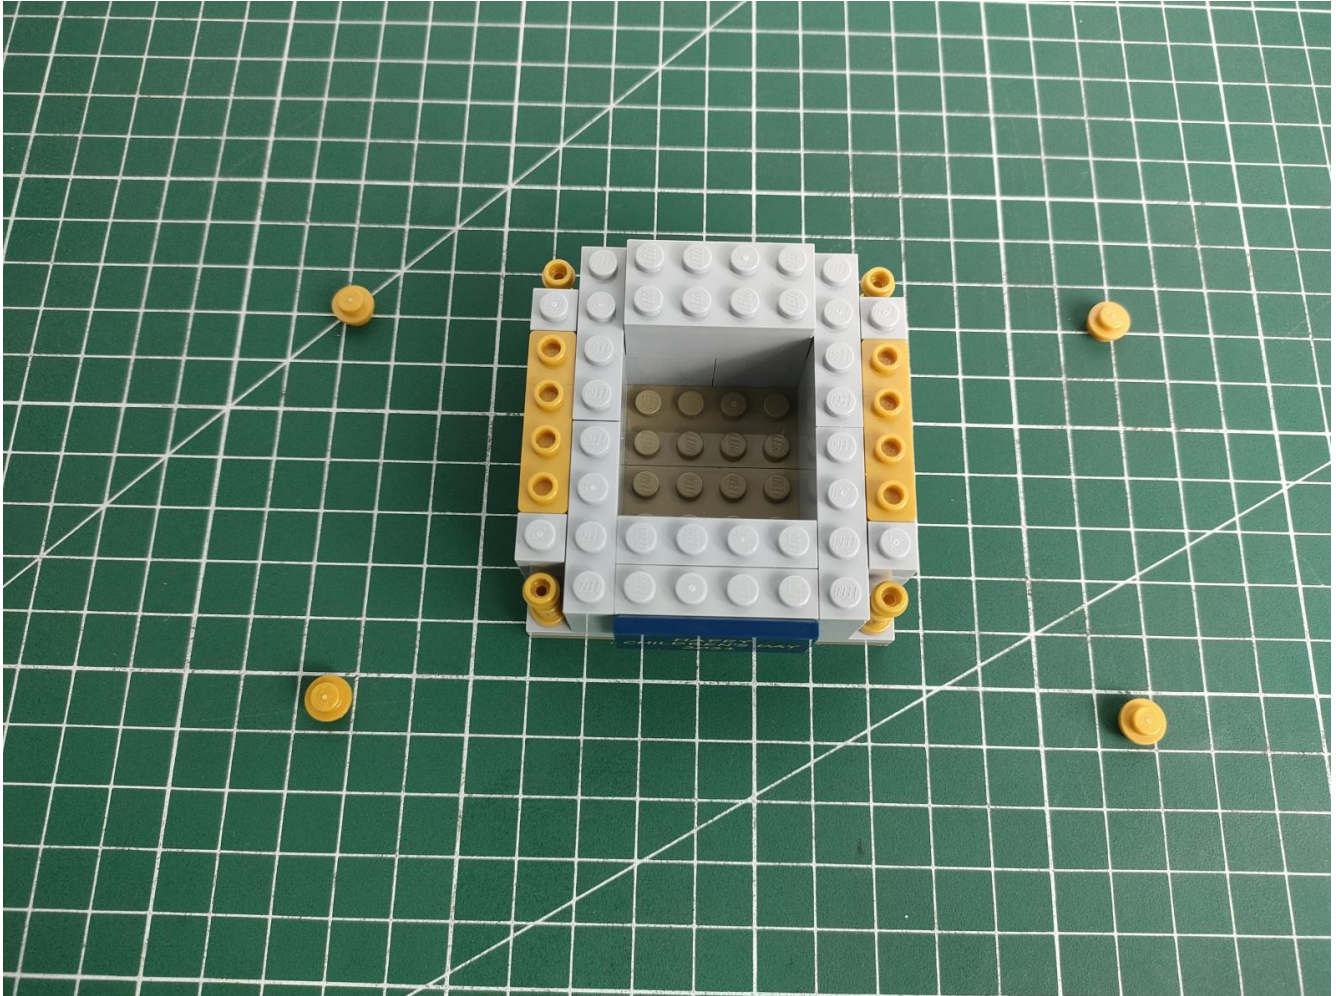
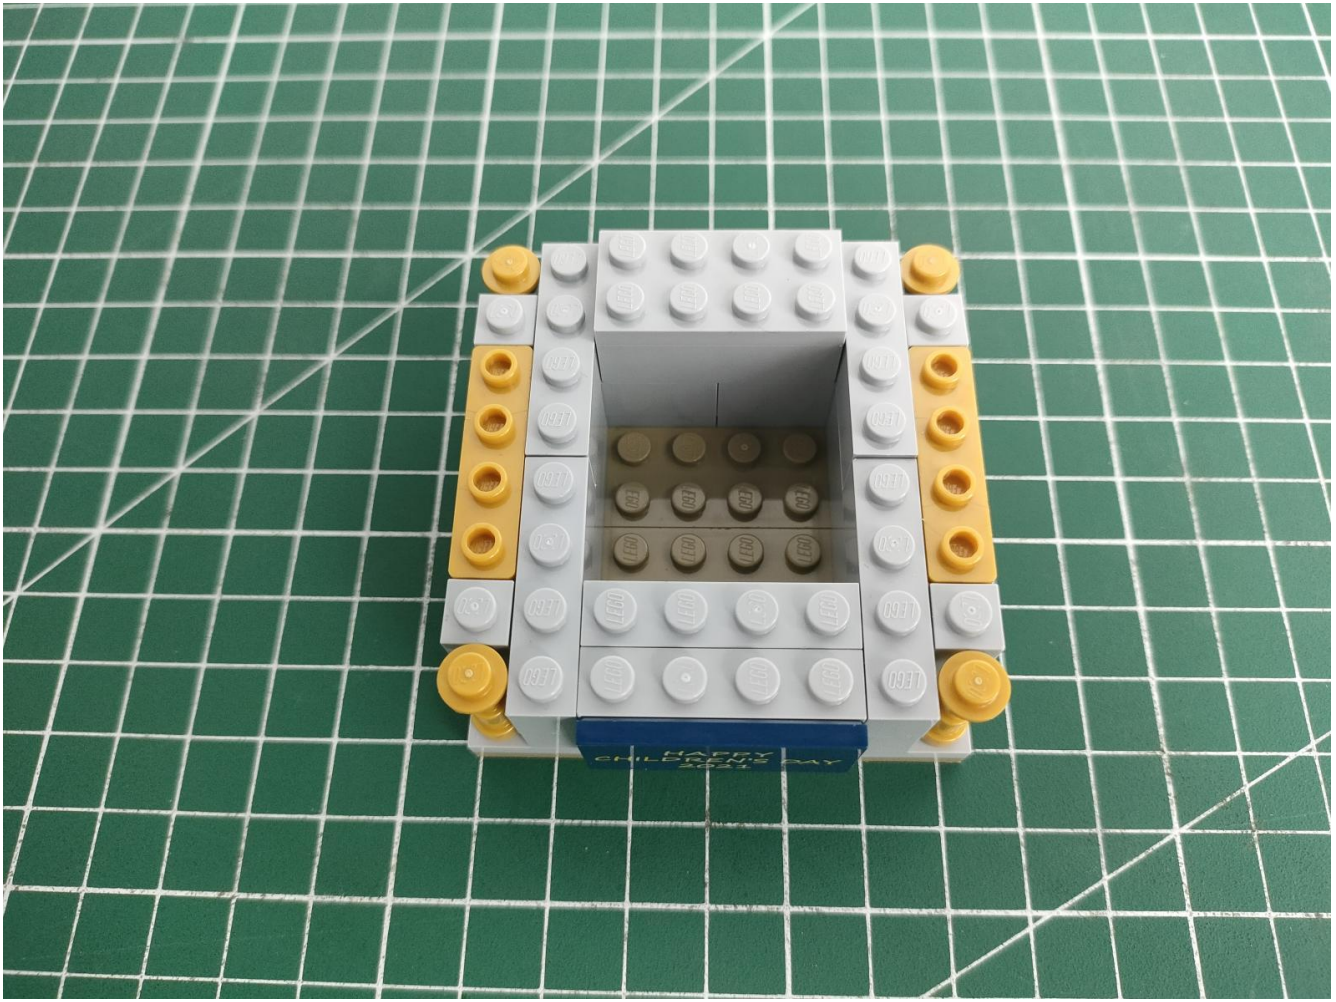


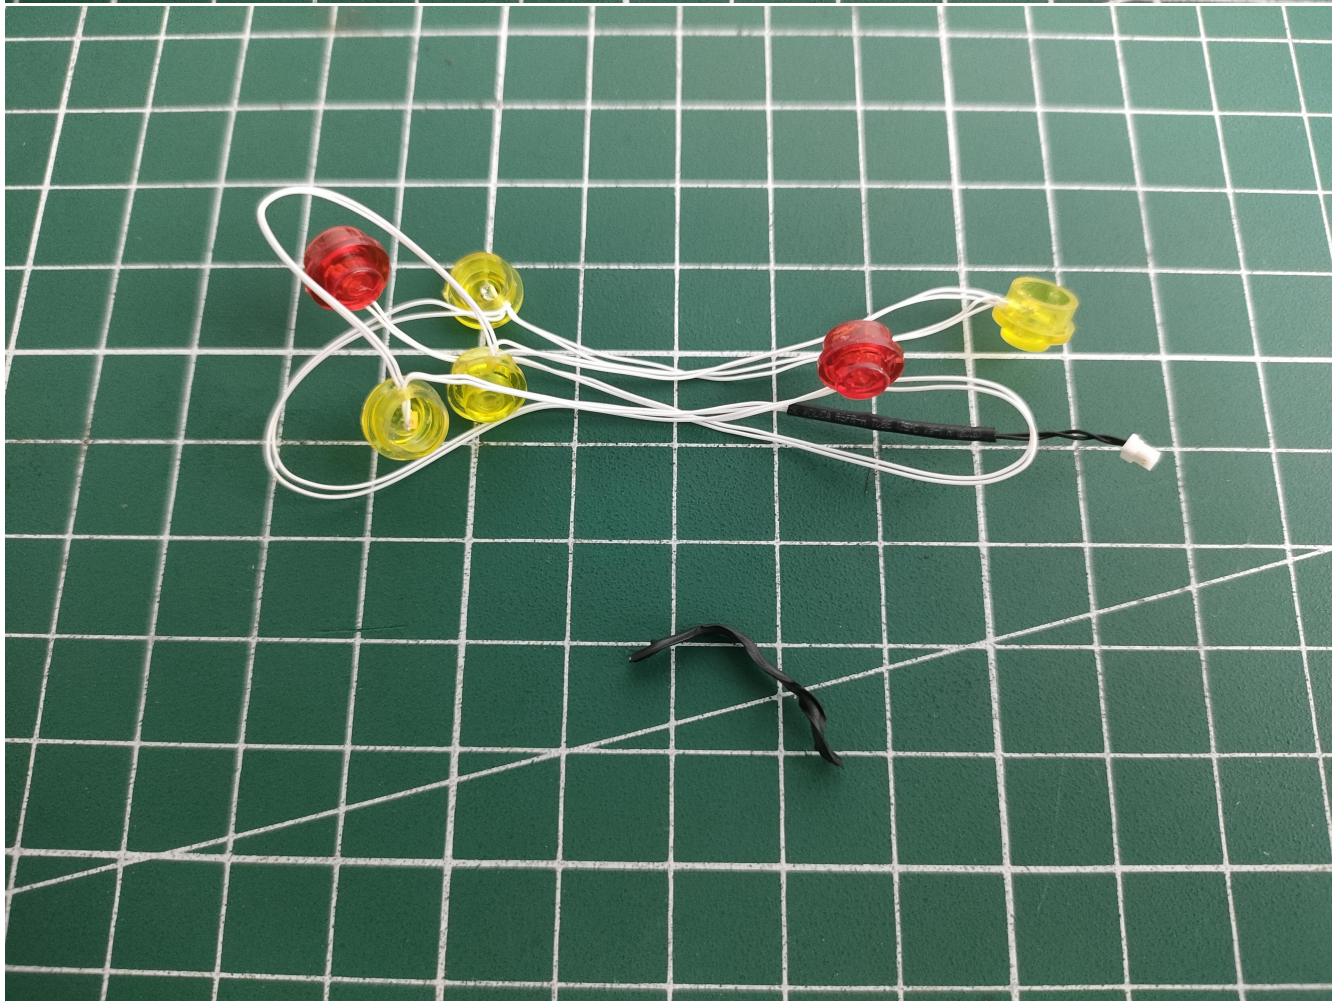
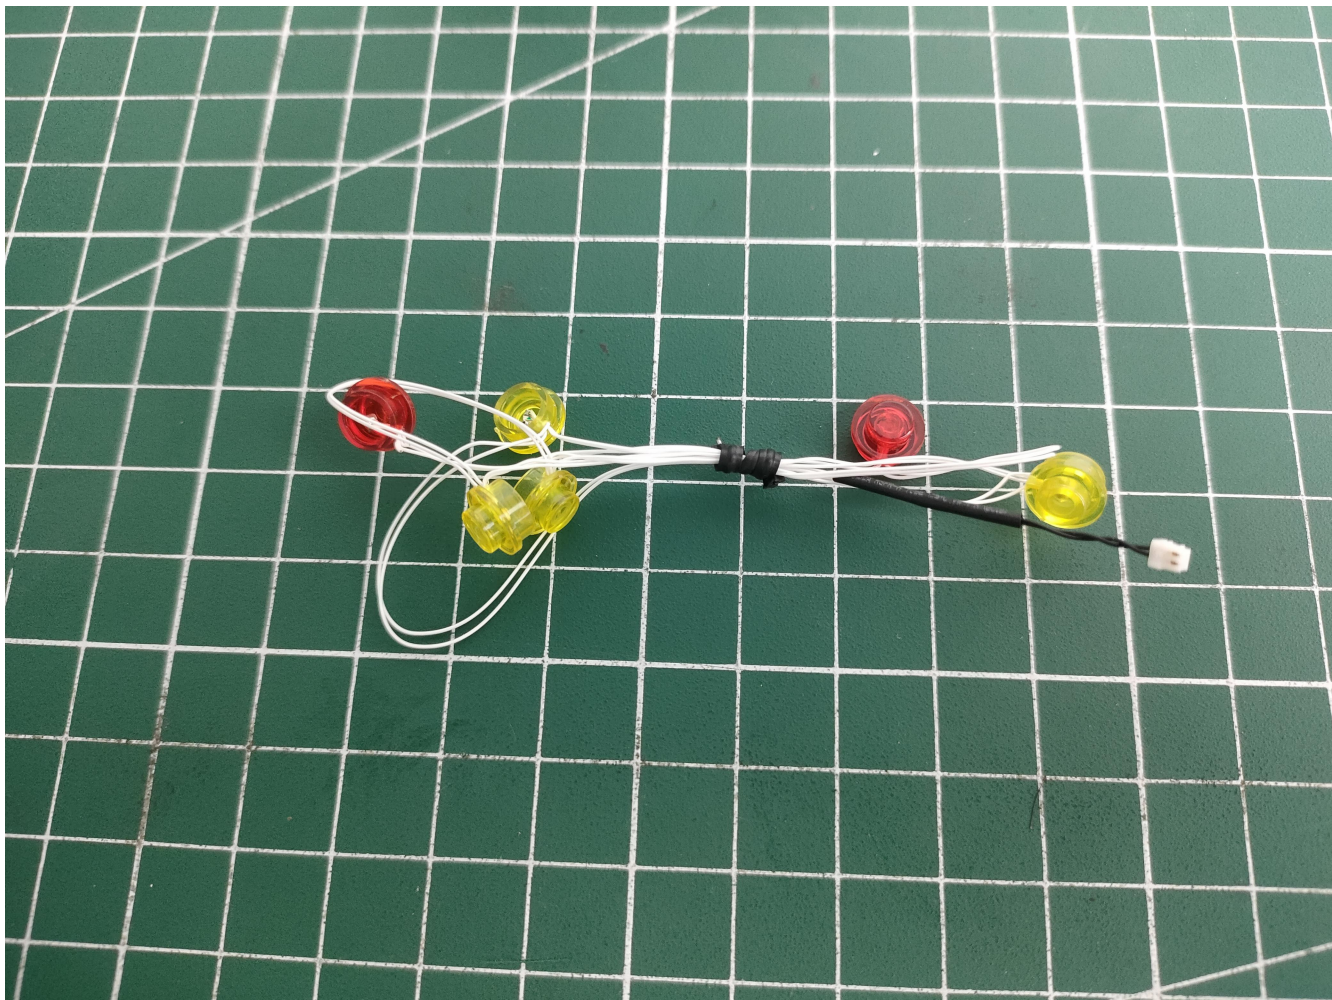


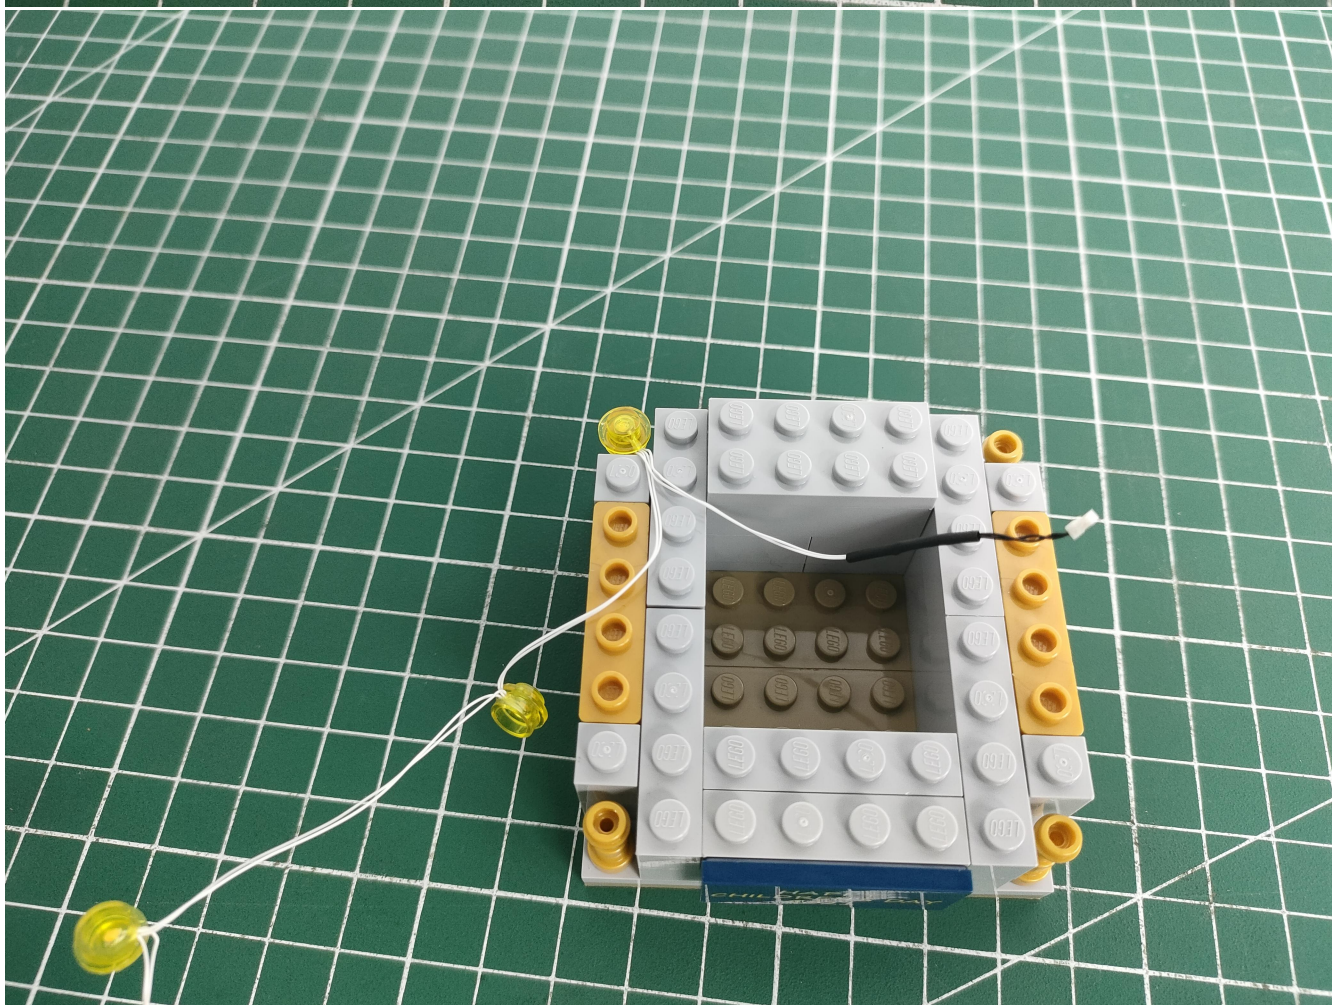
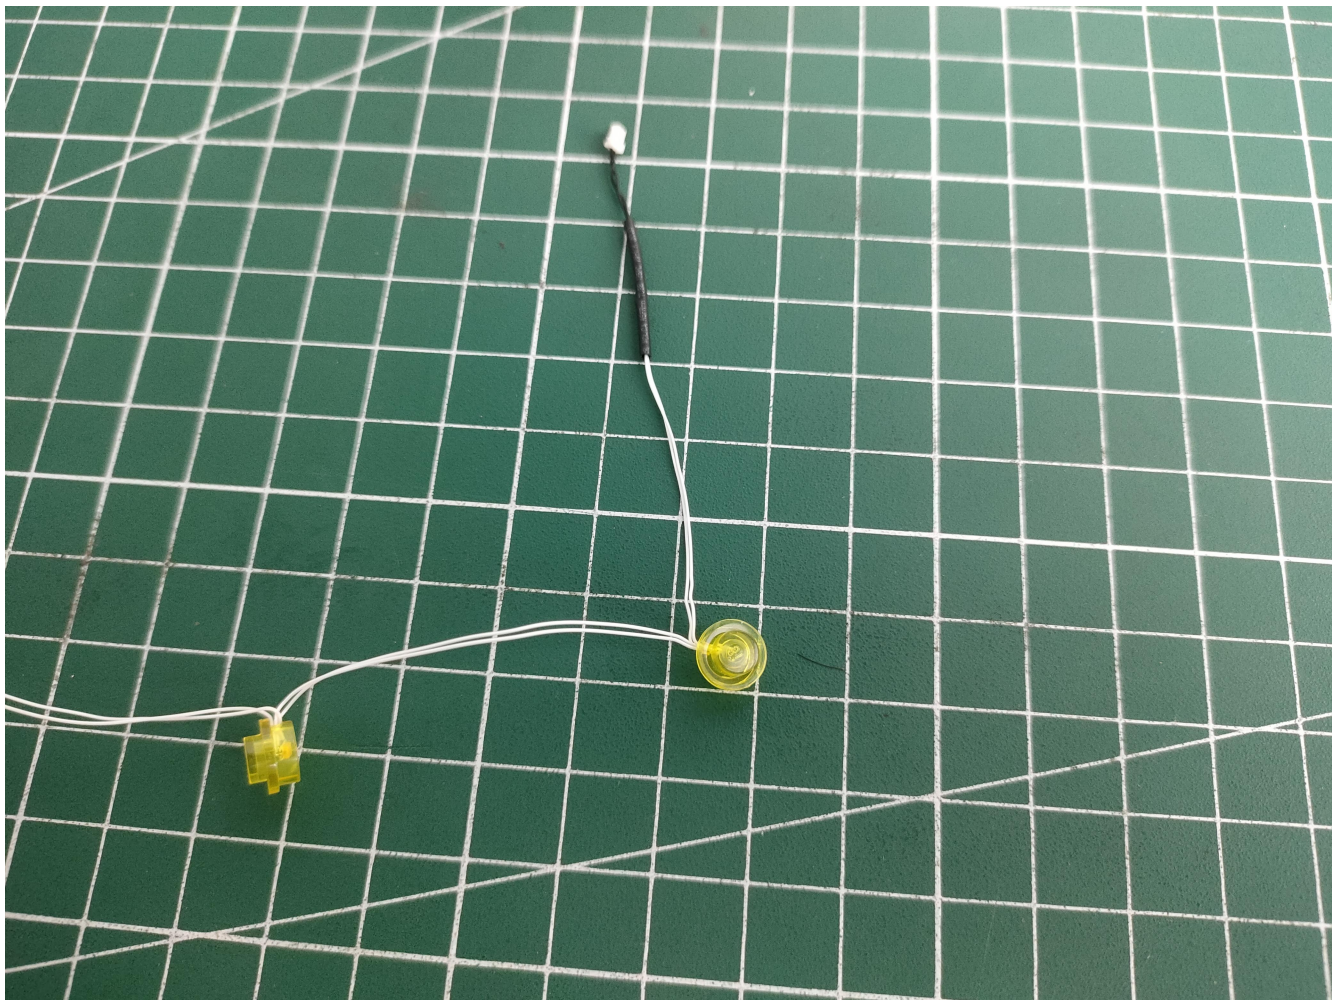


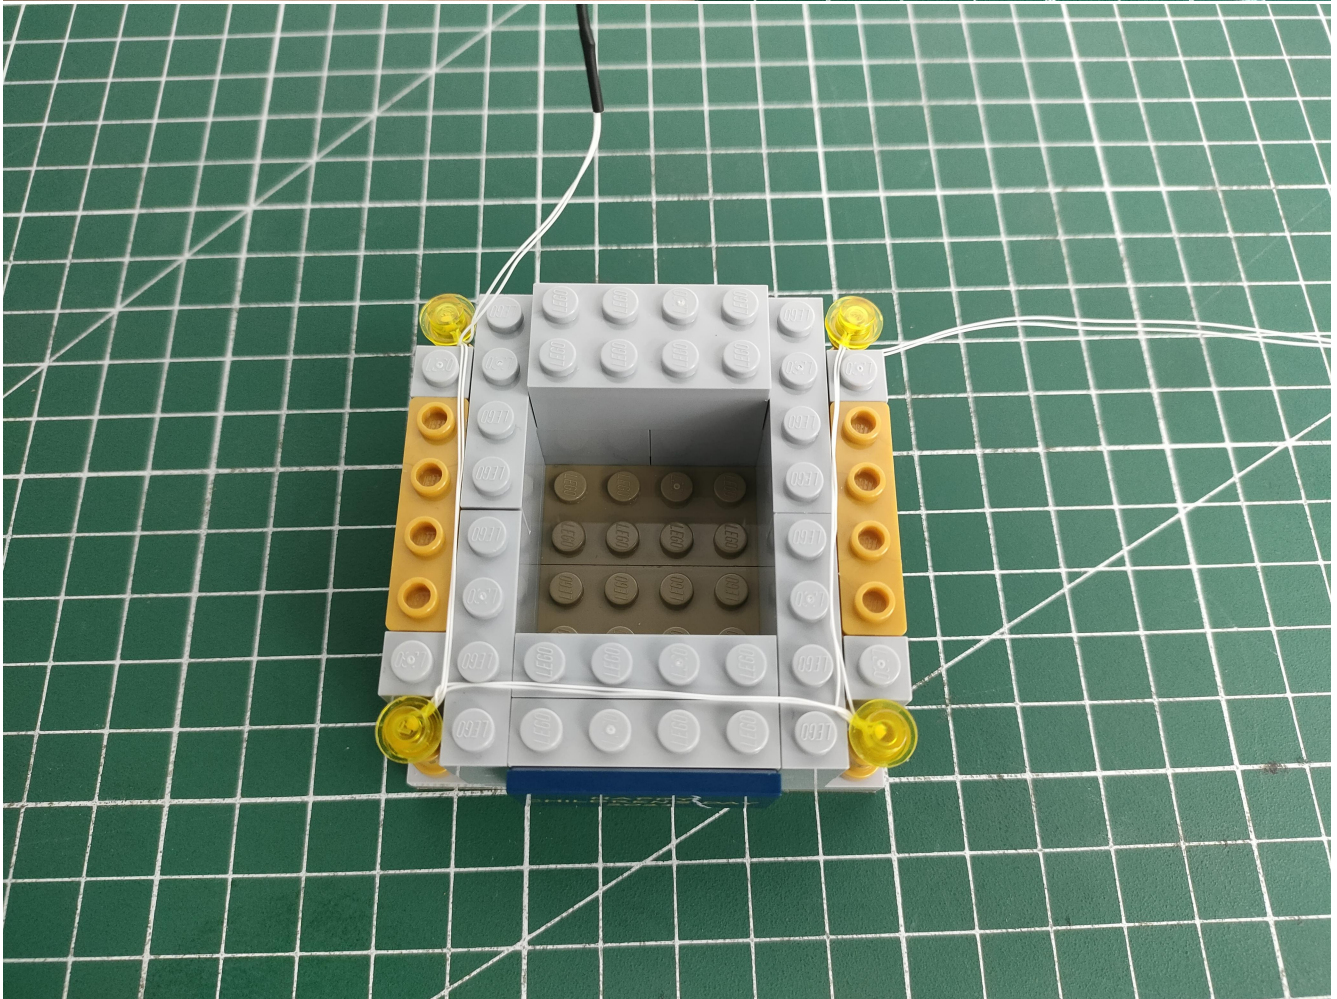
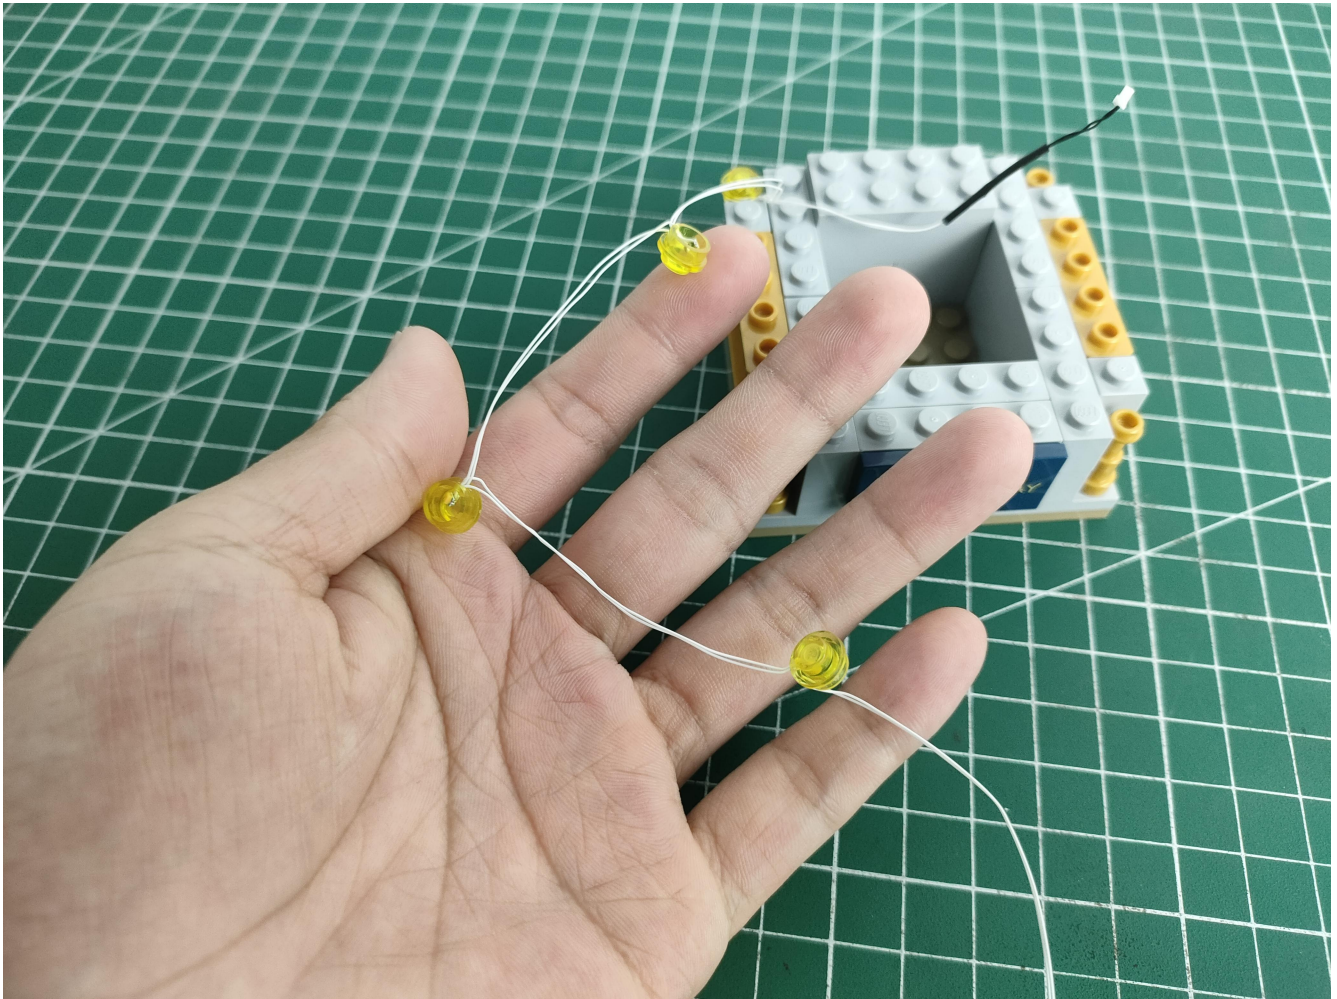




Please pay attention to the way the interface is used. The interface is small, please use it carefully: the = sign of the 2P interface is aligned with the = sign of the expansion board

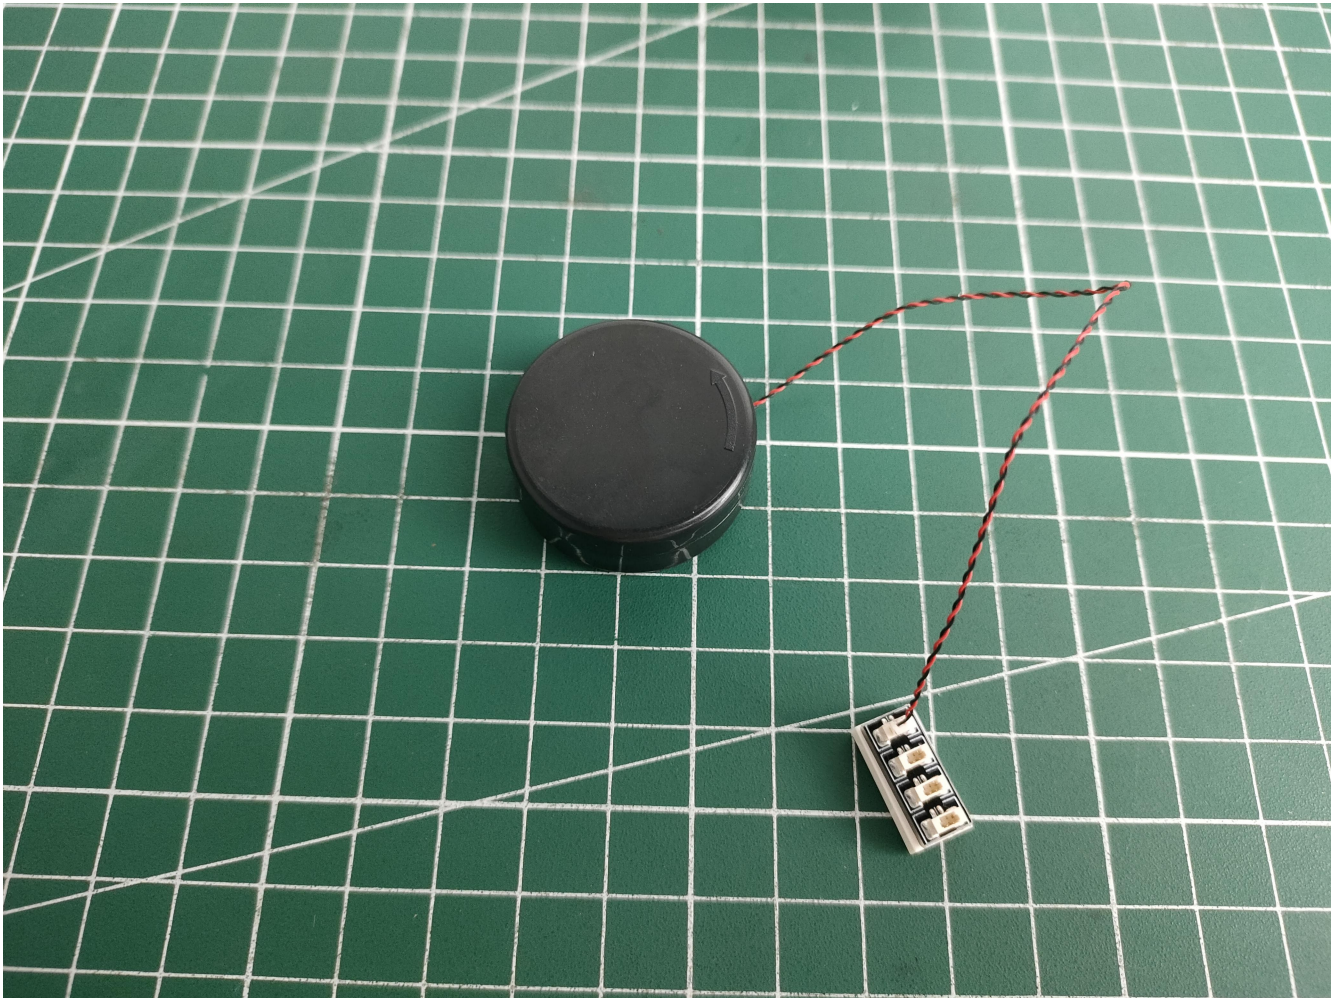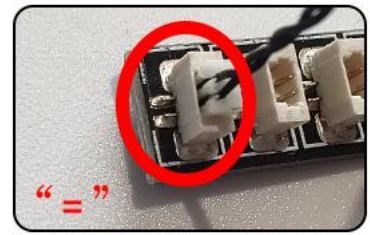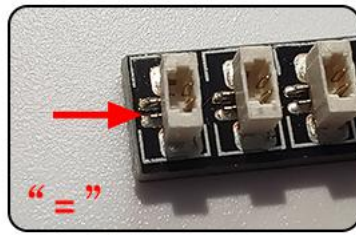
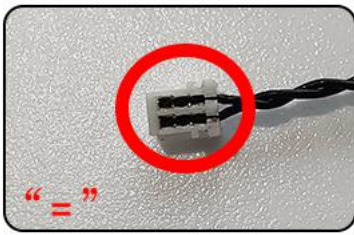


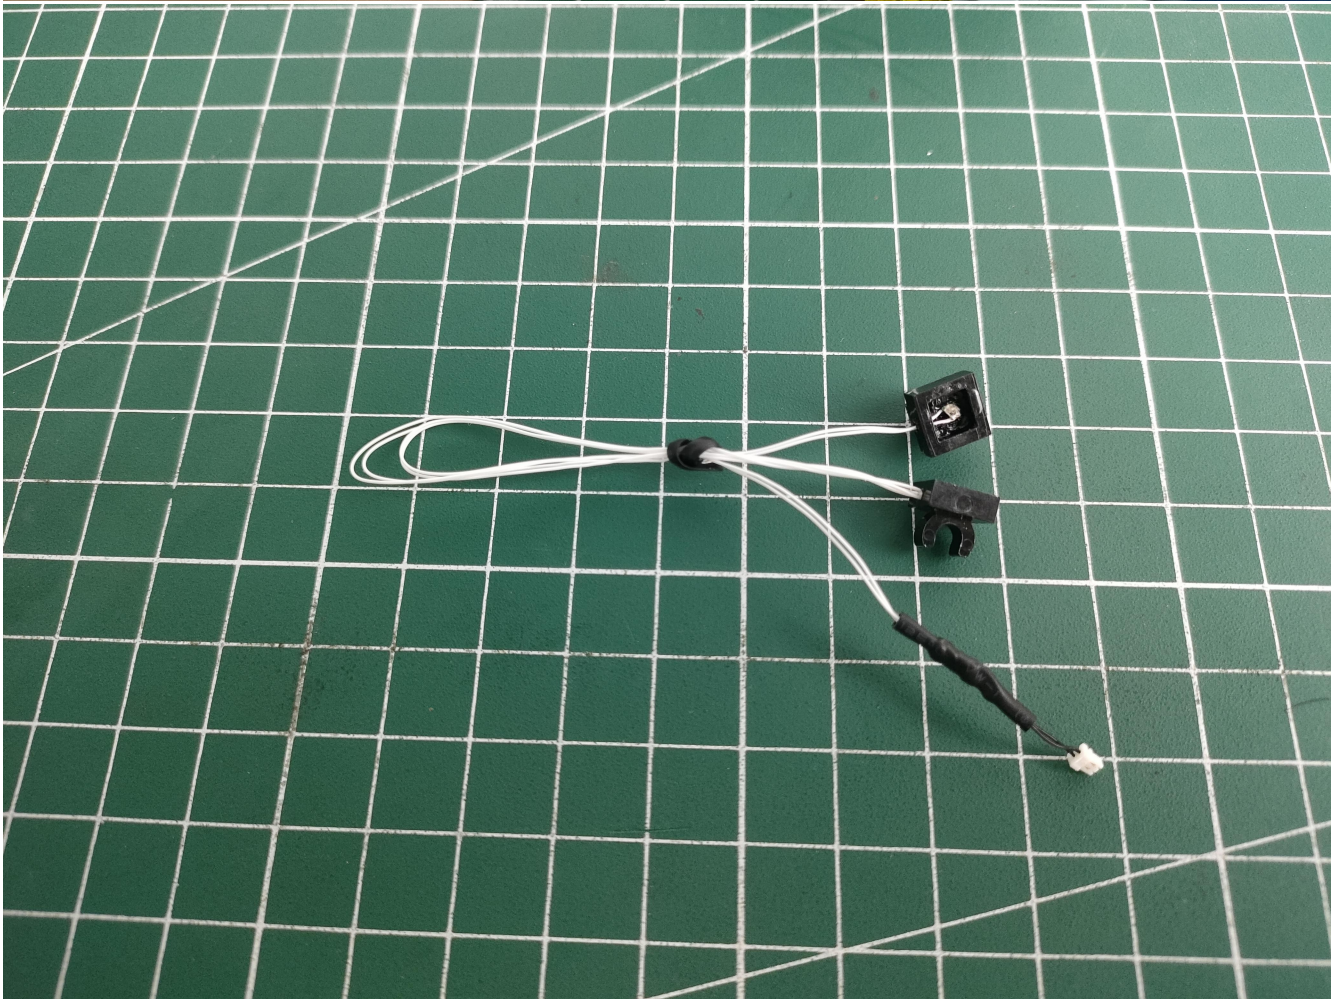
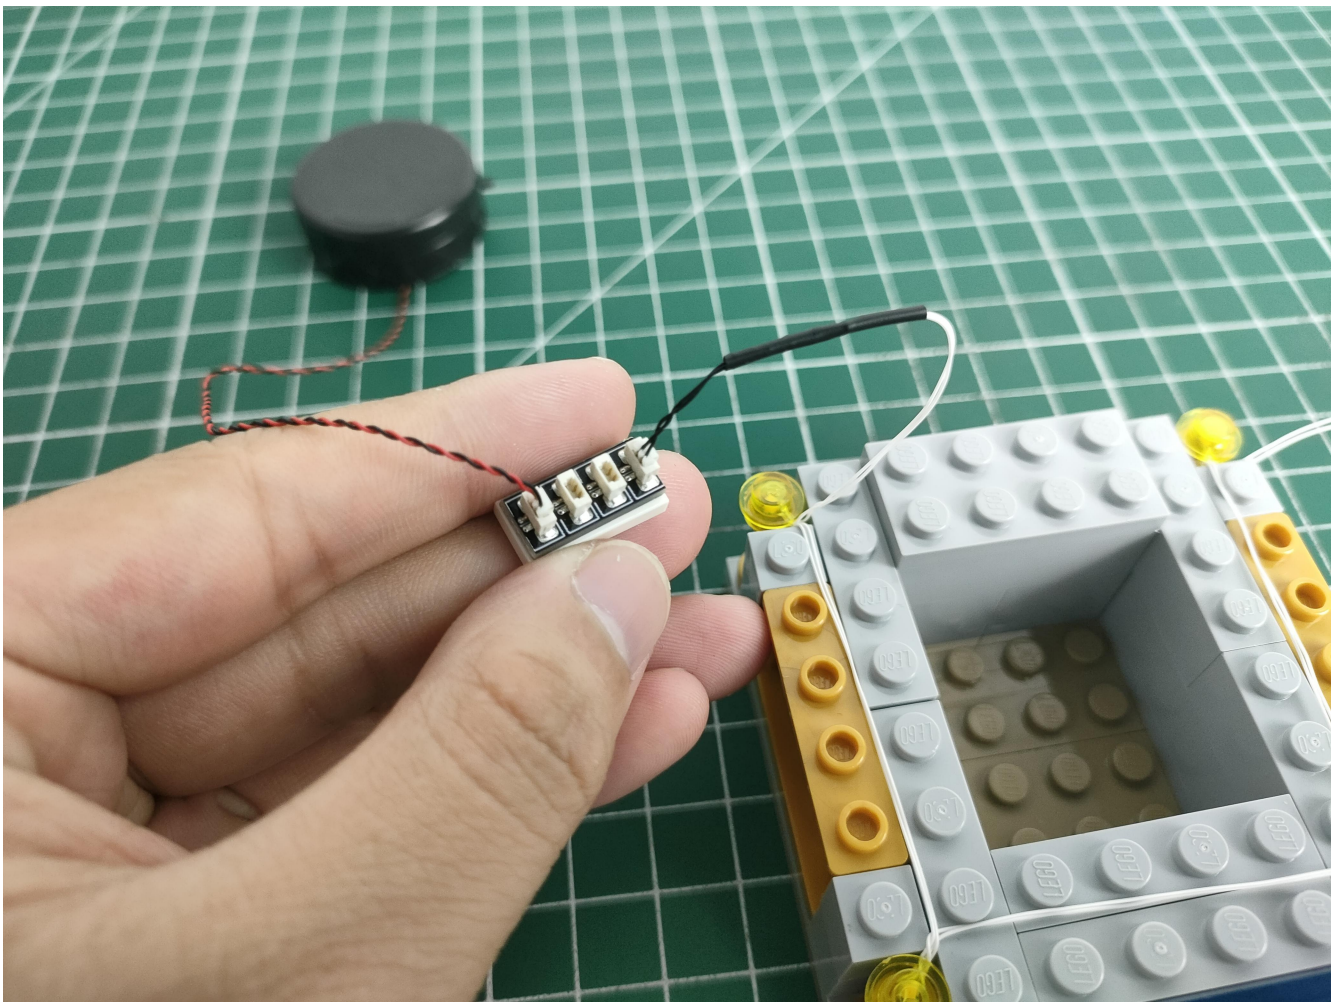


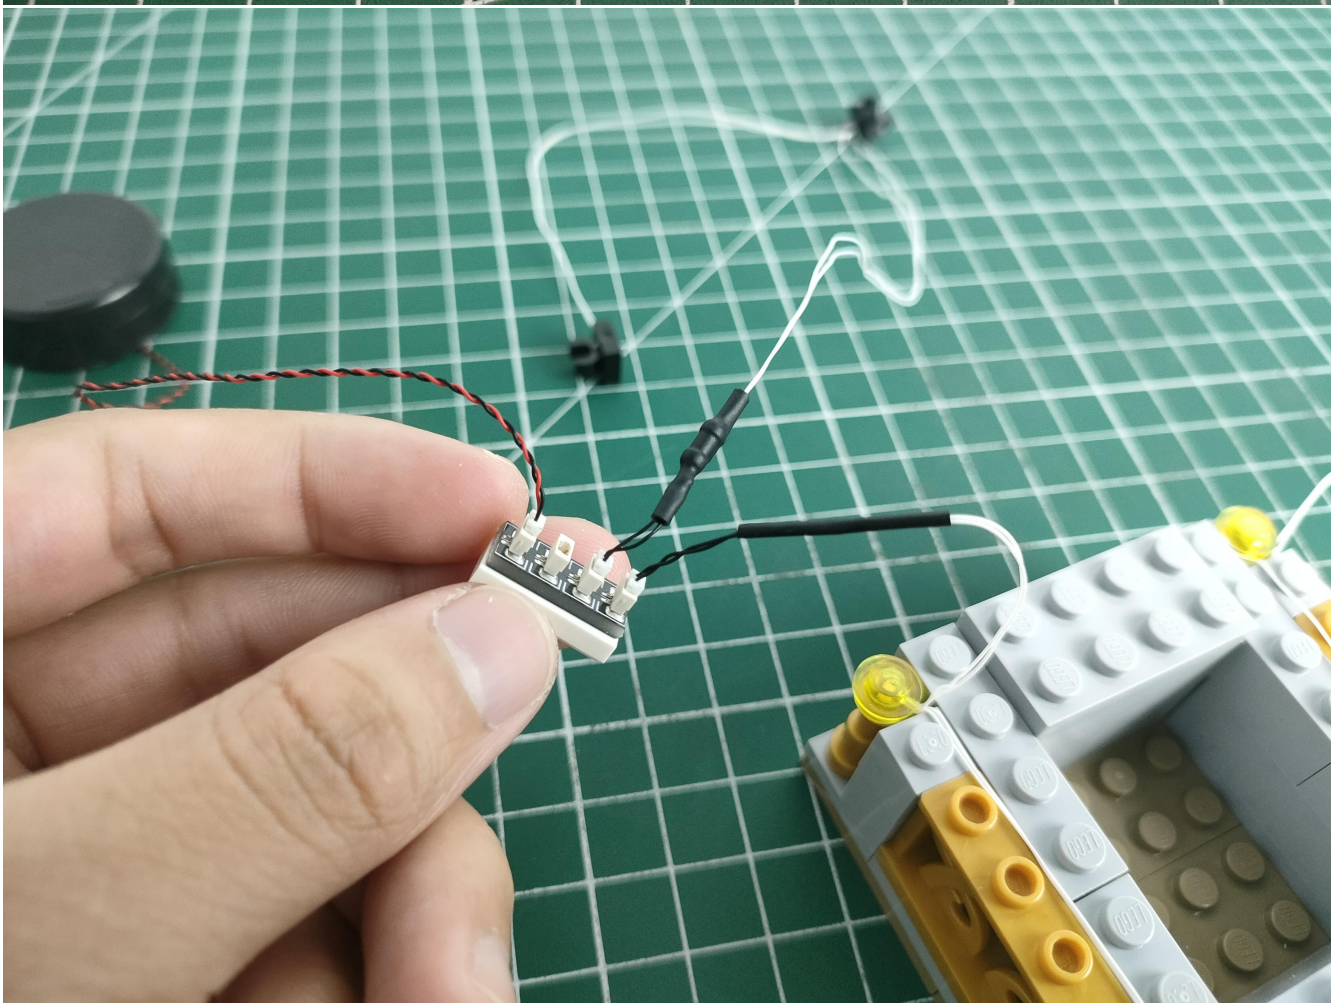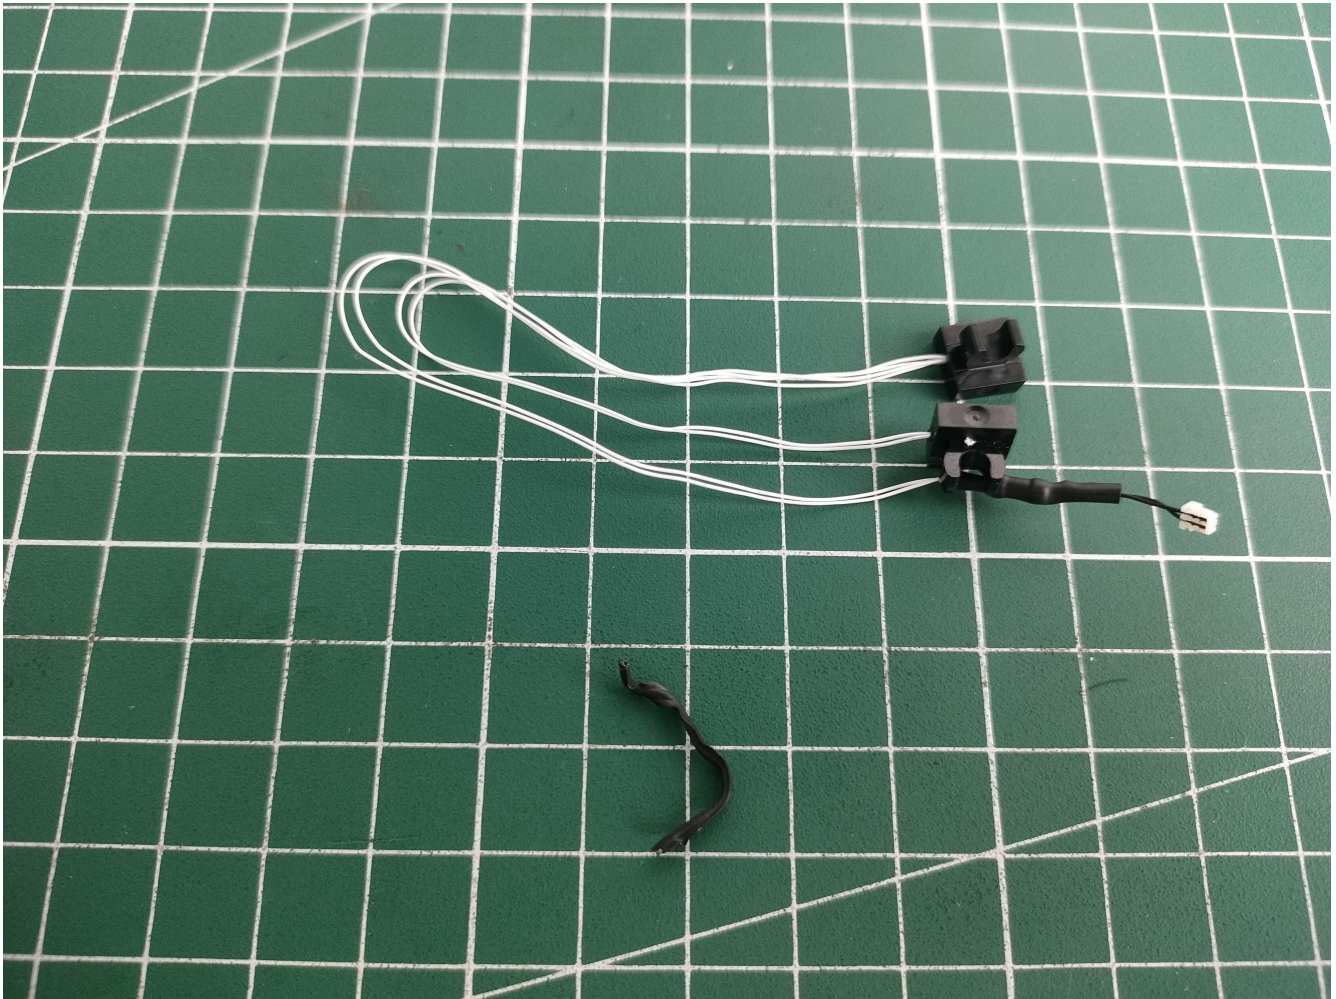


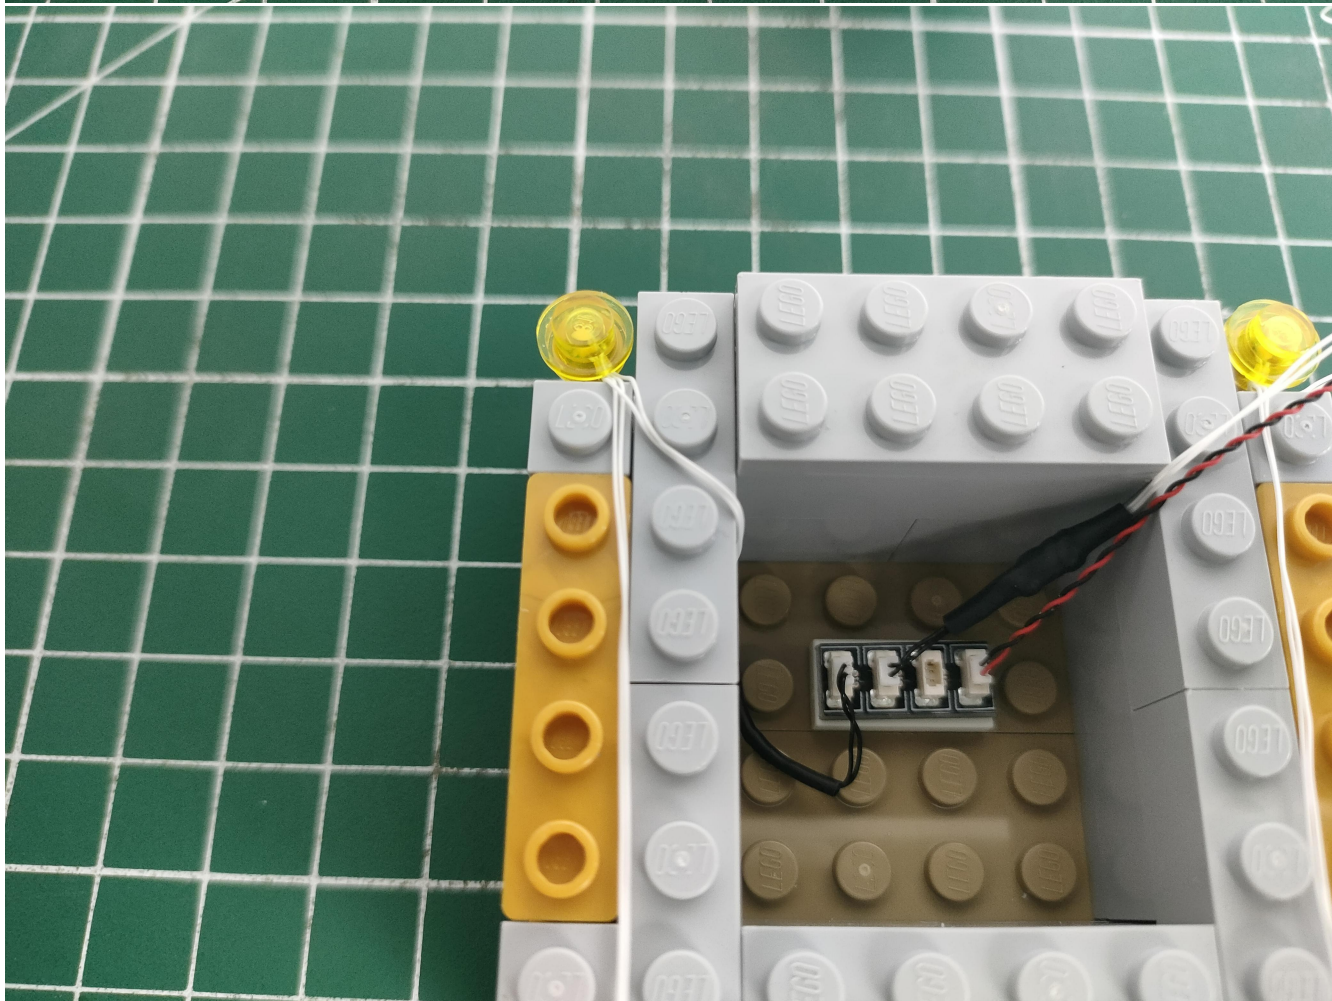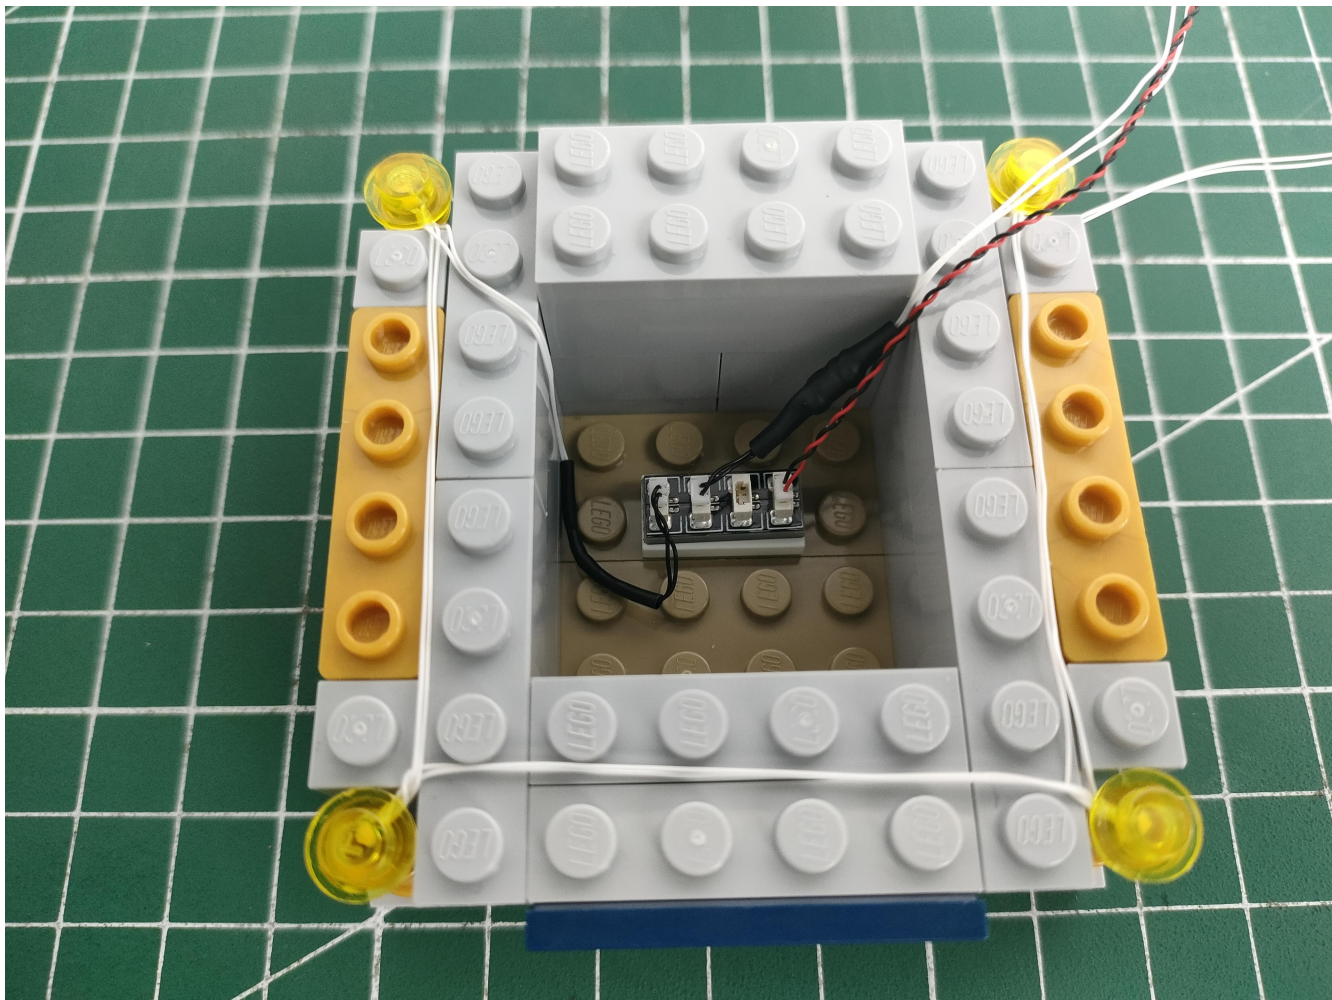


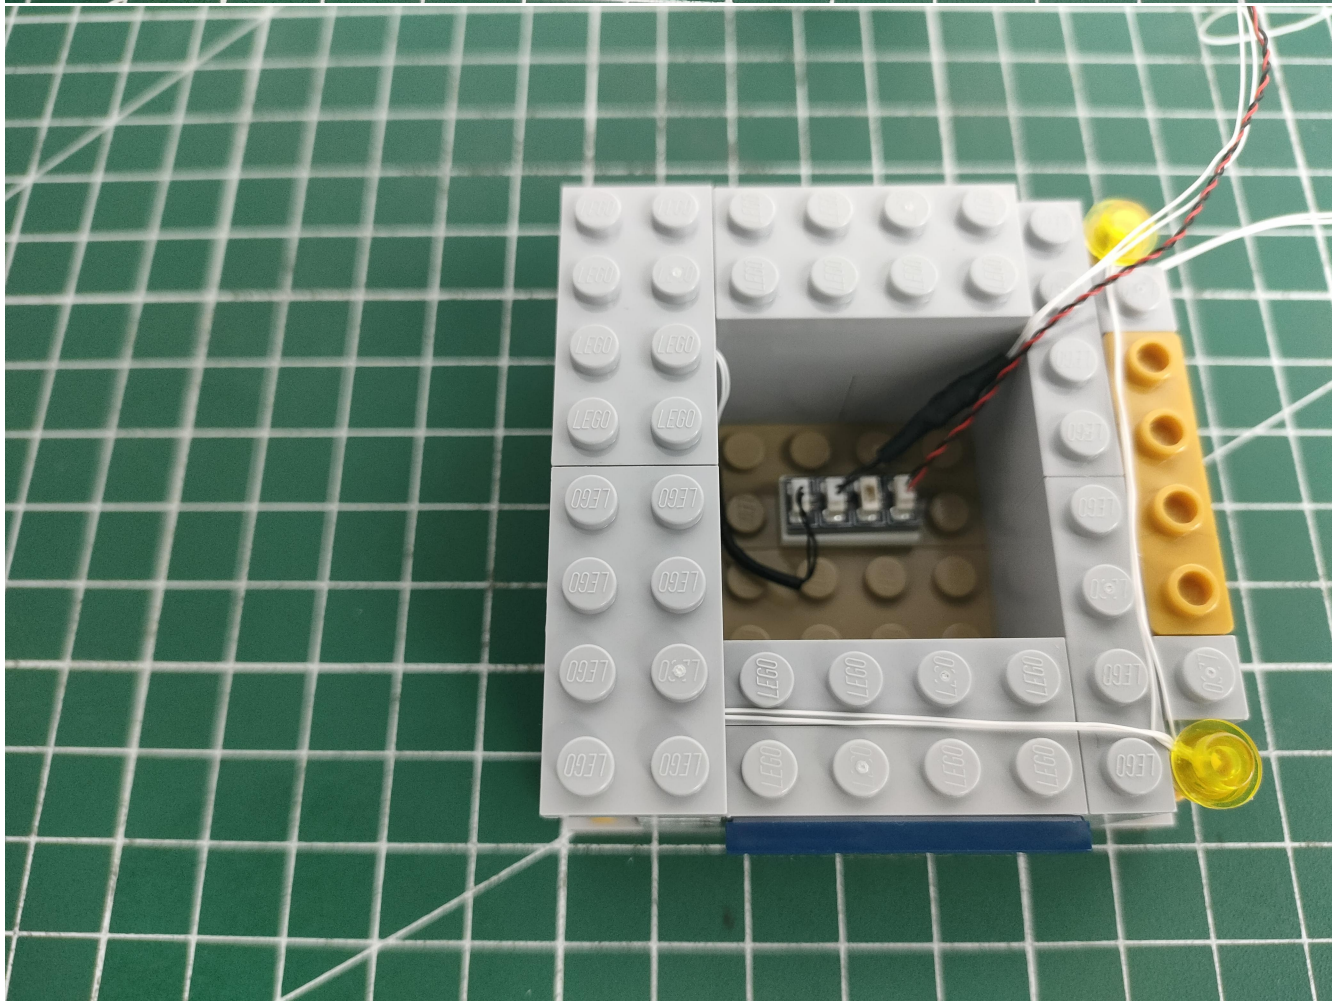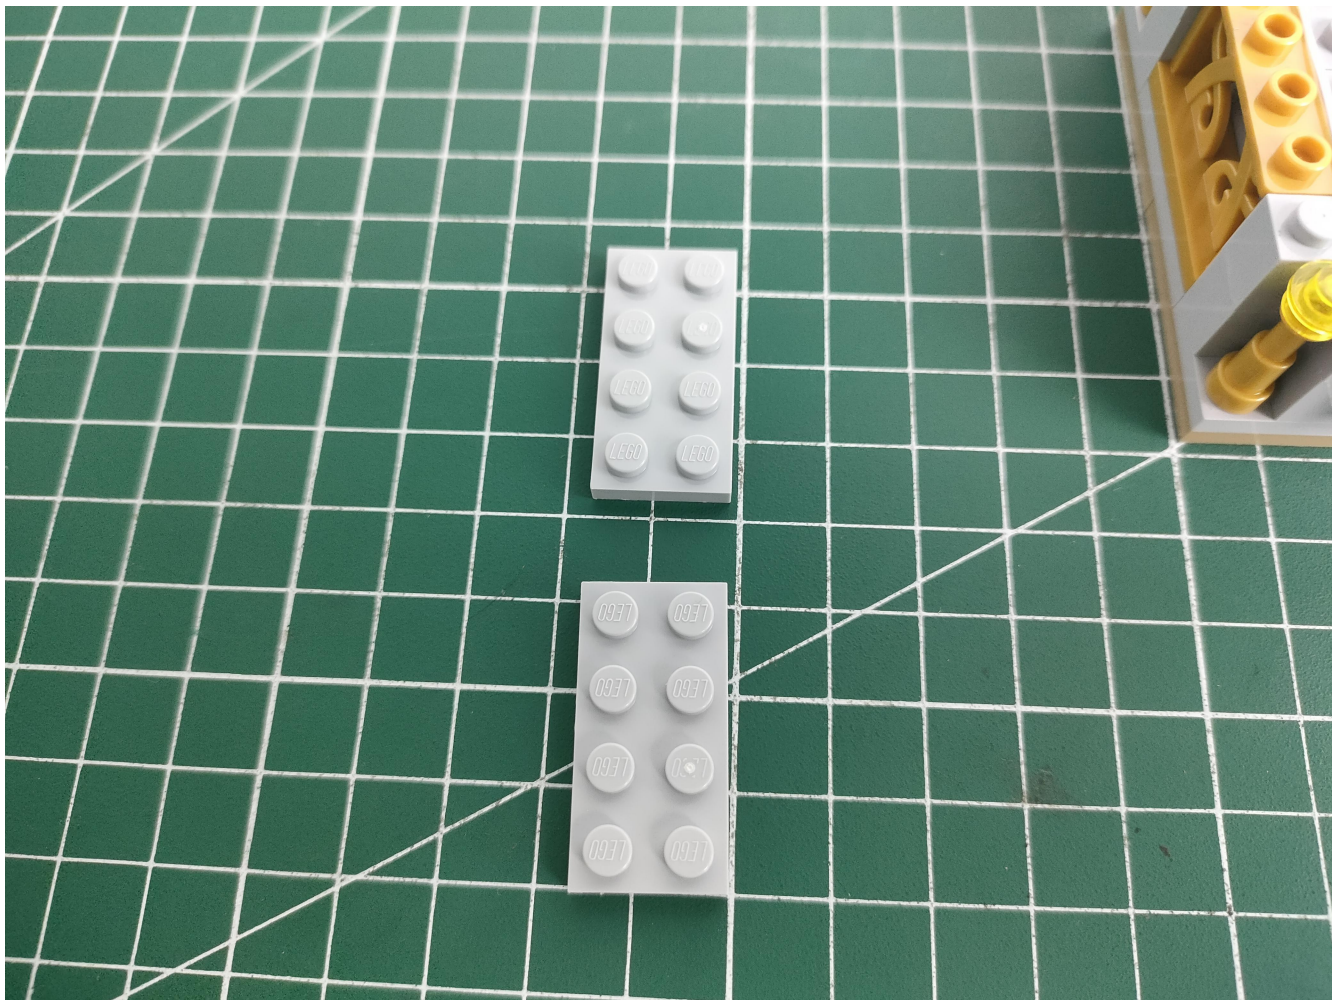


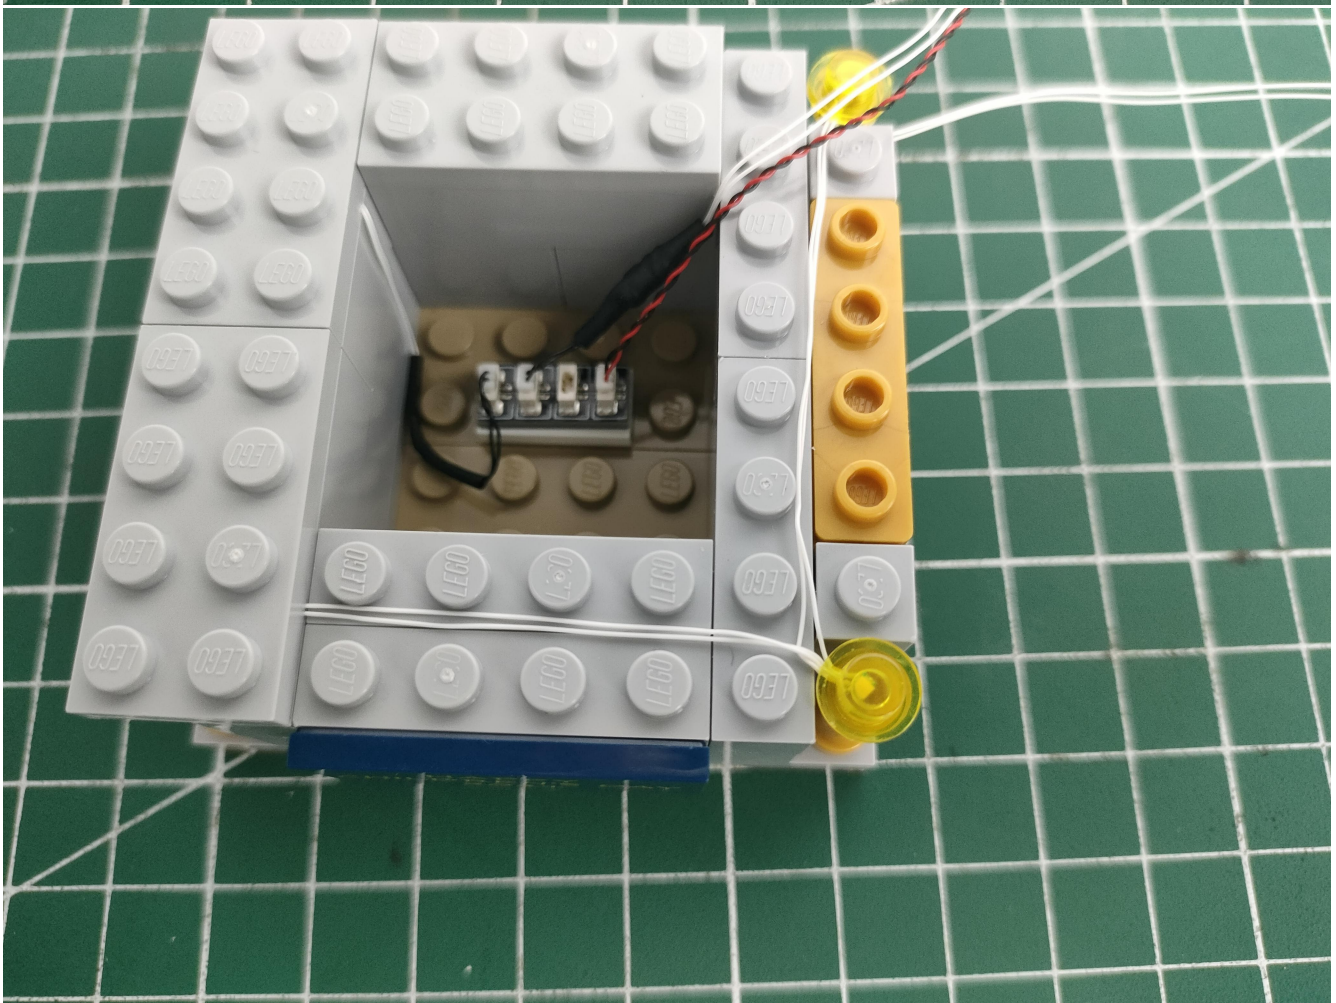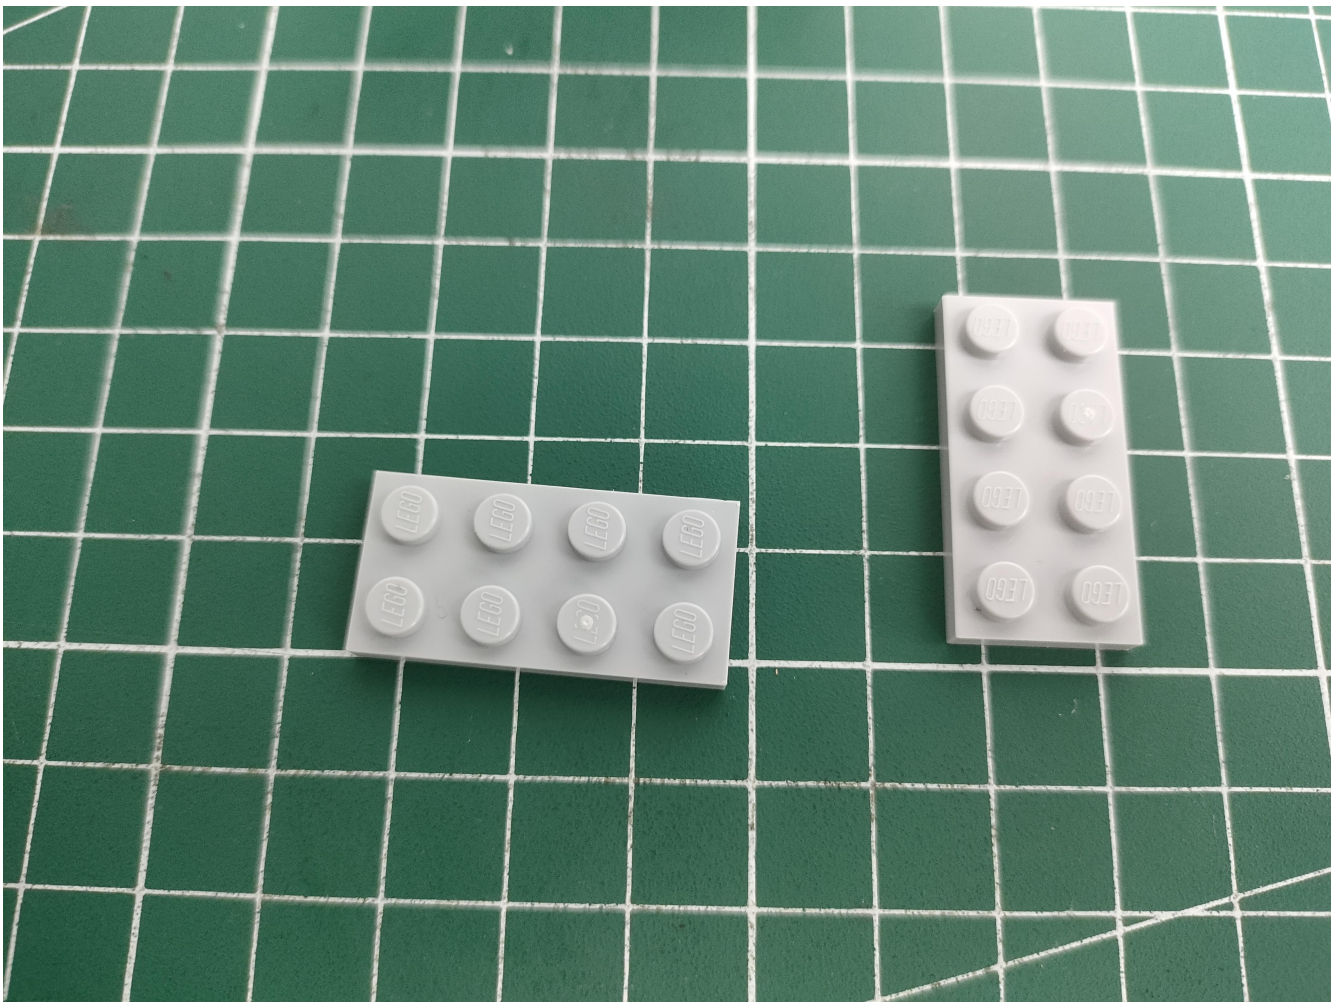

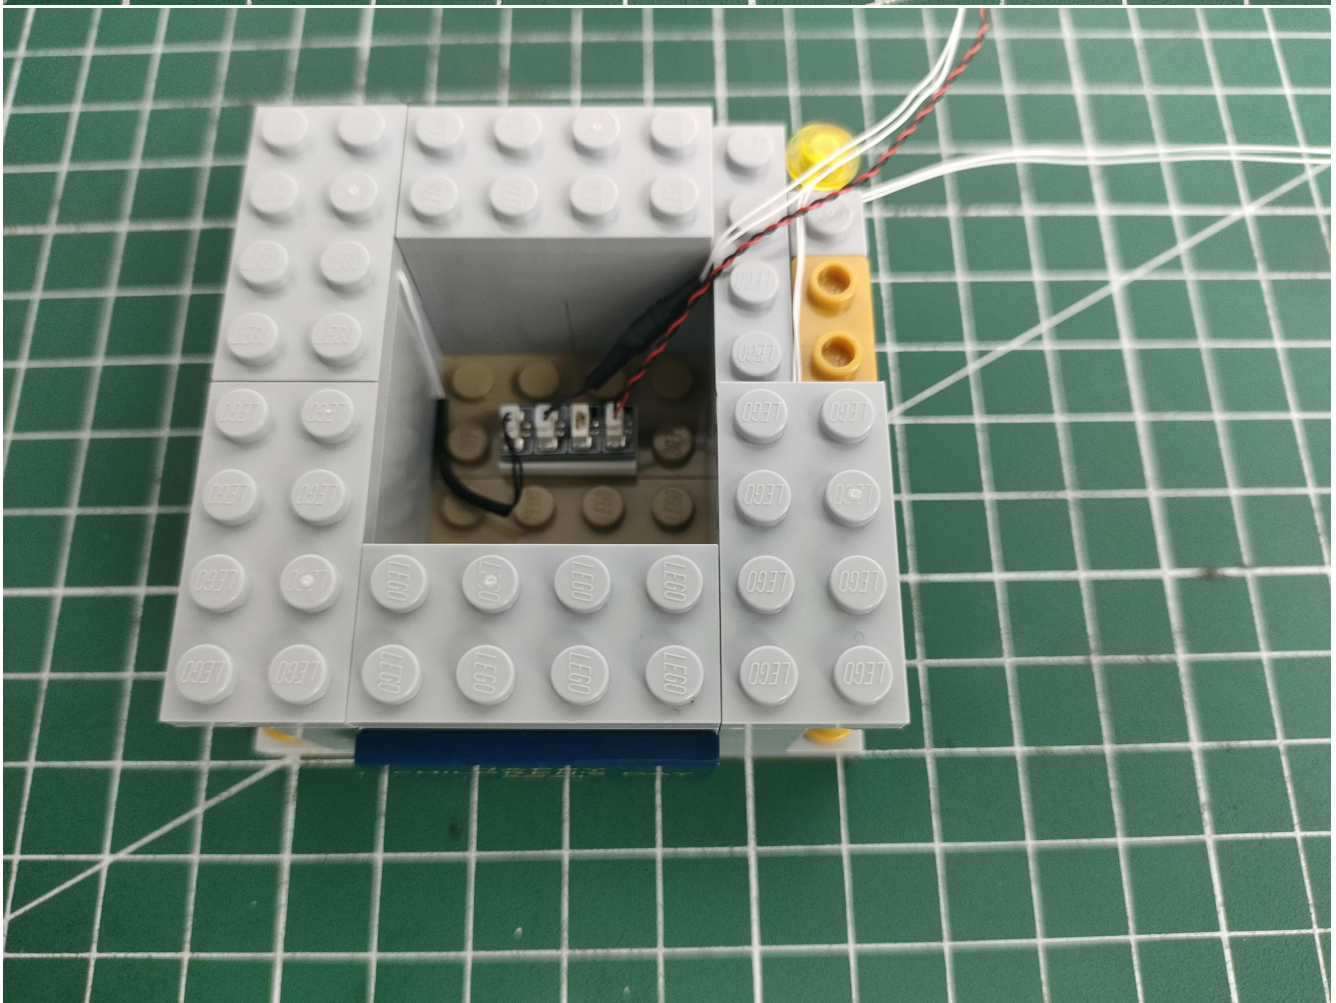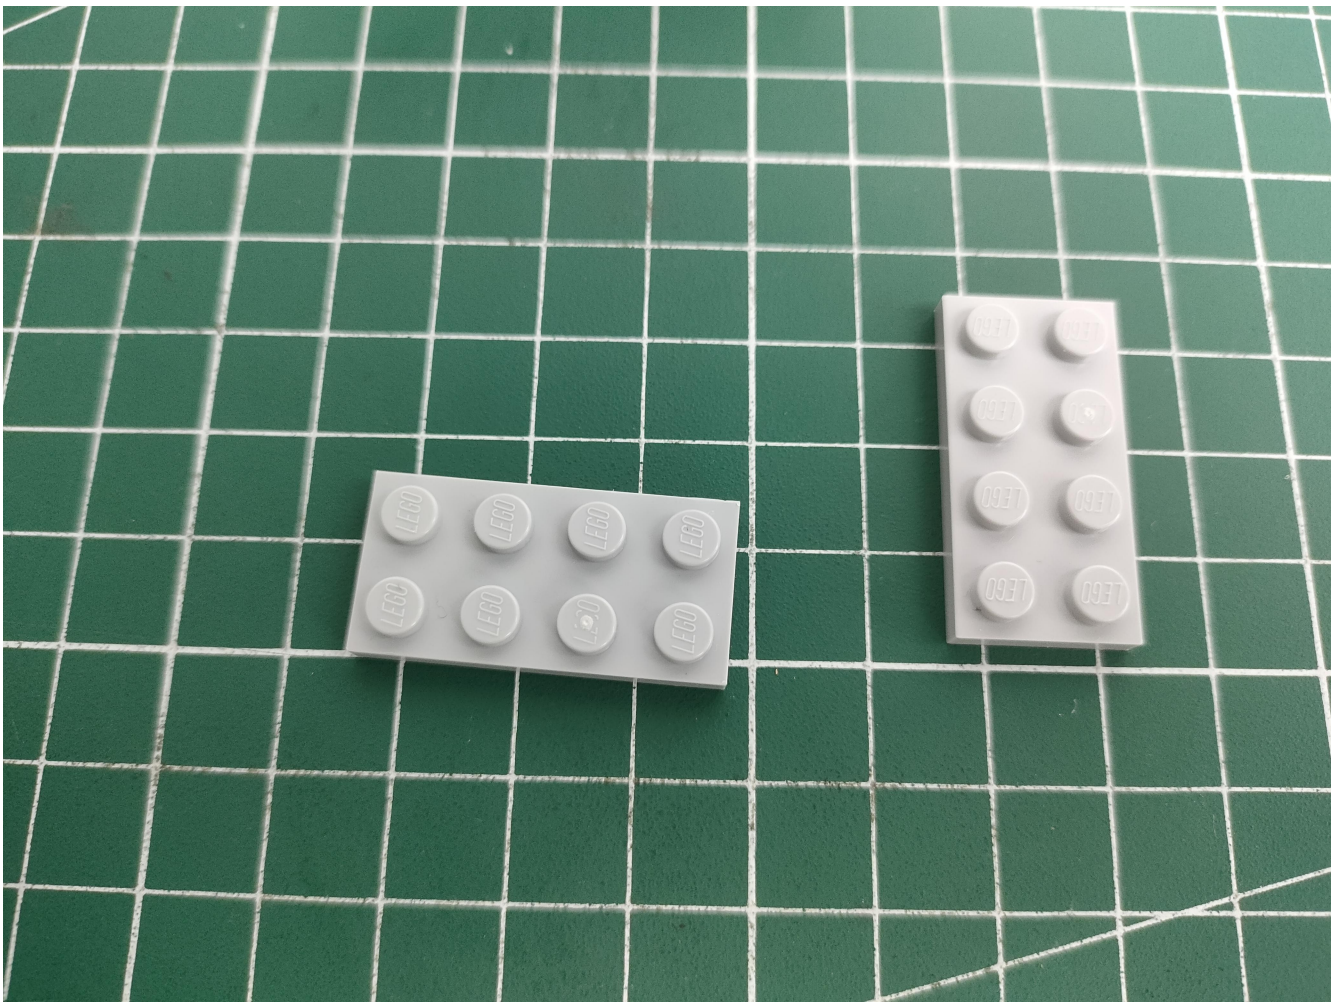



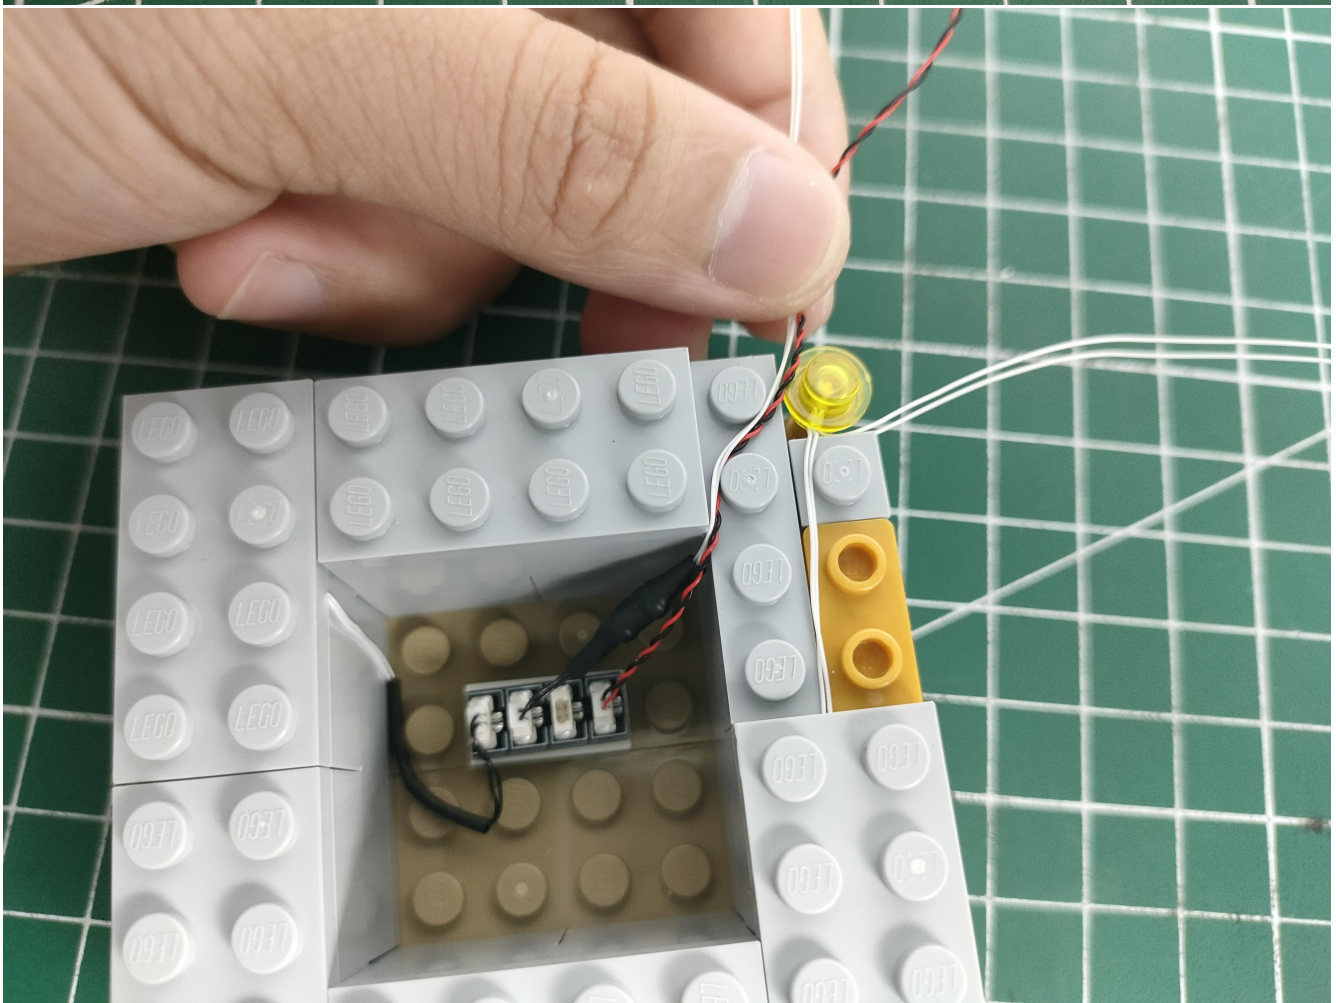



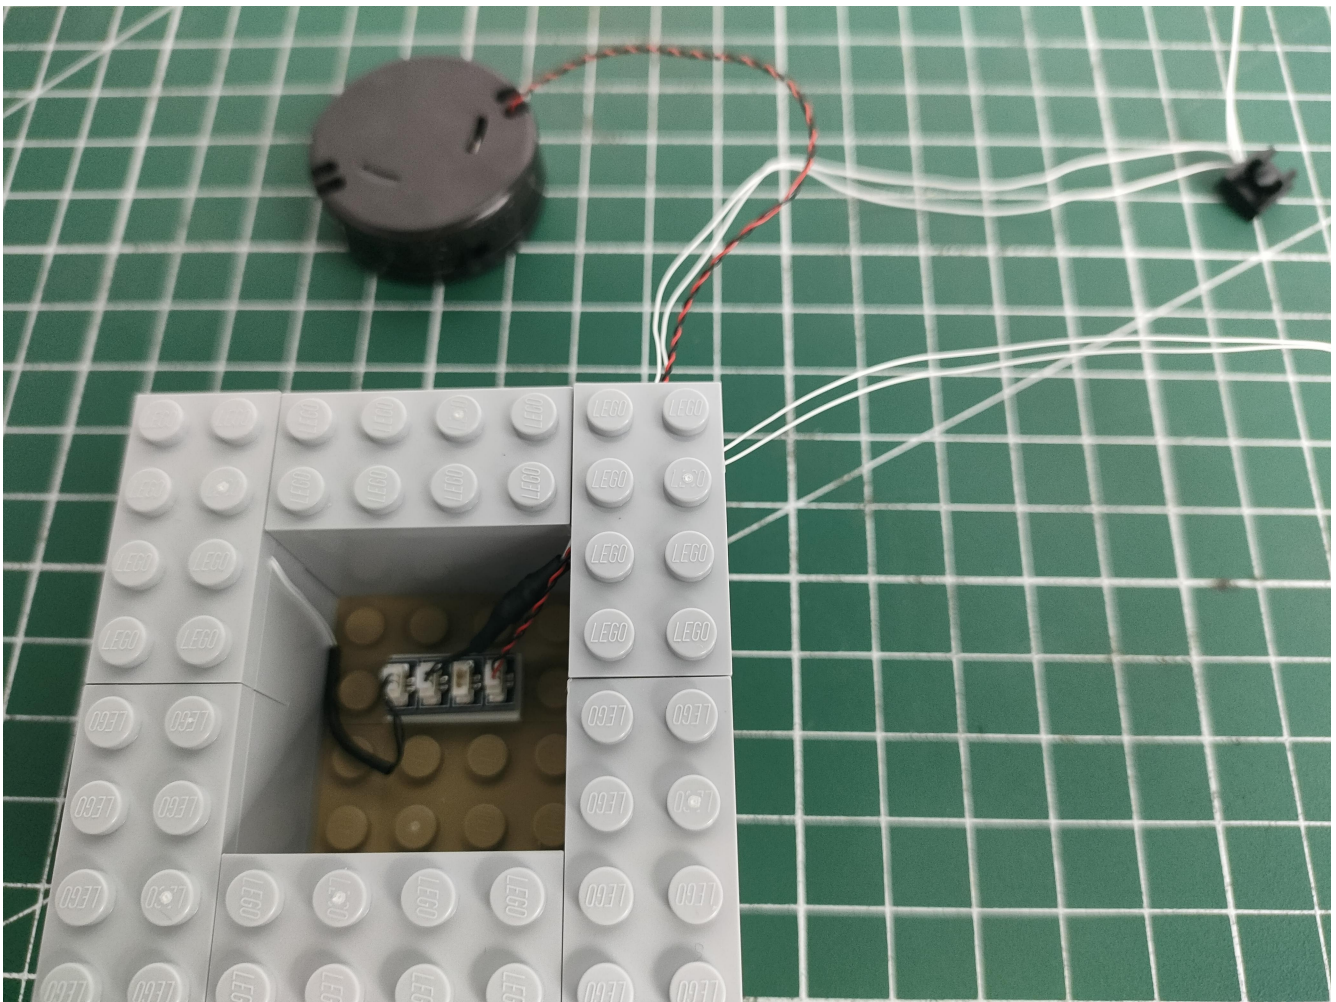



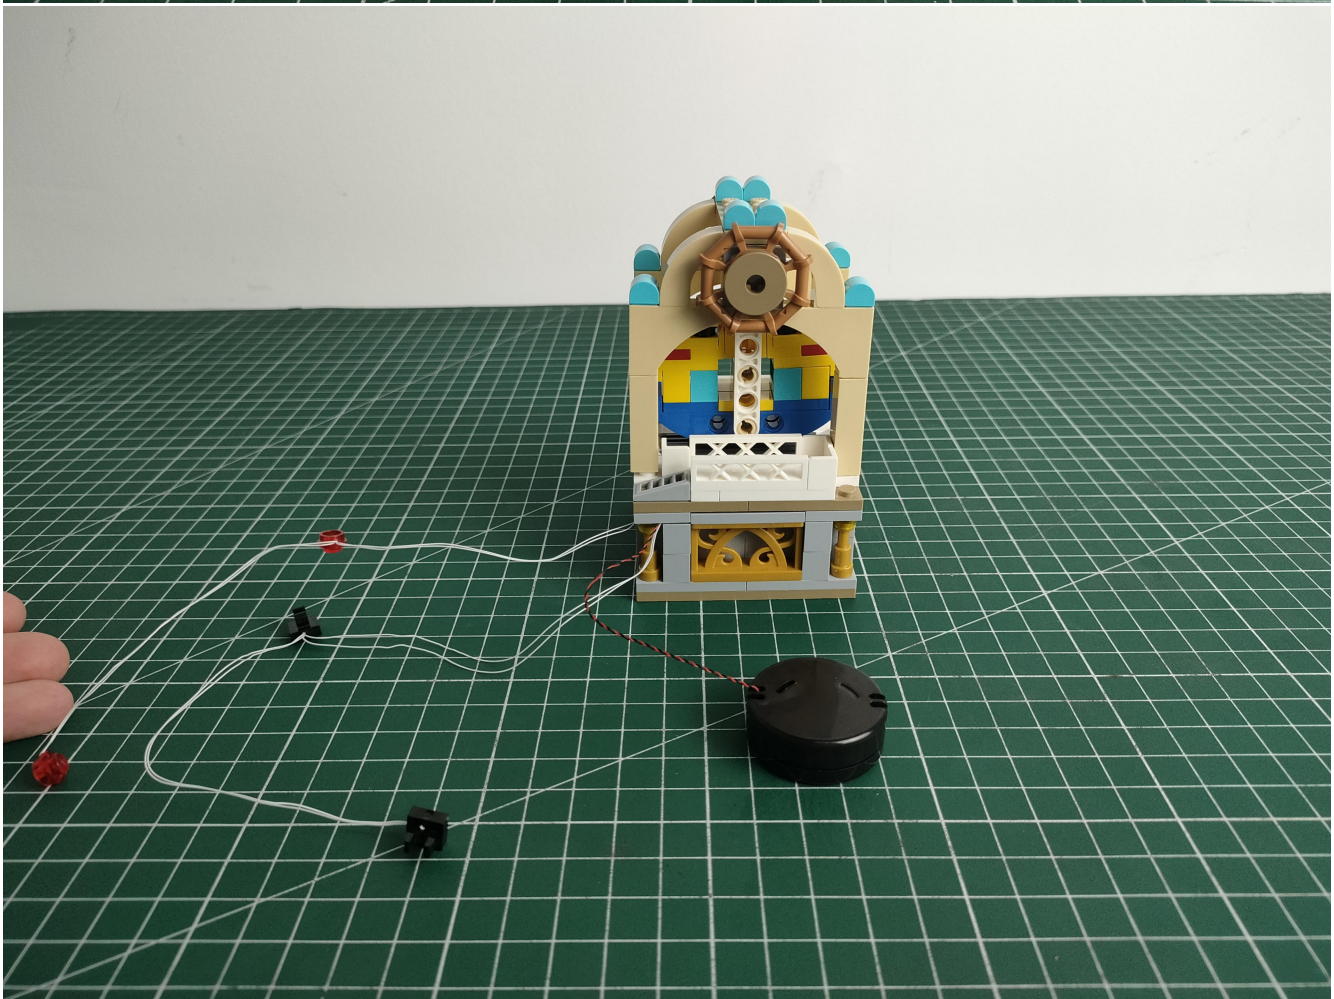





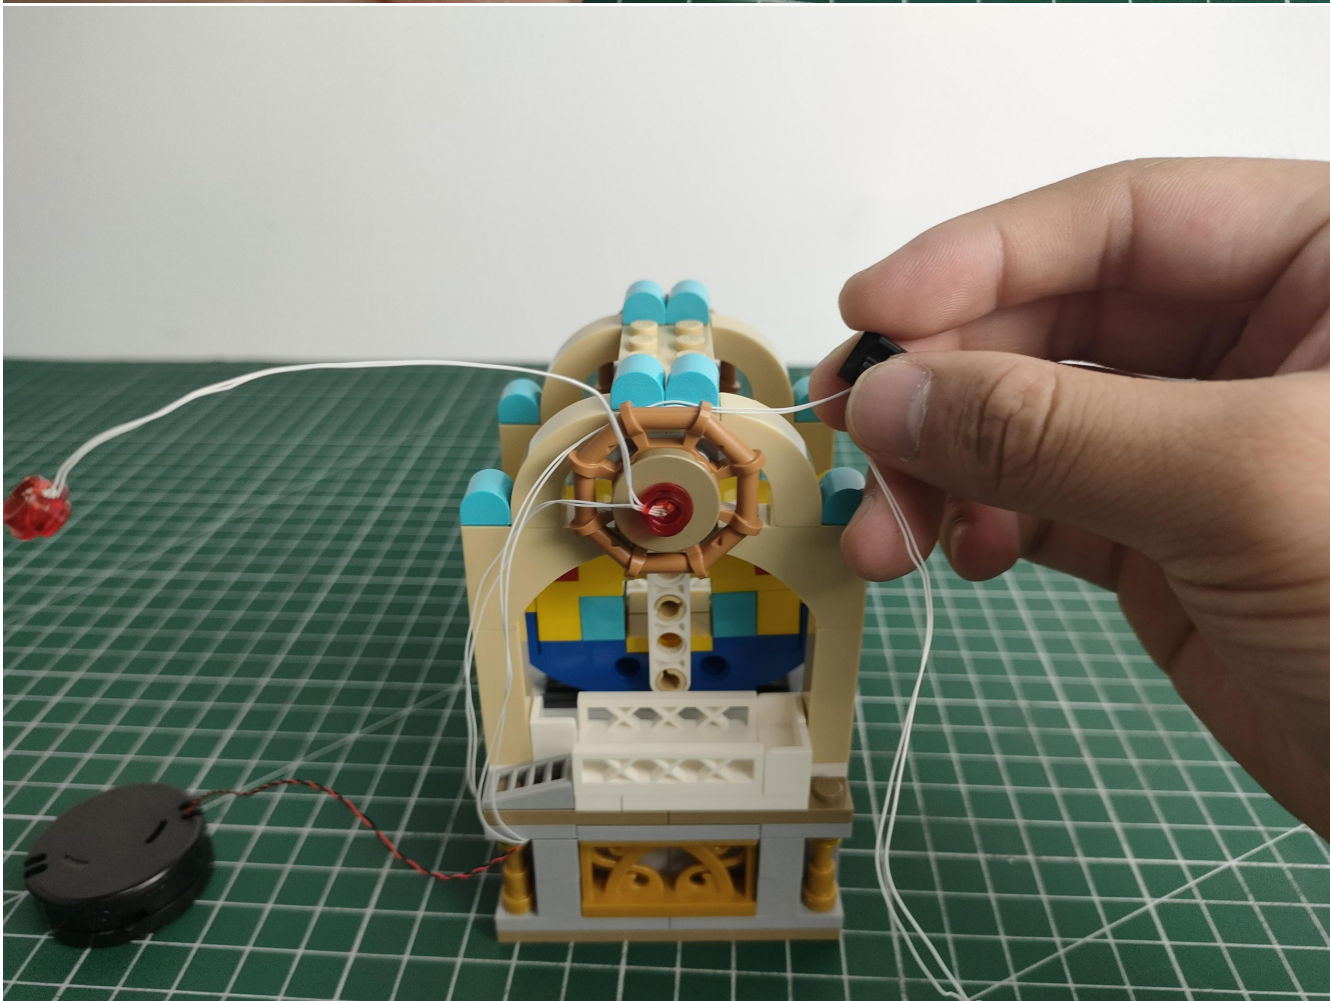


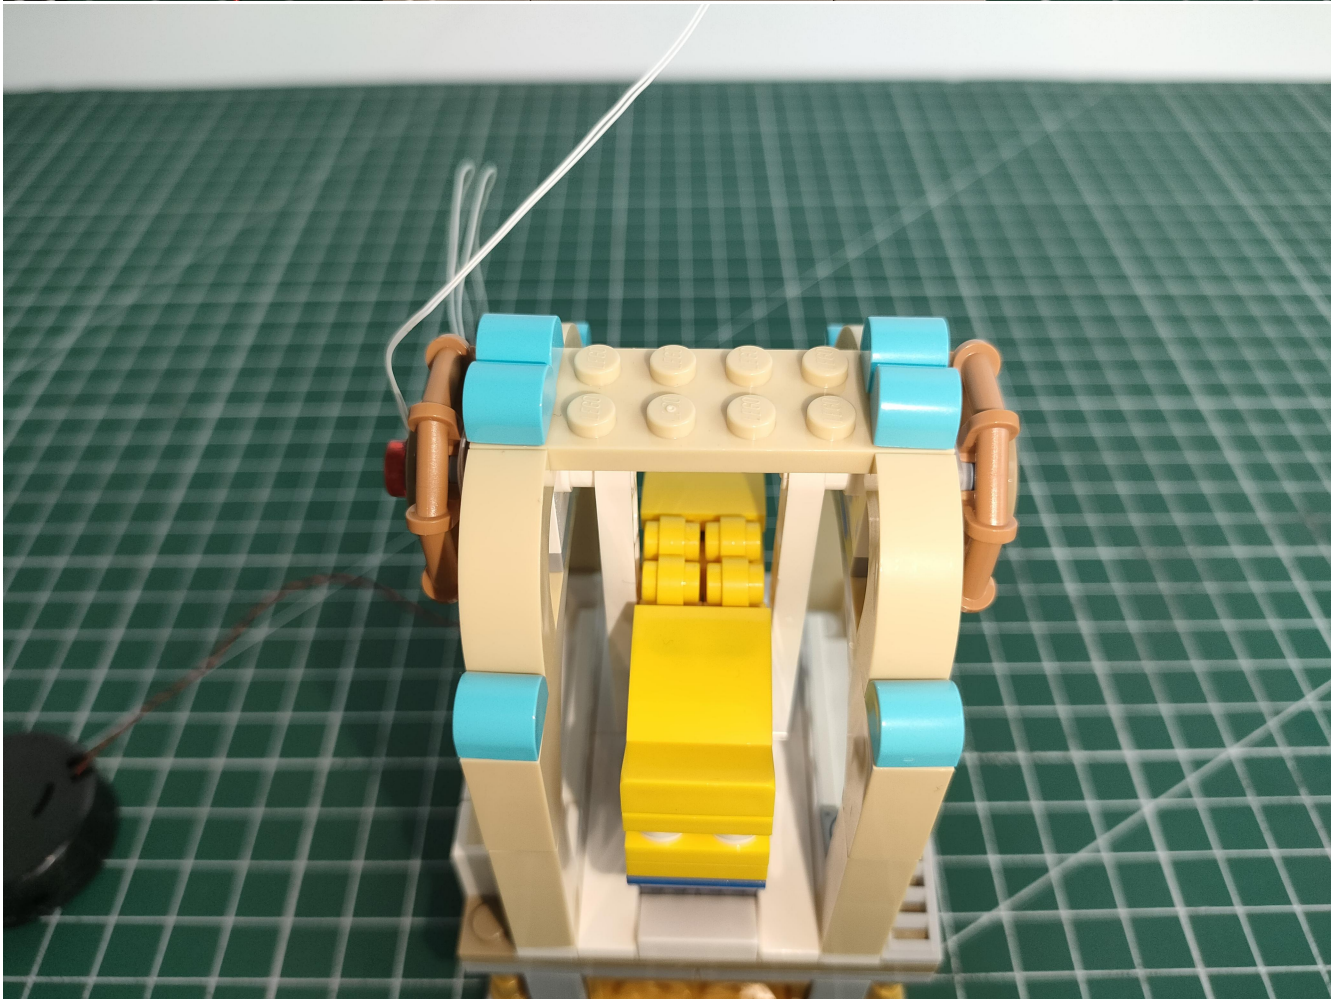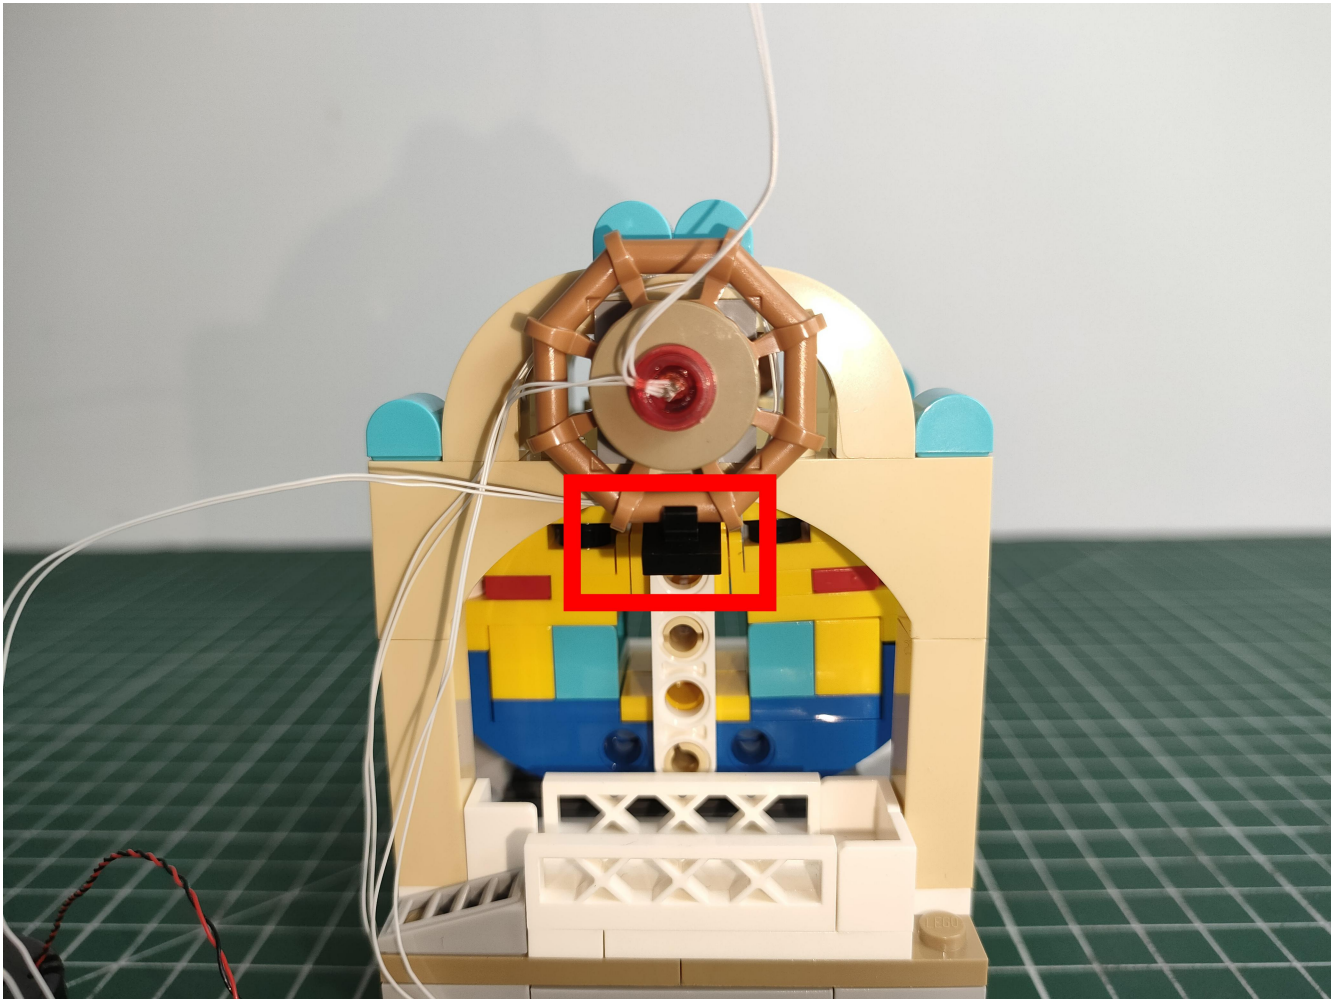

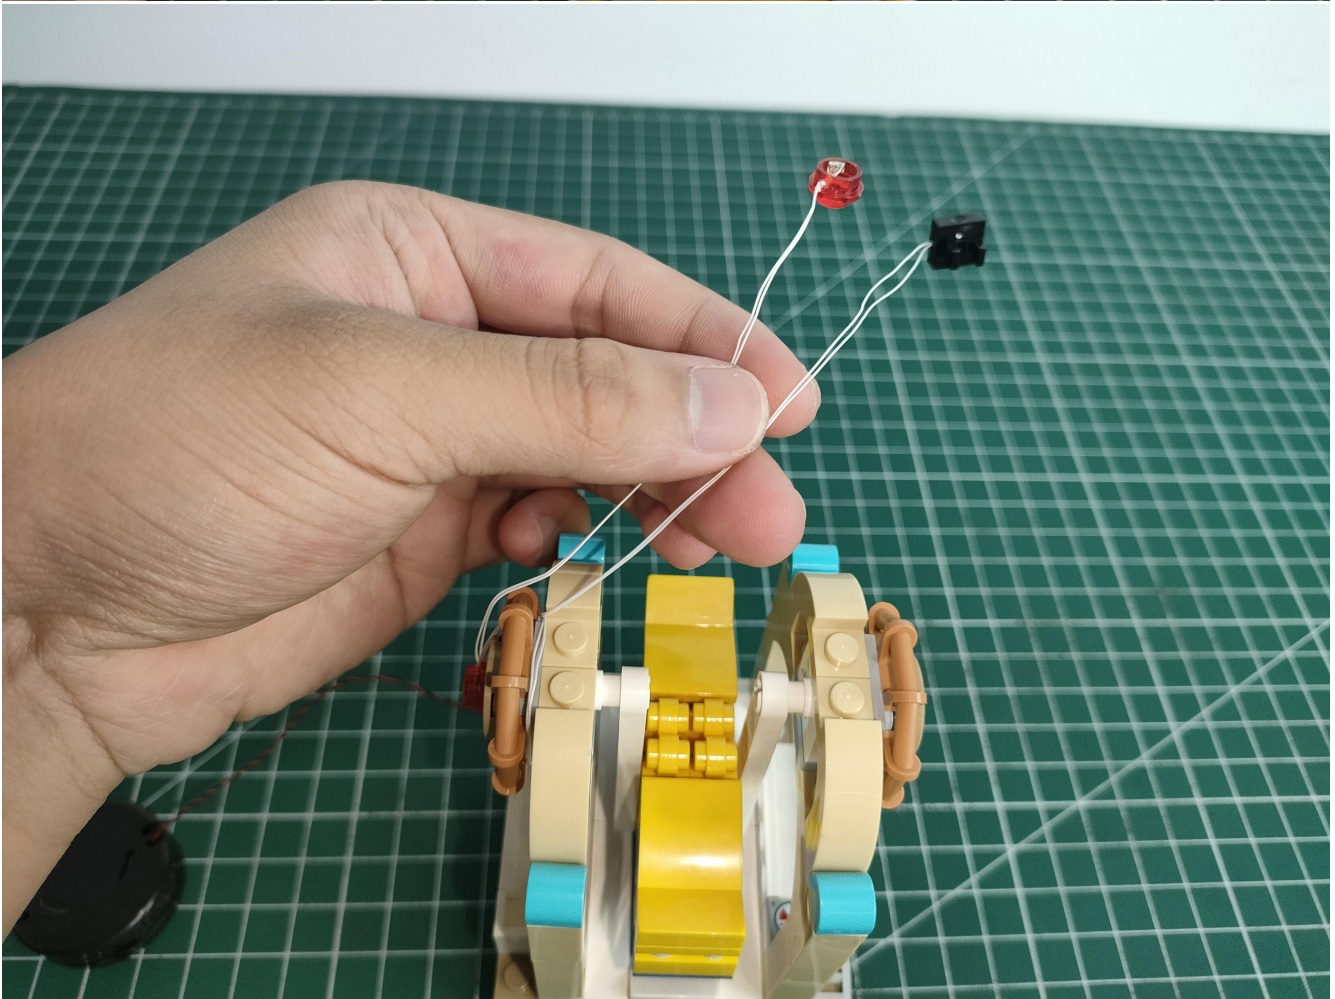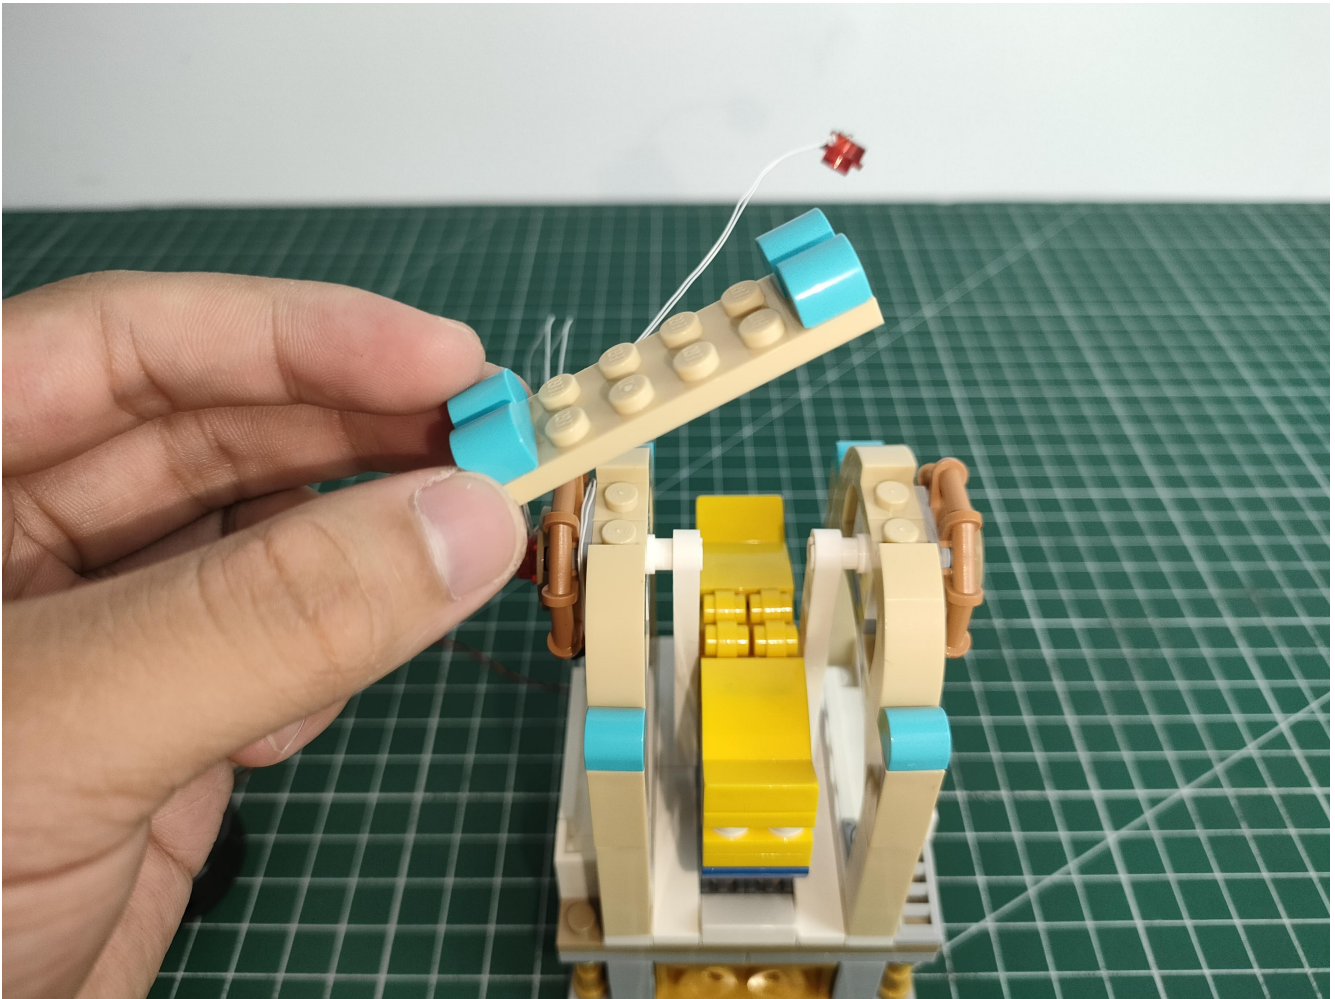


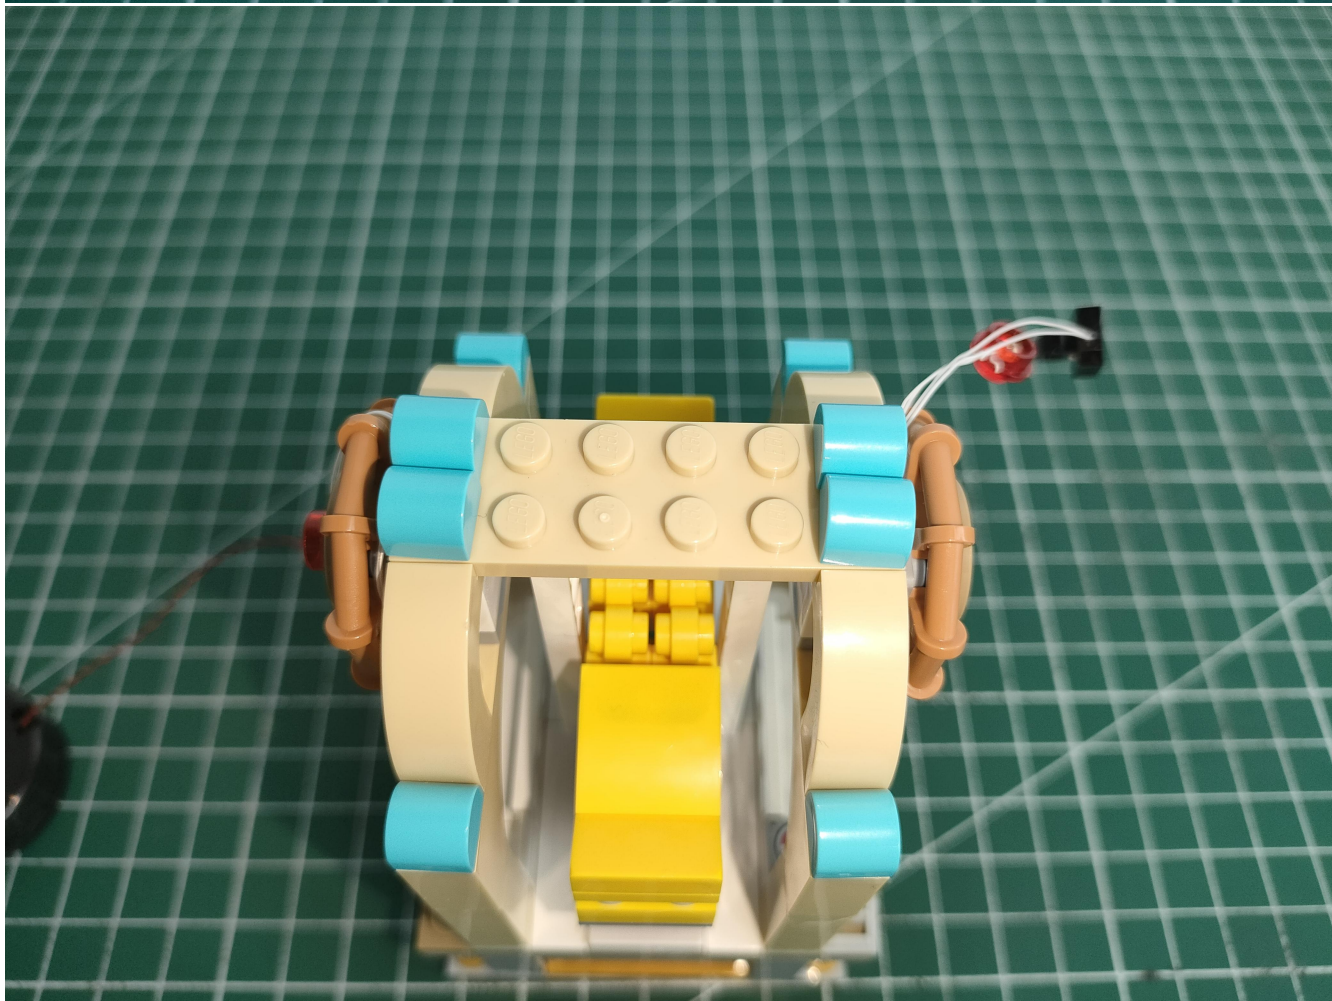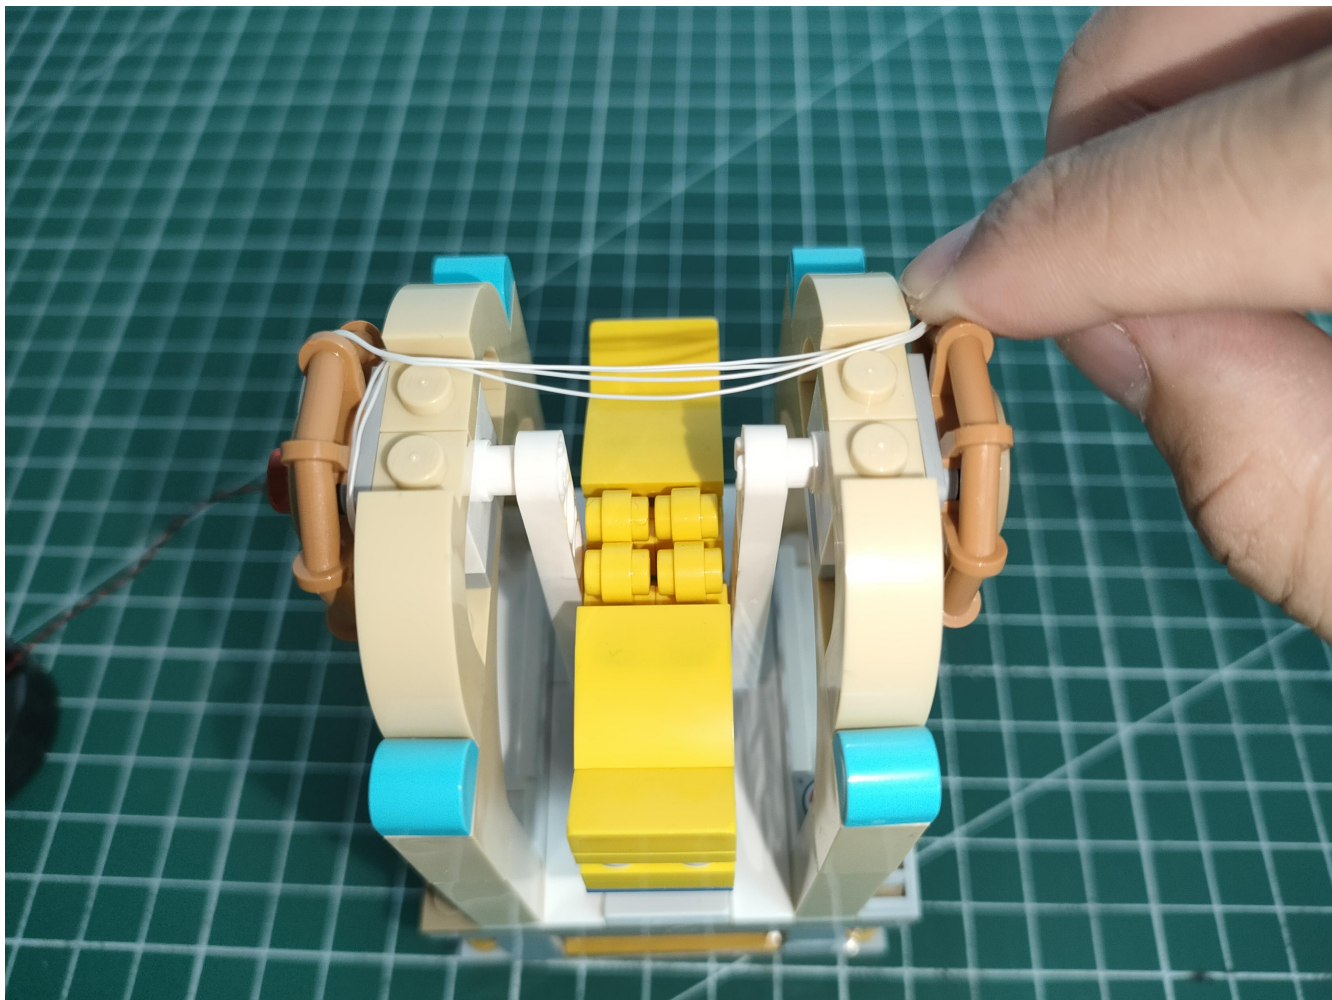

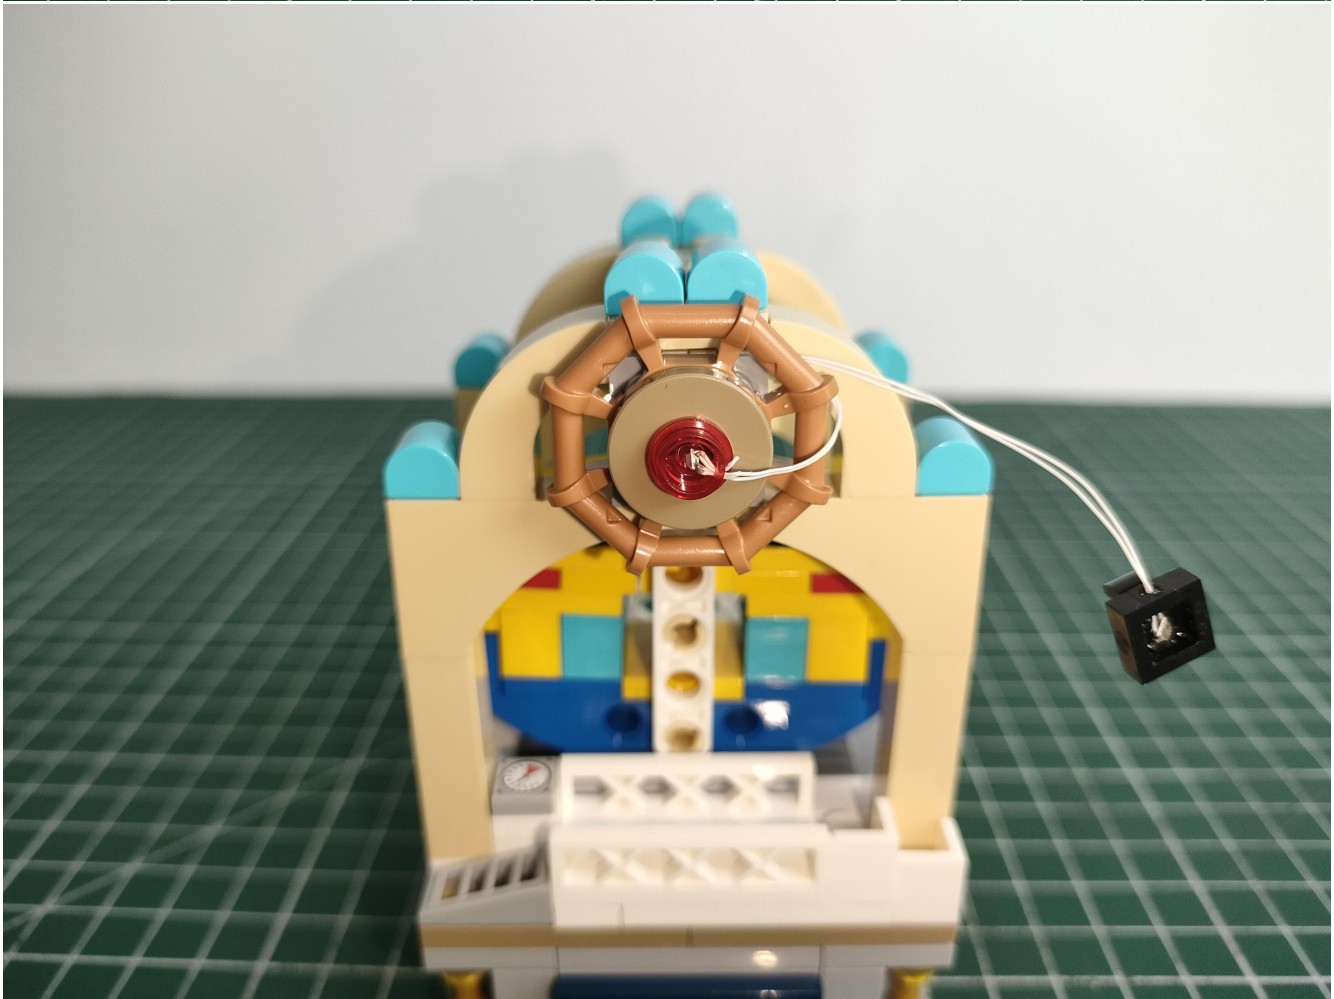

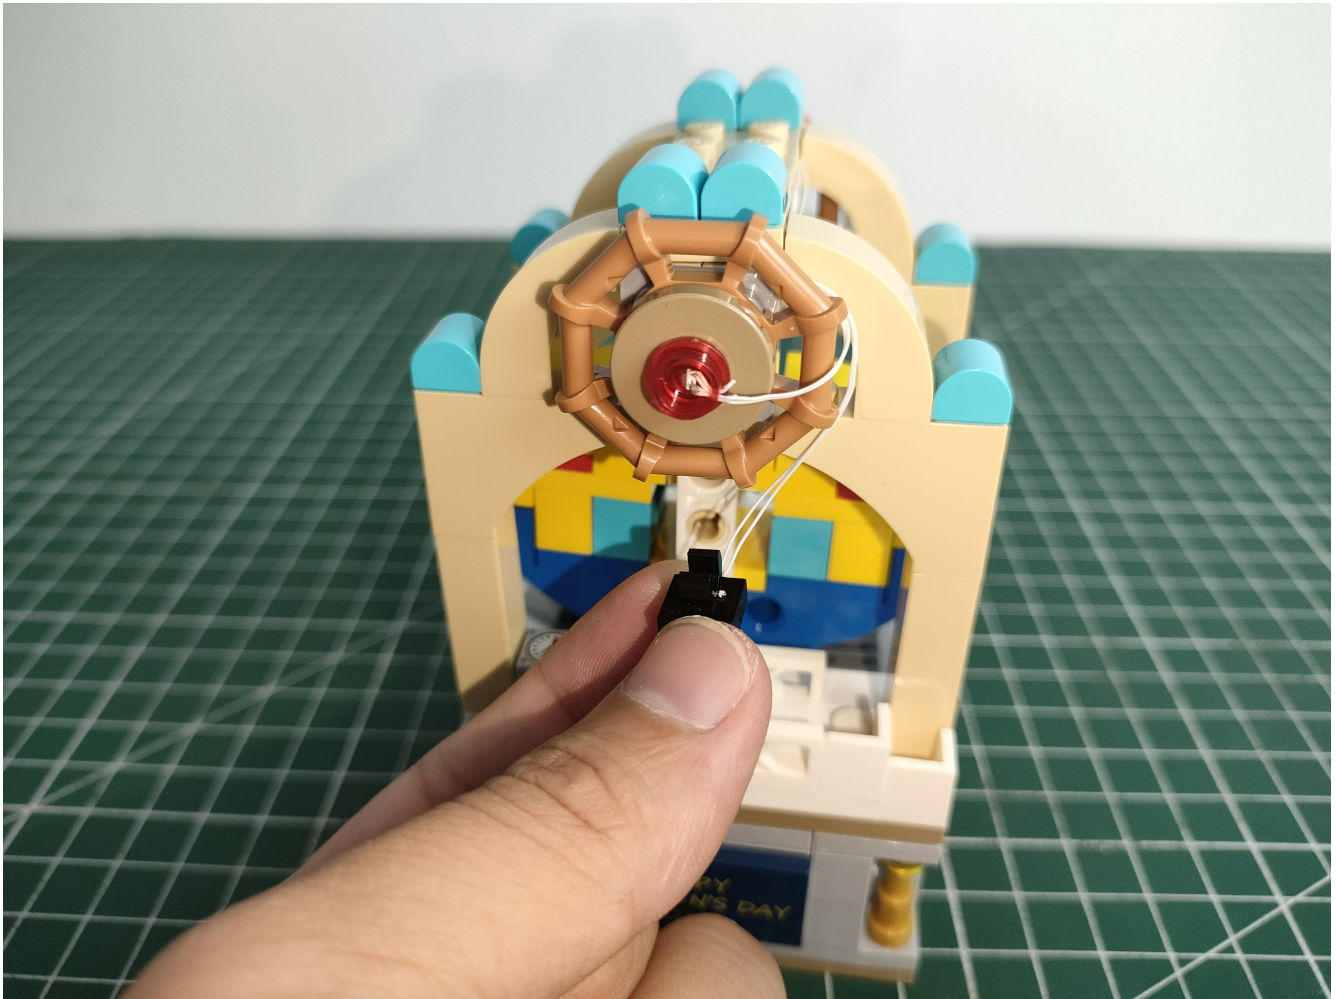

Installation is complete!

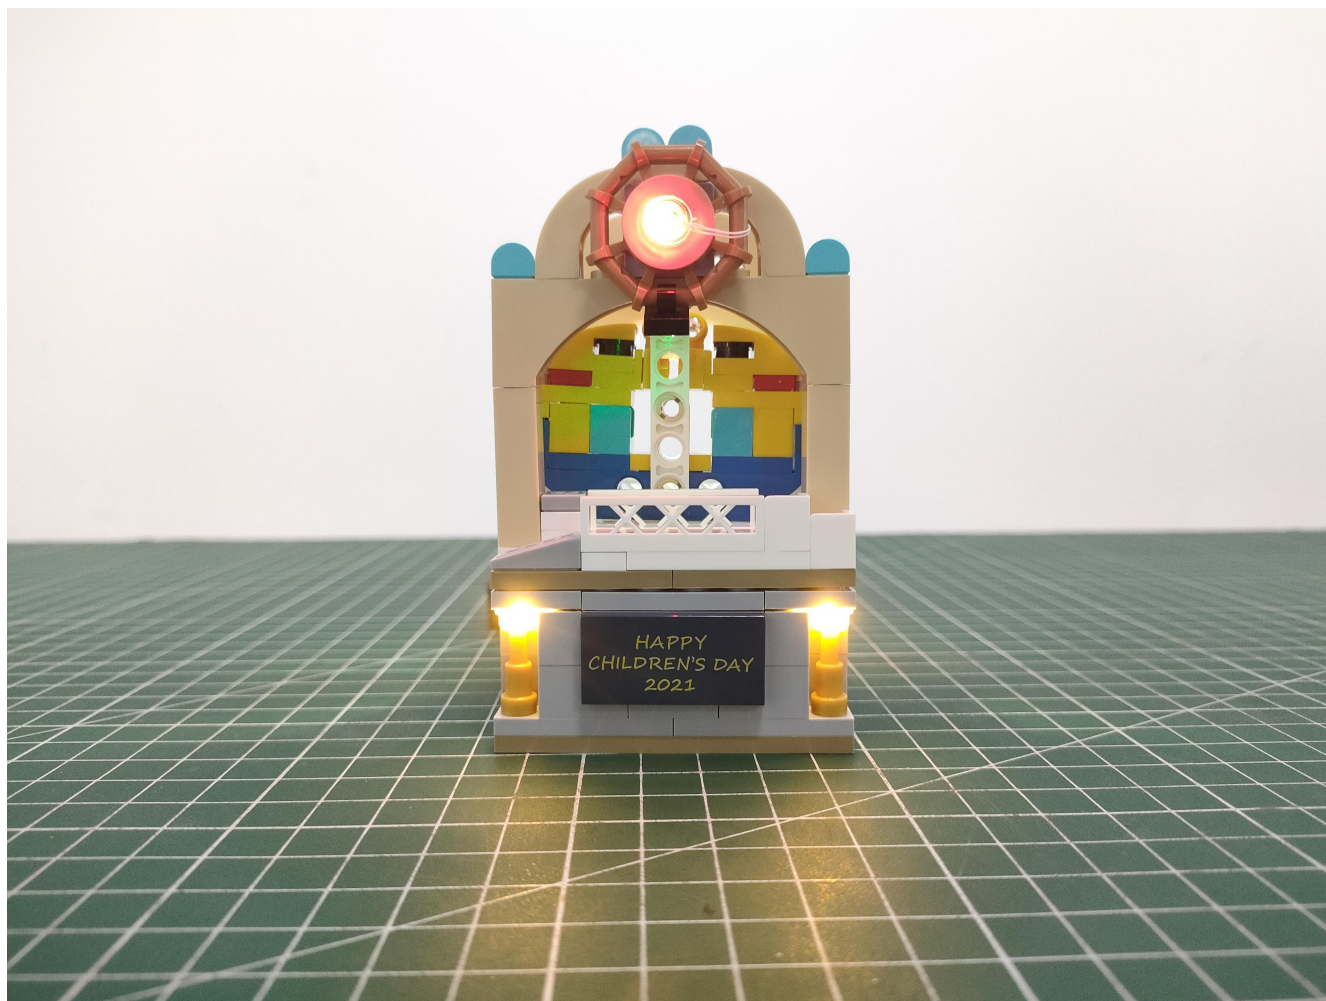

The above are ideas and instructions provided by our designers. Please move on:

- 1: Do you have any suggestions about the material and quality of our products?
- 2: Do you have any suggestions on the installation instructions and the degree of difficulty of the installation?
- 3: If you have better installation method and ideas, please contact us in time.