60266 Ocean Exploration Ship LED lighting Kit (Standard Version) LG96


Instructions for installing this kit:



Power supply mode: USB power cord (please bring your own power supply).

It can be energized through a USB battery box (please pay attention to the positive and negative poles of the battery), power bank, mobile phone charger or USB socket. The normal voltage is 3-5V.

USB connectors to connect devices

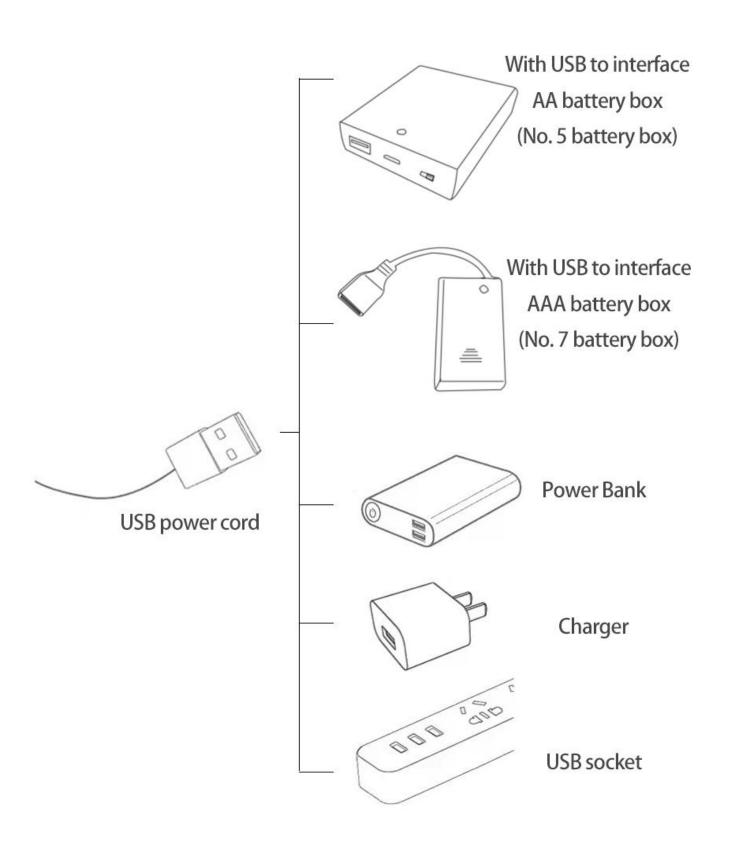

There are 4 bags of this product, and the AAA battery box is a gift. (Without battery)



Take out the accessories inside (accessories include: AAA battery box, 50cm USB power cord). The following power supply methods use mobile power, equipped with a USB power cord, and the battery box (battery self-supplied) can be used by yourself.



Take out the AAA battery box.




Flip to the back of the battery box.




Slide up to remove the battery cover.



Install 3 AAA batteries (note the positive and negative poles).

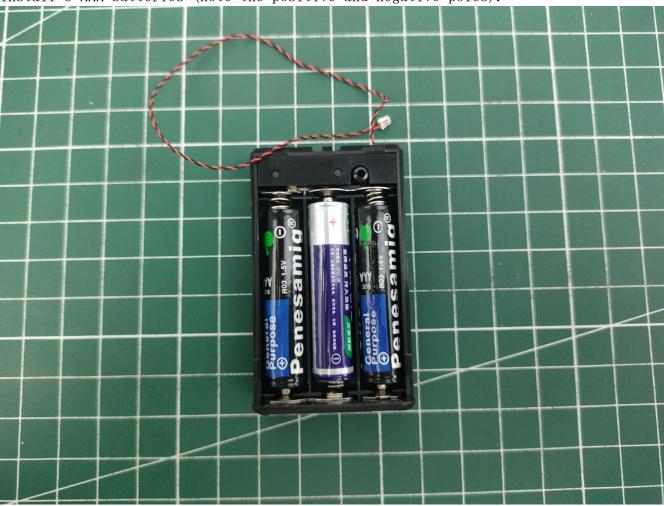

Slide down to install the battery cover.

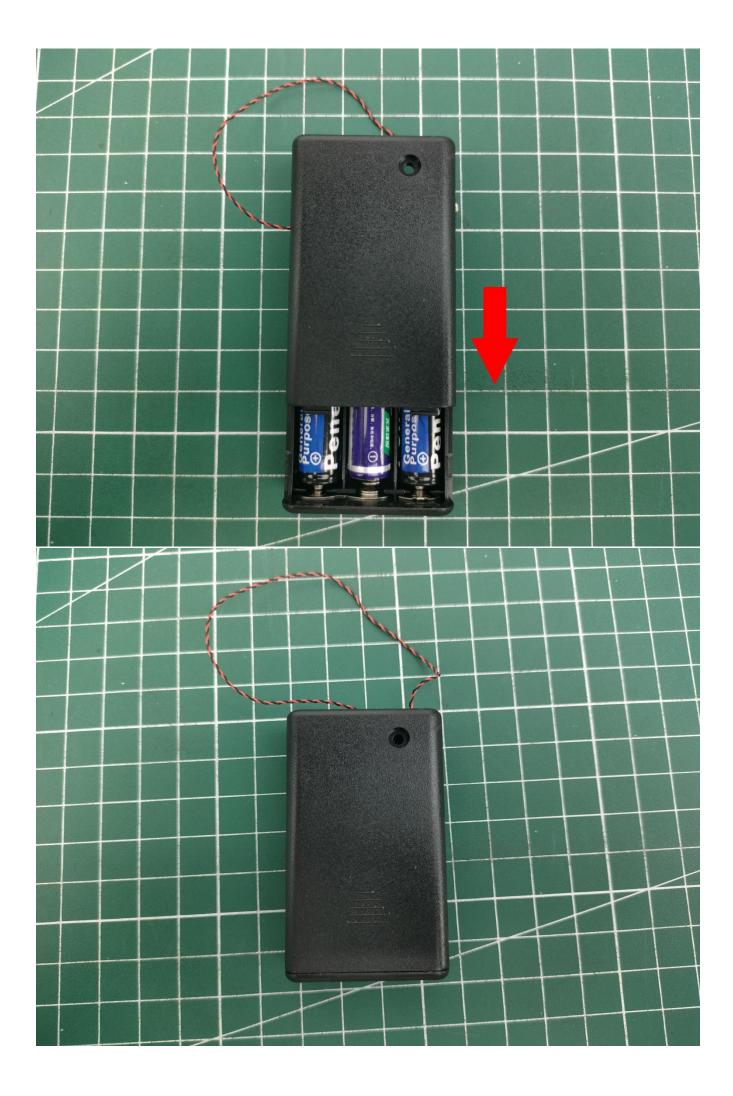


Take out the beige small bag from bag 3.




Take out one 8-seater expansion board.




The two are connected through the interface, the connection method is as follows.








Connect the expansion board and the battery box.

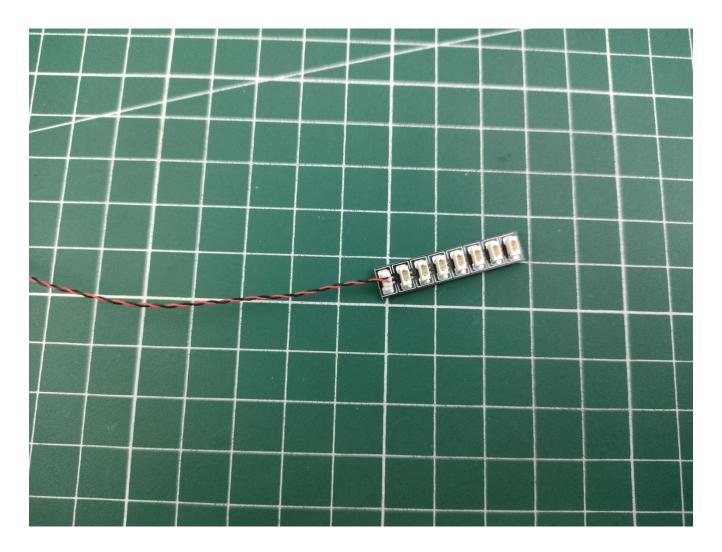

Take out the lighting from the No. 1 bag.




Connect the lighting to the 8-seater expansion board.

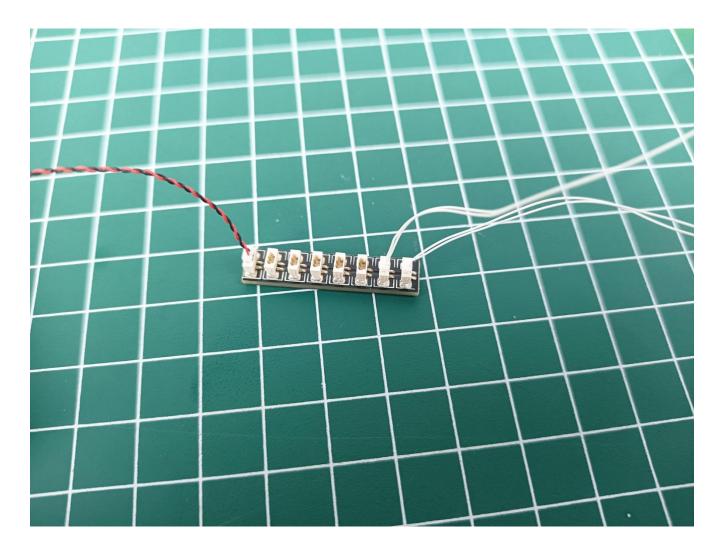


Take out the lighting from the No. 2 bag.




Connect the lighting to the 8-seater expansion board.

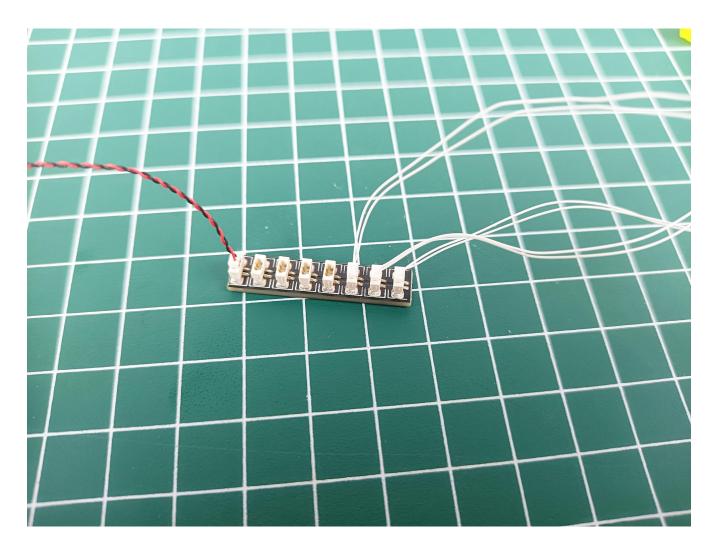


Turn on the battery box switch.

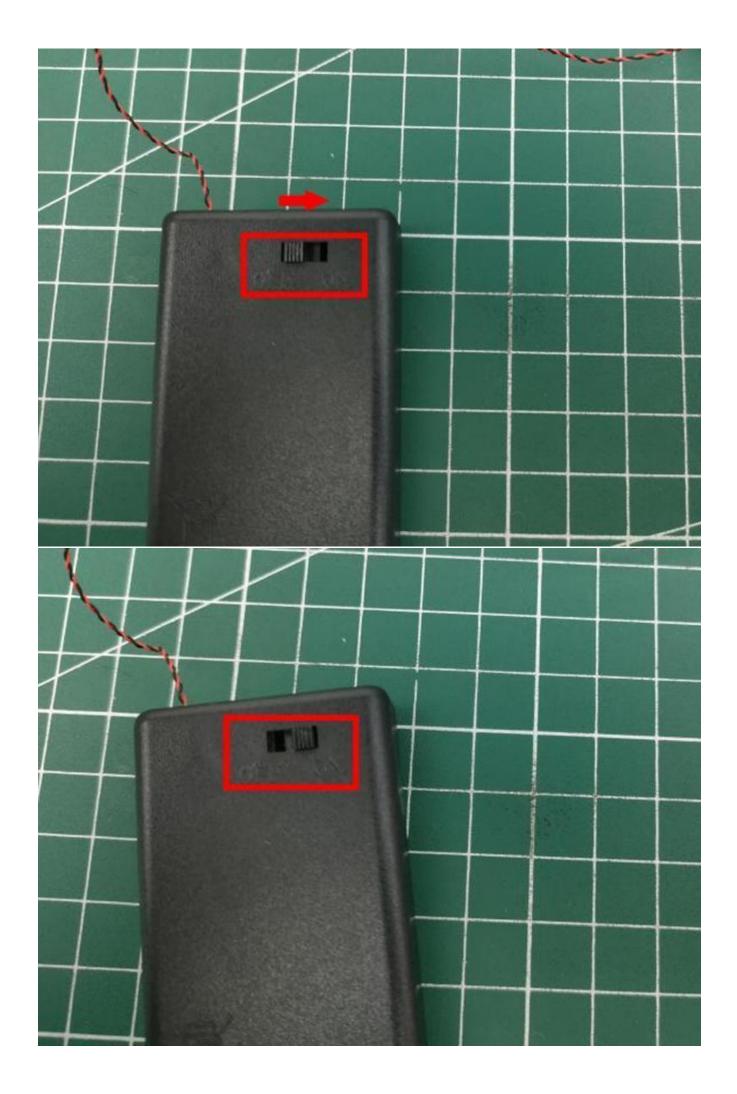

Test whether the lighting can work normally. (Note: If the lighting fails to work normally, please contact us in time).

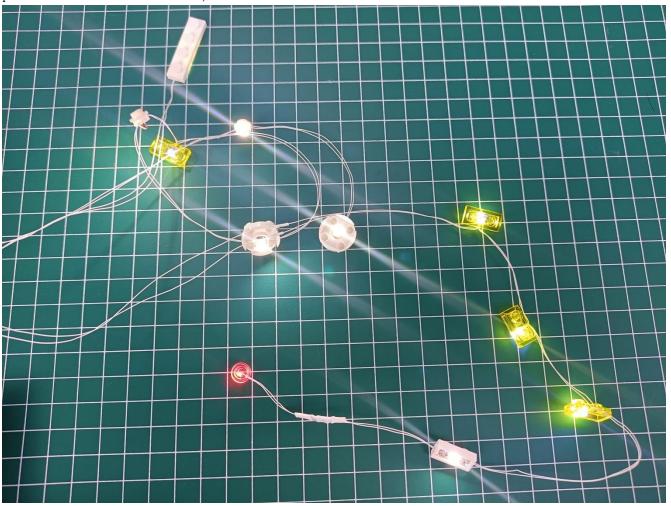

Separate the AAA battery box and the 8-seat expansion board.

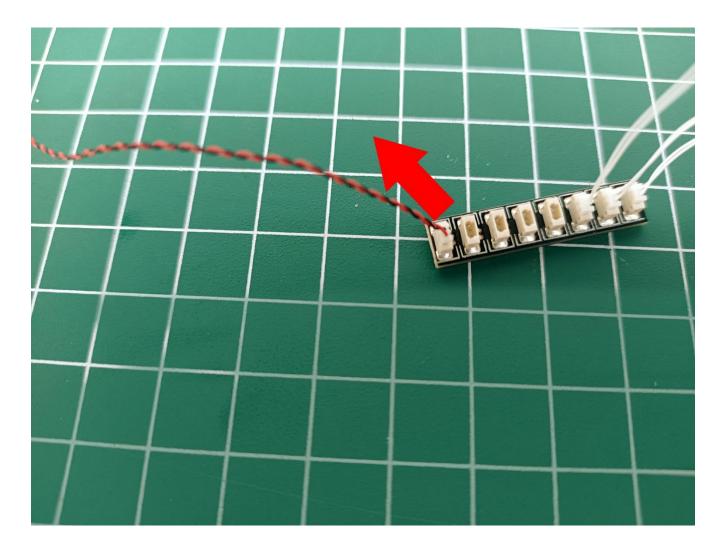

Put the AAA battery box back into the bag.




Take out the $50 \, \mathrm{cm}$ USB power cord.




Connect the USB power cord to the power bank.



Connect the USB power cord to the 8-seater expansion board.

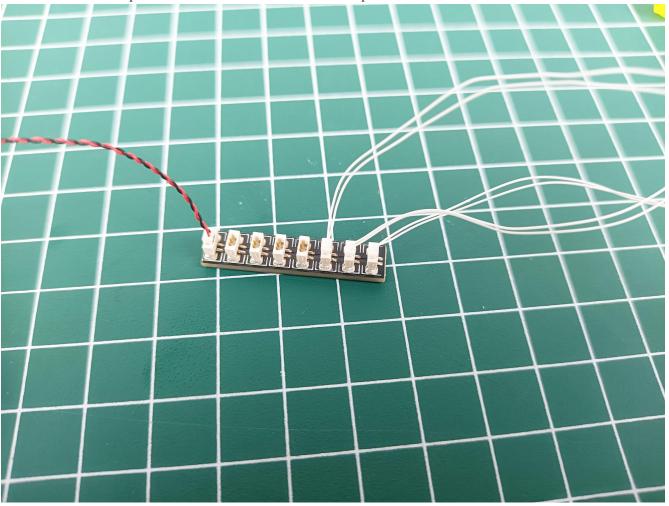

Turn on the power bank switch to test whether the lighting can work normally. (Note: If the lighting fails to work normally, please contact us in time).

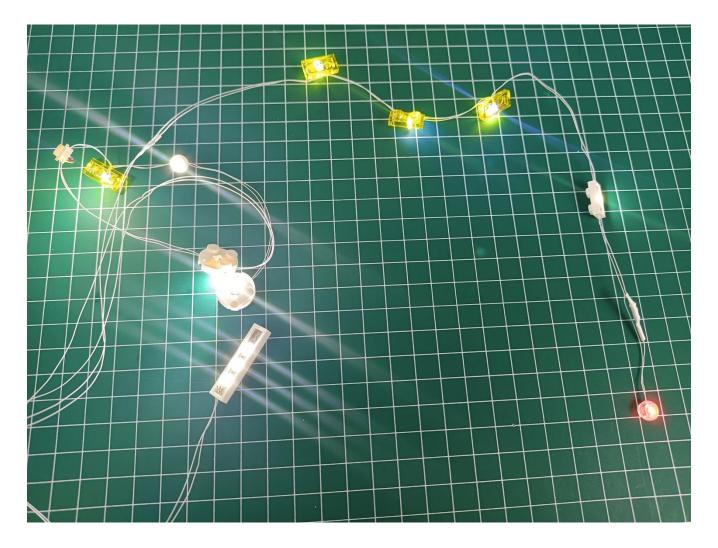


Remove all the lamp wires and put them back in the corresponding bag.



Remove the remaining parts and put them back in the corresponding bags.

Note:


Please be careful when installing. The lamp wire is relatively slender and cannot be pressed on the raised position of the building block. It should pass along the gap, otherwise the lamp wire will be pinched.

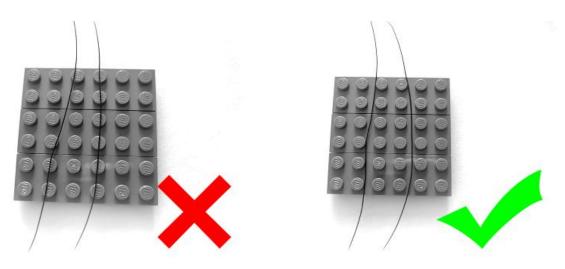


start installation:







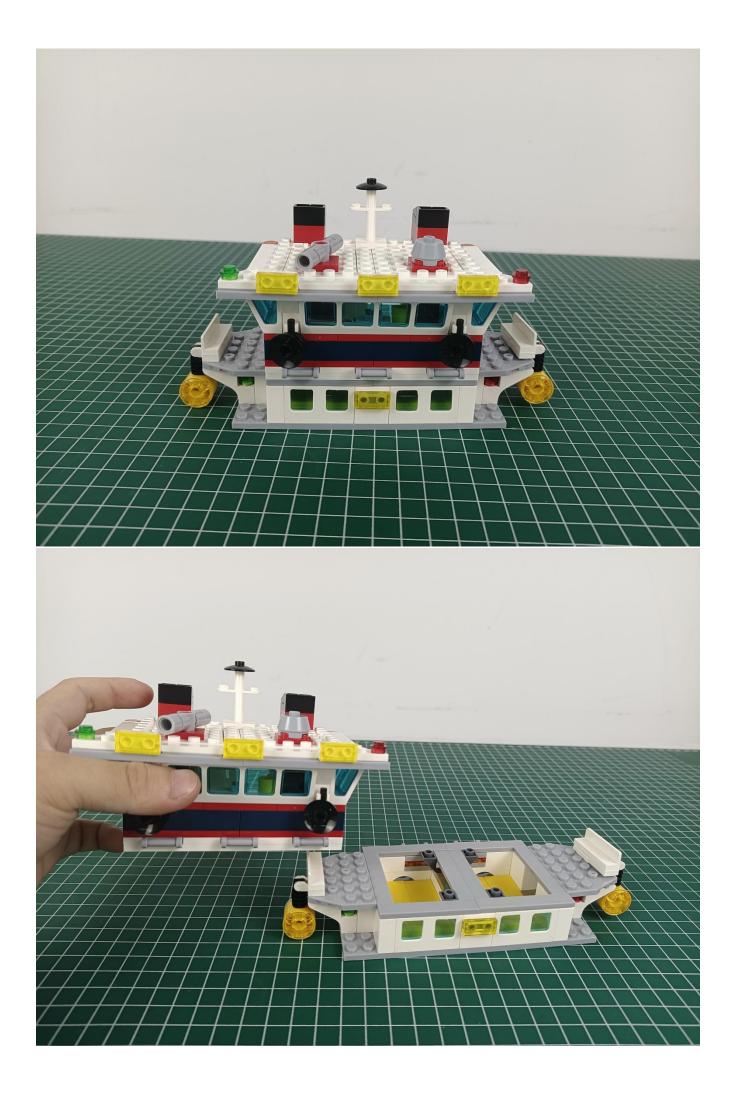


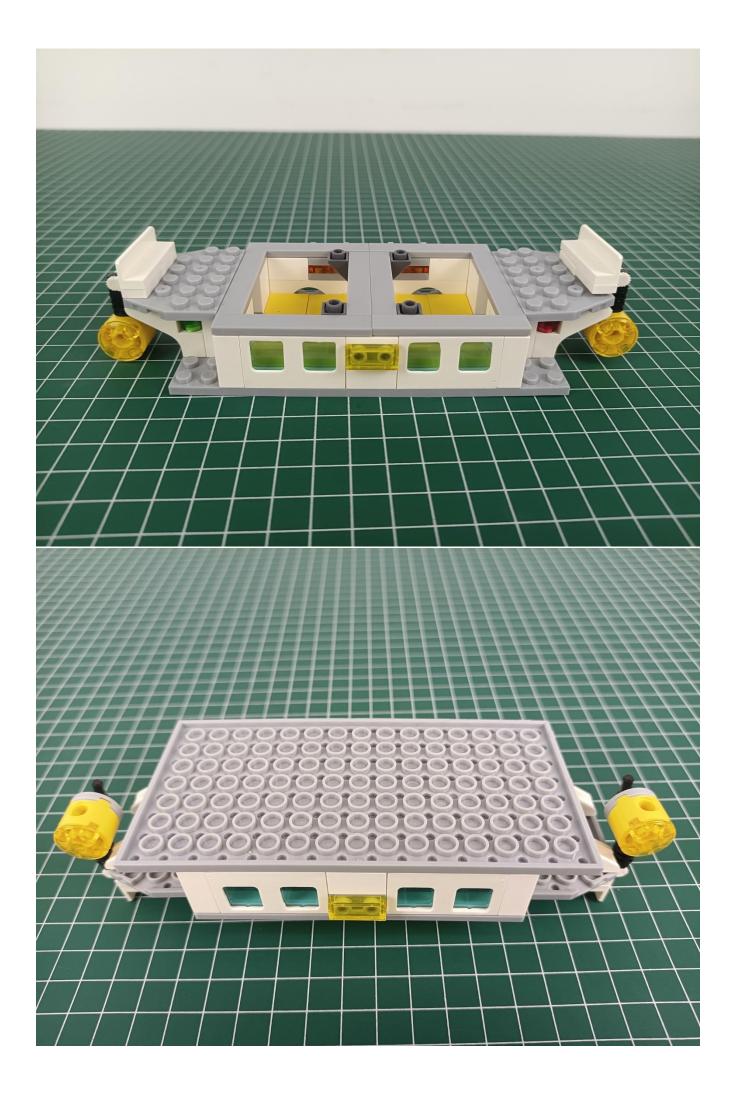





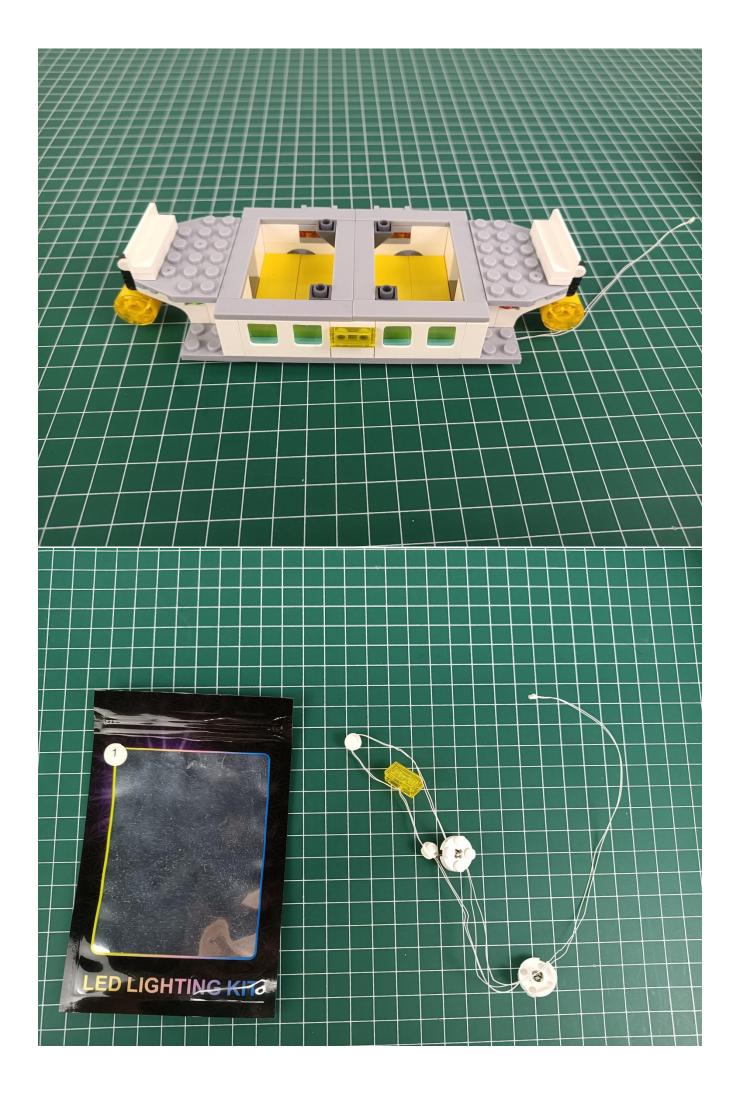


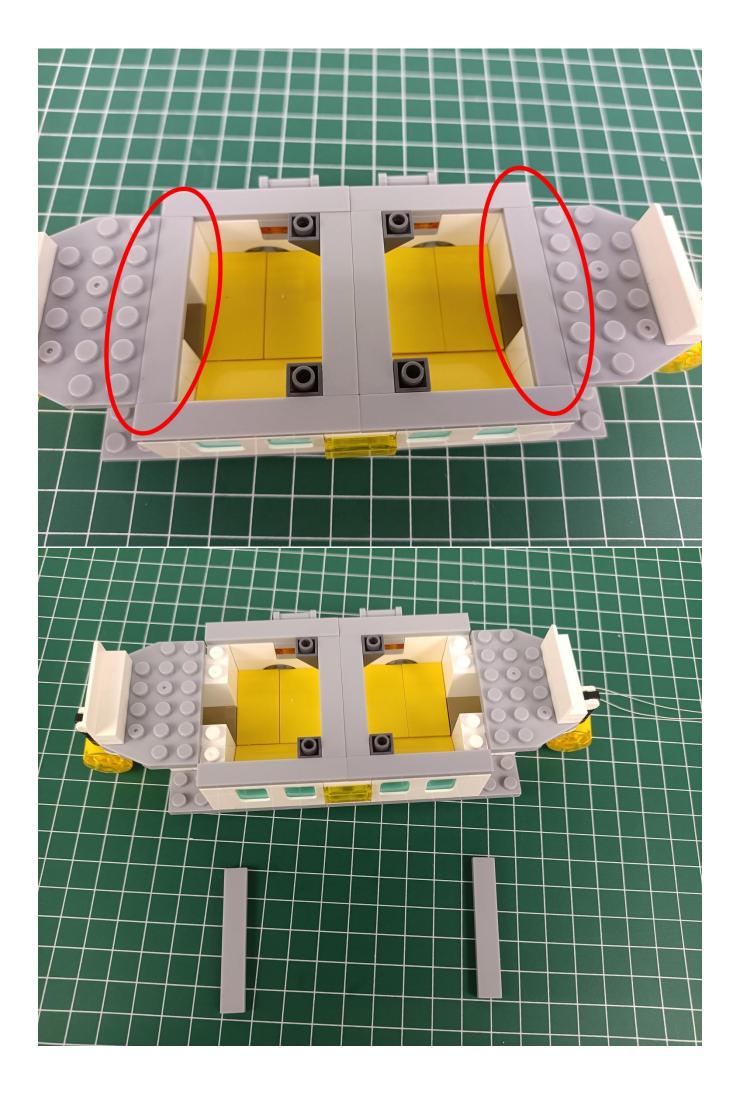


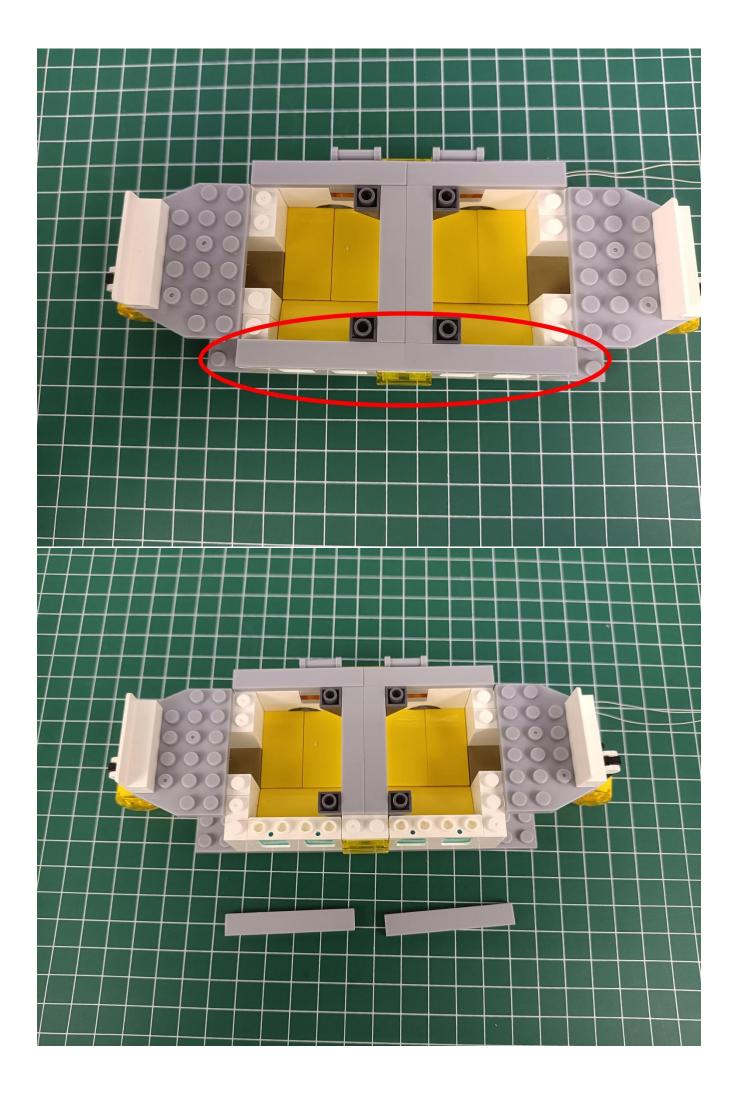


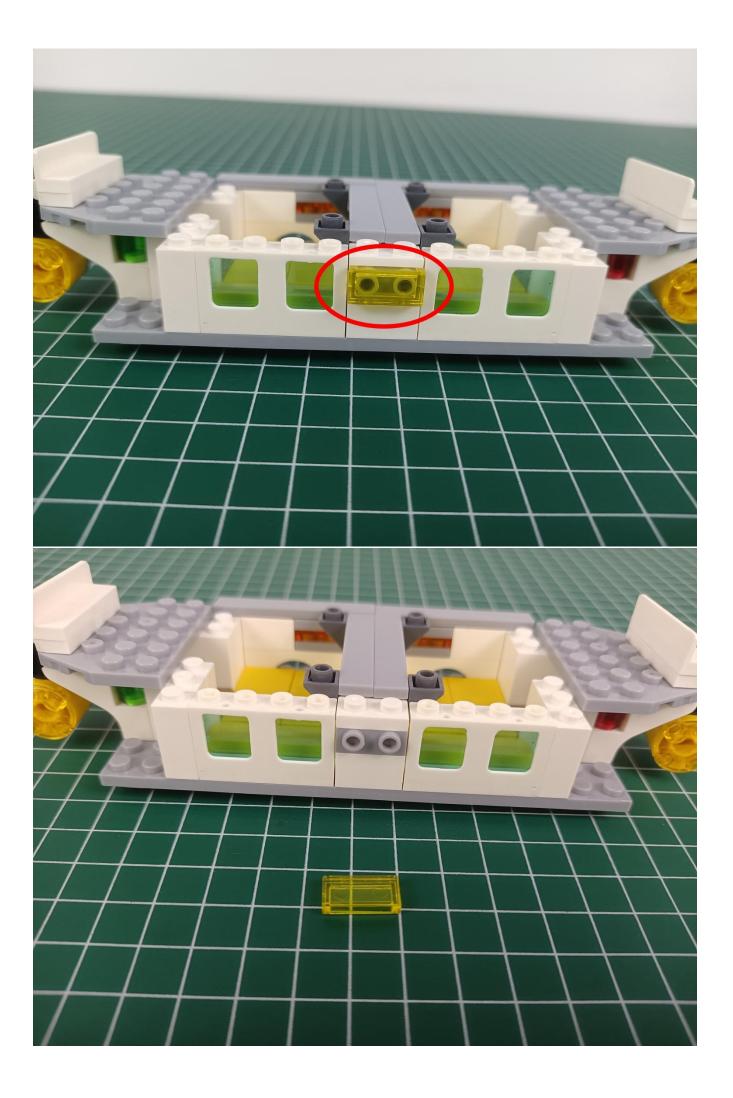


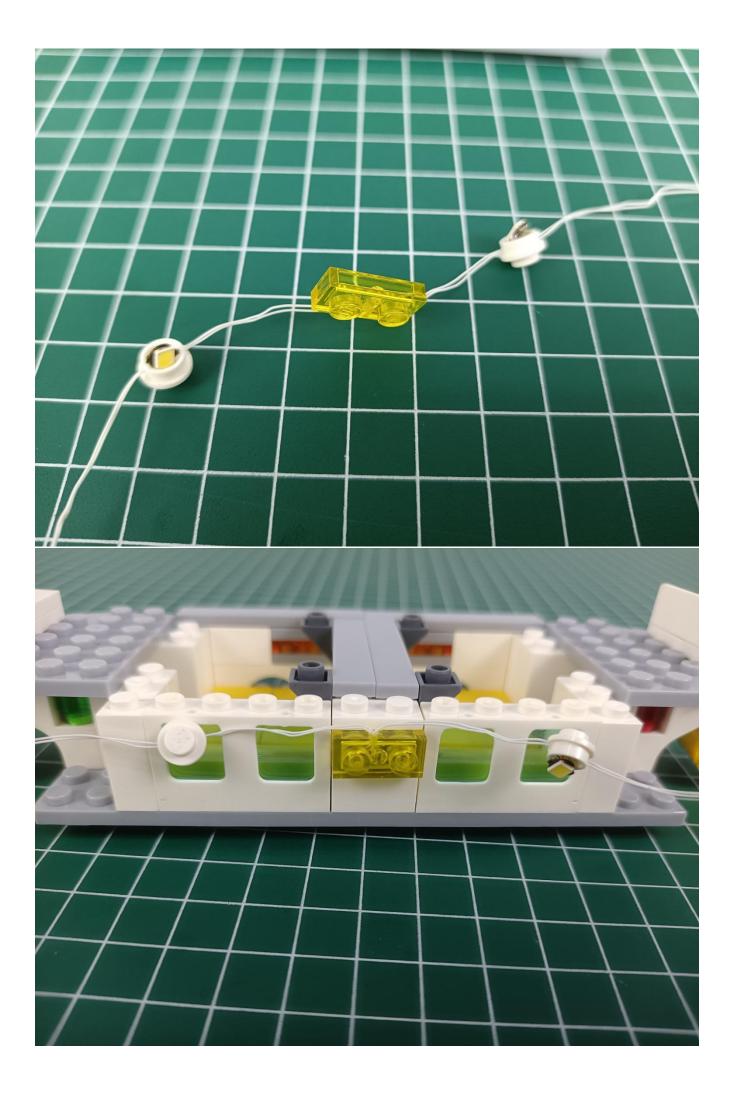


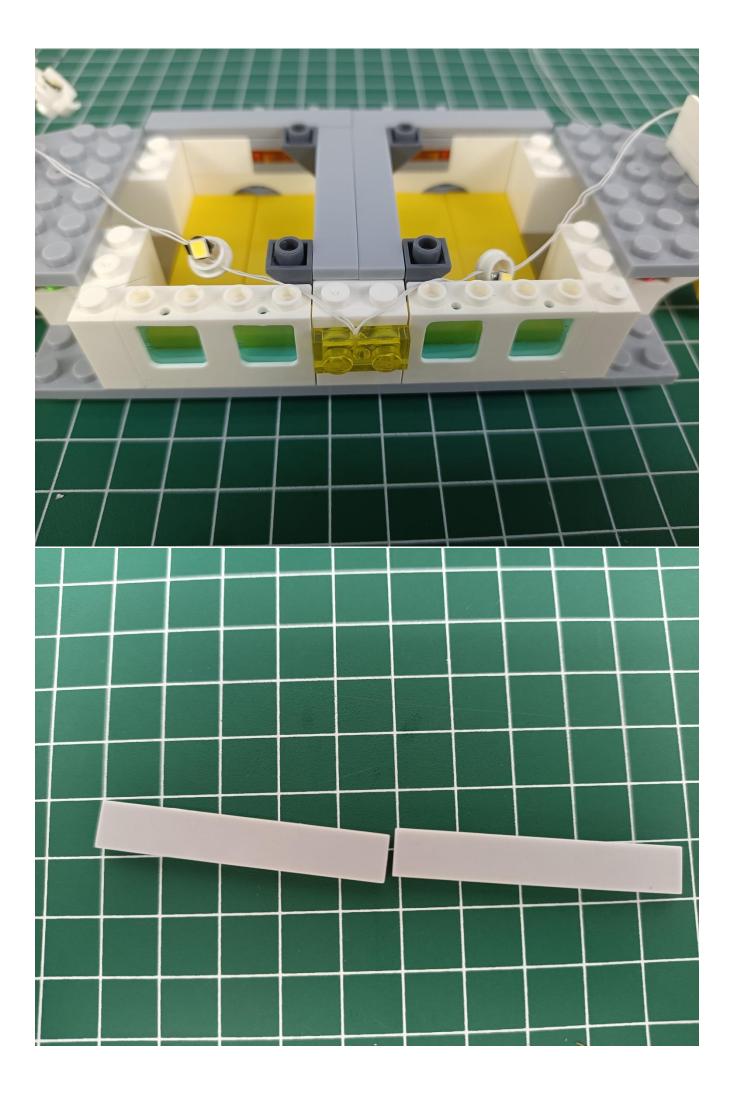


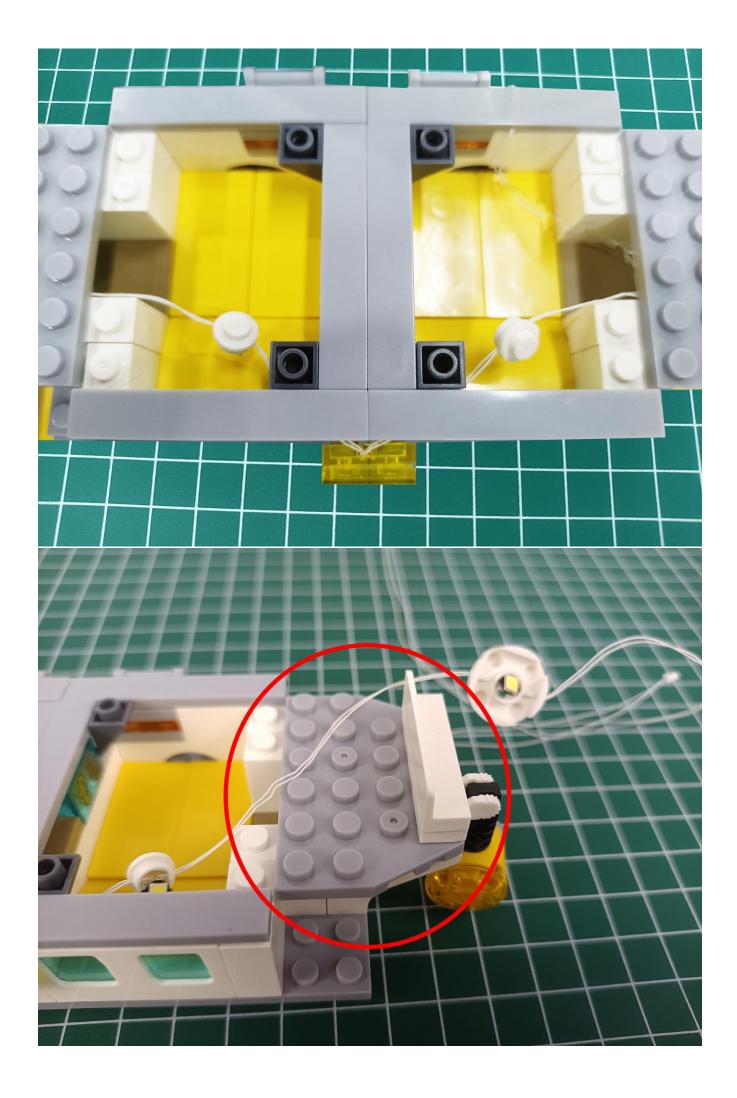


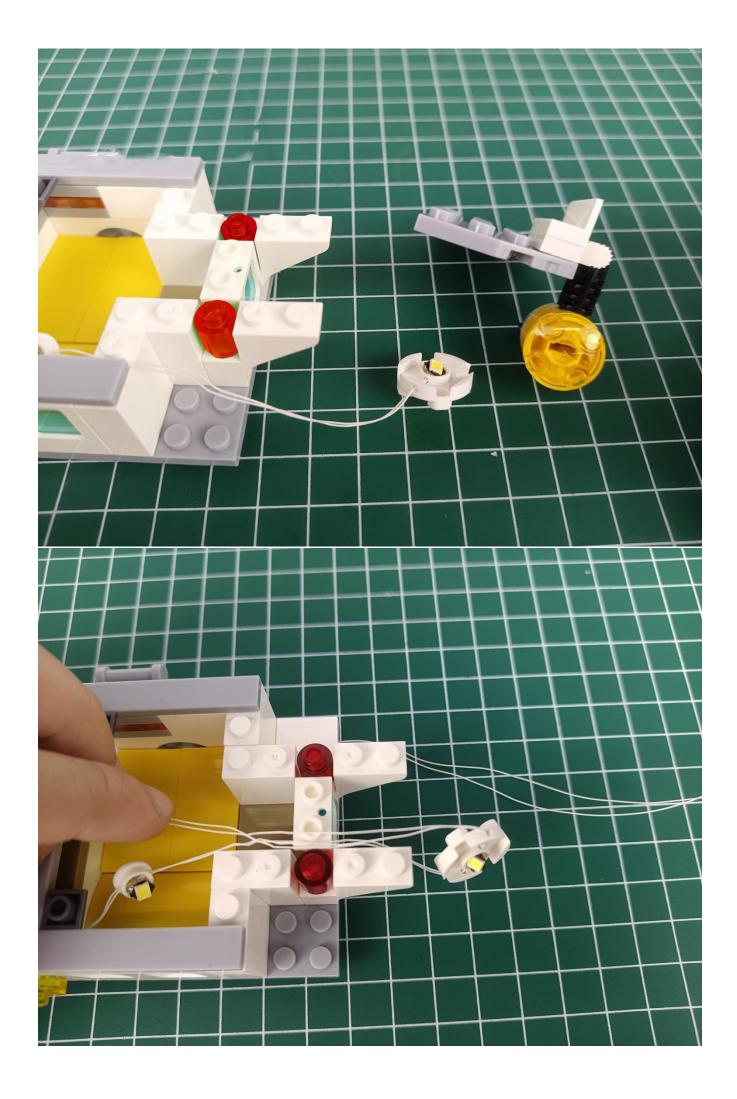


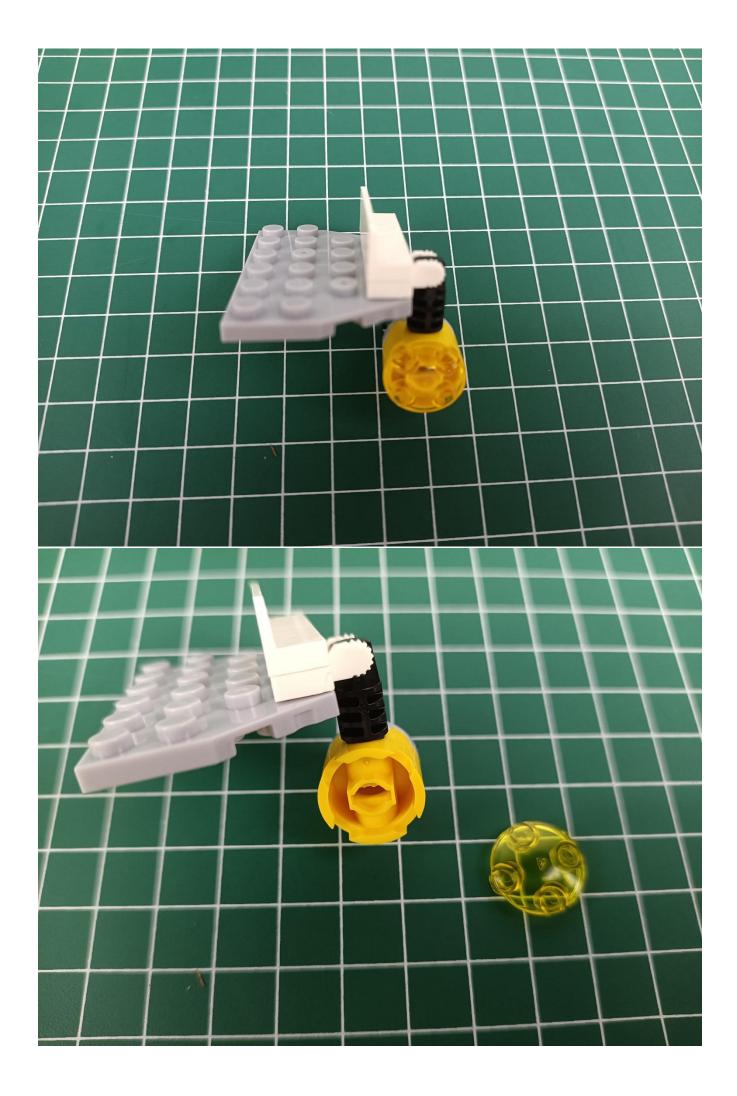


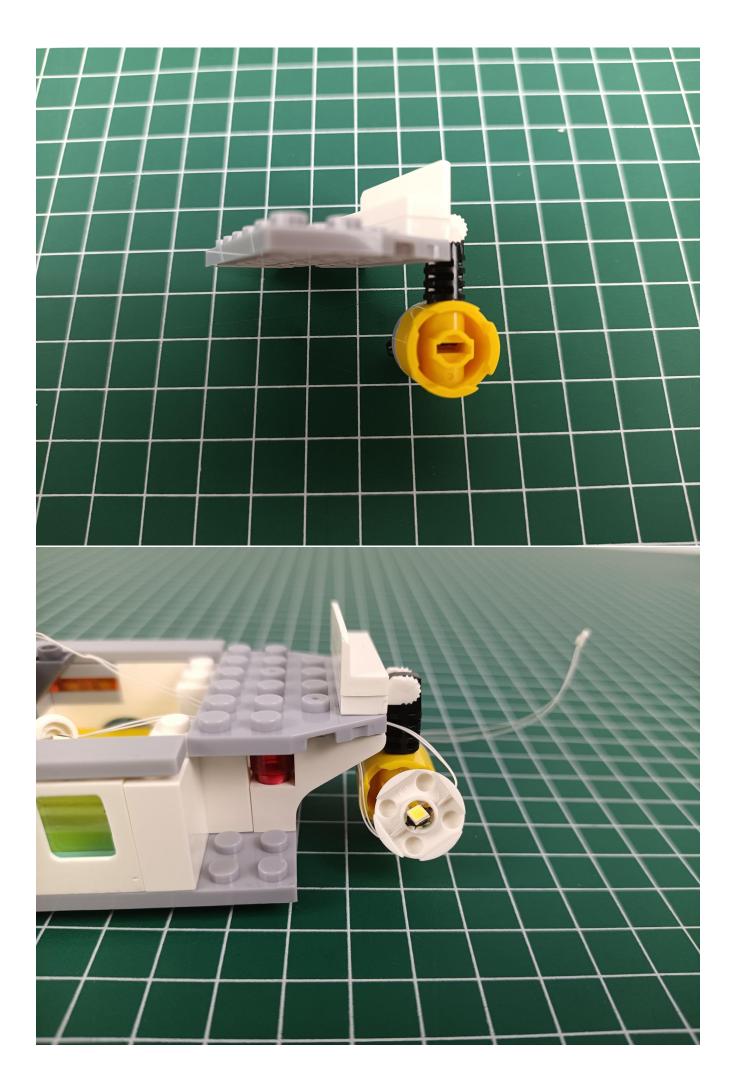


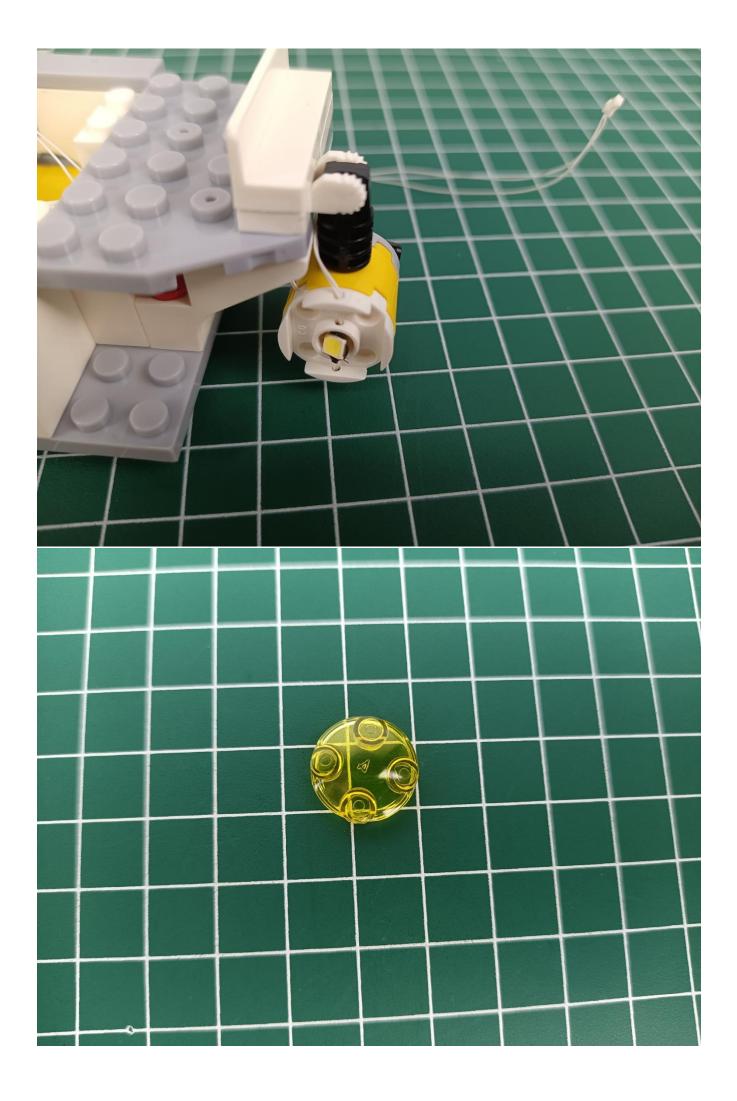


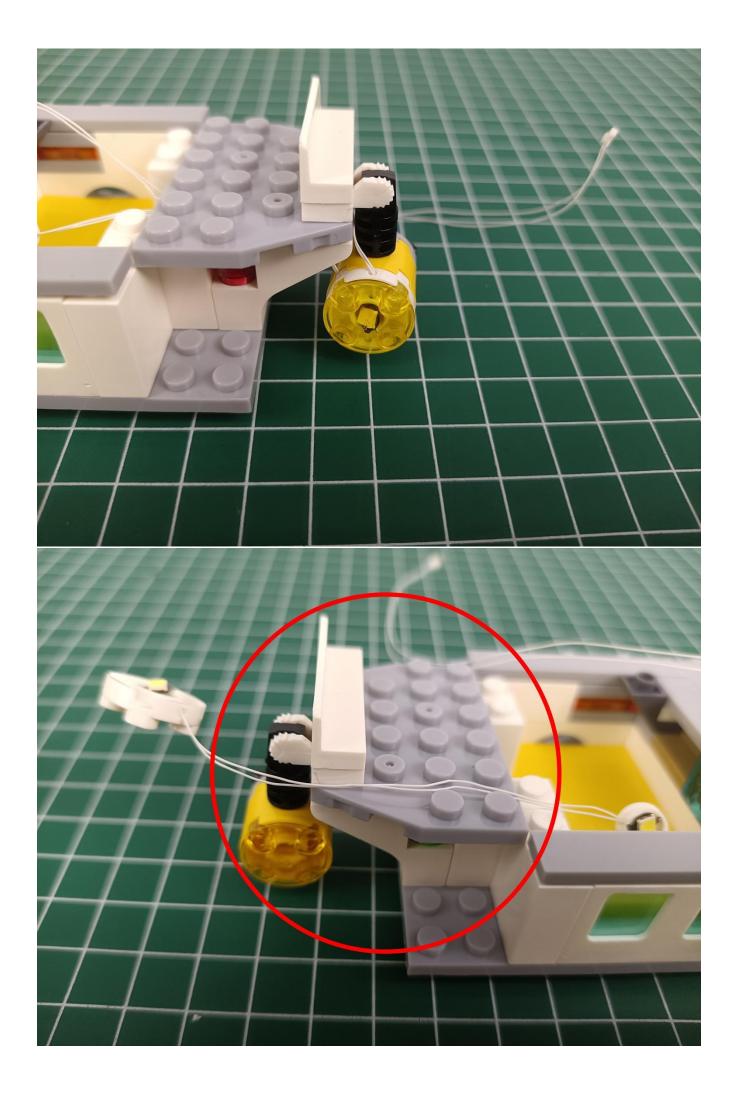

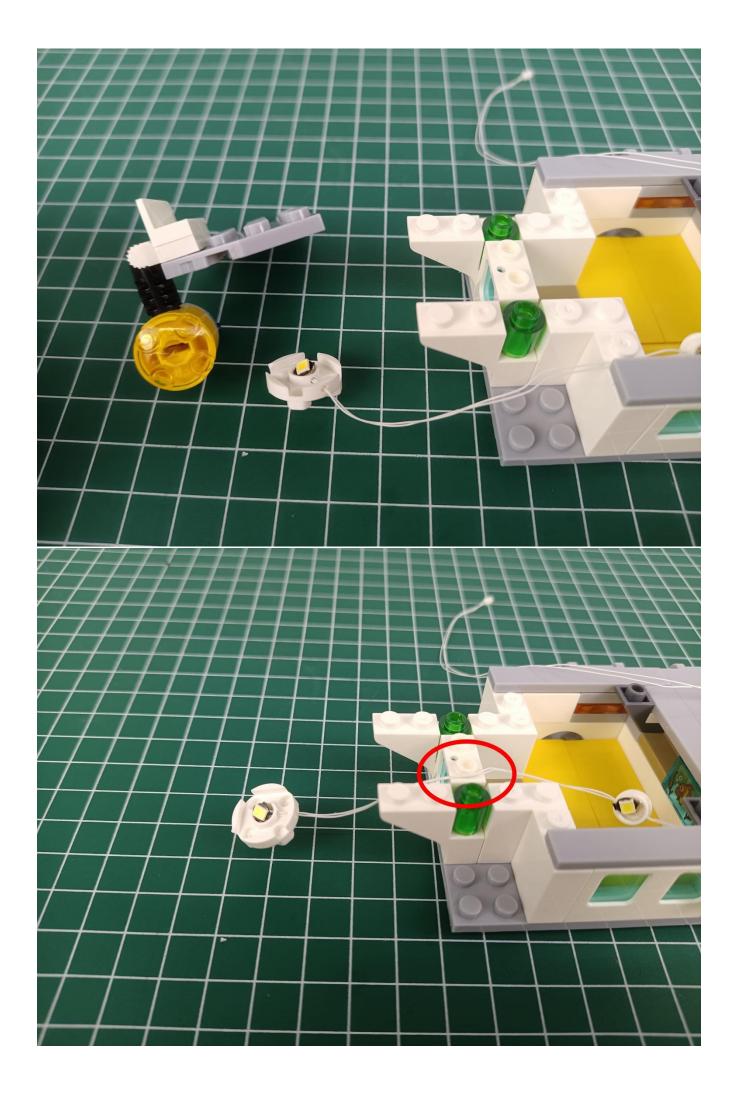


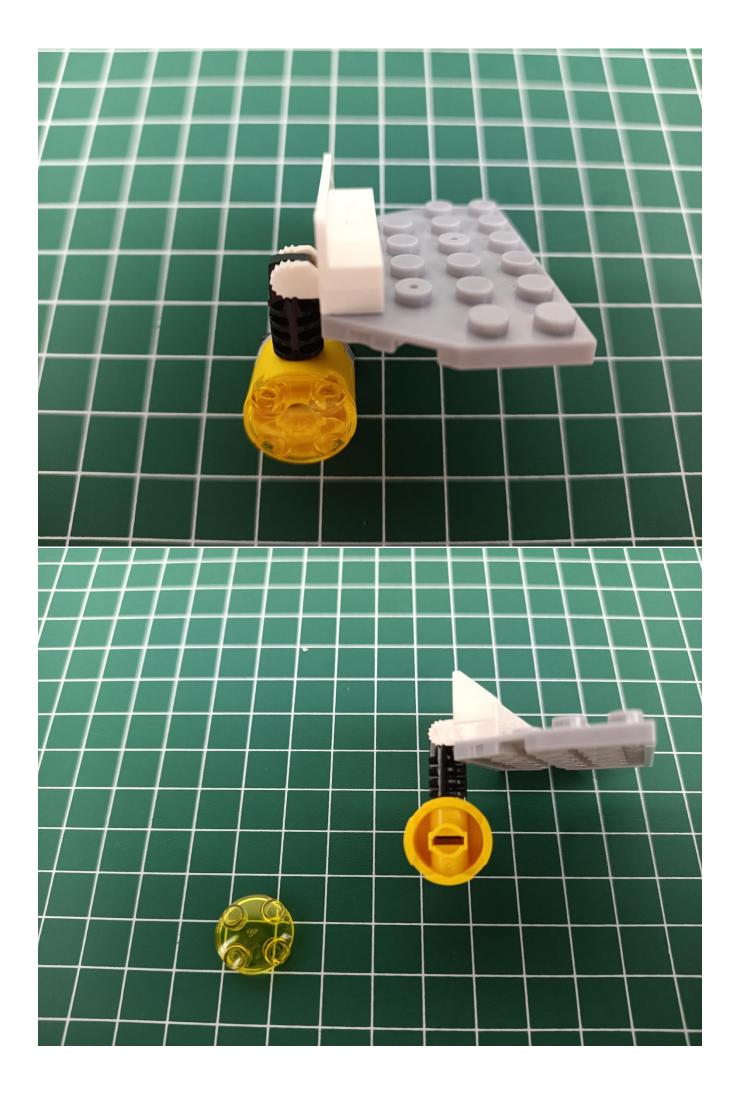


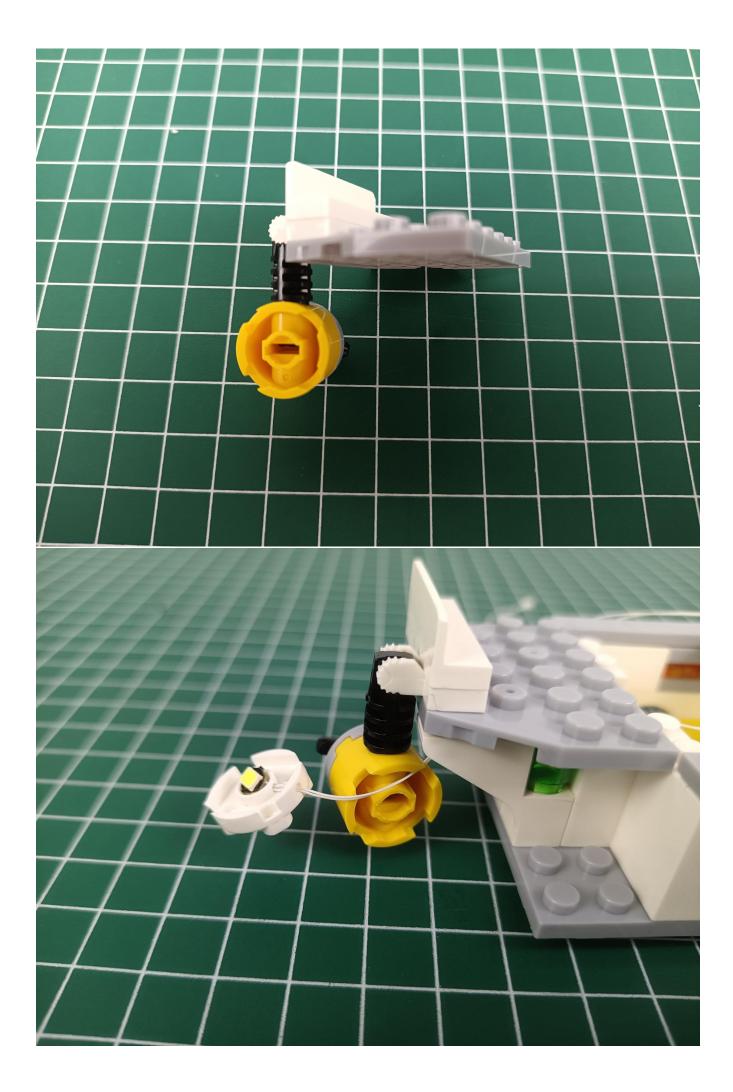


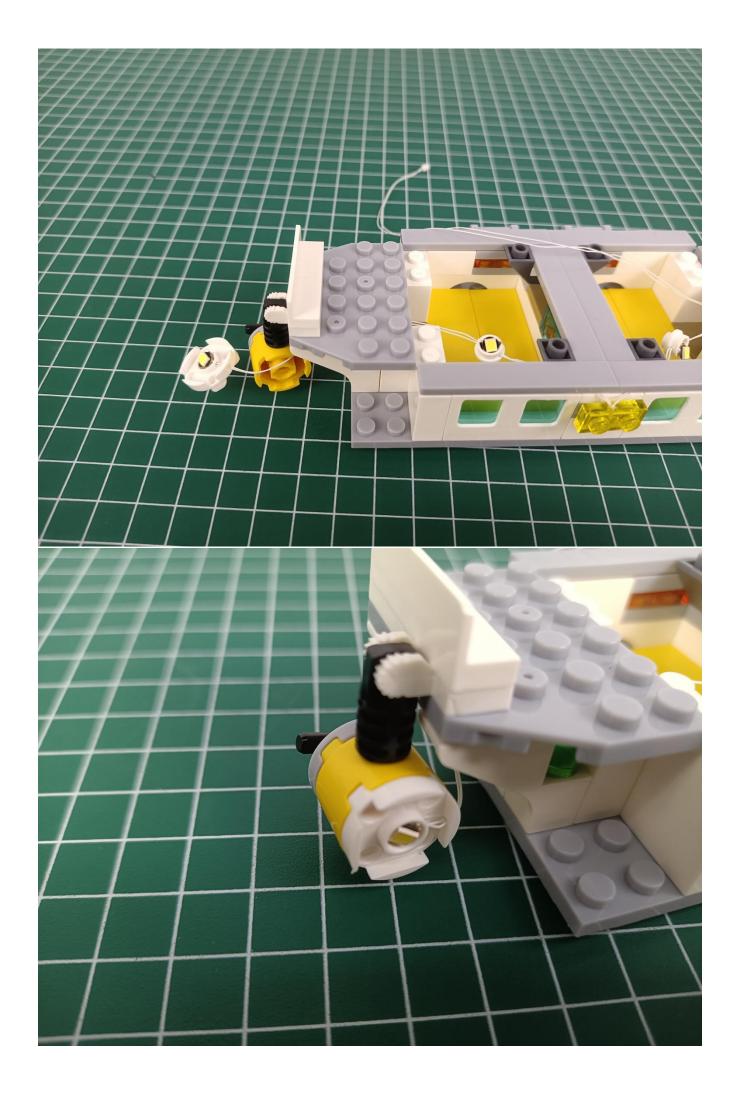





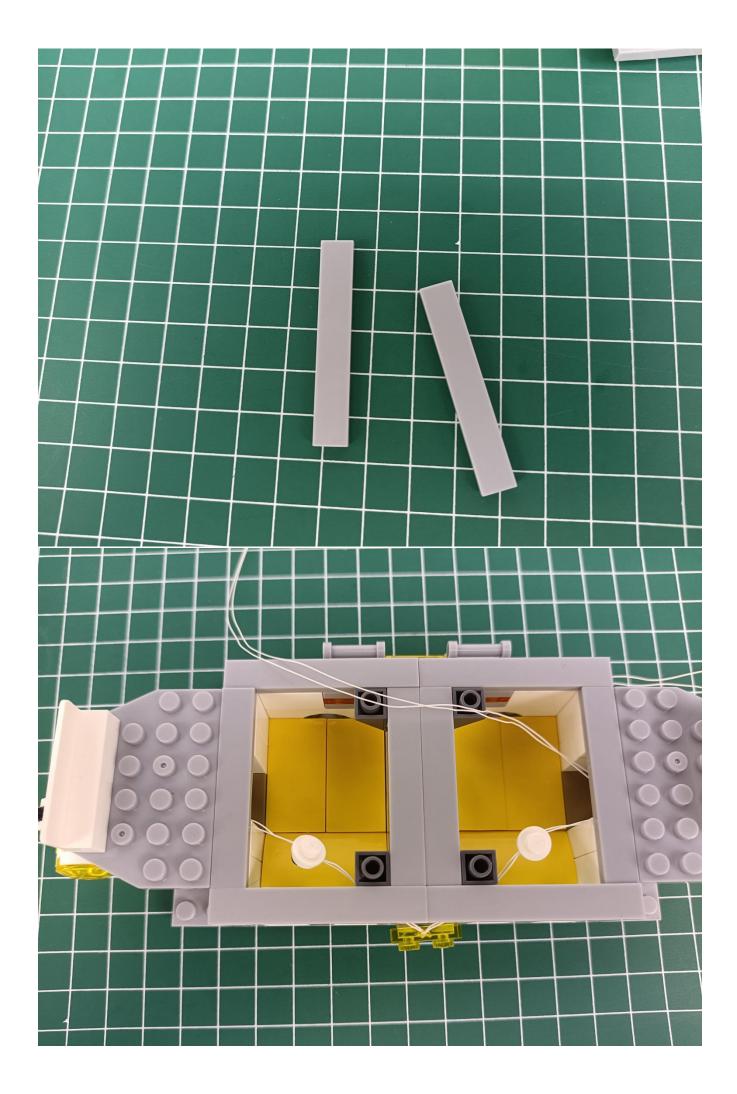


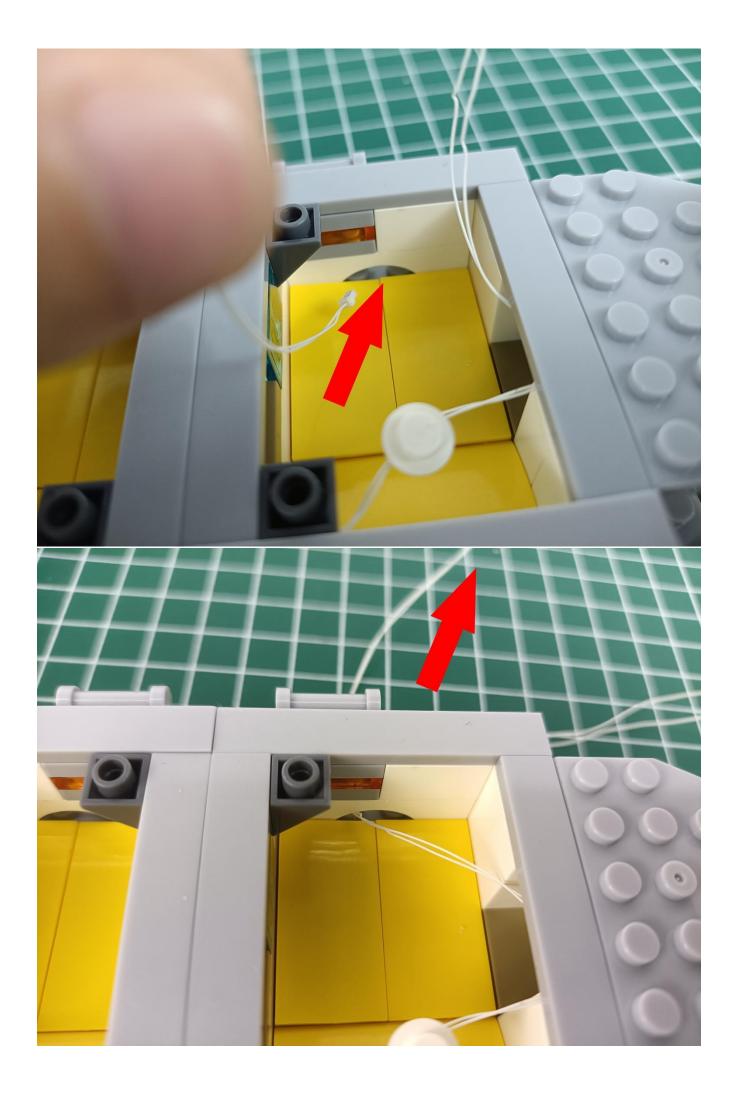


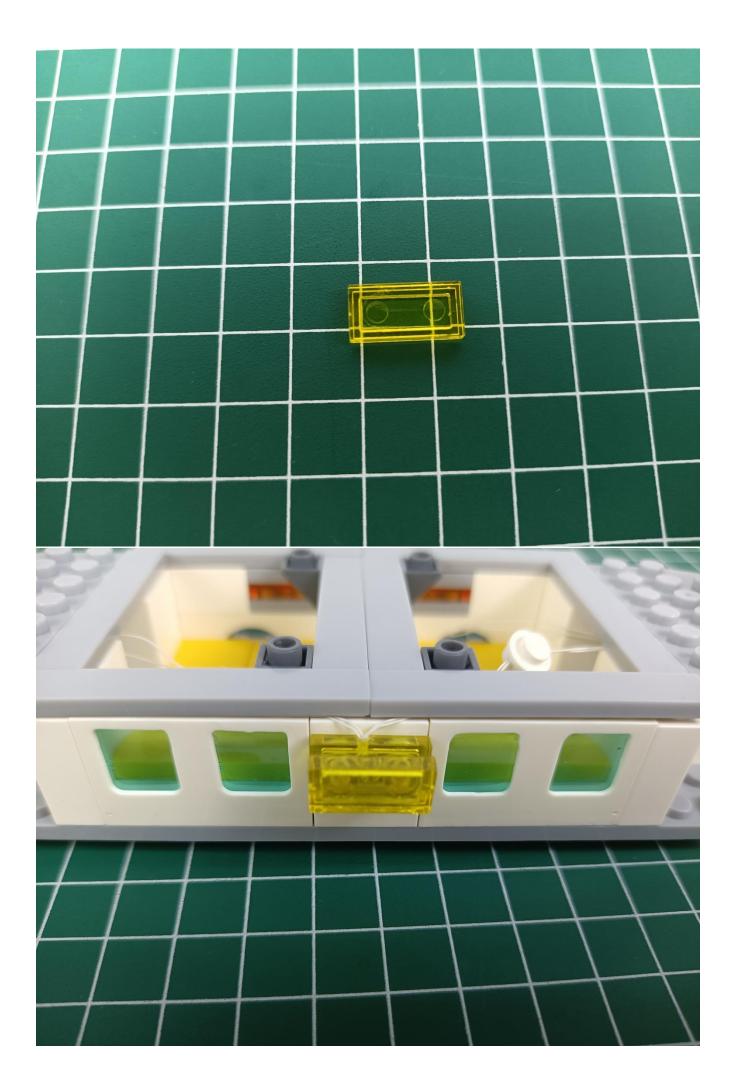


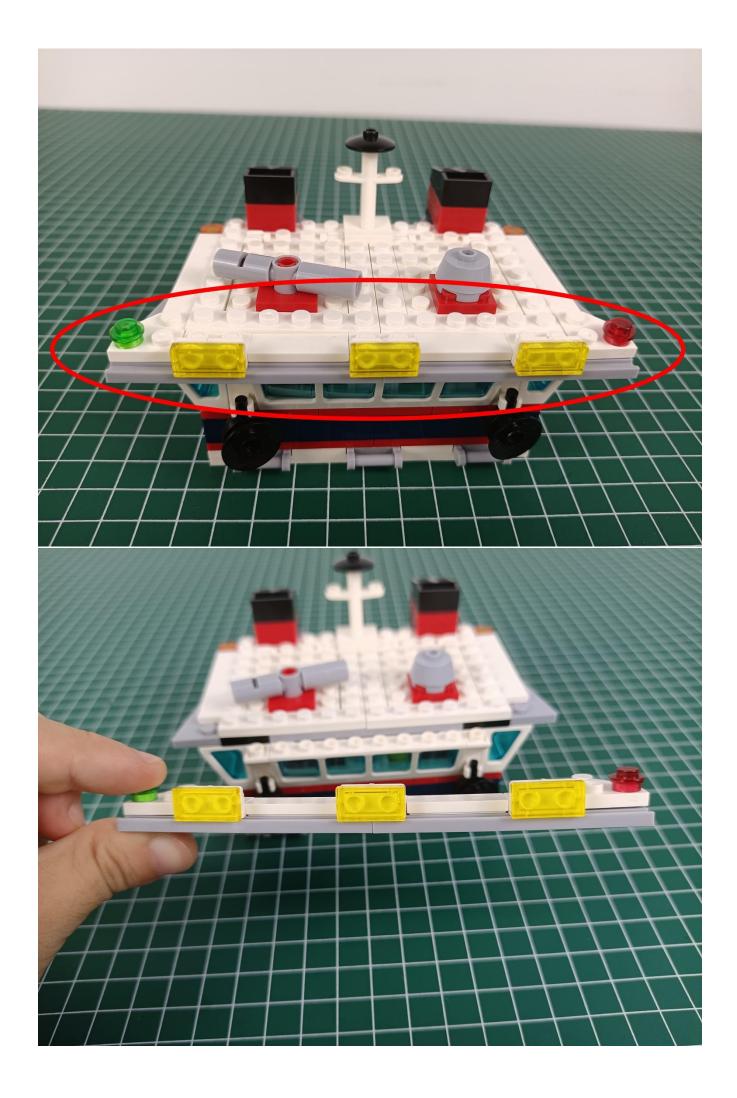


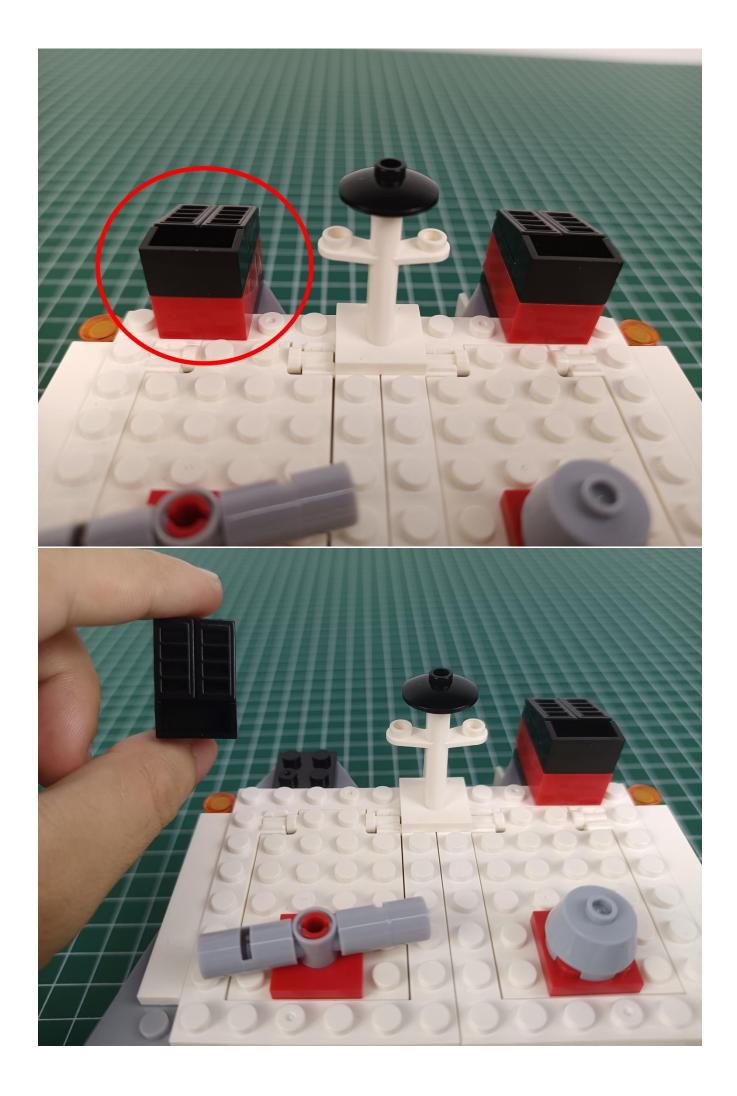


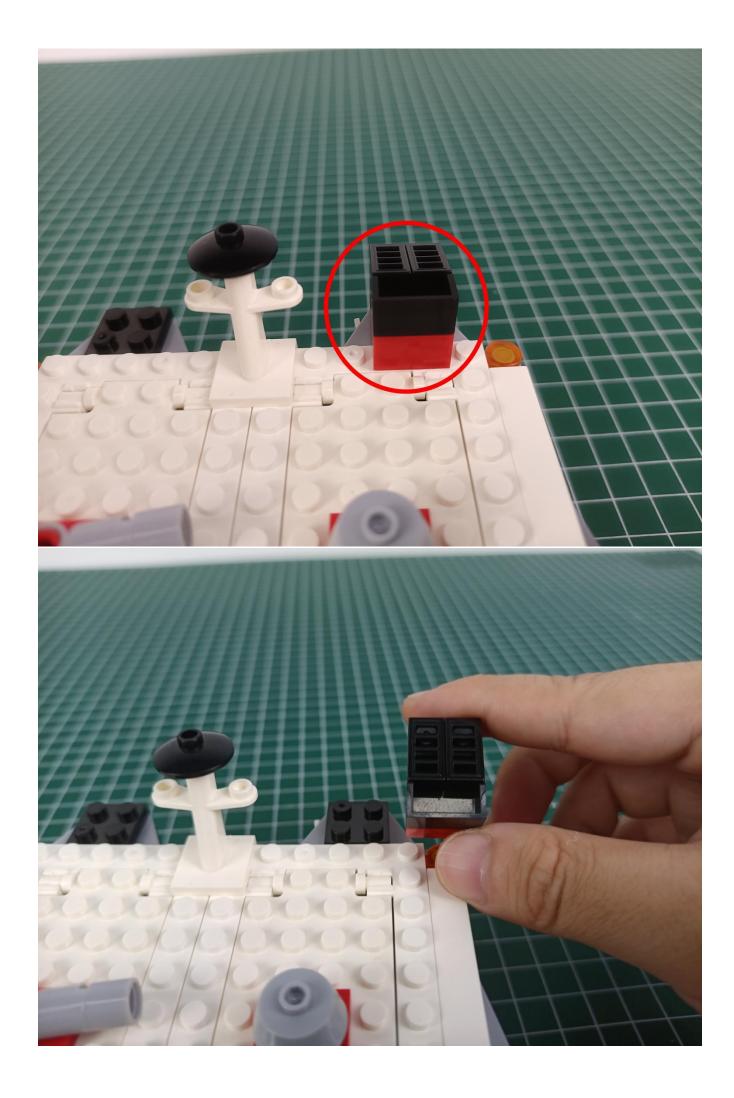


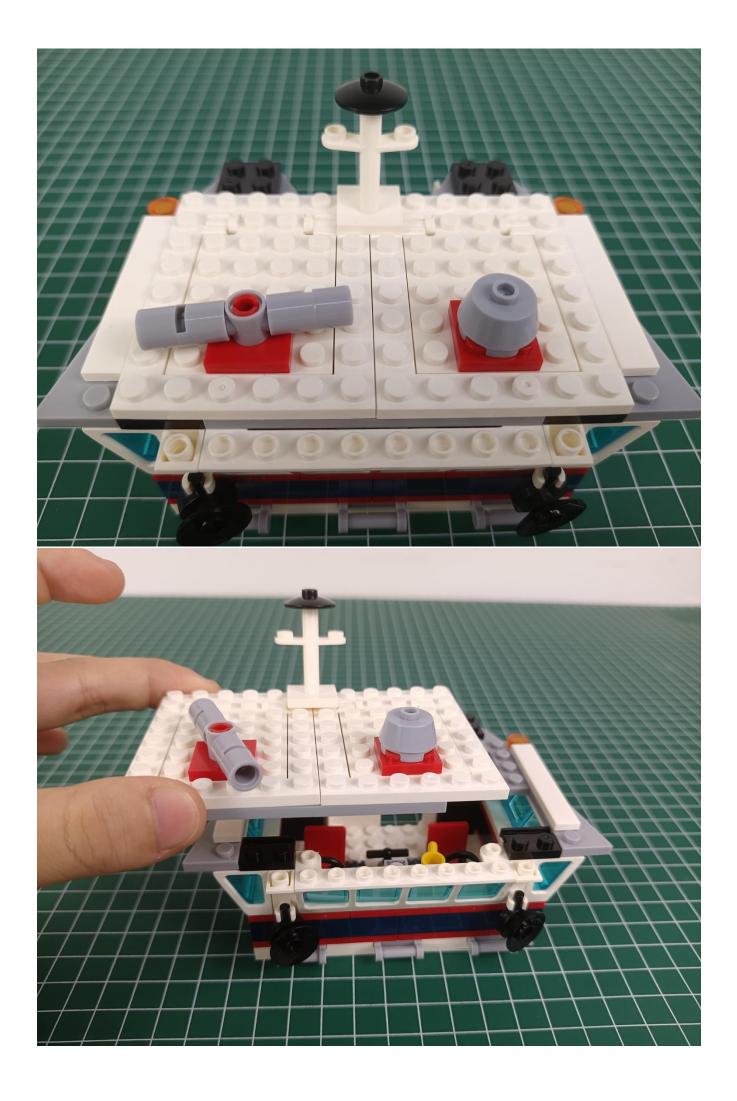


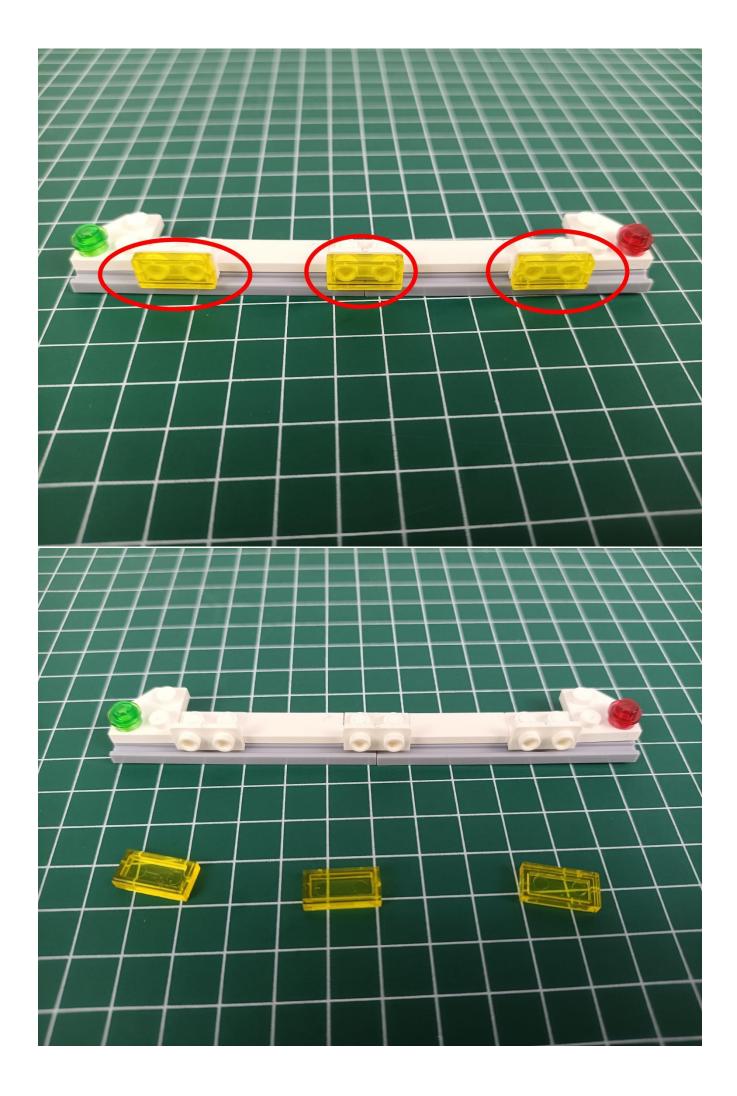


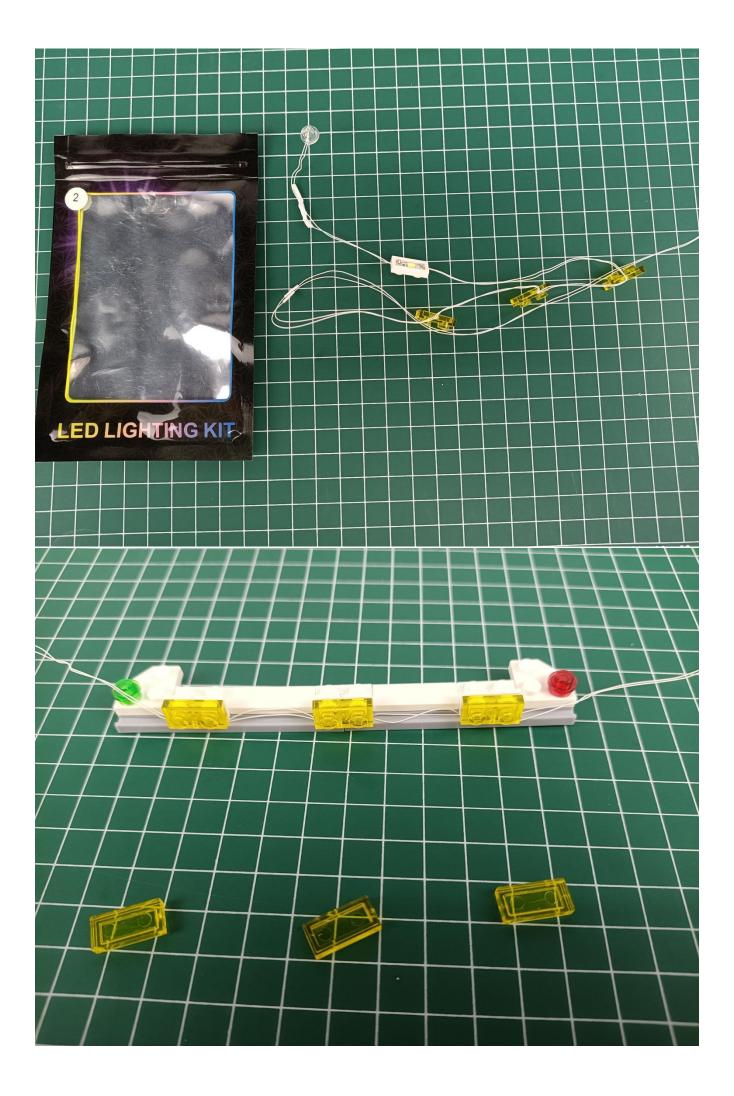


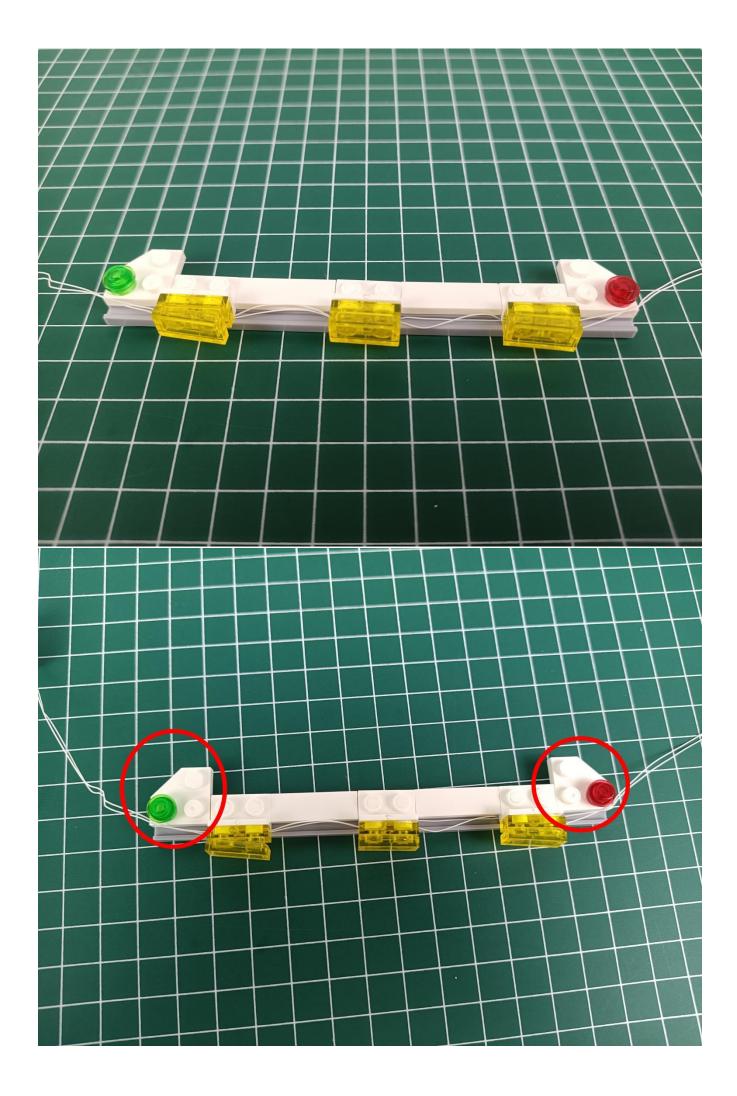


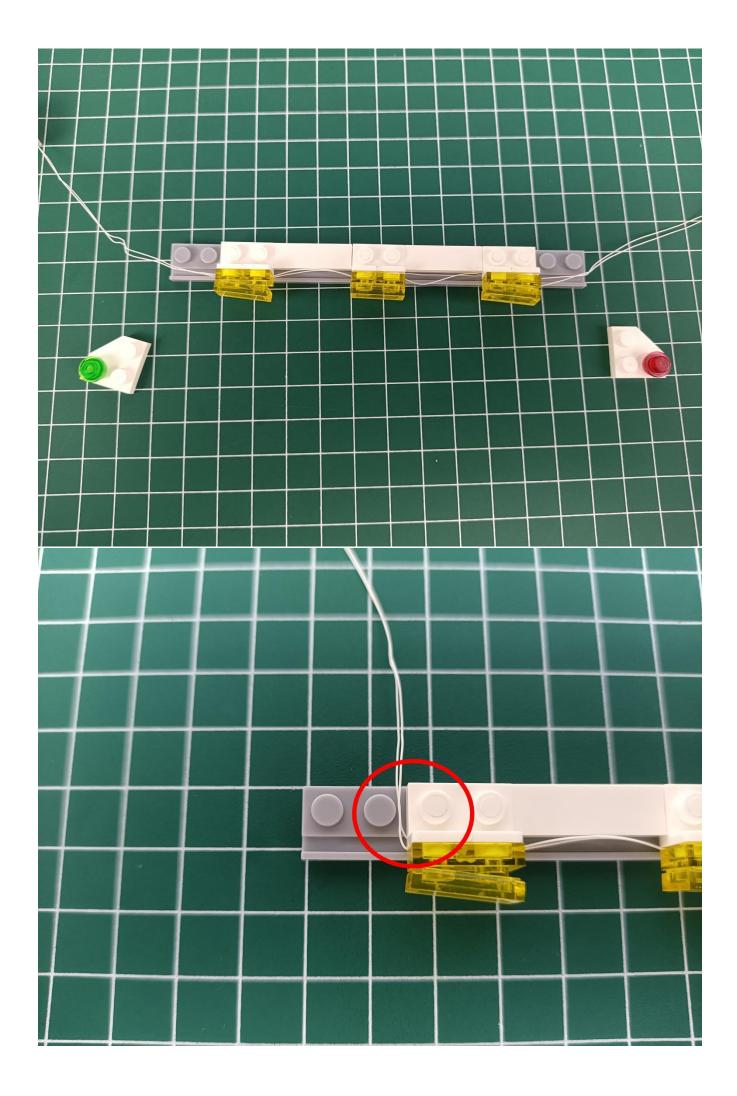


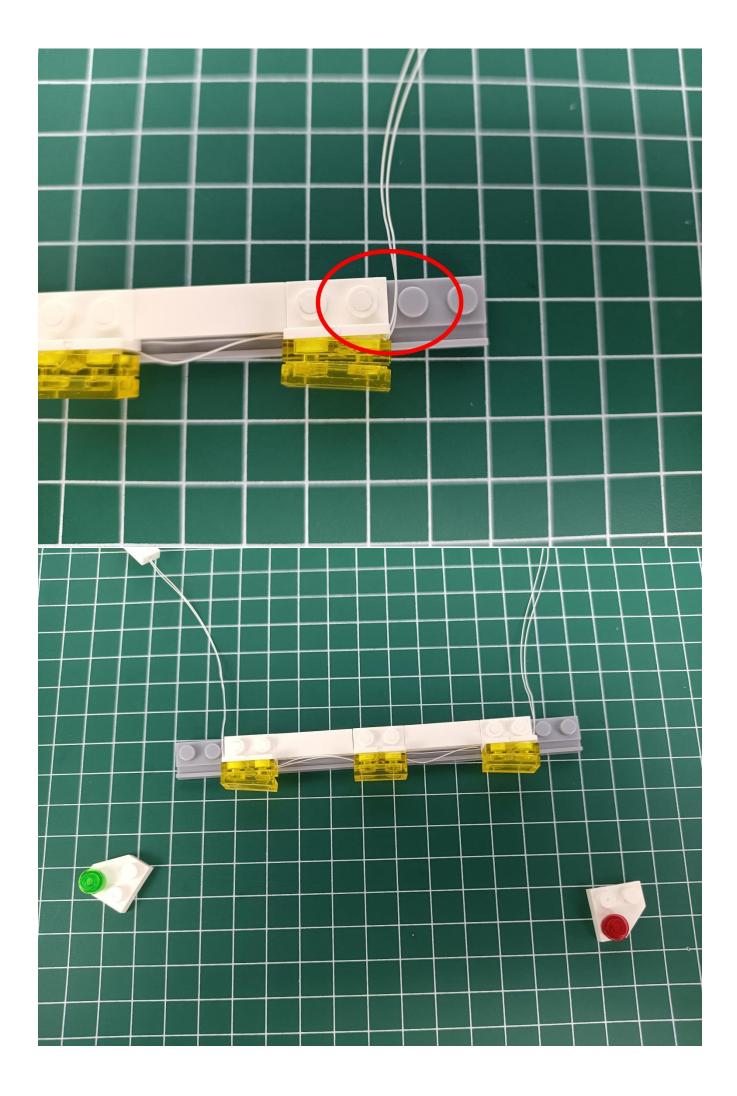


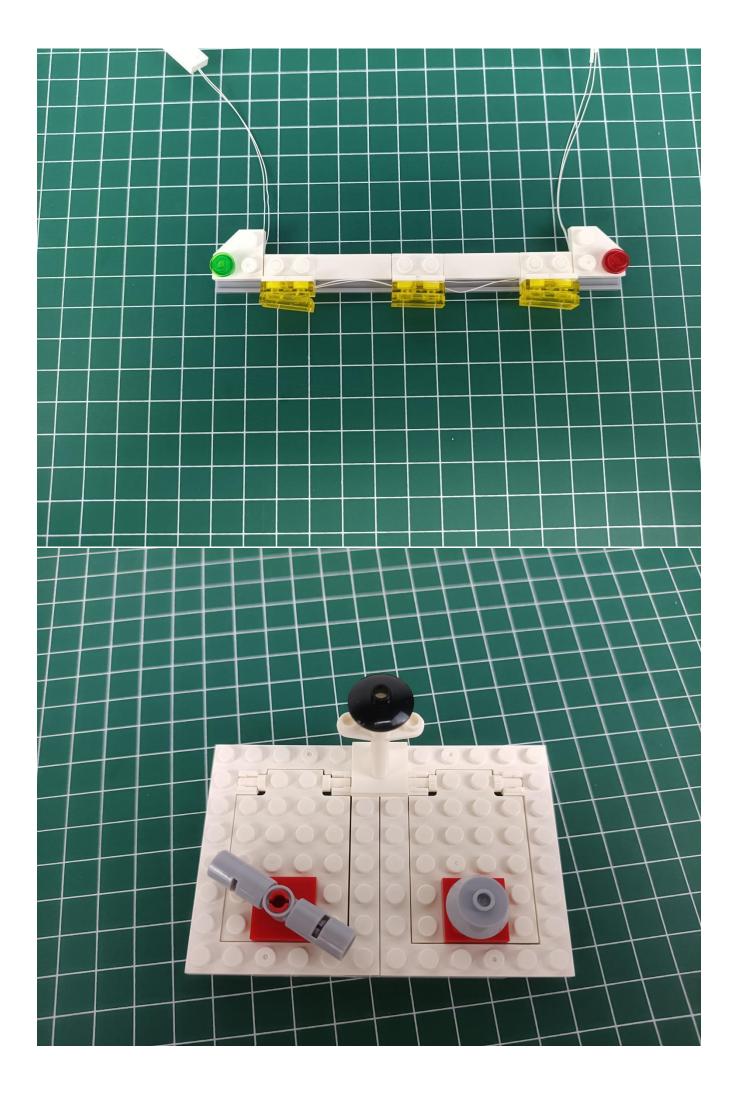


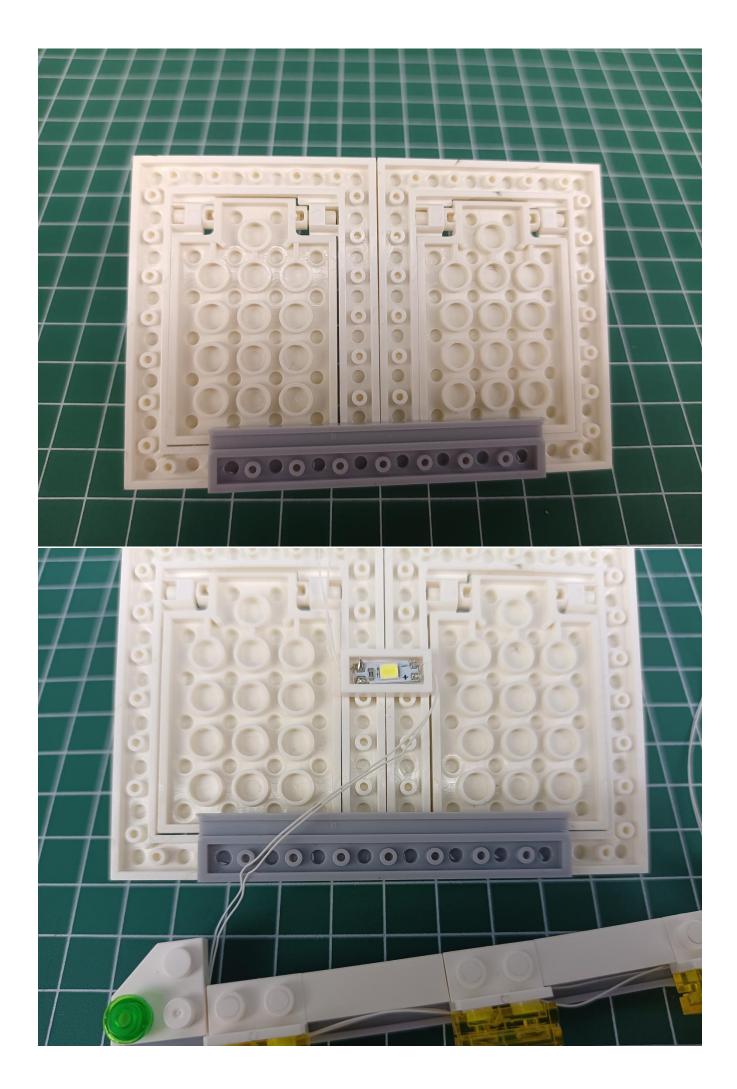


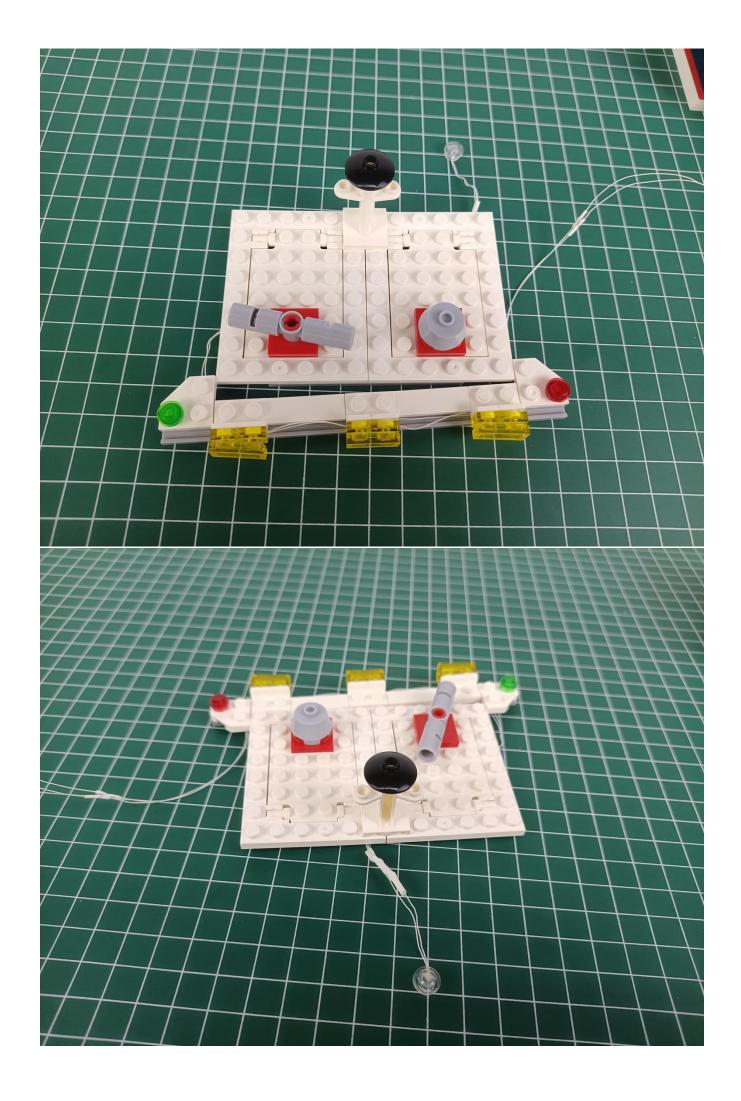


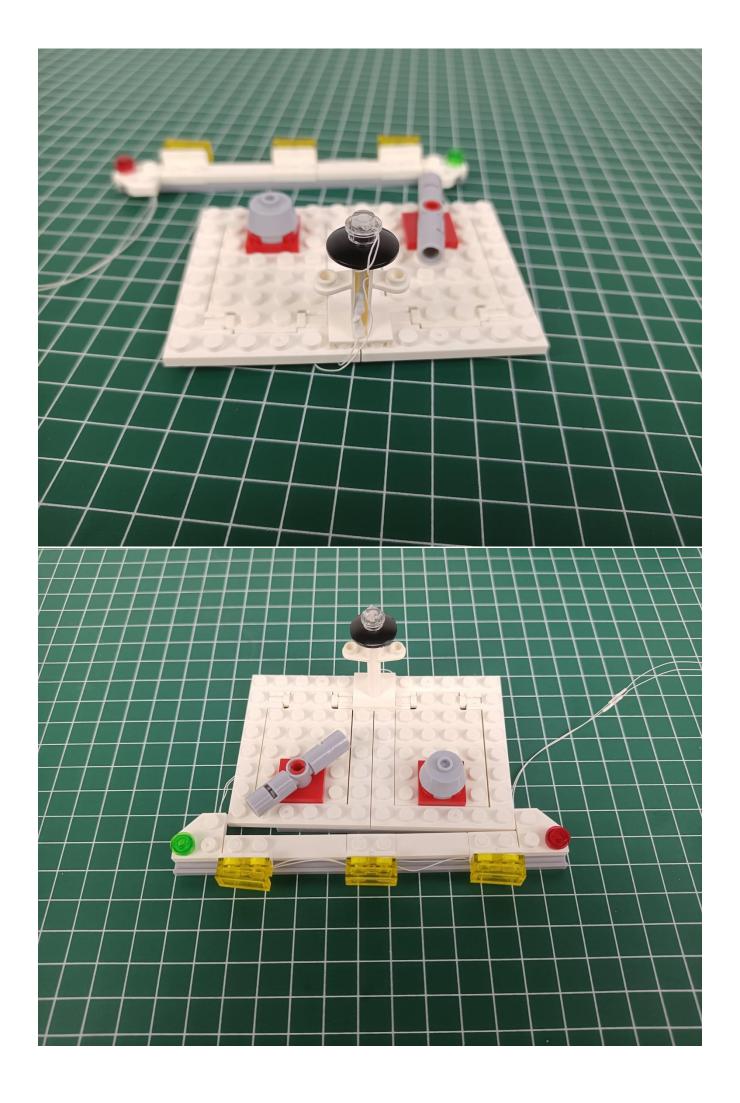


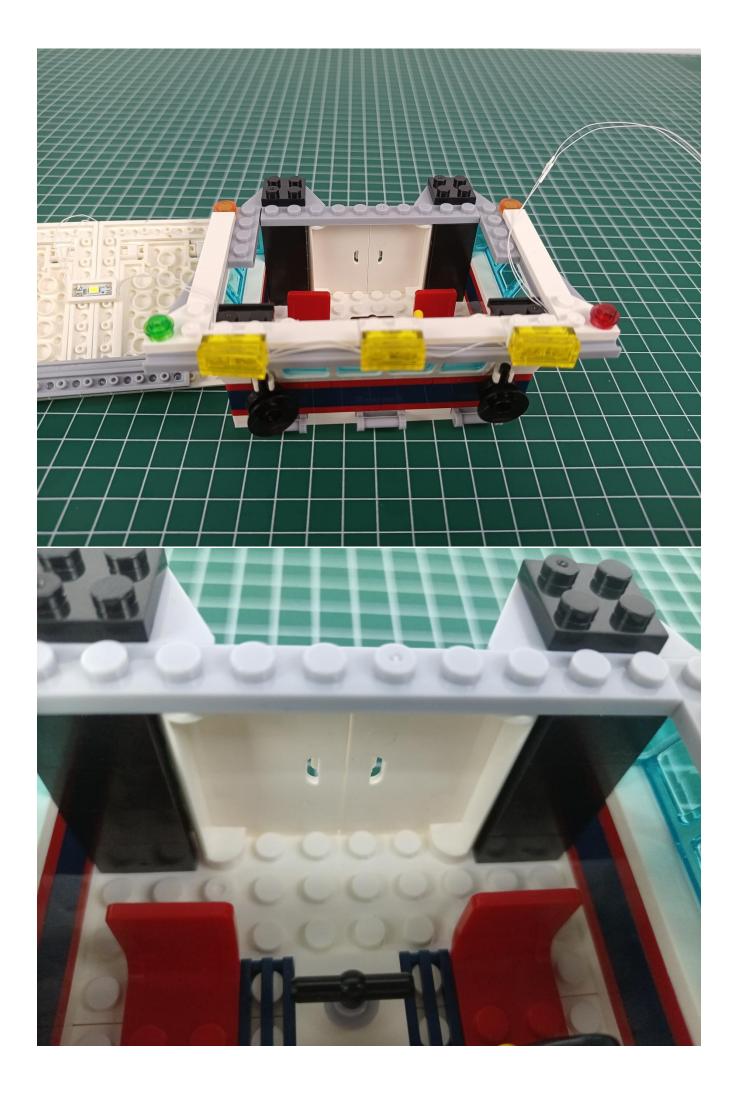


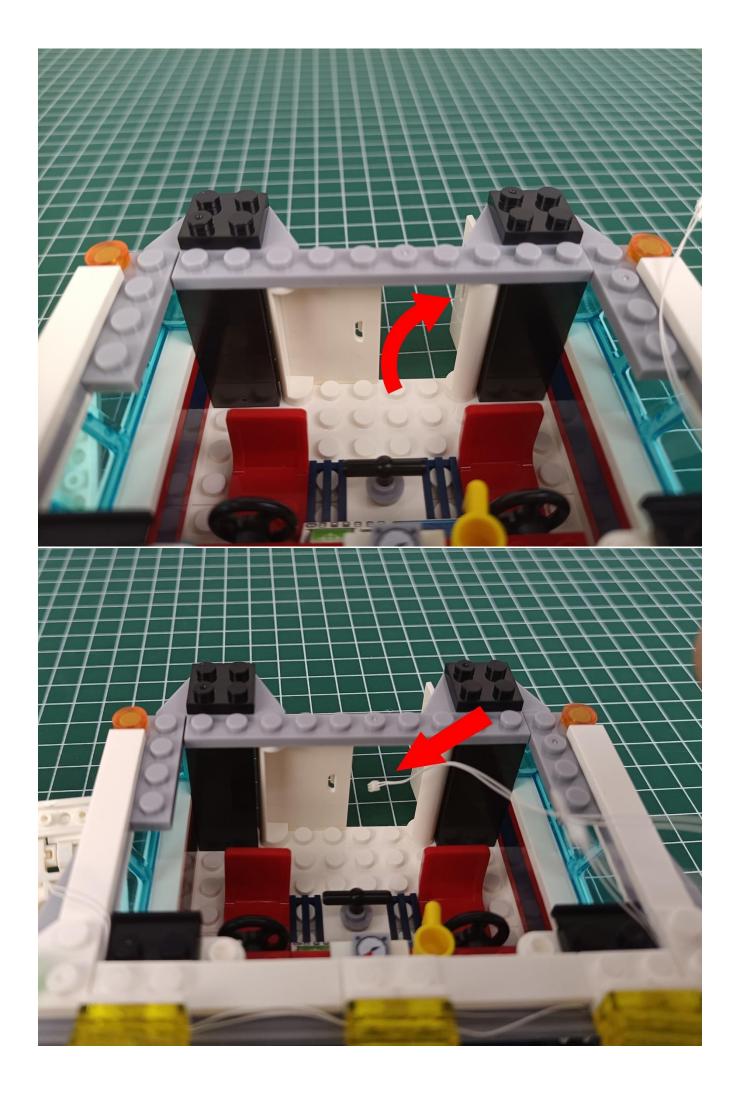


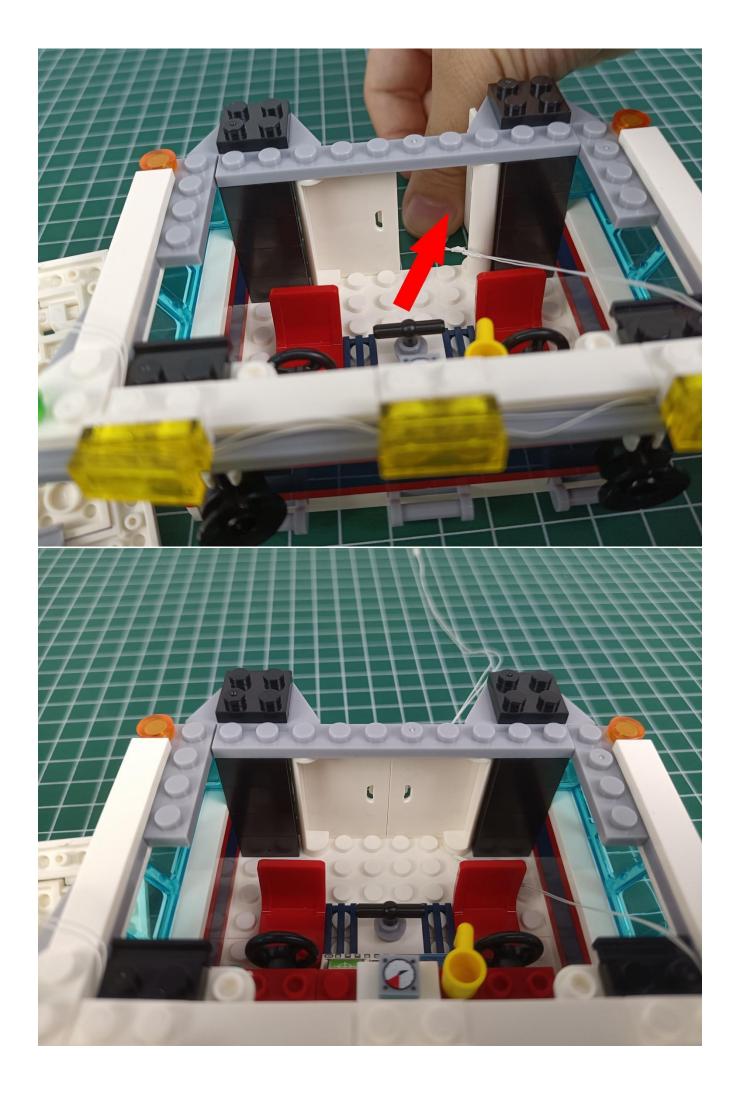


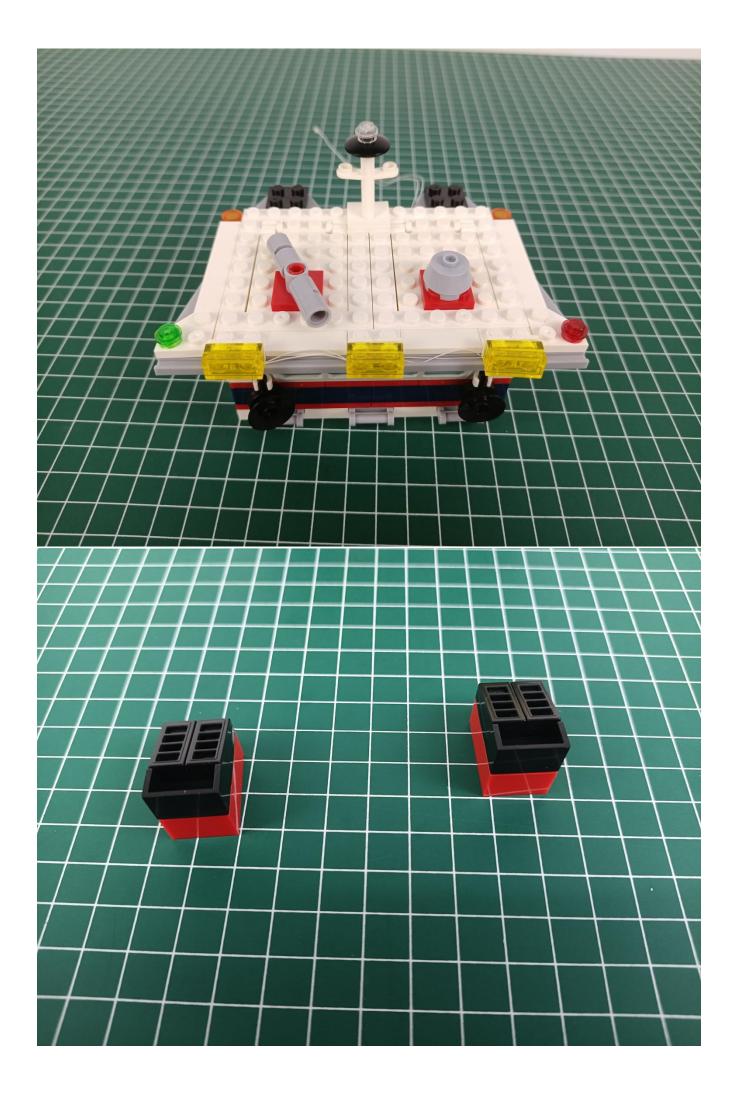


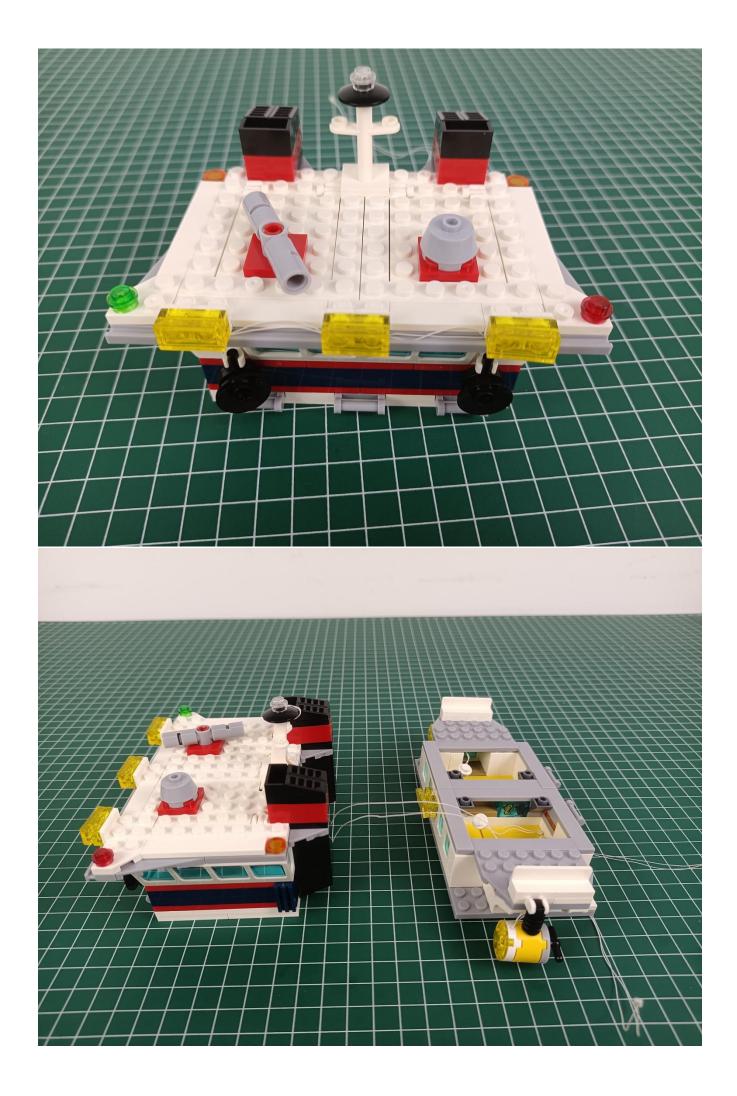


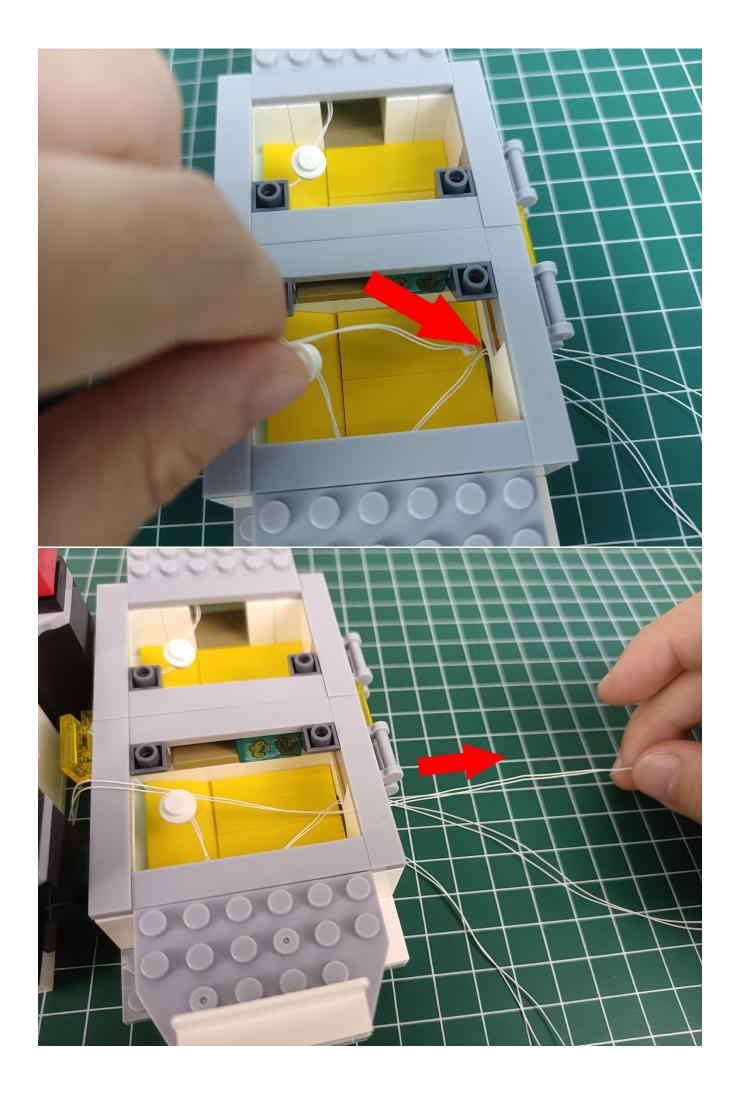


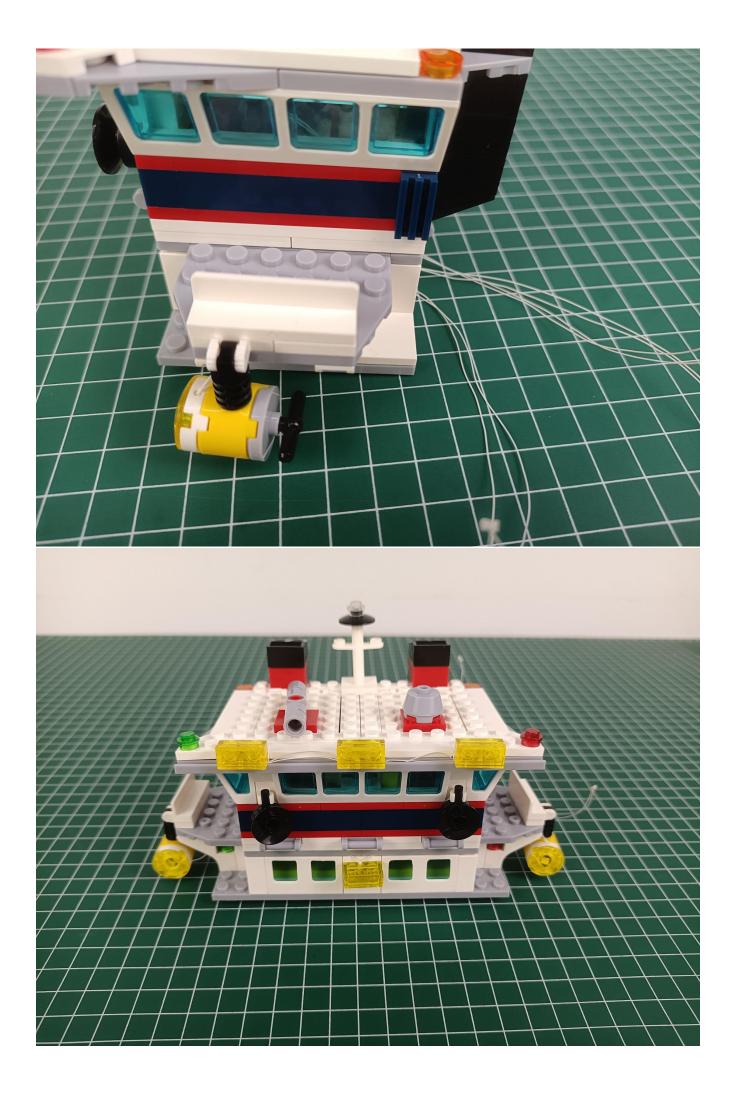


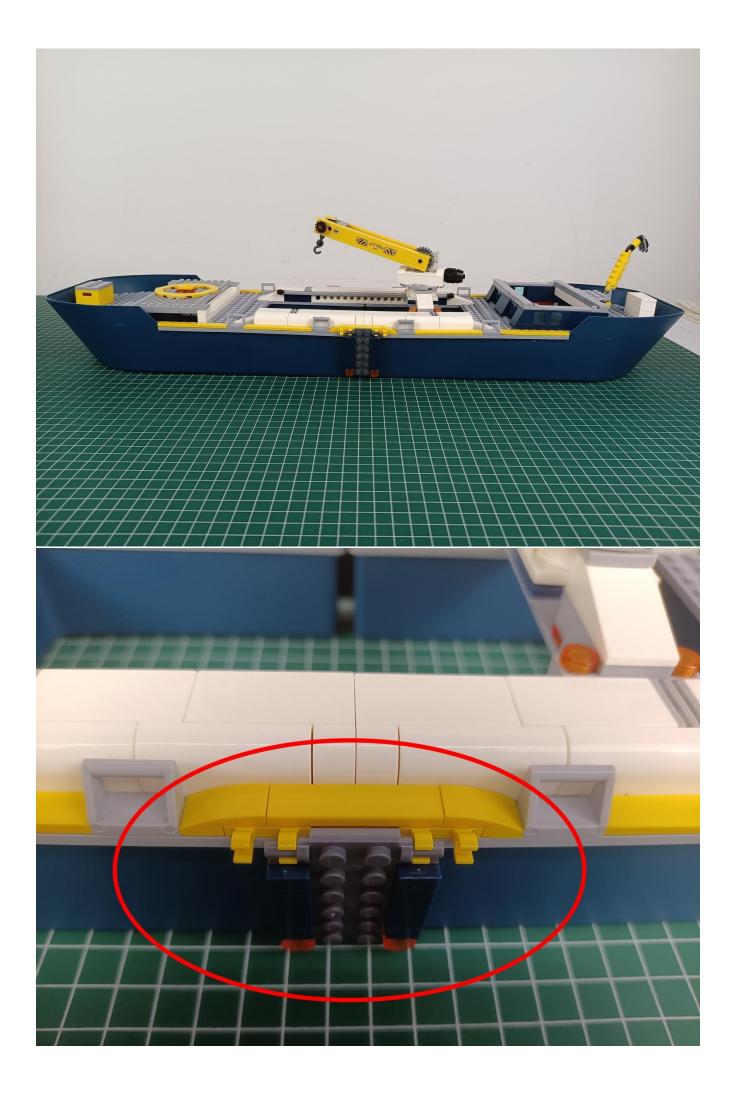


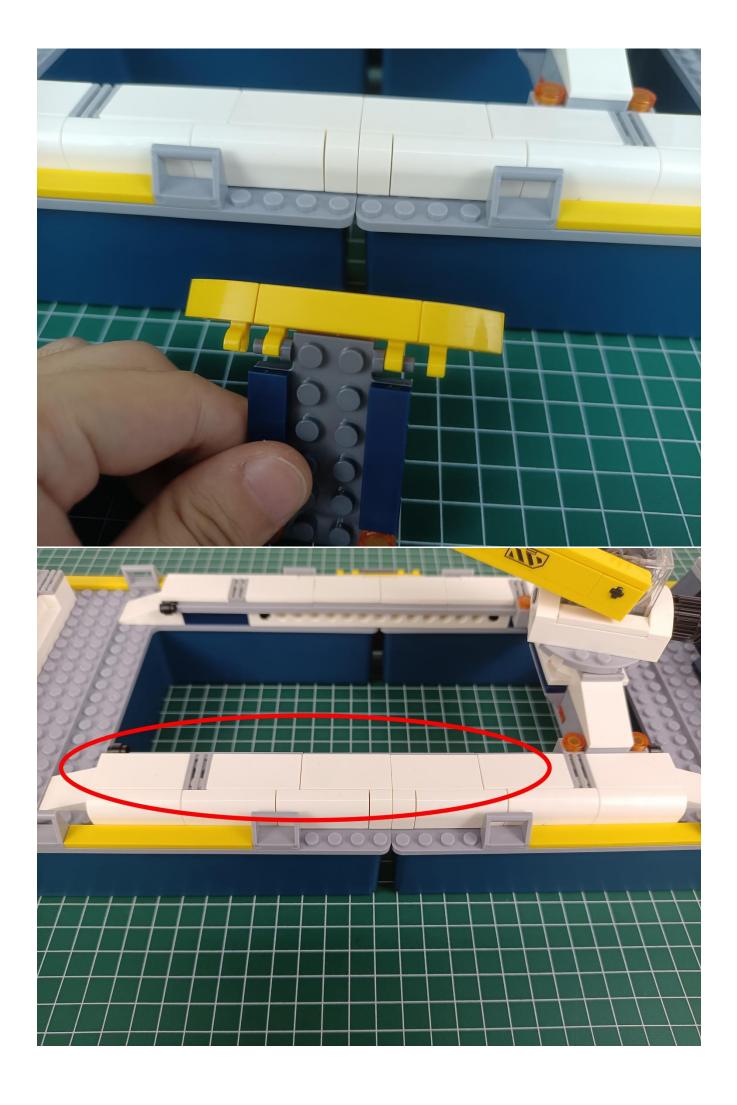

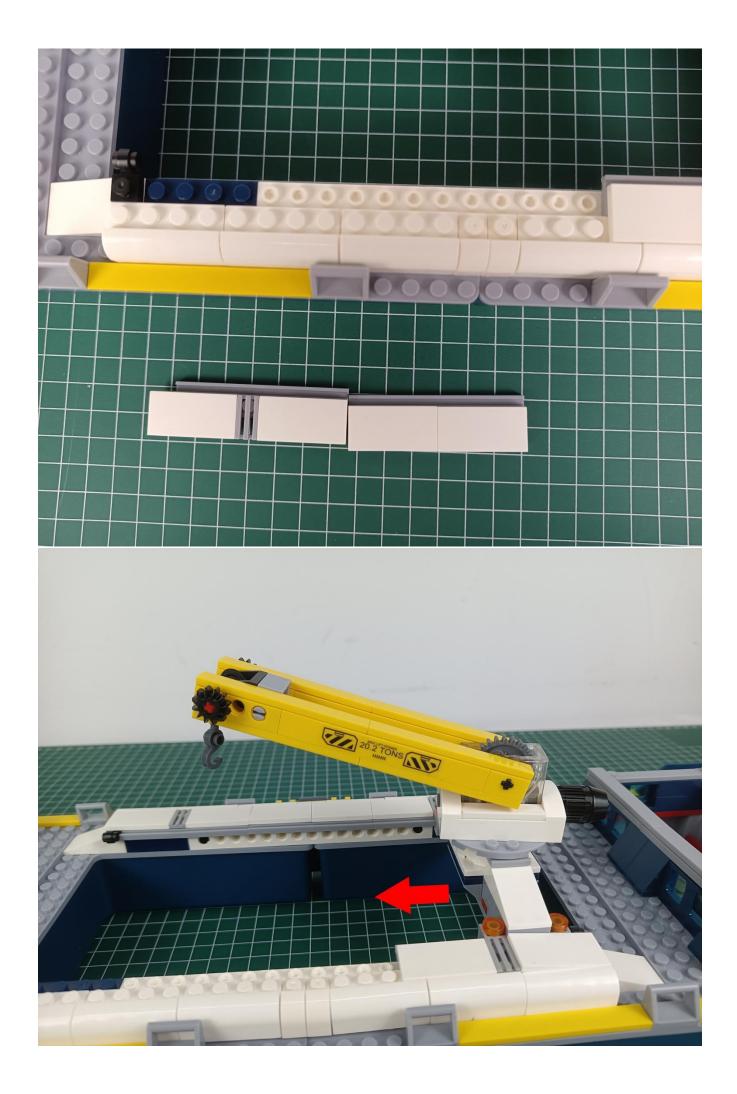


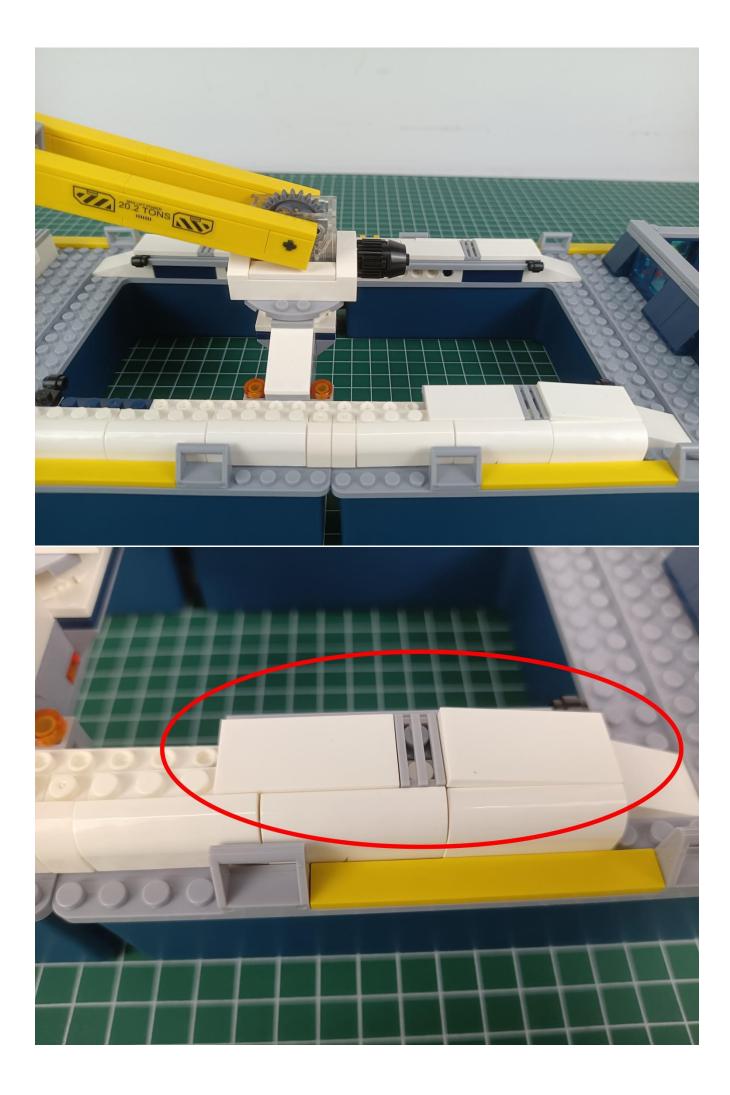


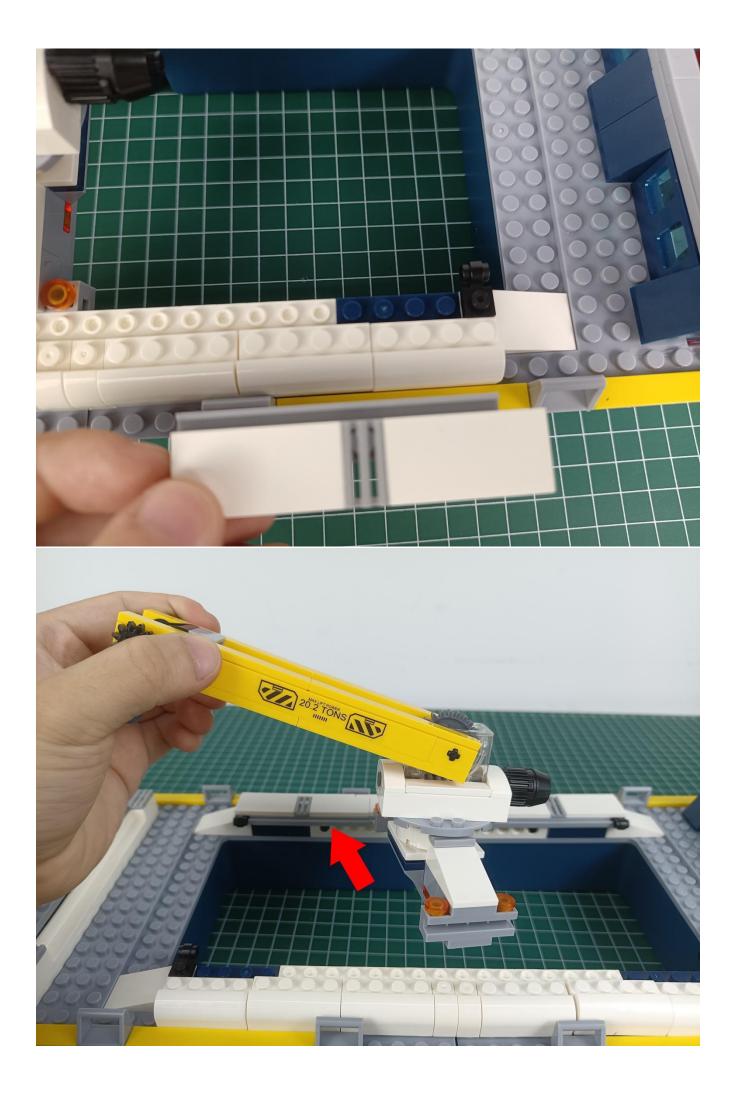


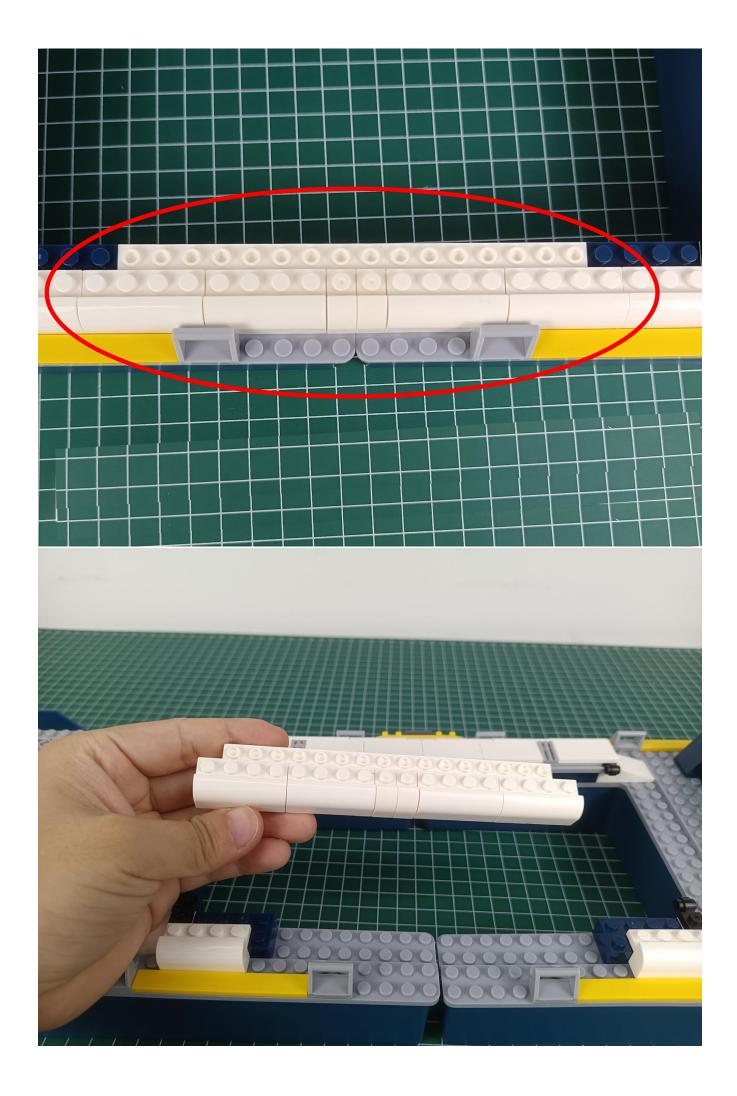




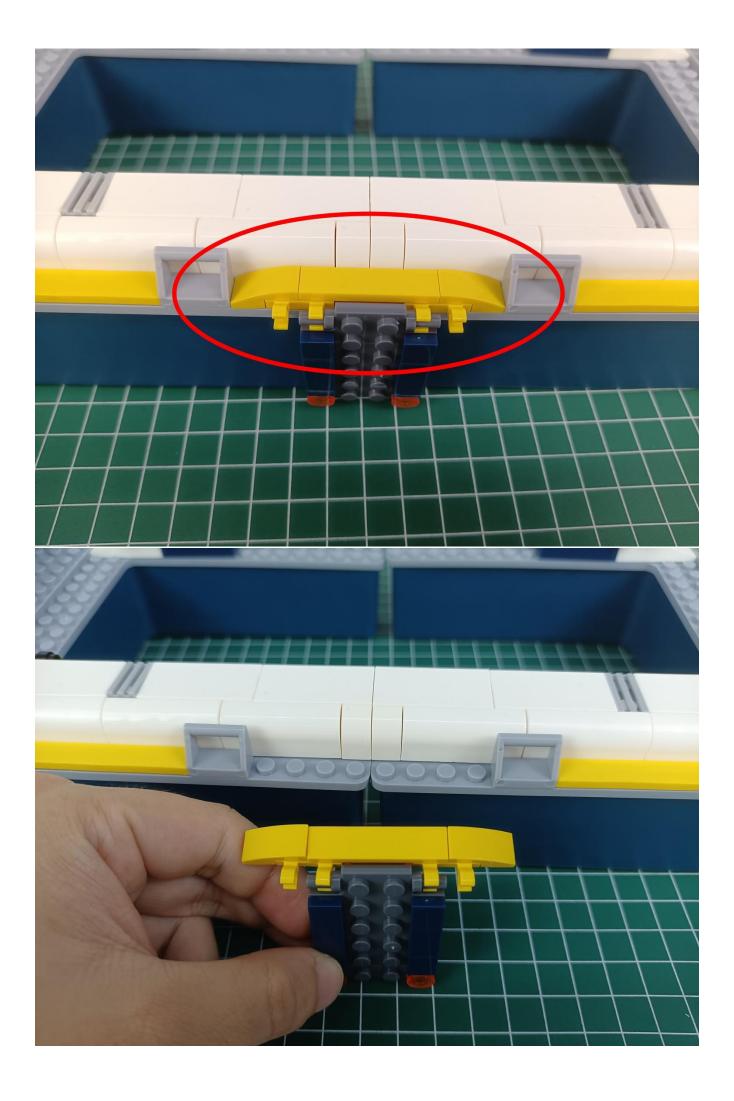


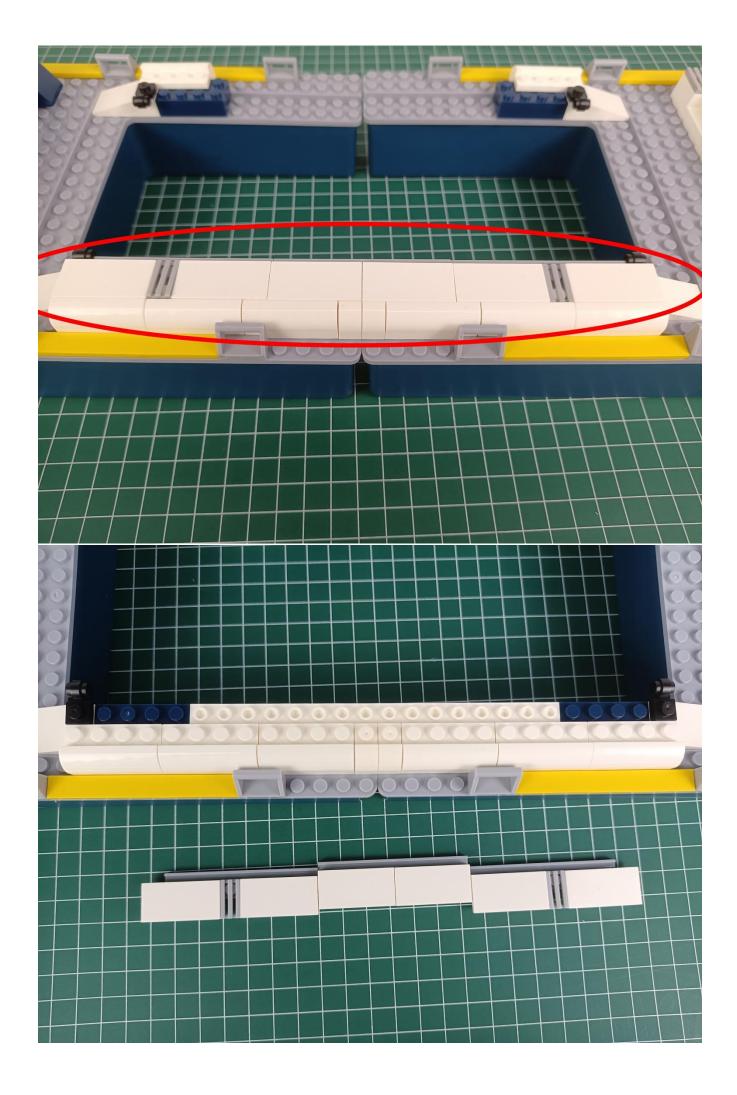

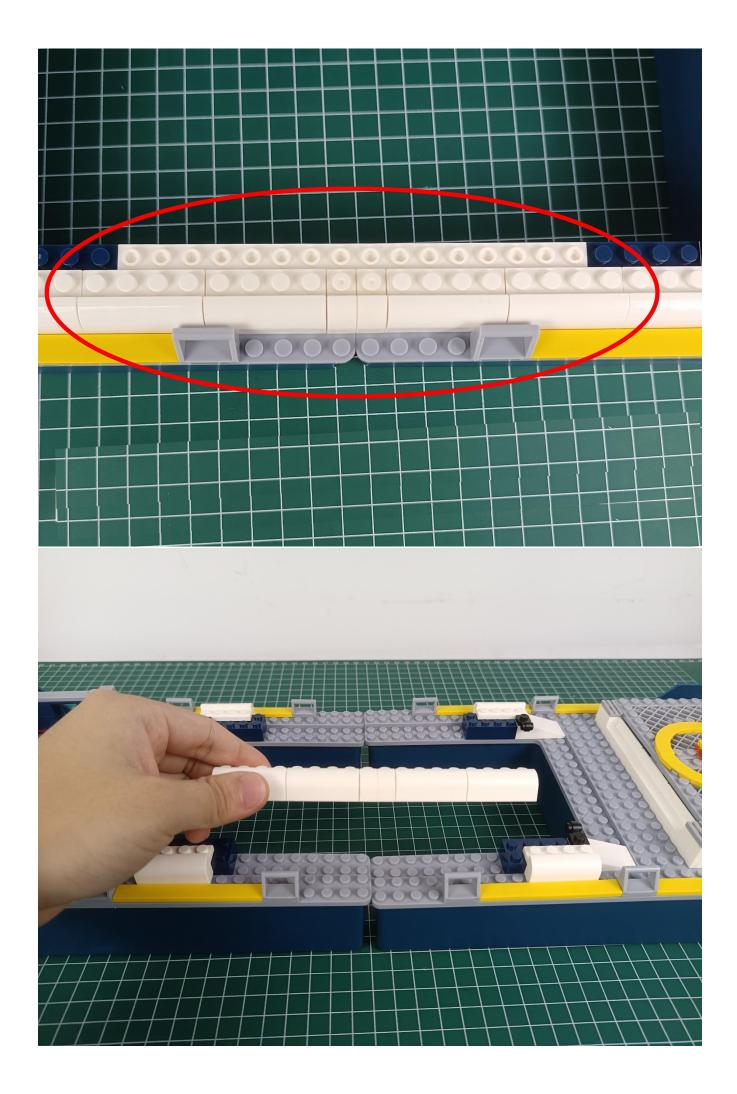



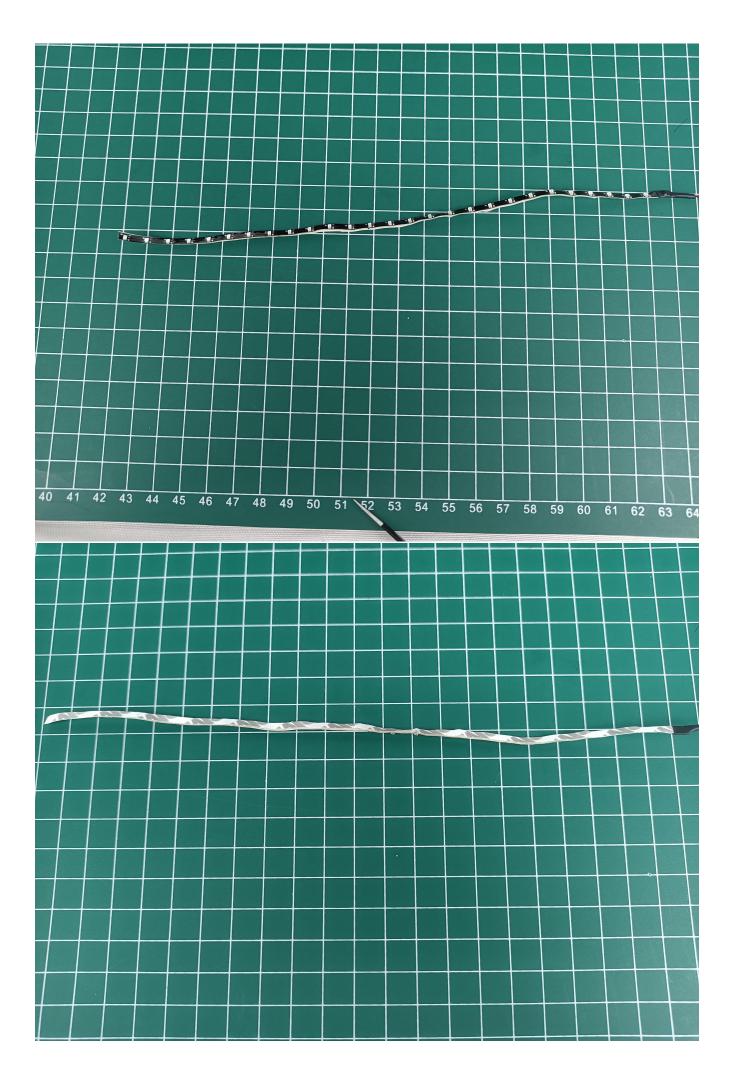

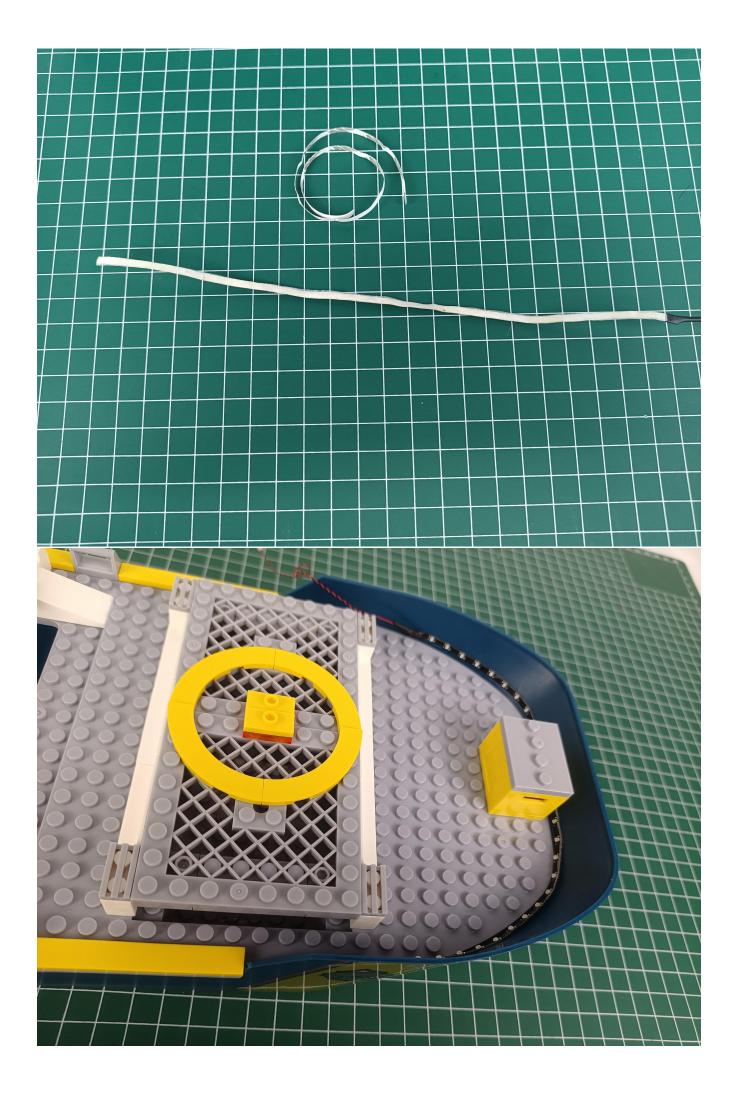











Please pay attention to the use of 2P interface, the interface is small, please use it carefully:

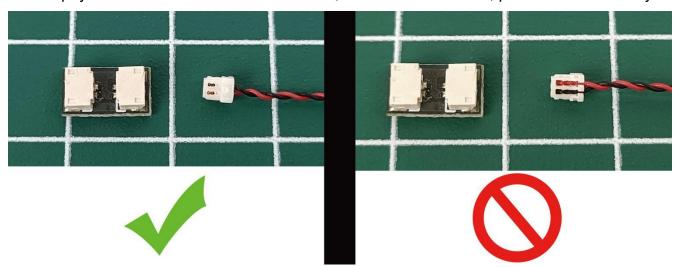


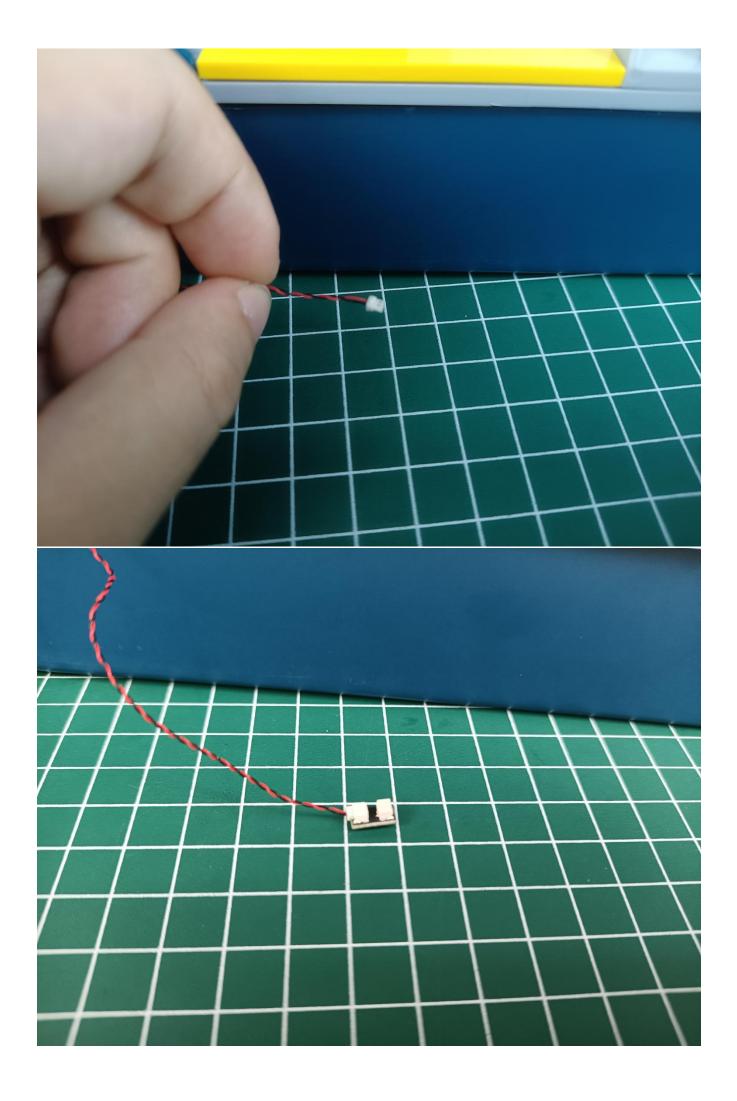




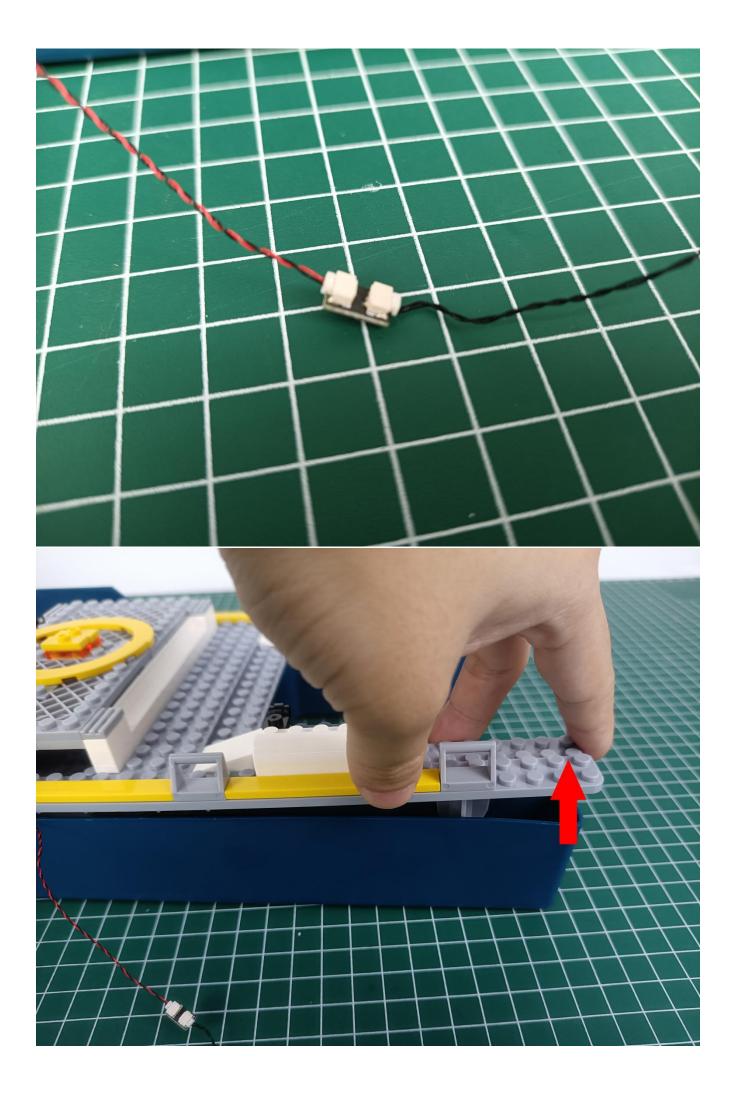


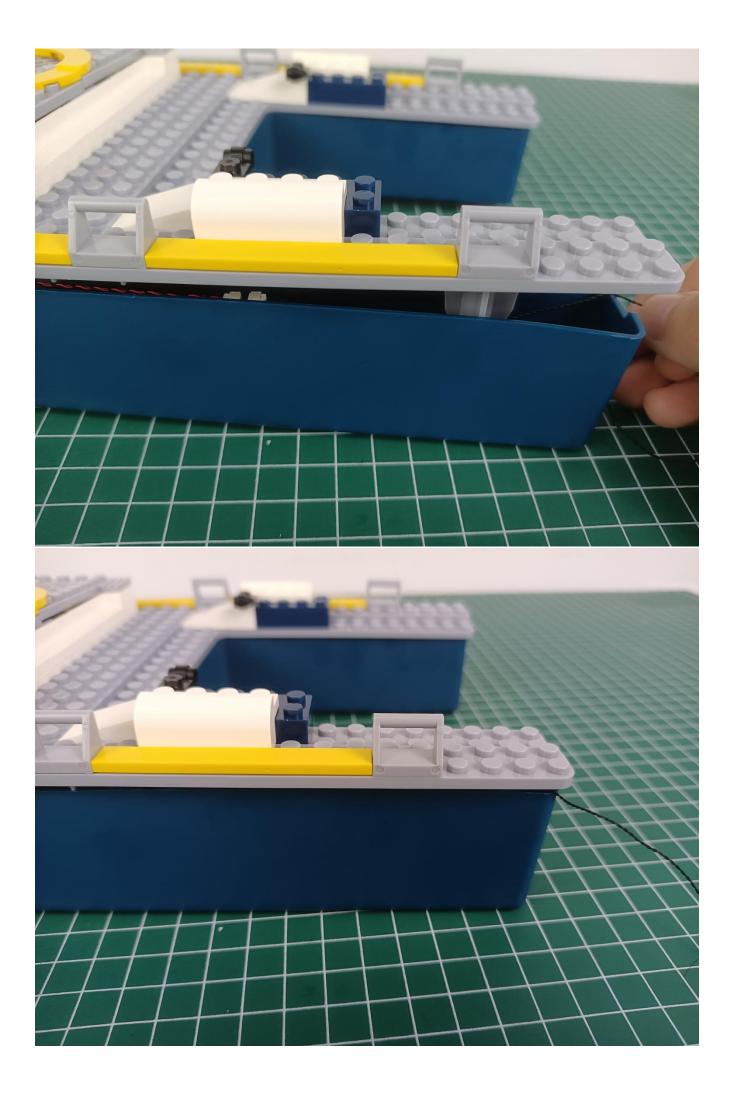


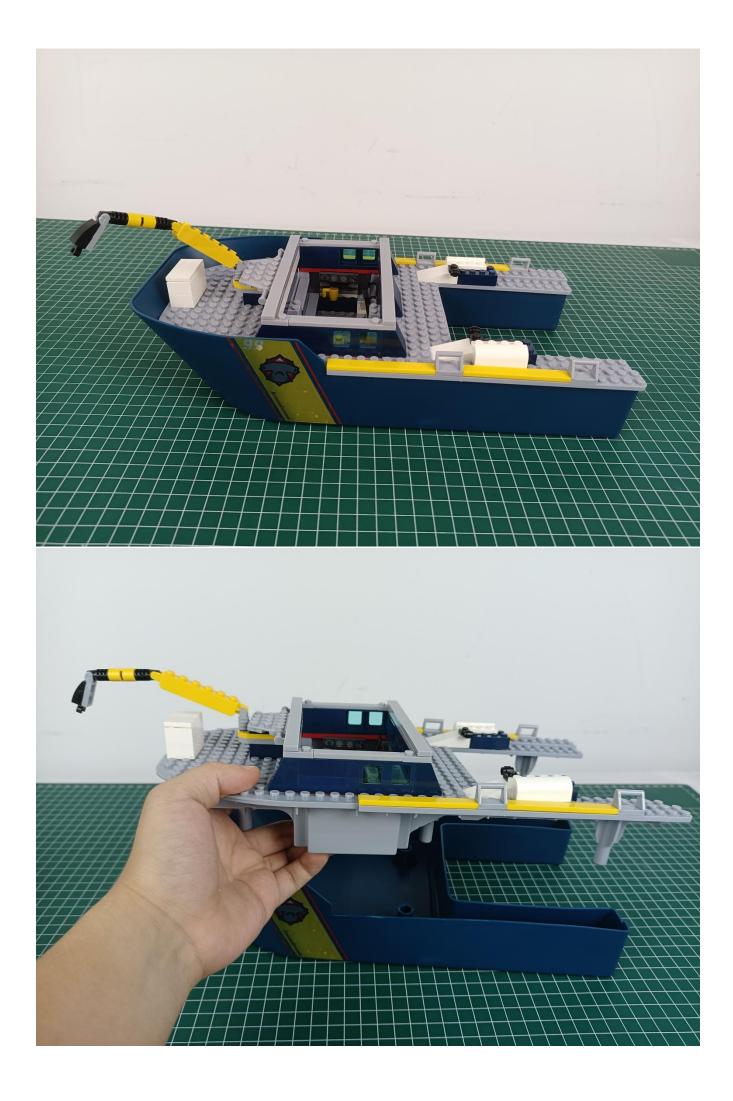

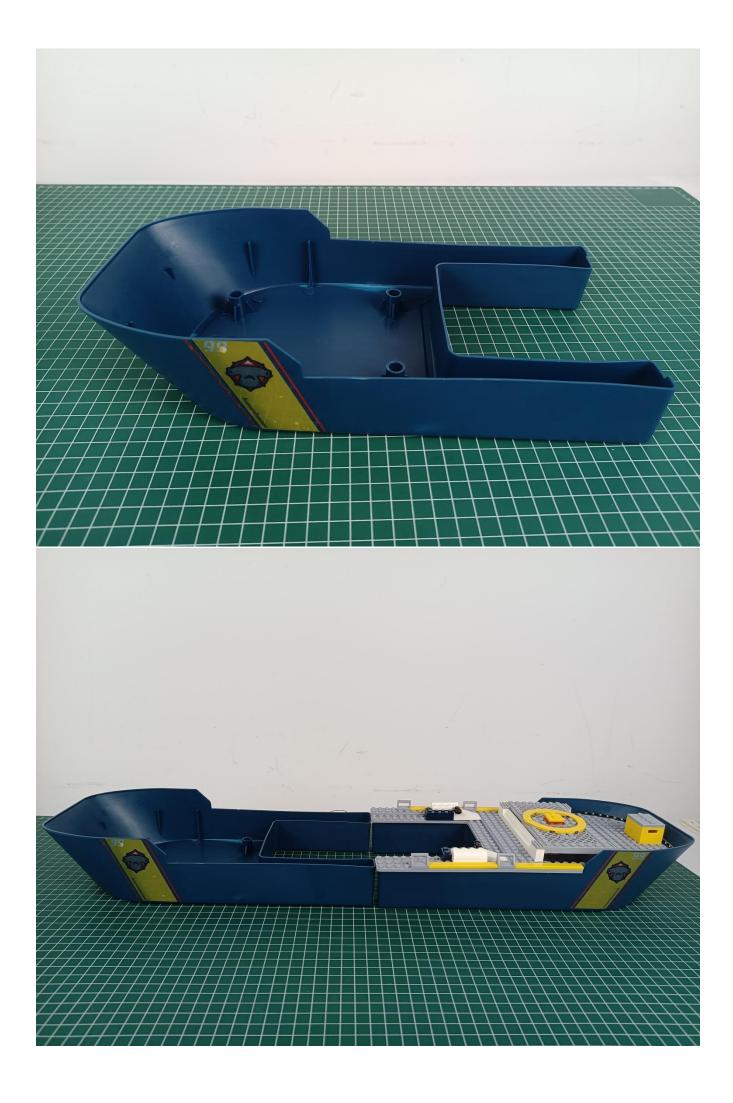





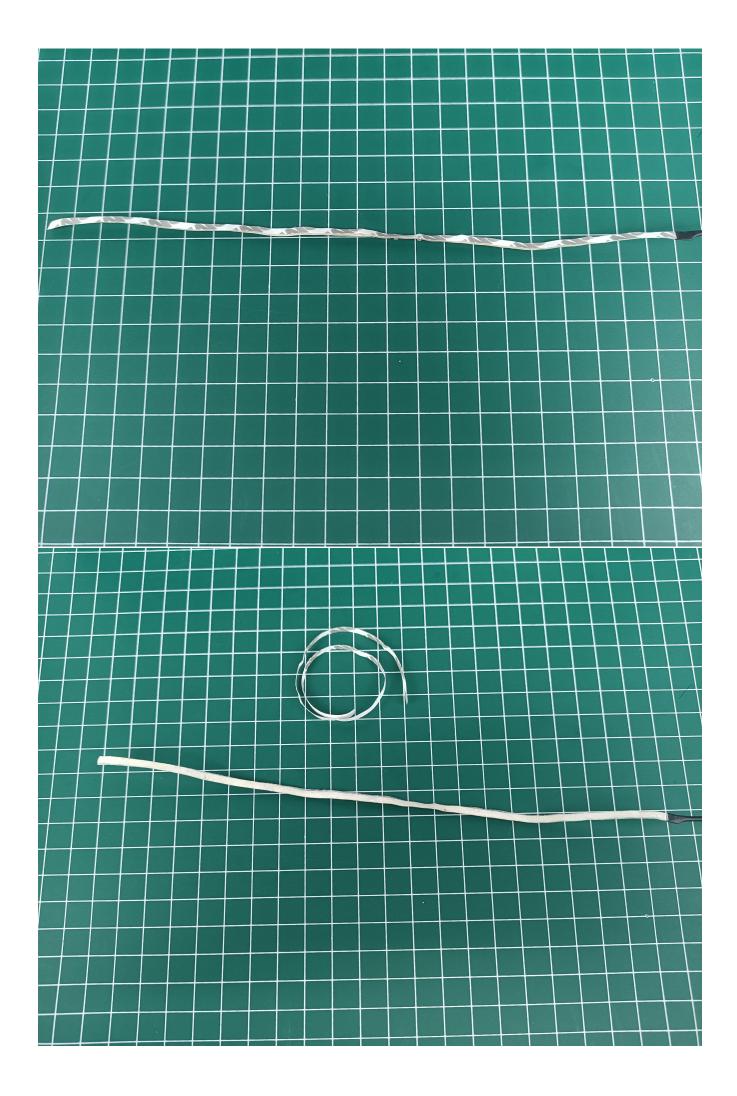


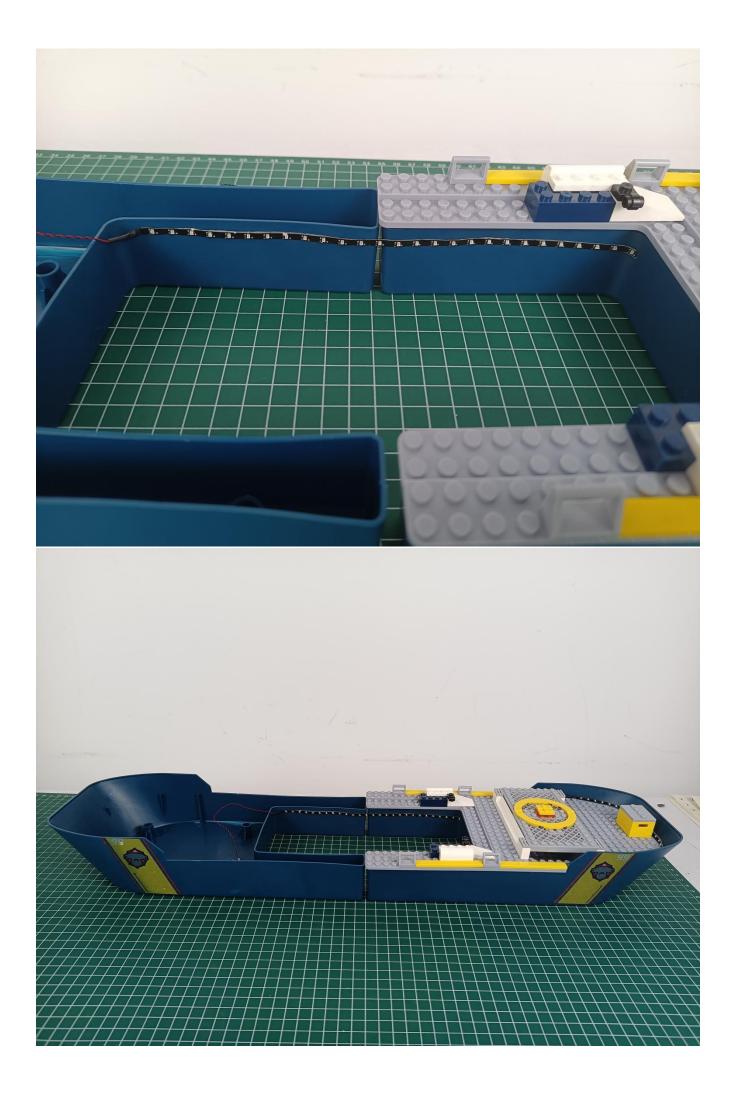




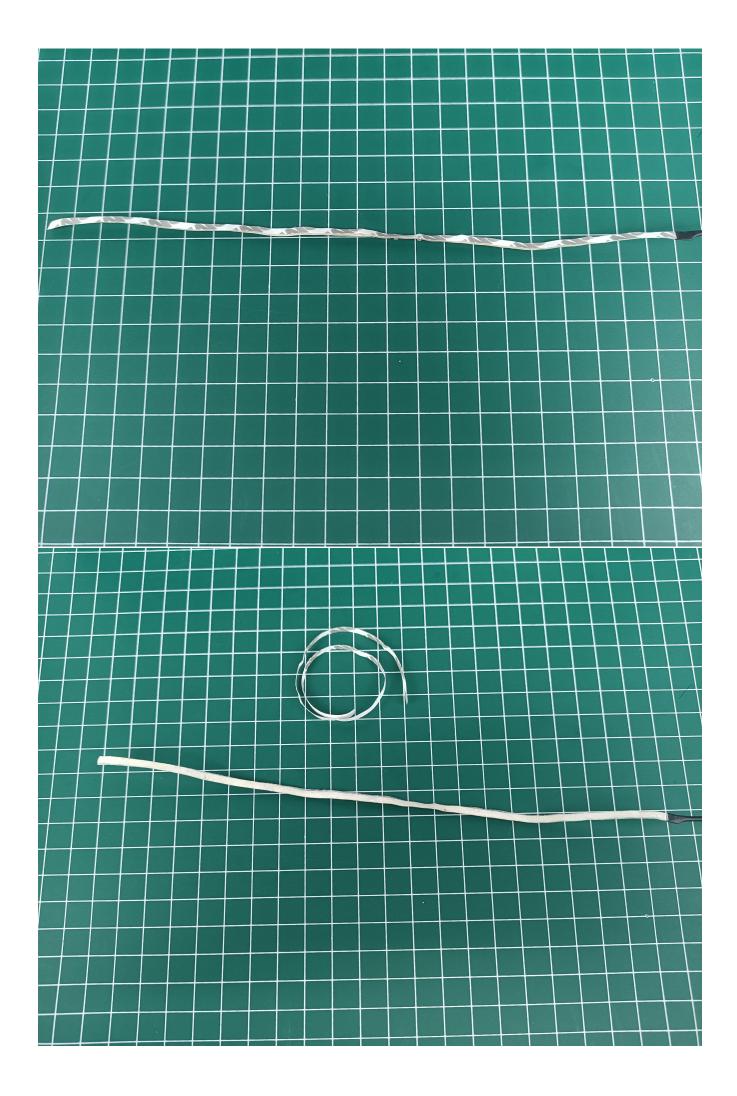

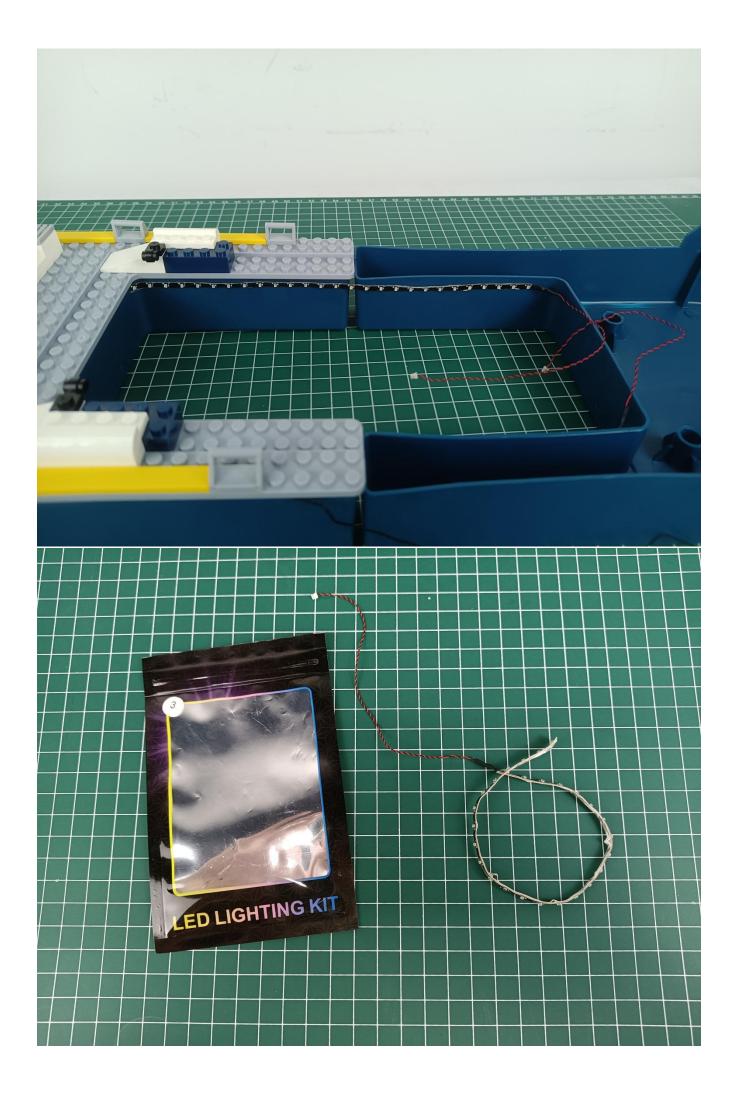


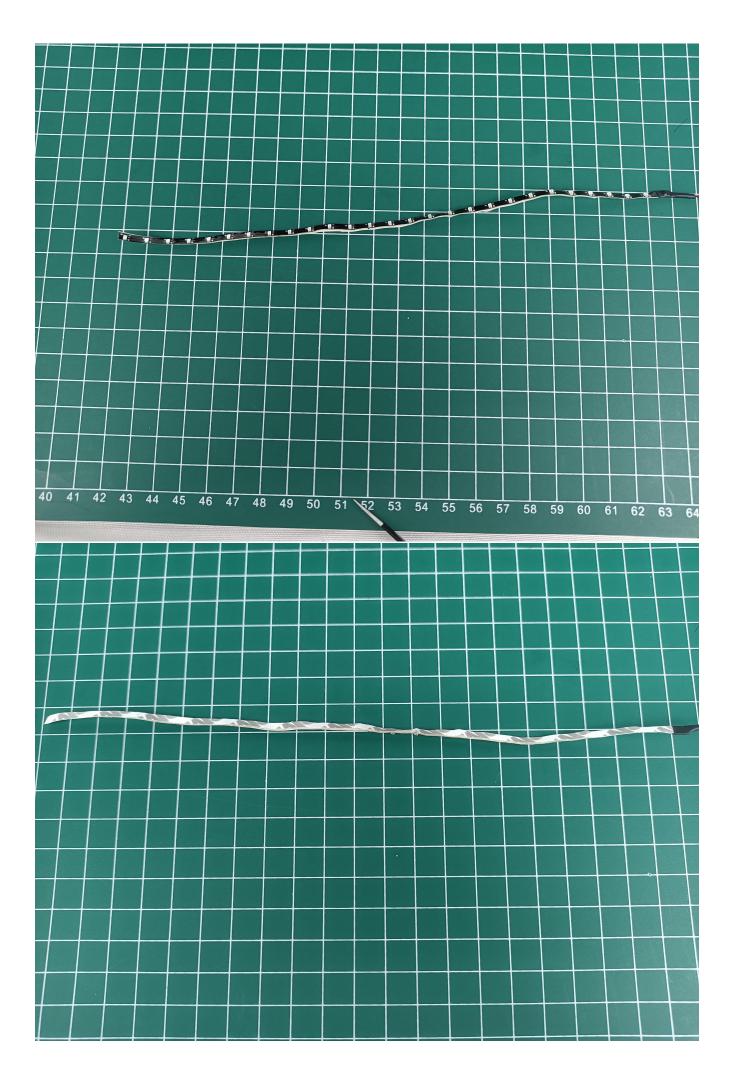


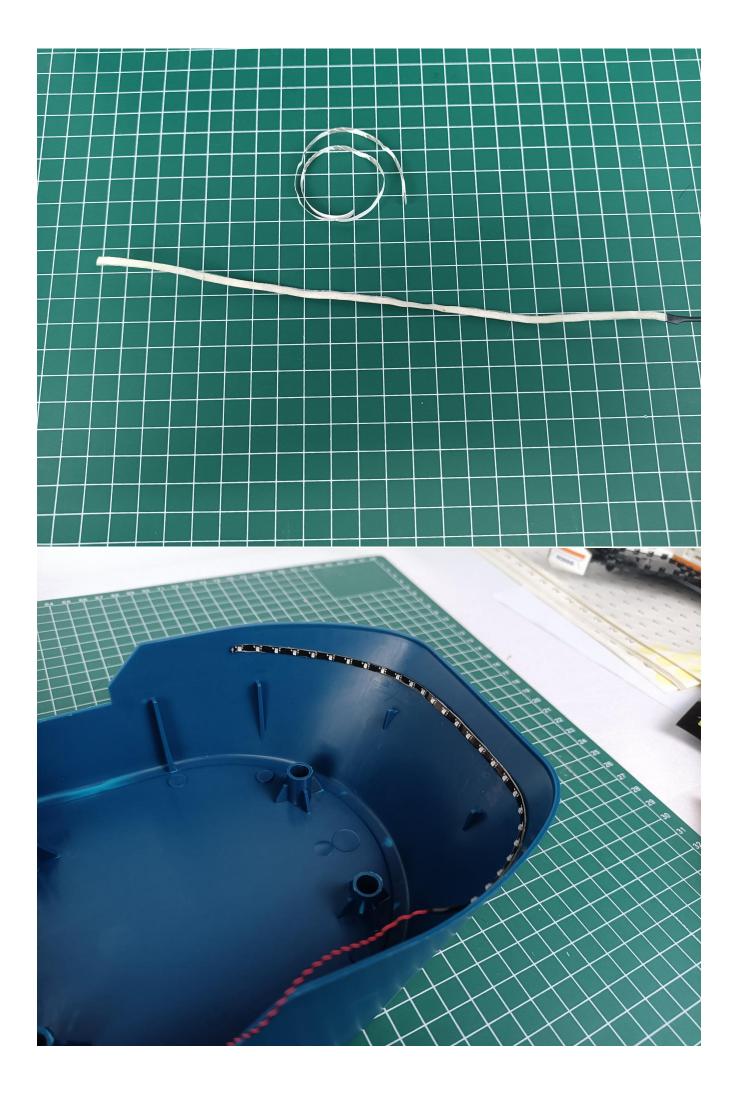





Please pay attention to the use of the interface. The interface is small. Please use it carefully: the = number of the 2P interface is aligned with the = number of the expansion board. The equal sign on the expansion board refers to the two solder joints on the outside, not the two inside the jack Metal pin.









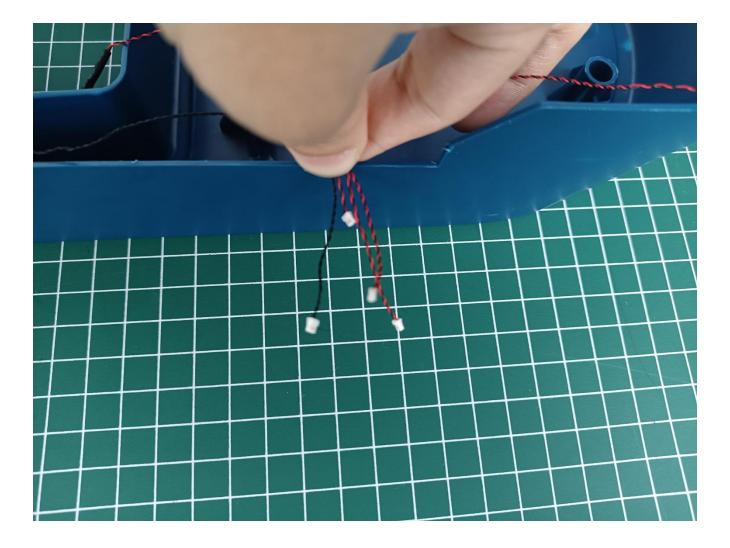


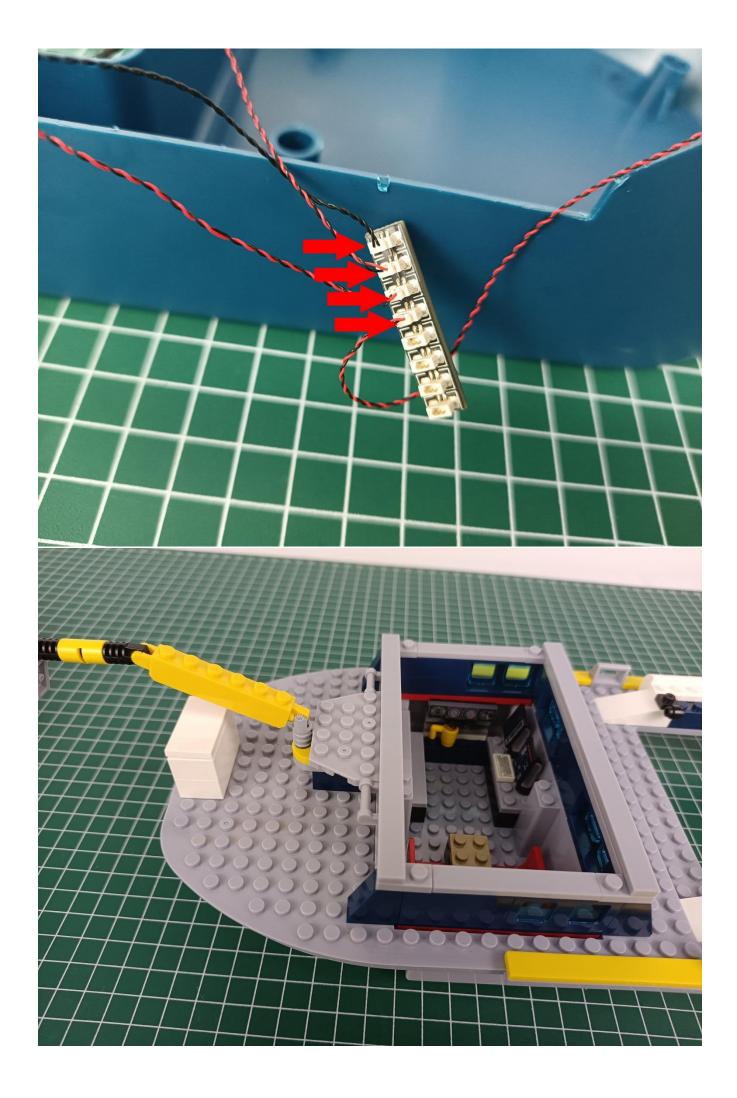


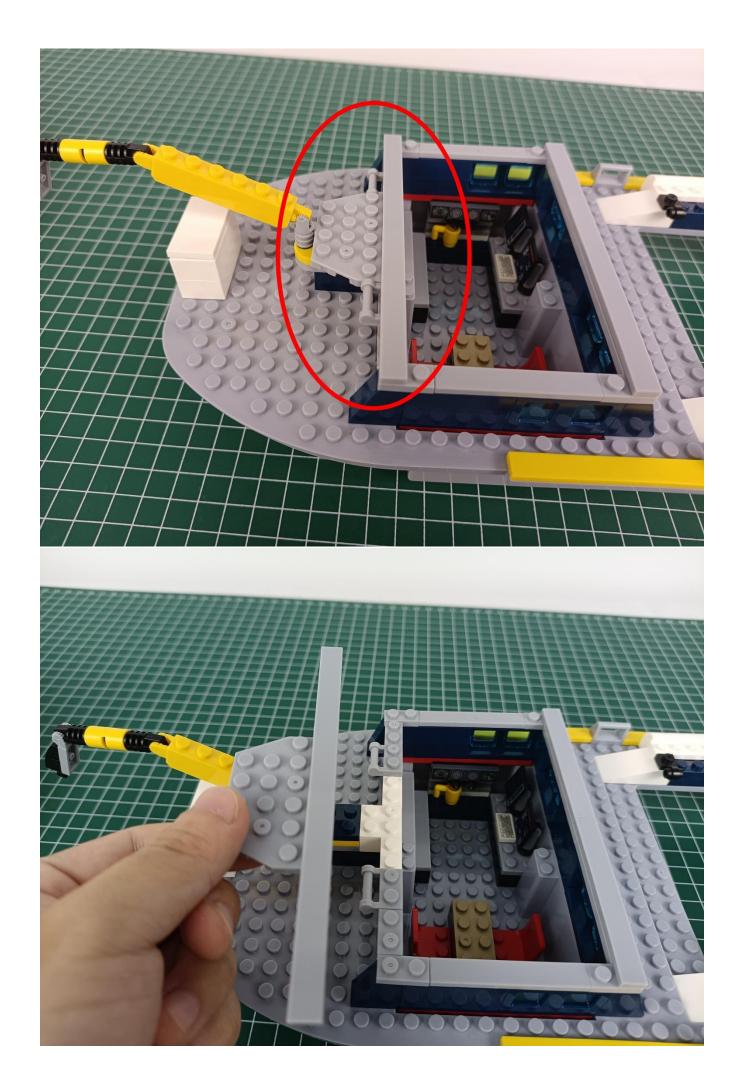





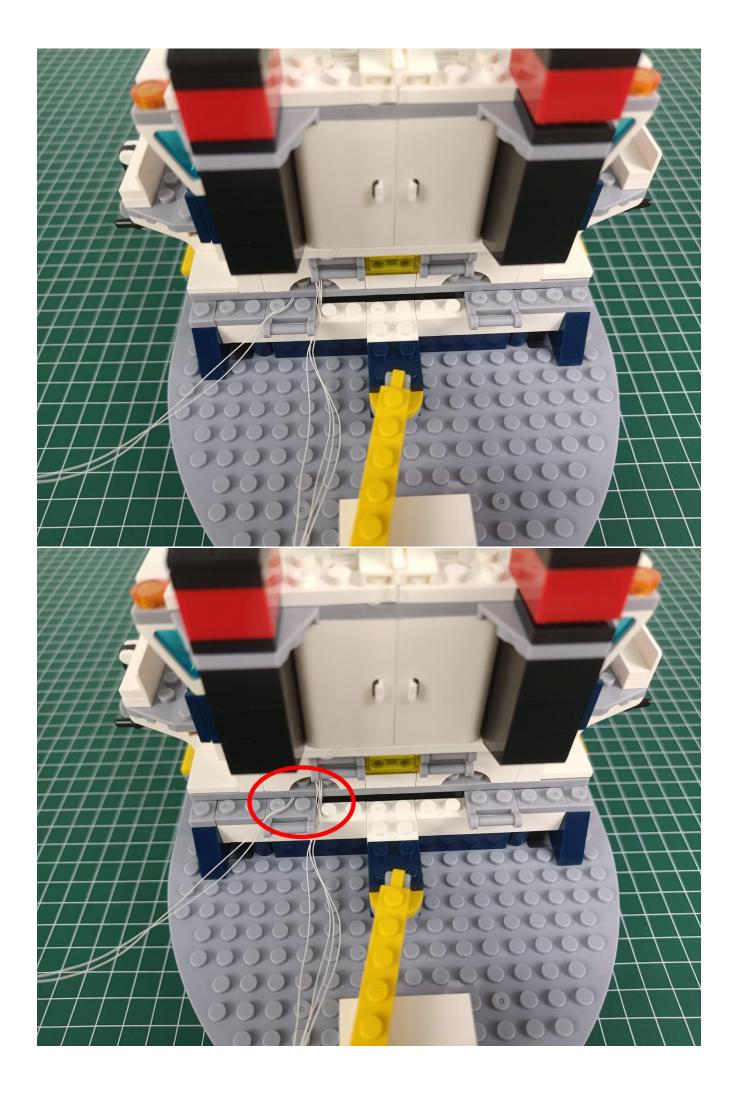


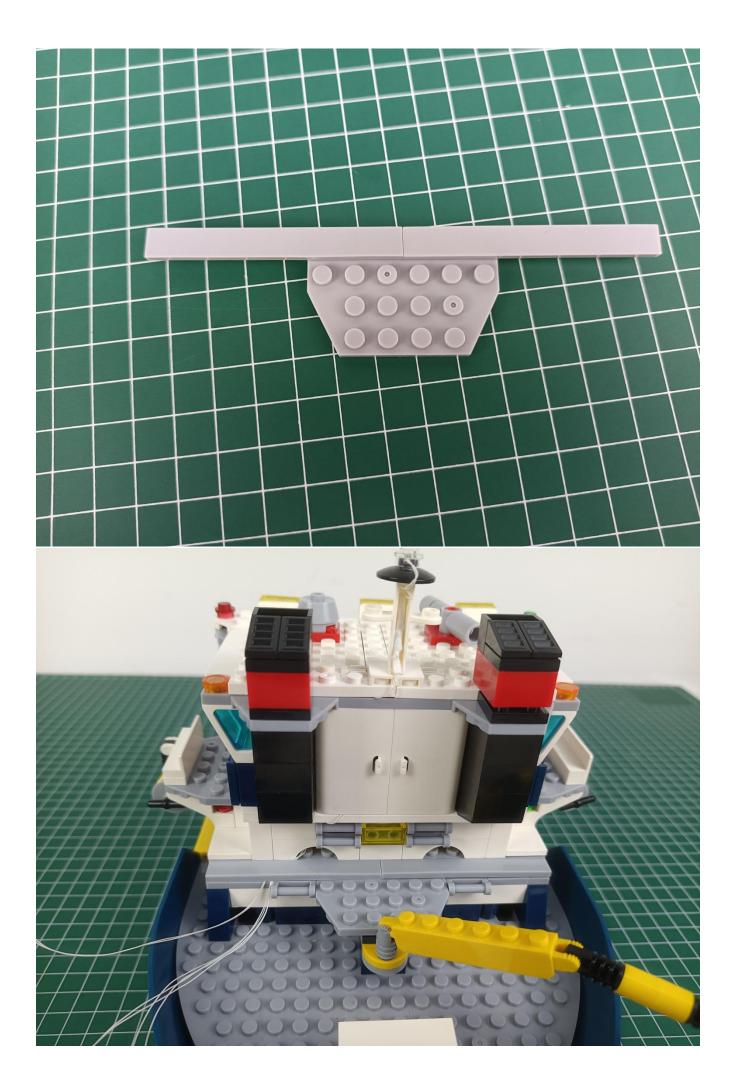

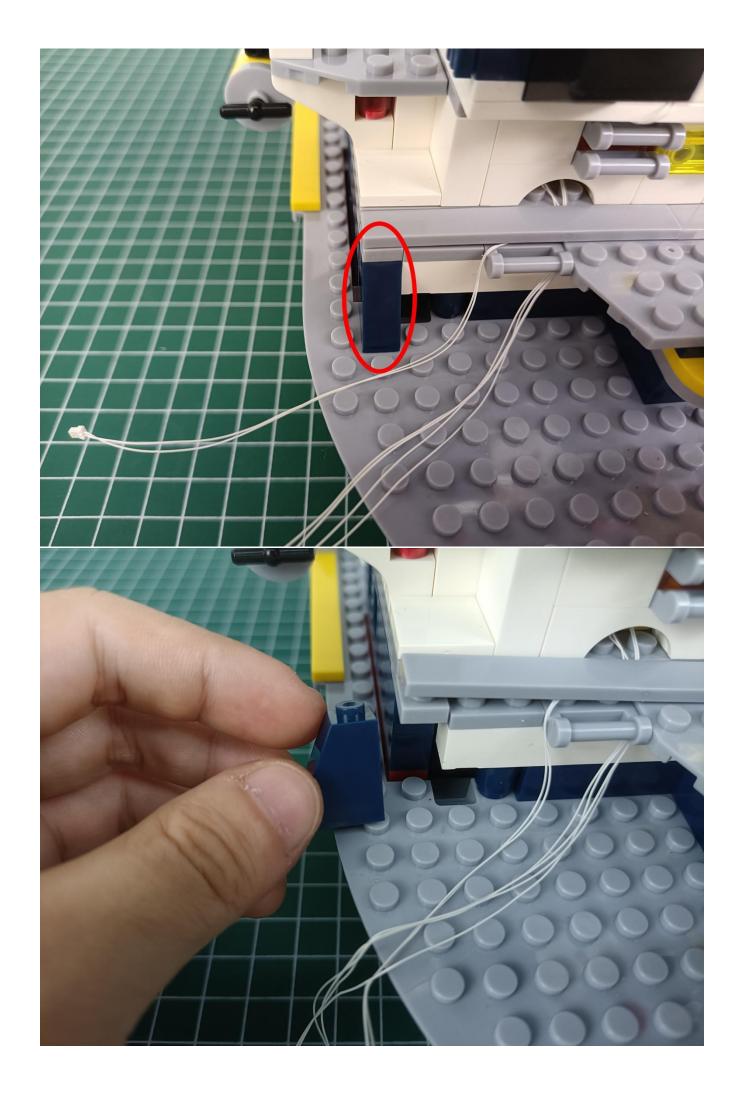

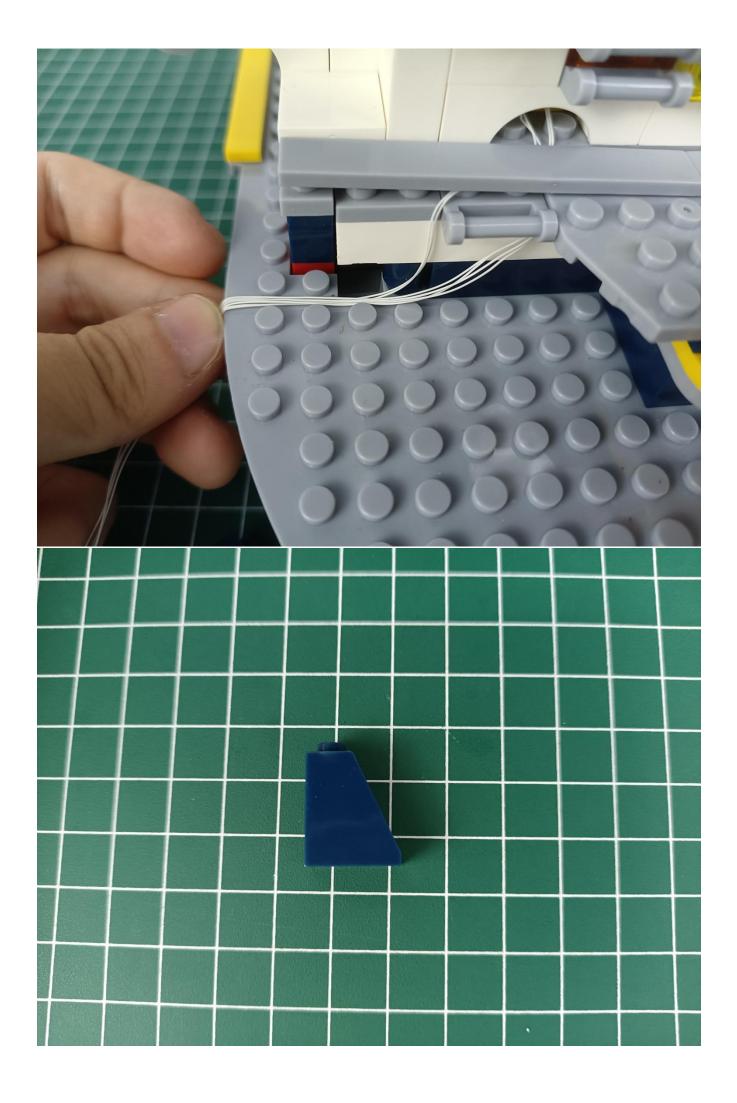

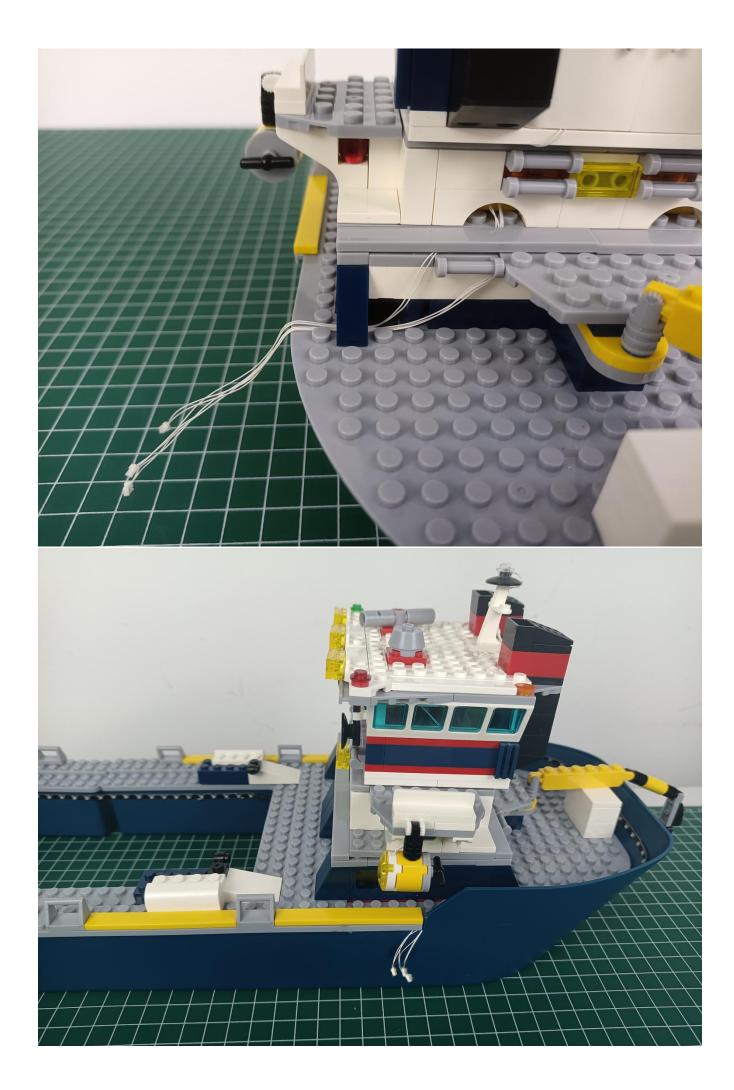


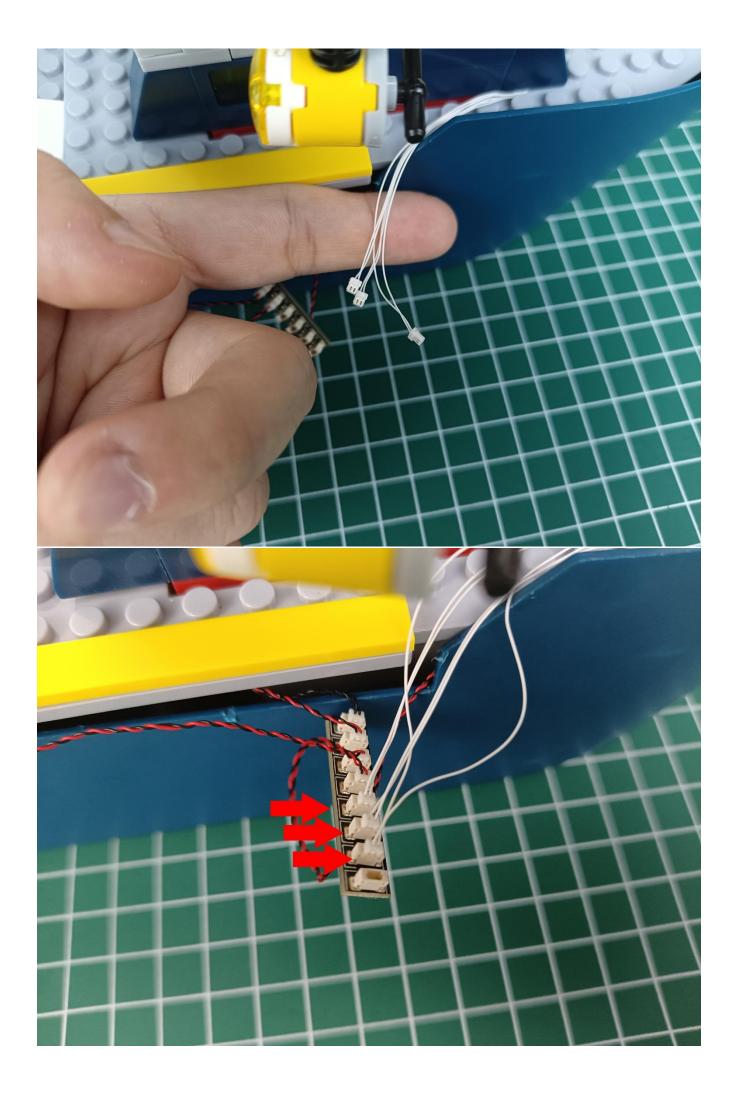



Take out the USB power cord from the small bag in bag 4.


(You can choose the battery box or the USB power cord to connect to the power supply. This demonstration uses the USB power cord).




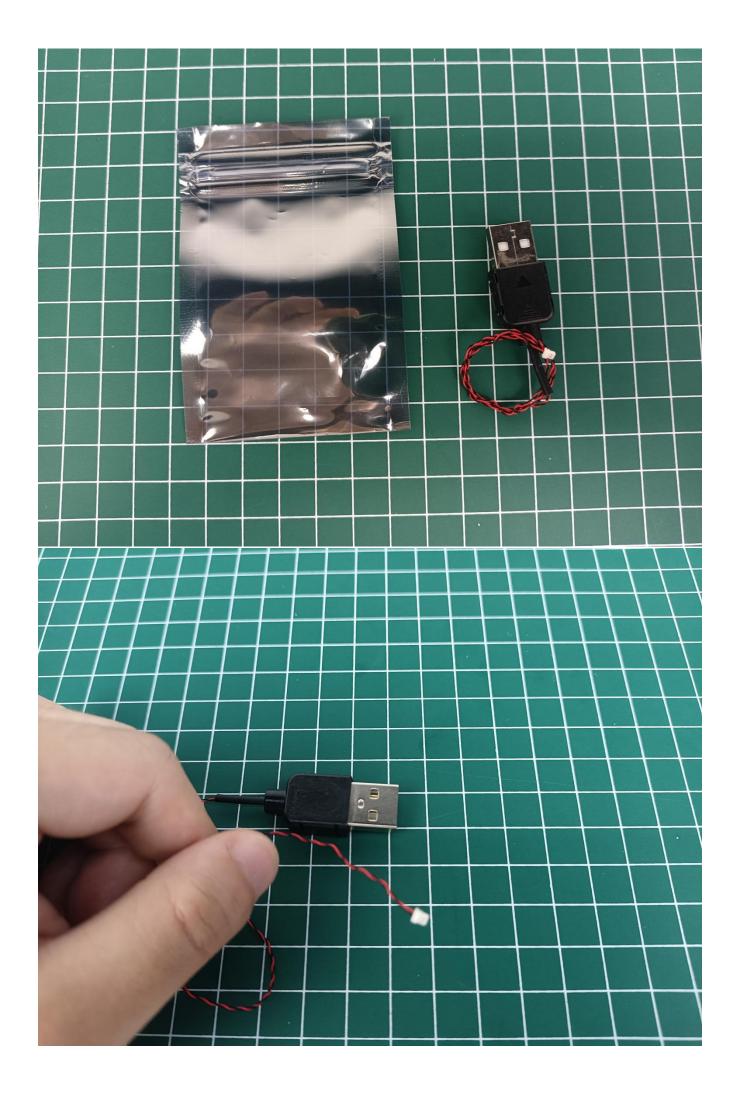


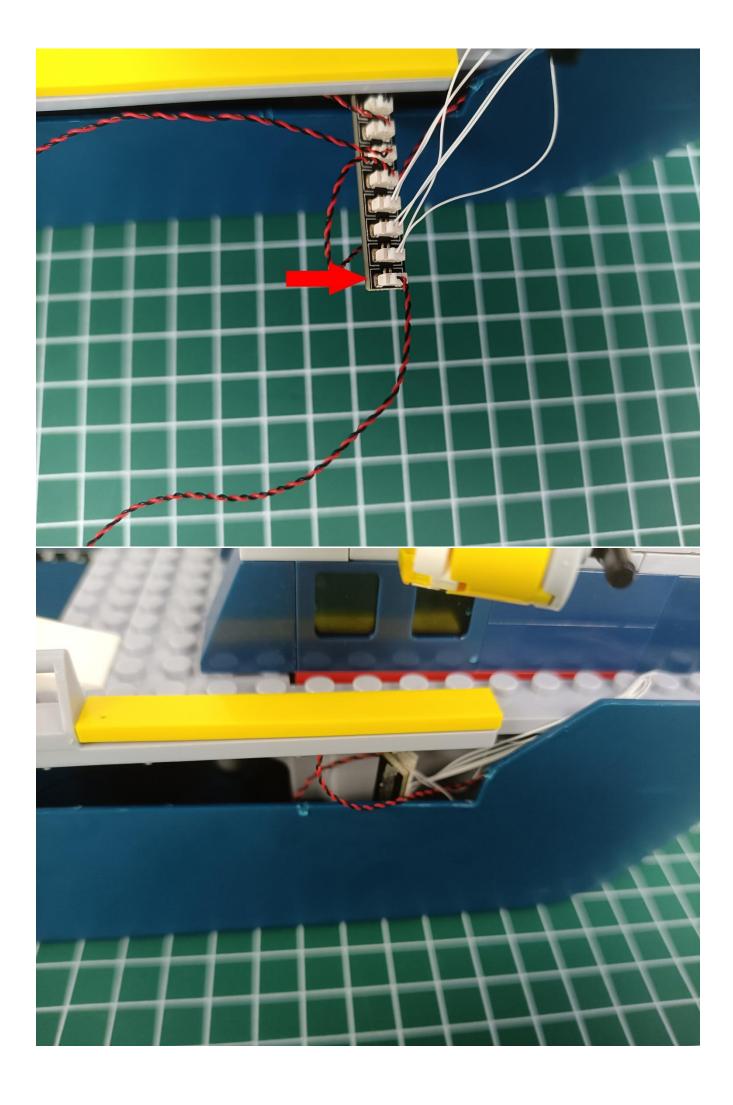


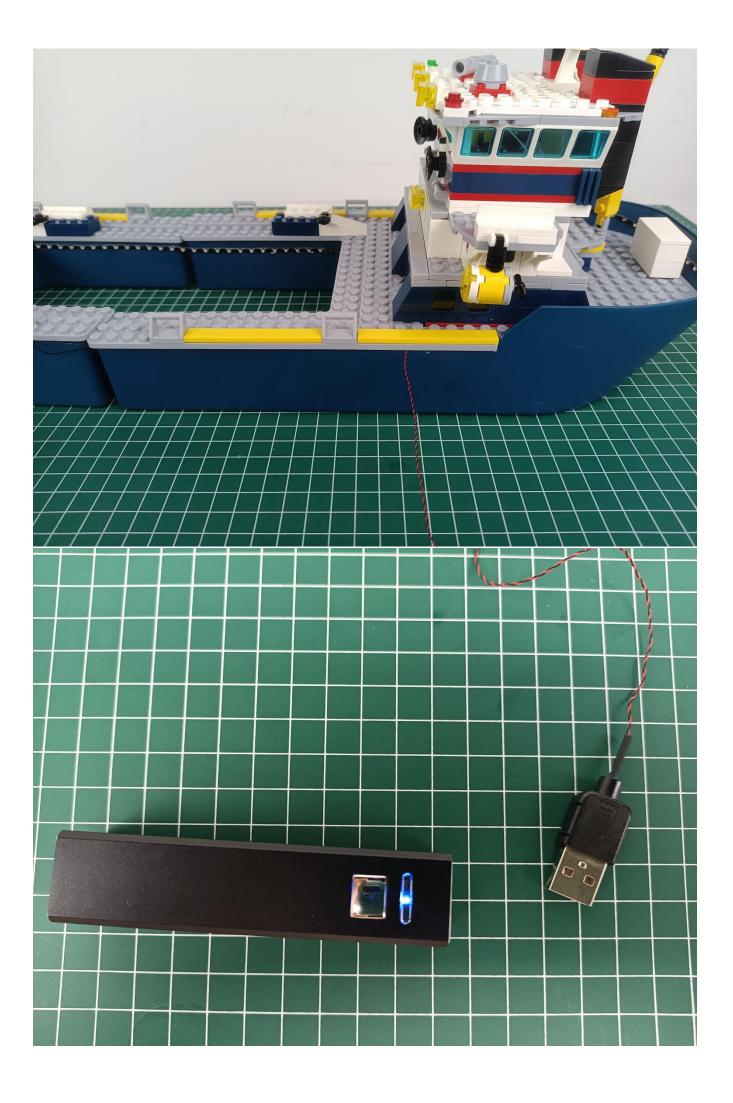

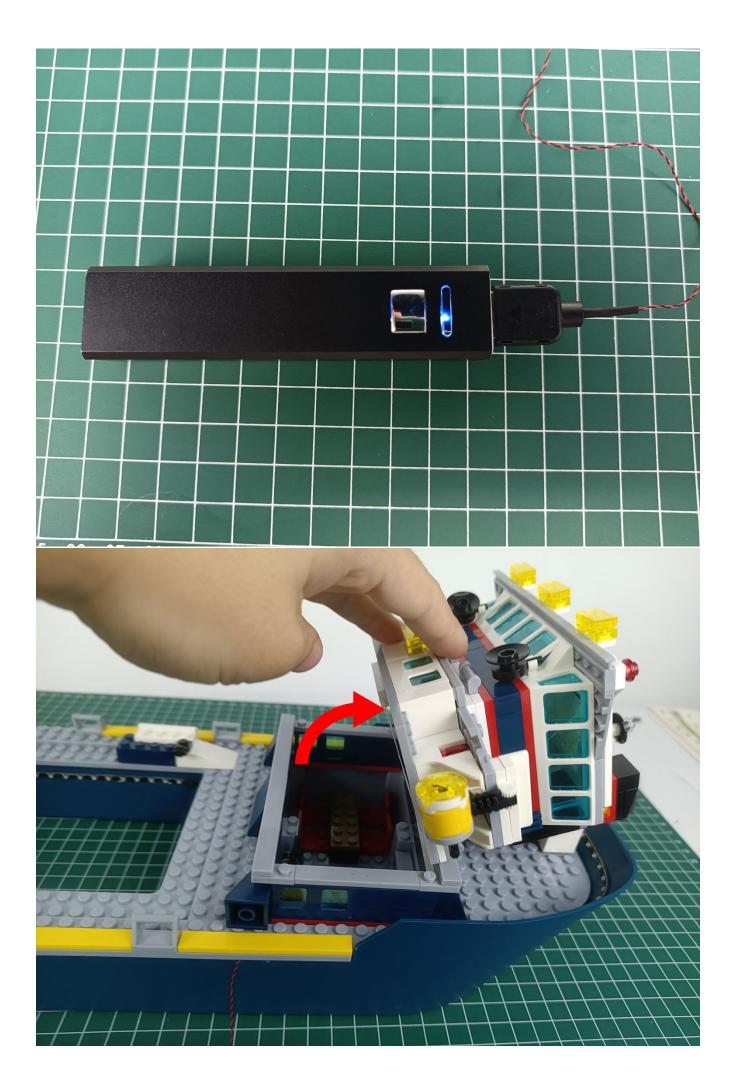


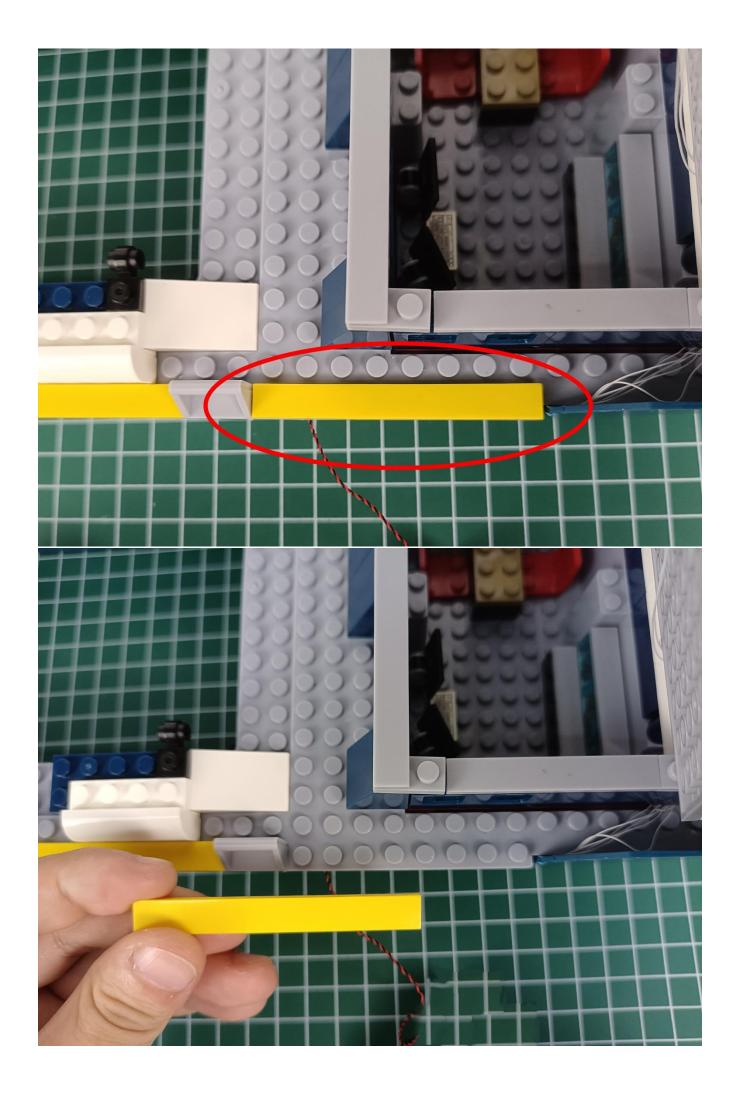


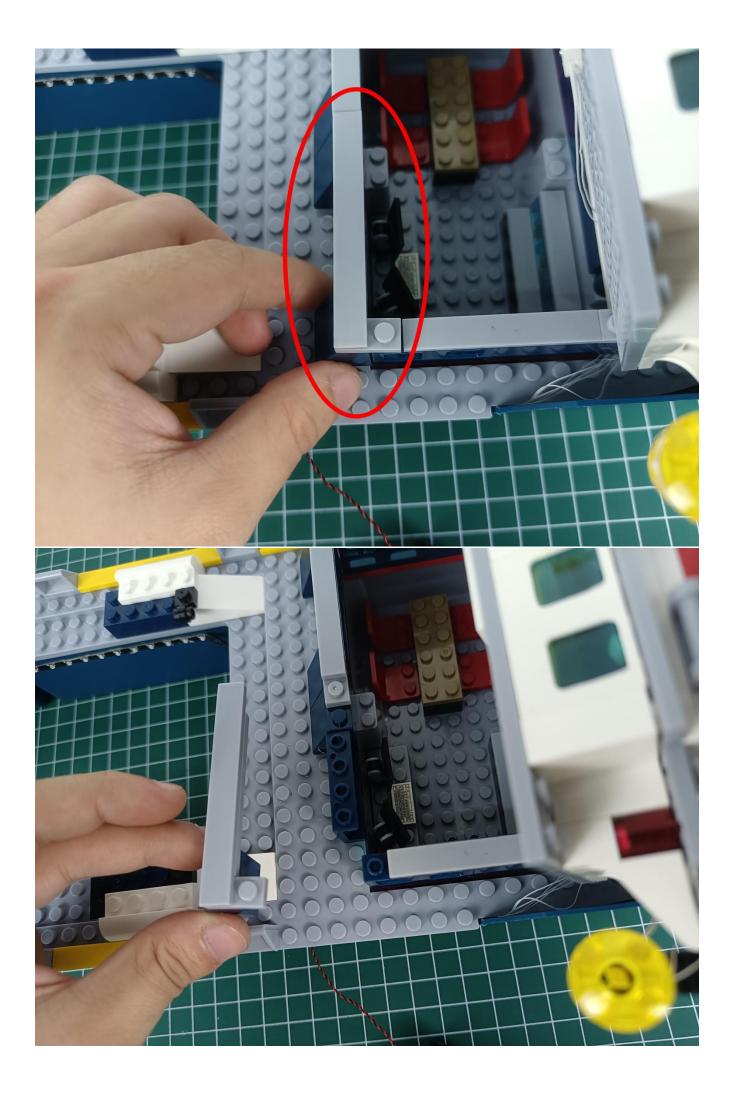


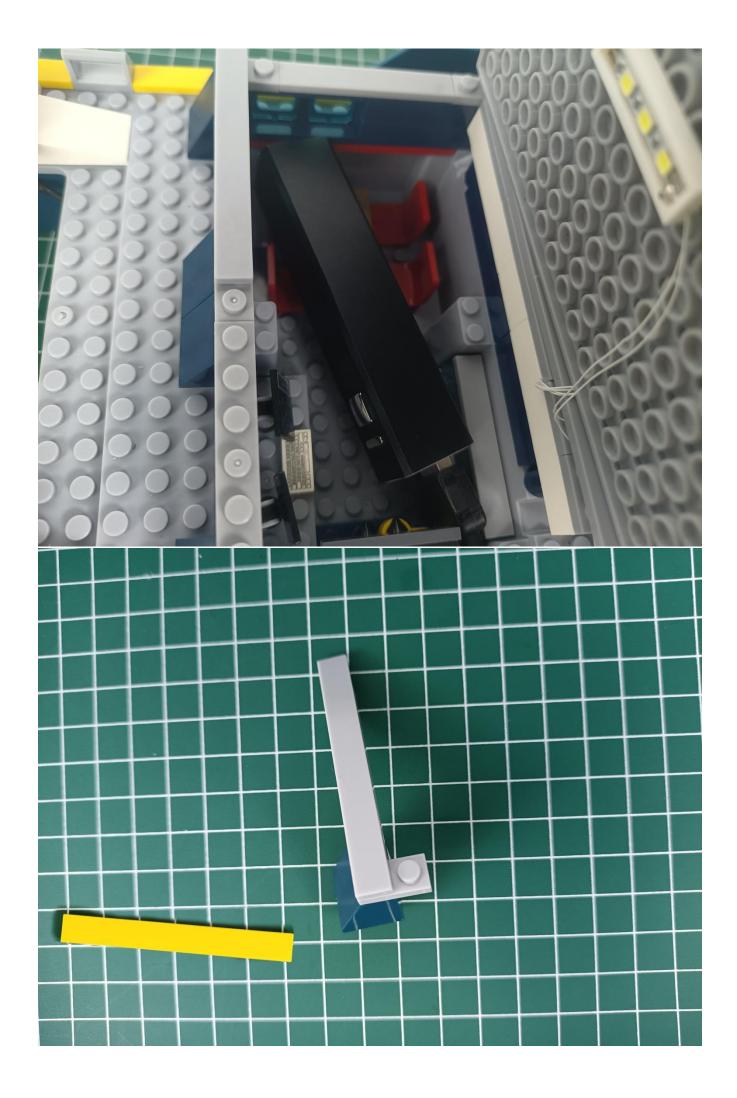





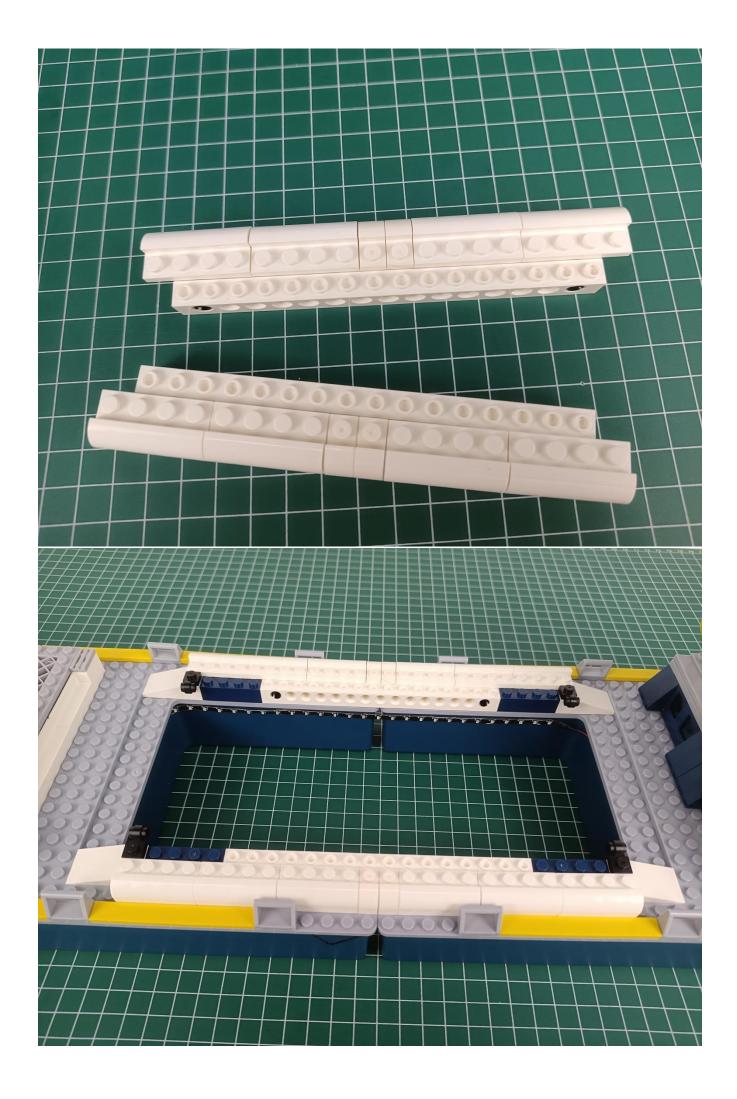


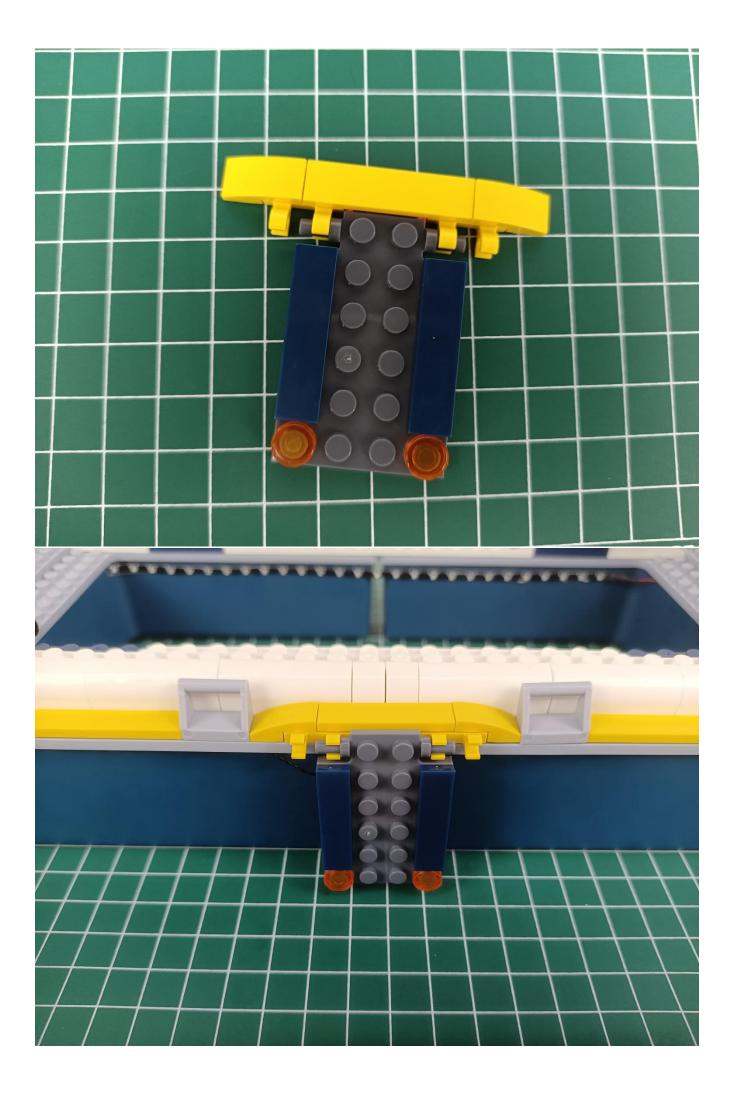

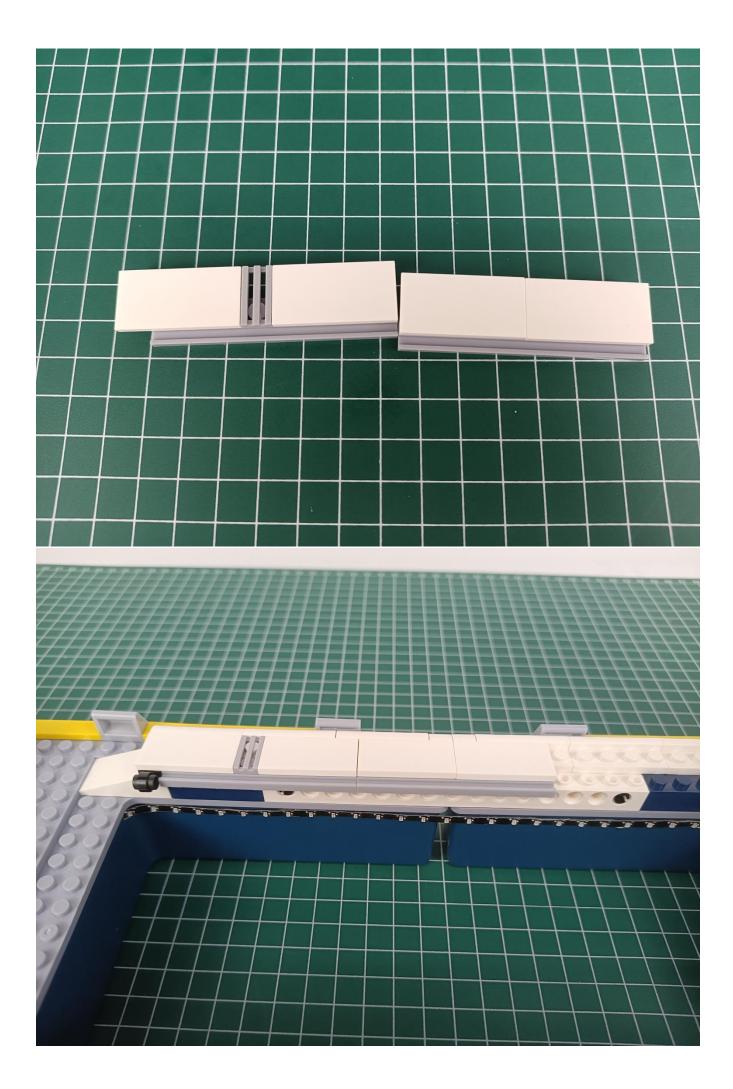


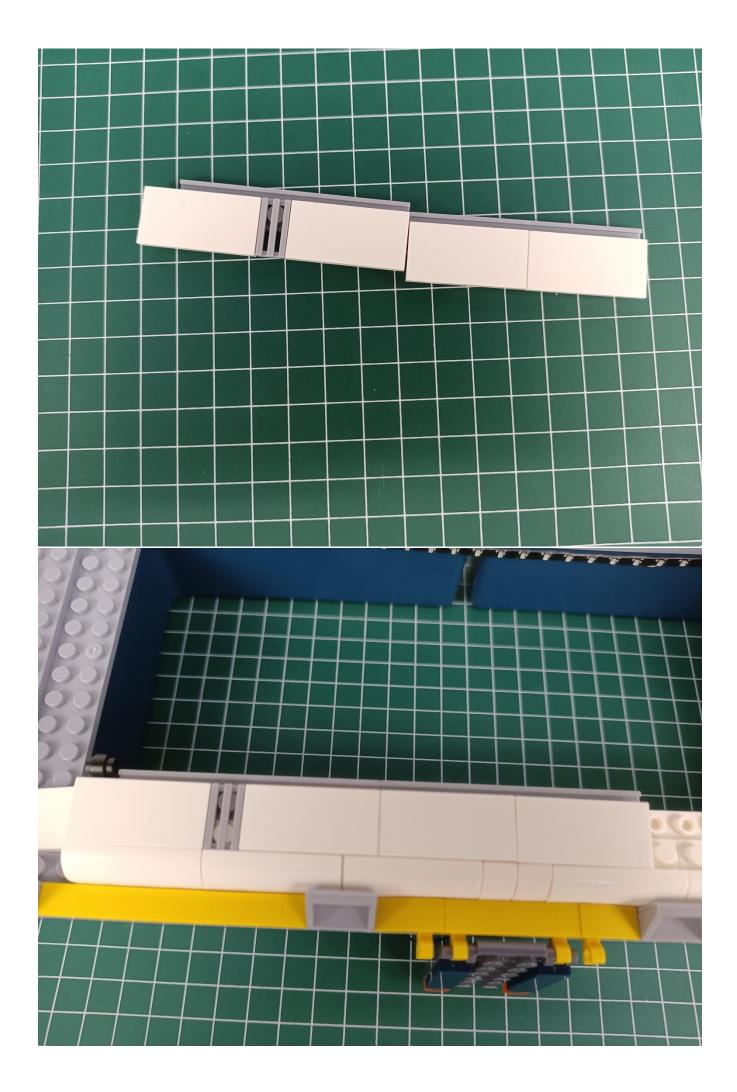

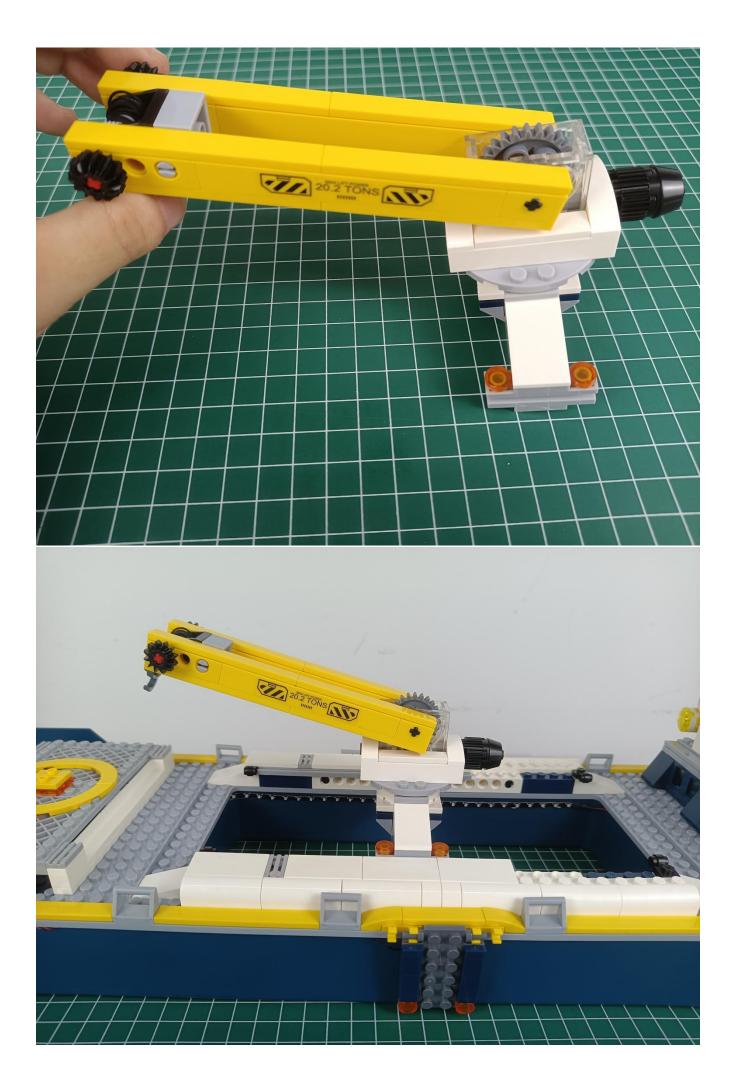

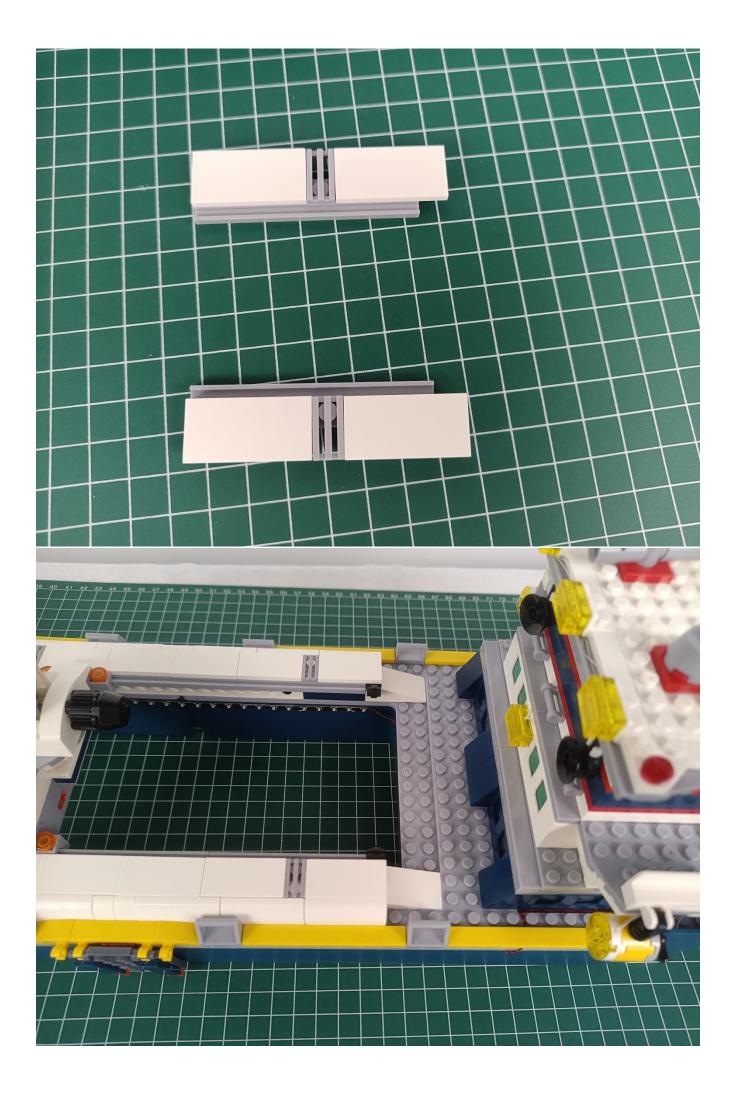



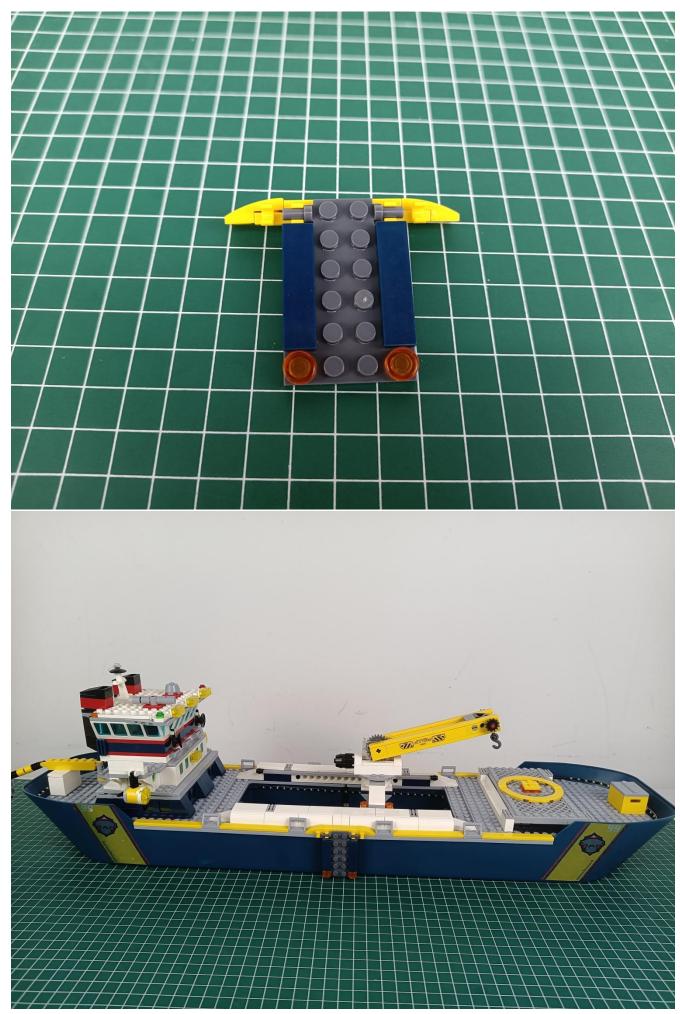

The installation is complete.



The above are ideas and instructions provided by our designers. Please move on:

- 1: Do you have any suggestions about the material and quality of our products?
- 2: Do you have any suggestions on the installation instructions and the degree of difficulty of the installation?
- 3: If you have better installation method and ideas, please contact us in time.