

75255 Yoda P19408

- P19408 is the unique code of lighting set, we use this to accurately identify the product you purchased and the corresponding manuals and services you need to obtain. Please make sure your product code is the same as the label on the back of the box shown “75255 P19408”.
- Installation requires a lot of patience and great observation that your LEGO bricks will come alive when you get this finished. The bricks with lighting as below, so make sure you're ready and let's get started.



Strategies for the Installation

This instruction divides three sections to complete the installation of the lighting set.

Section A: Check the type and quantity of components.

The quantity and type of components of each products are different and it needs to be carefully checked to make sure there do have enough material. The type of components is indicated by the label on the bag.

Section B: Test that each components is working properly.

Each components is made individually so it is necessary to test that each components is working properly to avoid the situation that the lighting does not work .

Section C: laying out components following the instruction.

Our material is very small but not fragile, just be reminded that don't to pull the wires too hard. For different people, there may be some installation steps that you can't understand. Please look at the previous and later installation step

Section A: Check the type and quantity of components.

There are 9 bags in this set. The name and quantities of specific components are as shown , please check carefully.

Label	Content	Quantity
Bit Lights-15CM-Yellow	Bit Lights-15CM-Yellow	4
Bit Lights-30CM-Blue	Bit Lights-30CM-Blue	2
Bit Lights-30CM-Red	Bit Lights-30CM-Red	1
Expansion Board	6 Socket Expansion Board	1
	4 Socket Expansion Board	1
AAA Battery Box	AAA Battery Box	1
Connecting Cables-5CM	Connecting Cables-5CM	2
Light Strips-Green-28	Light Strips-Green-28	1
Remote Control Board	Remote Control Board	1
Parts package		

Please contact us immediately if there have any missing components.


Section B: Test that each components is working properly.

We need a structure to test all lights, so take out the bag with label “AAA Battery Box” and “Expansion Boards” as follows.




It is worth reminding that our products are all customized. They have a unique way of connecting. The white plug on wire and the socket of the expansion board need to be connected together to transmit power.

Note that on one side of the white plug you can see two very small golden wires that should be connected to the two golden needles in socket of the expansion board. shown as blow.

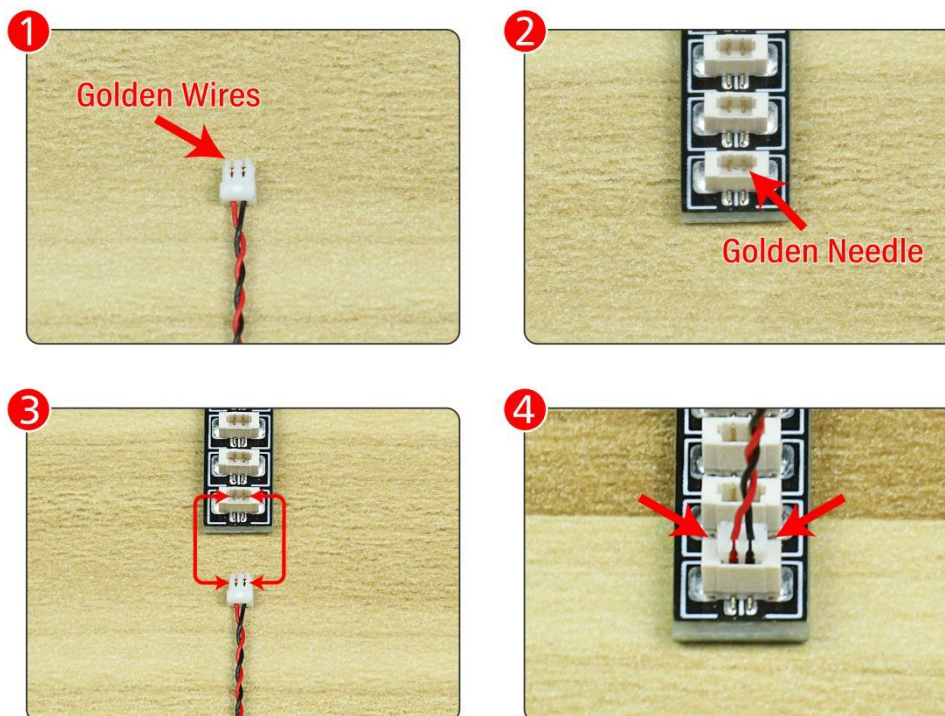

All our connections between plug and socket are all the same as shown above. So for any such structure with plug and socket, please pay attention to the golden wire of the plug and the golden needle of the socket, they must be touched together.


The connection method between the AAA Battery Box and Expansion Boards is as follows:

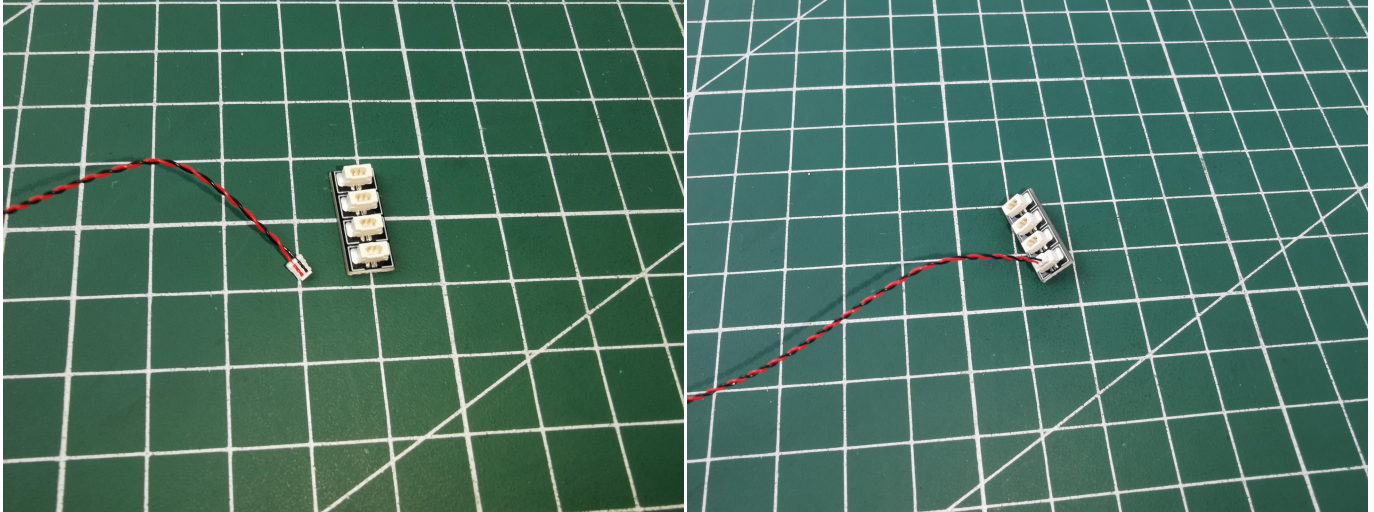

This instruction will use the power bank as power supply . The test structure is shown as follow. All lamp in this set will be tested by this structure.



when we test "Bit Lights-30CM-Red" particles,Take out the bag labelled "Bit Lights-30CM-Red".Take out one of the light and connect it to the socket. Turn on the aaa Battery Box, the light will turn on normally as shown below.

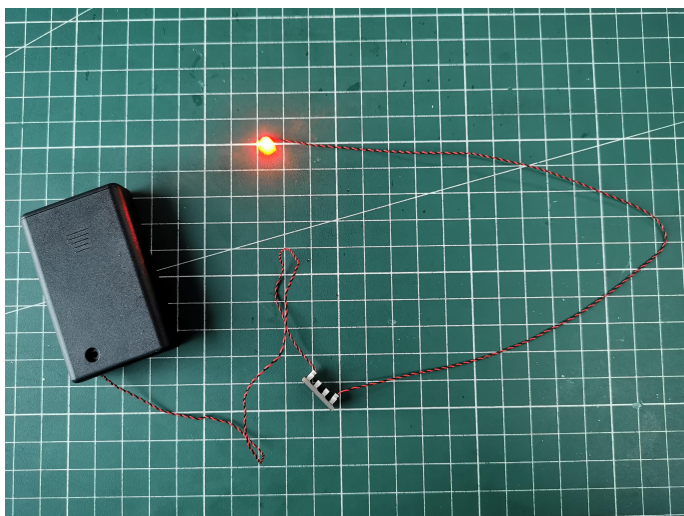

Test each lamp according to this method. It should be noted that after the test, the lamp must be returned to the corresponding bag to avoid confusion of types.




The components needs to be tested in this set is 4*Bit Lights-15CM-Yellow,2*Bit Lights-30CM-Blue,1*Bit Lights-30CM-Red,1*Light Strips-Green-28.
Please contact us immediately if any components don't work.

Section C: laying out components following the instruction.


1



2

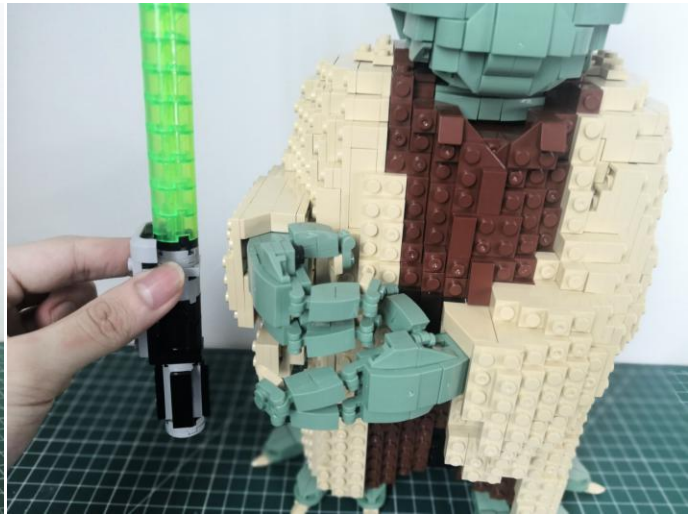

3

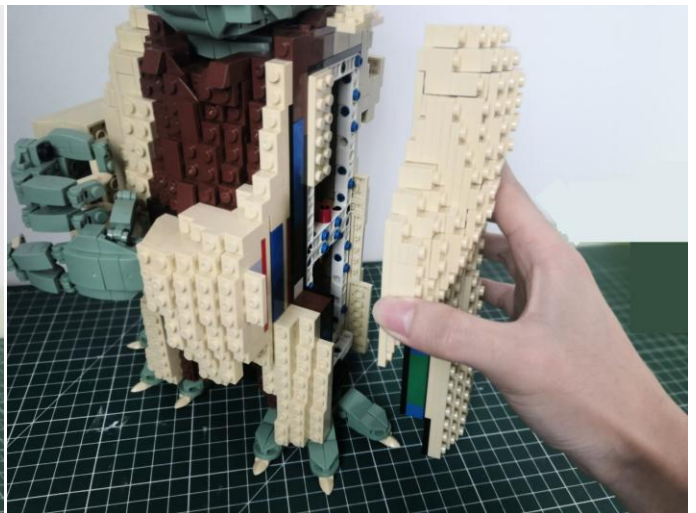


4





5





6

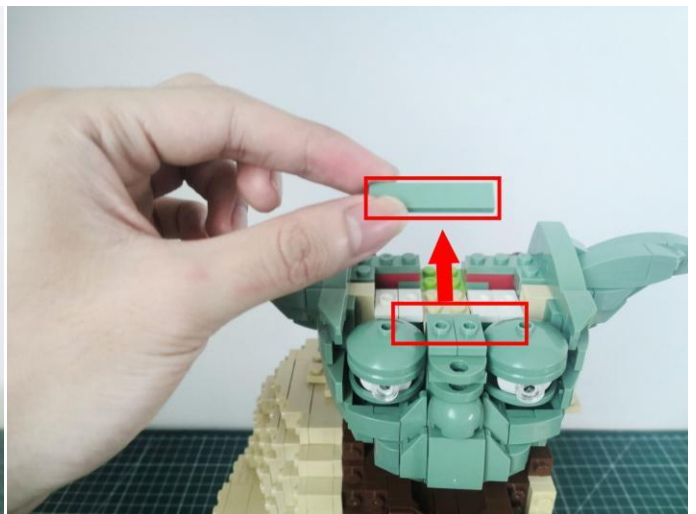


7

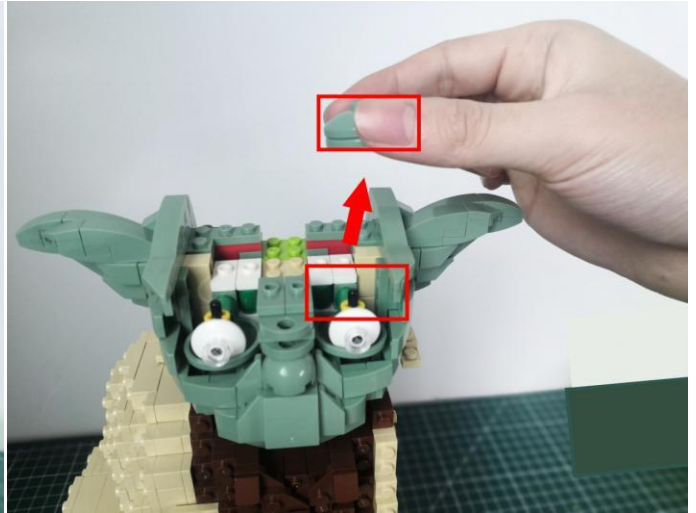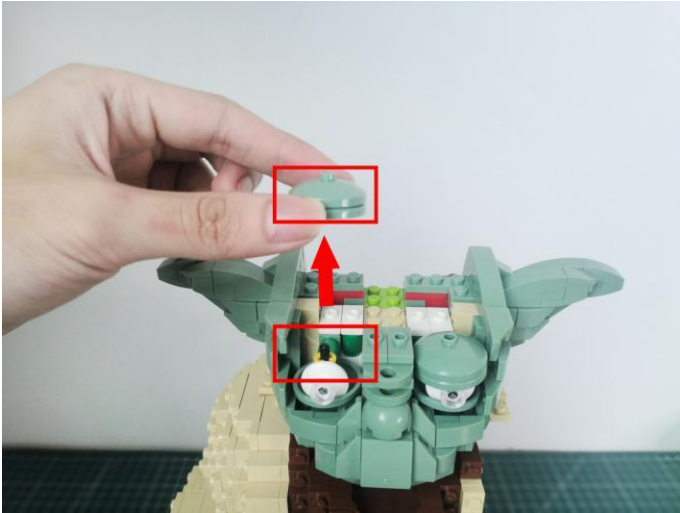

8

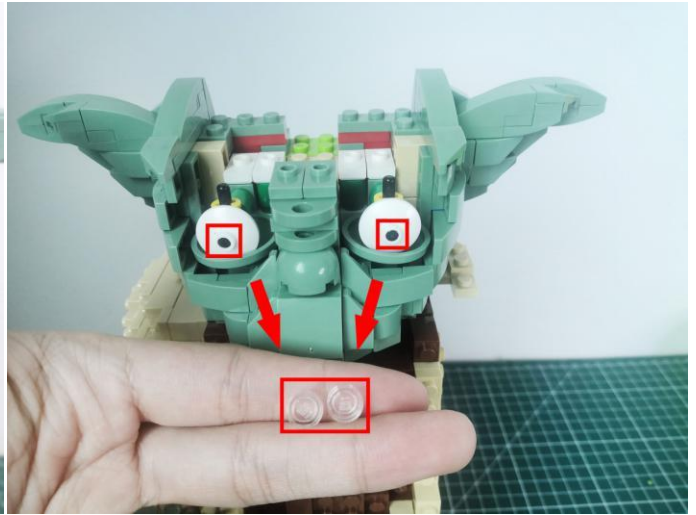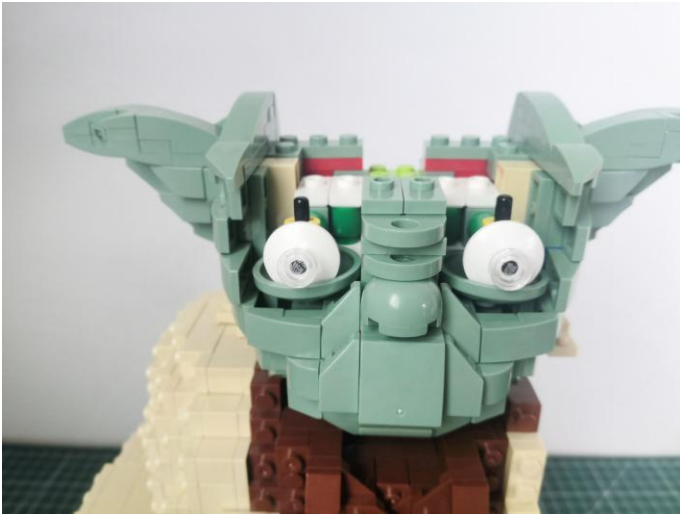

Take 2 blue 30cm dot lights, 2 trans light blue round plates.

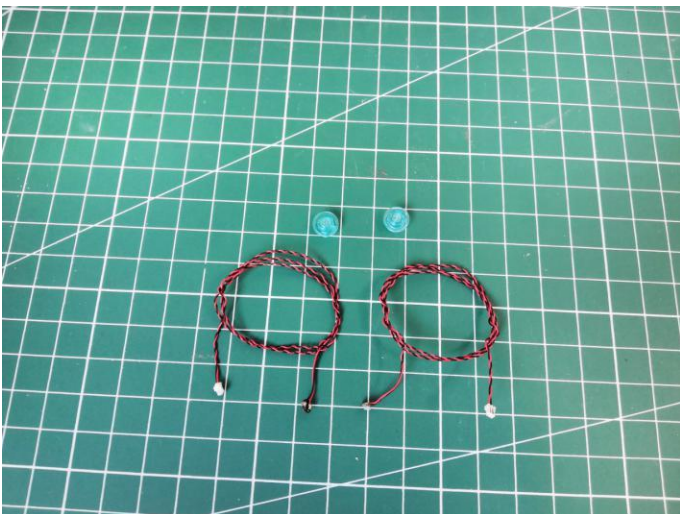

Tips

The plate without slit:

The plate without slit:

The squeeze causes the protective layer of the wire to be torn apart, the positive and negative wires touch together, and the set is short-circuited and the hot or wire is crushed, the wire to be disconnected and don't work.



The plate with slit:

The plate with slit:

The wire has enough space to avoid being squeezed endowed with longer service life and more stable effect.





The slit on the the plate round 1X1 are hand-made to avoid squeeze the wire and cause short circuit and abnormalheat during installation.

9



10

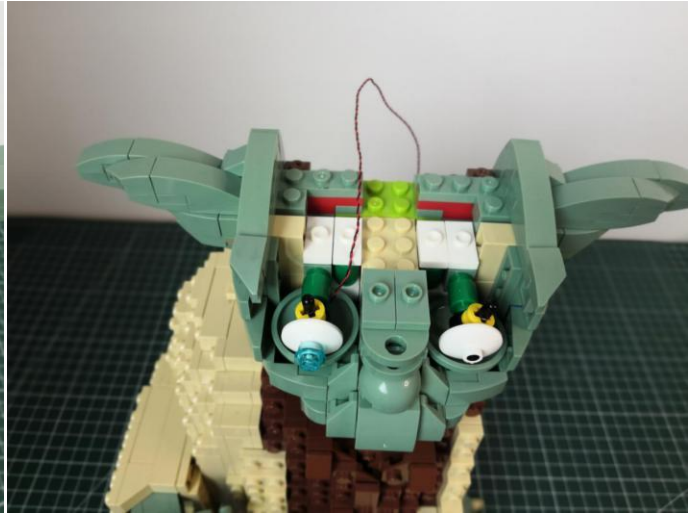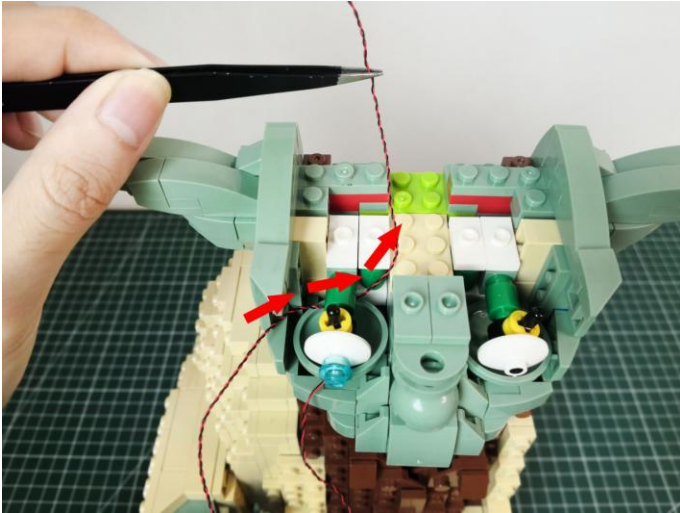

11





12



13



14

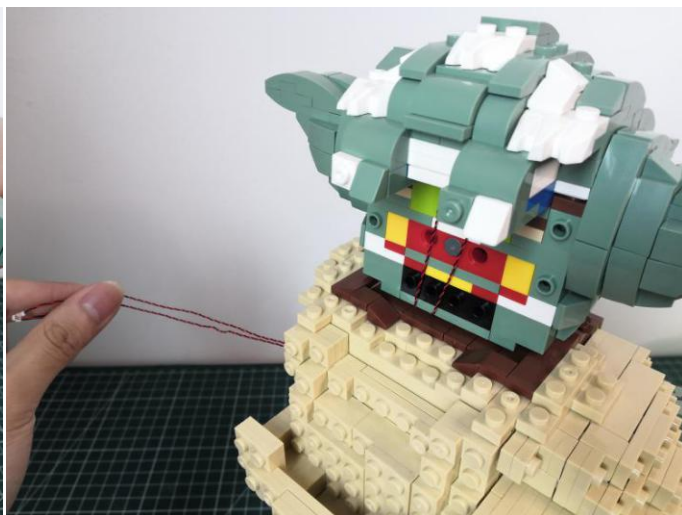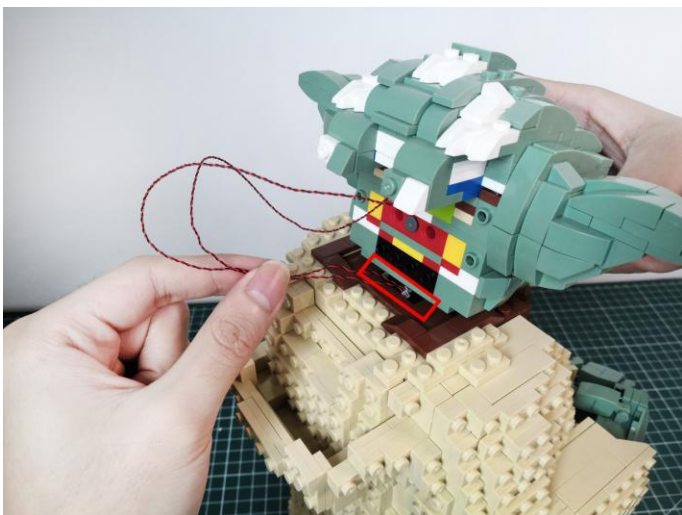


15





16





Take a 15cm green strip light.

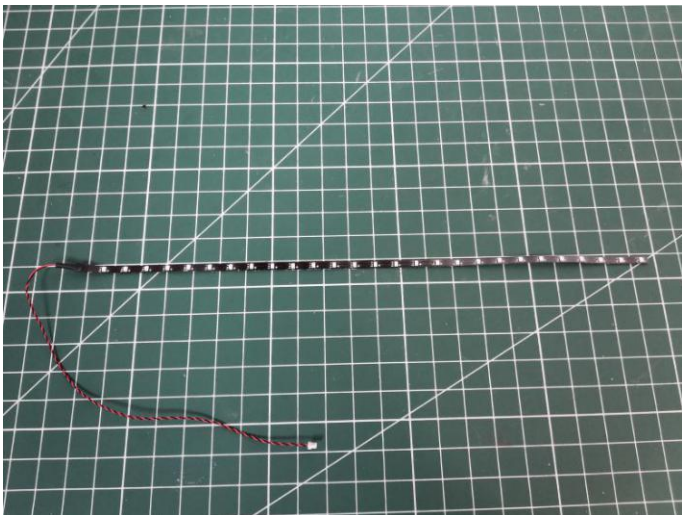



17

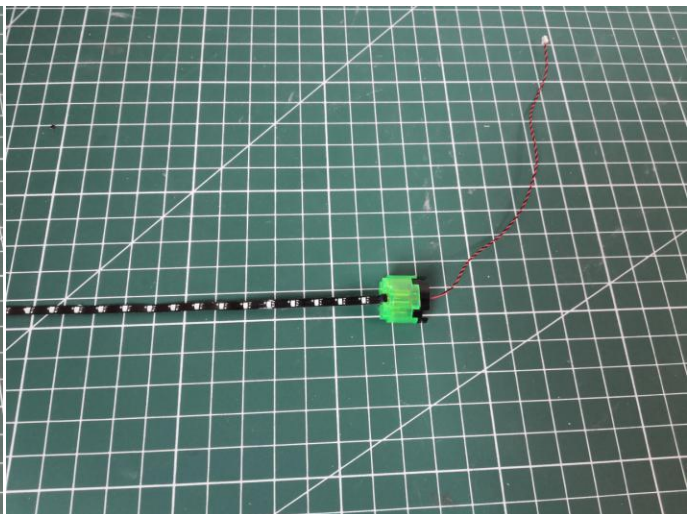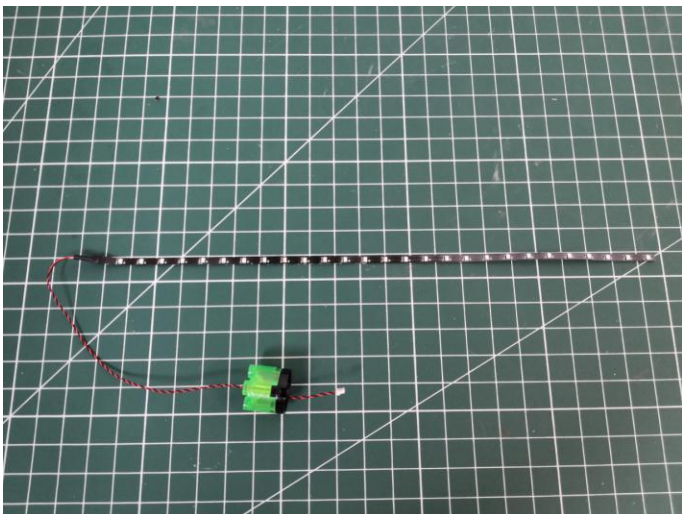


18

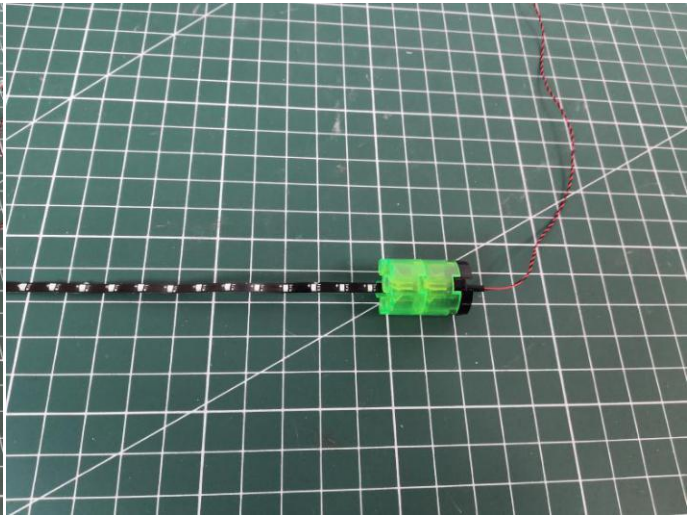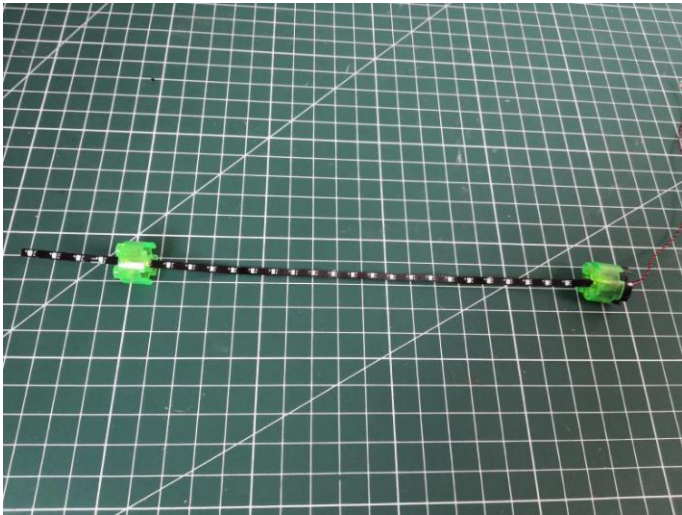



19

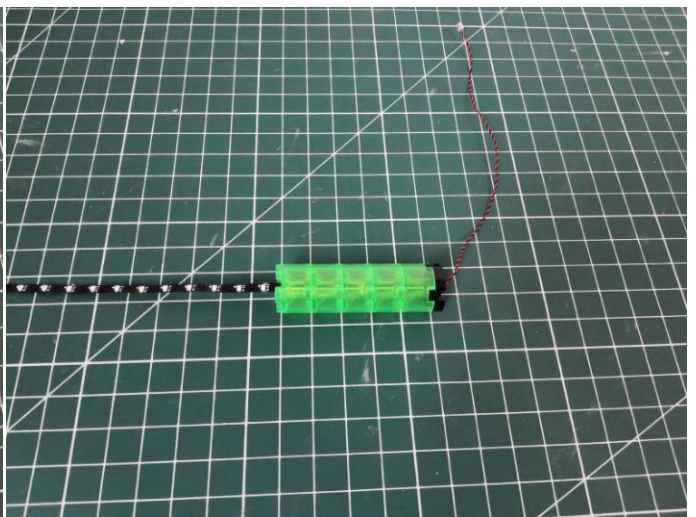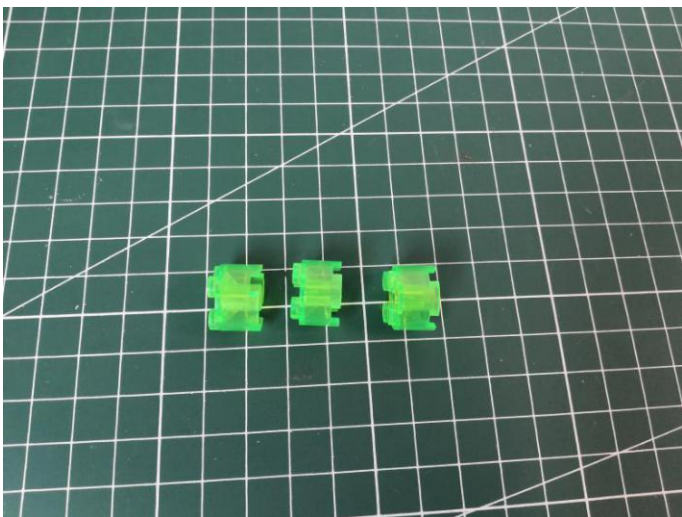



Take a trans green lightsaber.

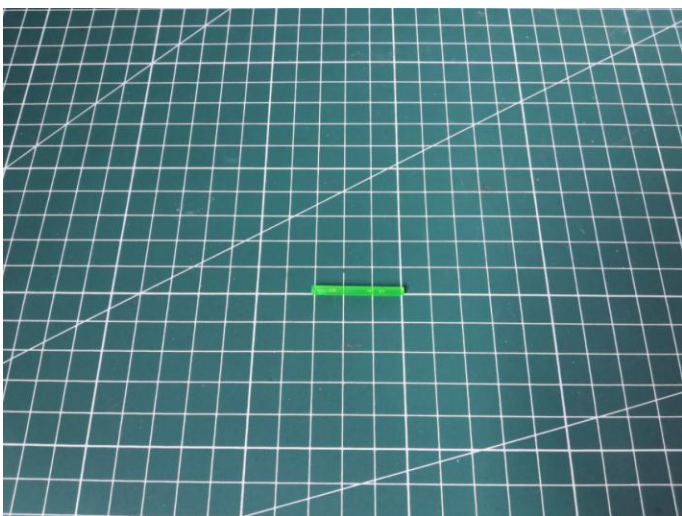


20

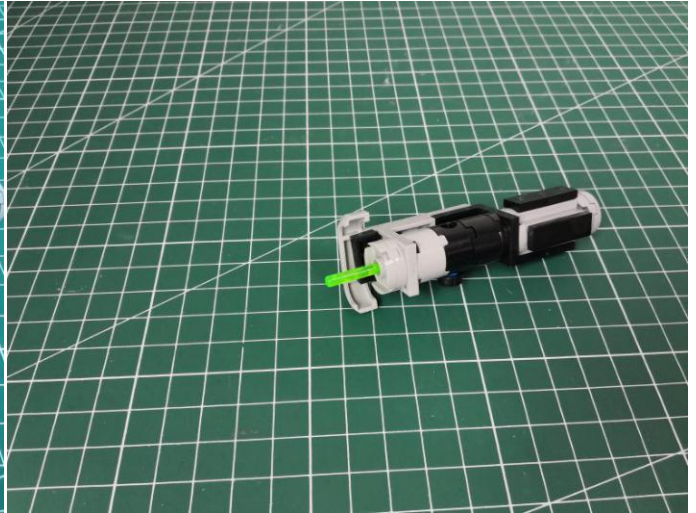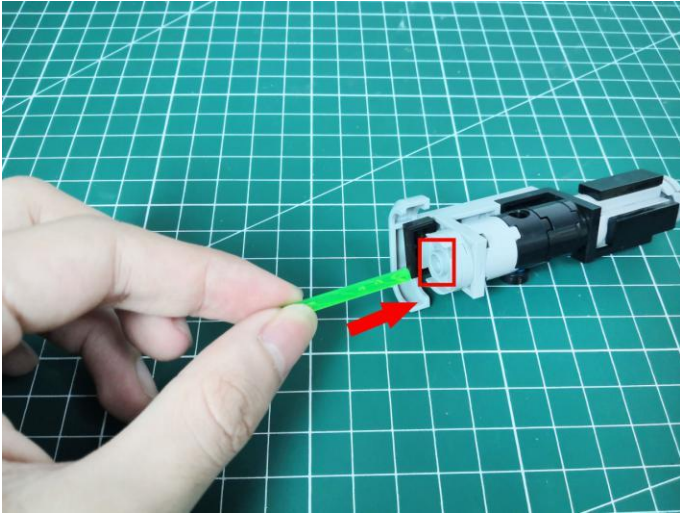



21

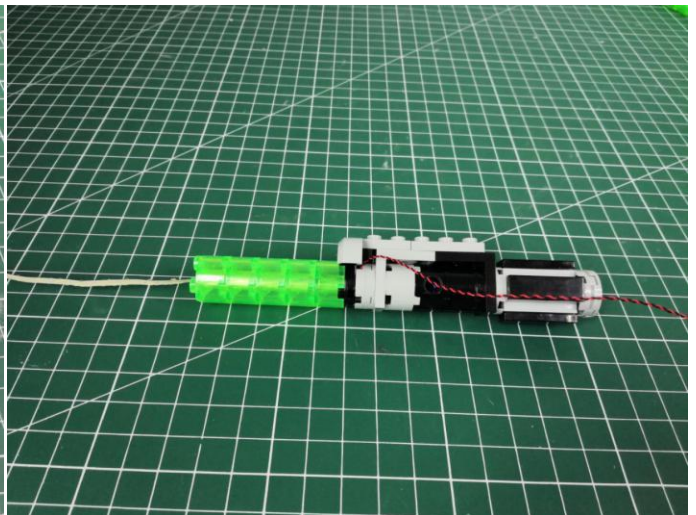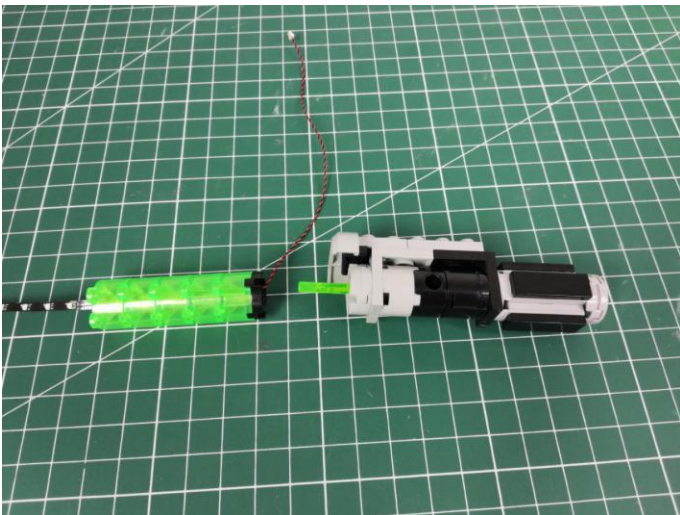


Take a red 30cm dot light, a trans red round plate.

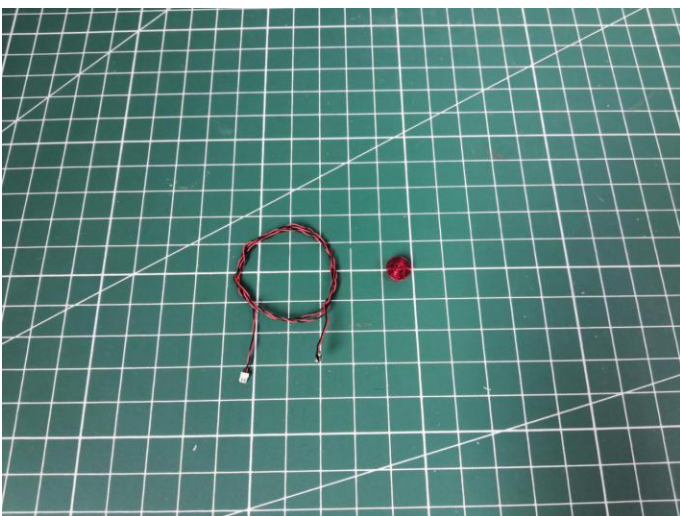


22

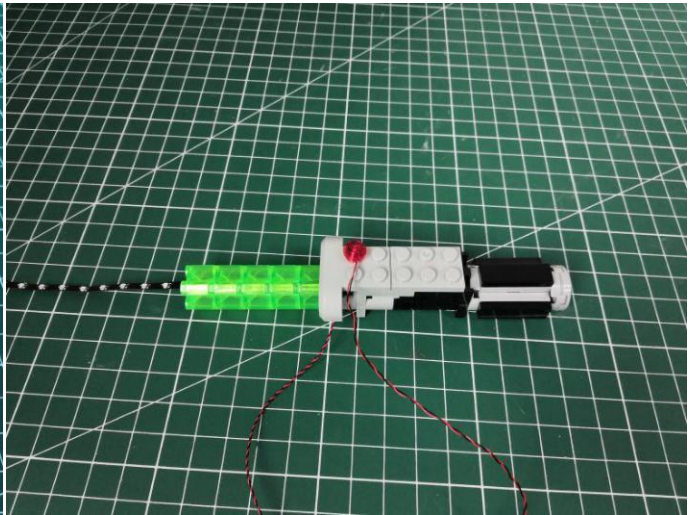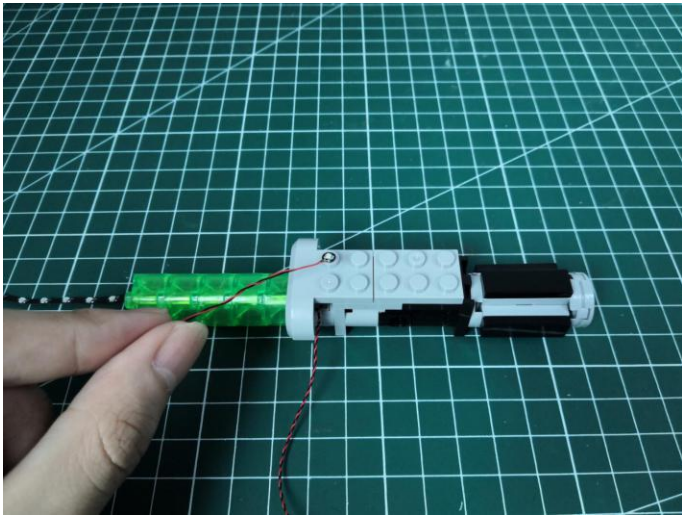


23

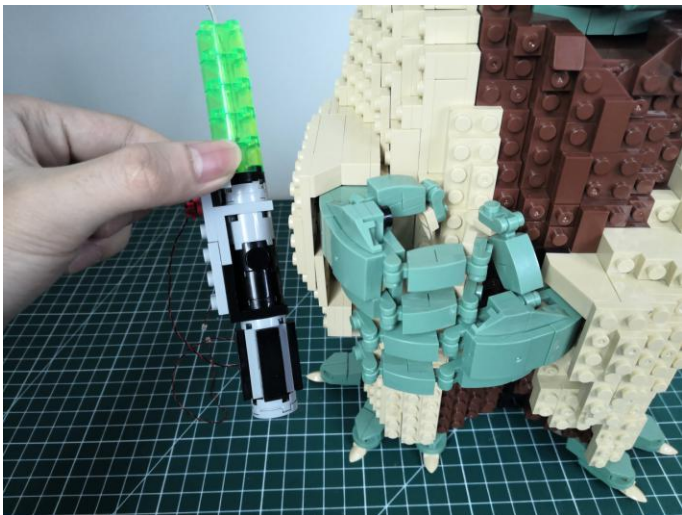


24

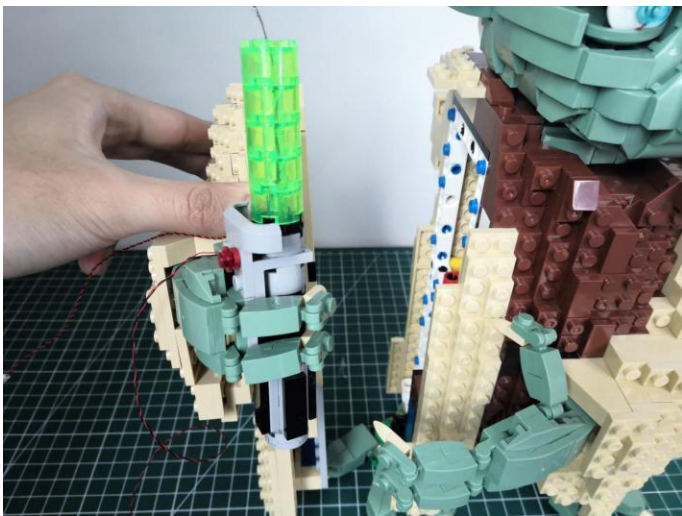


25

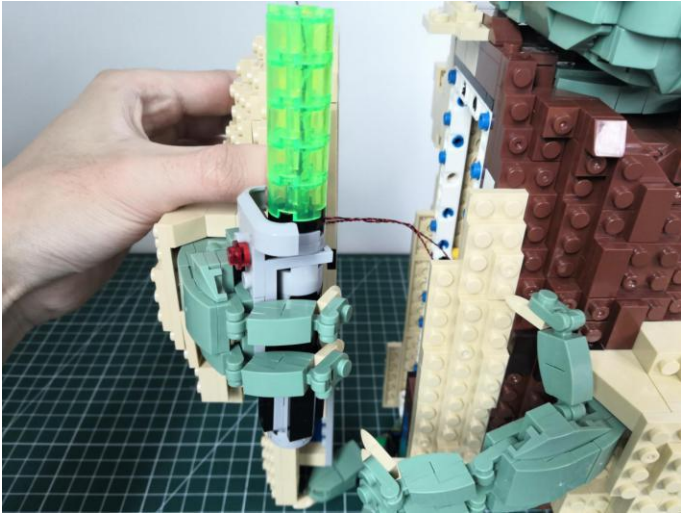

26

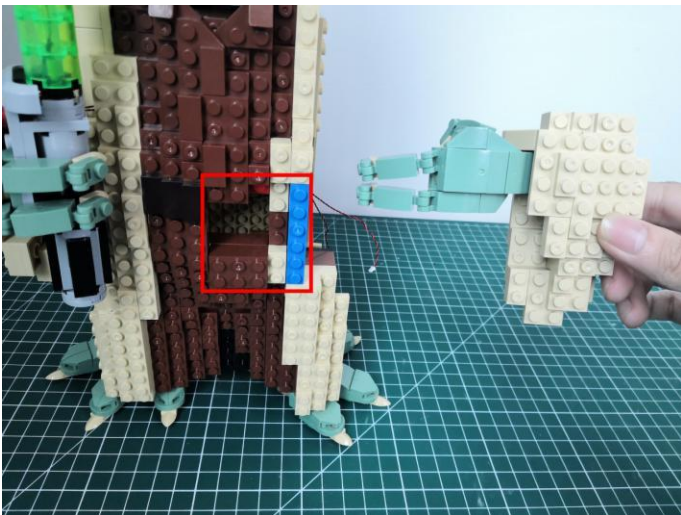


Take 4 yellow 15cm dot lights, 4 trans yellow round plates.

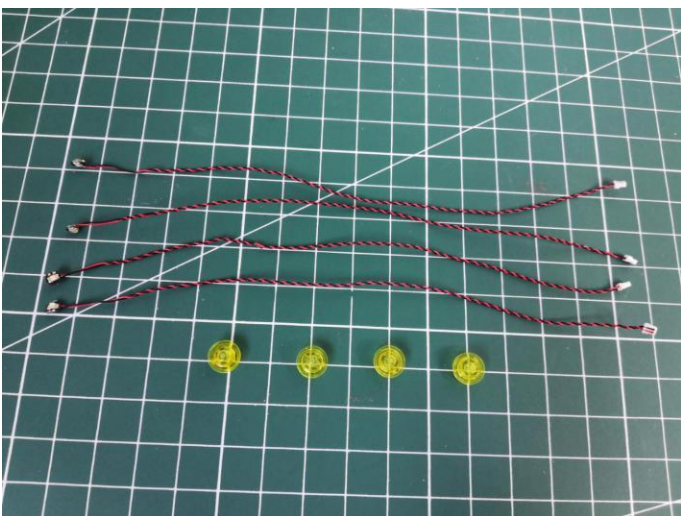

27




28

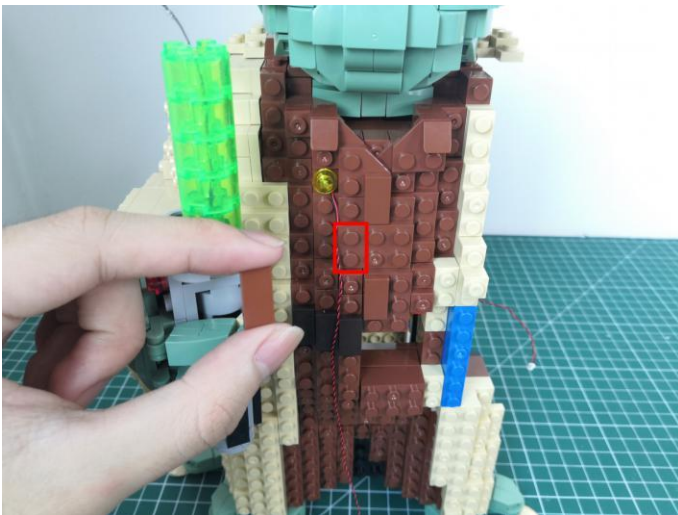



29





30

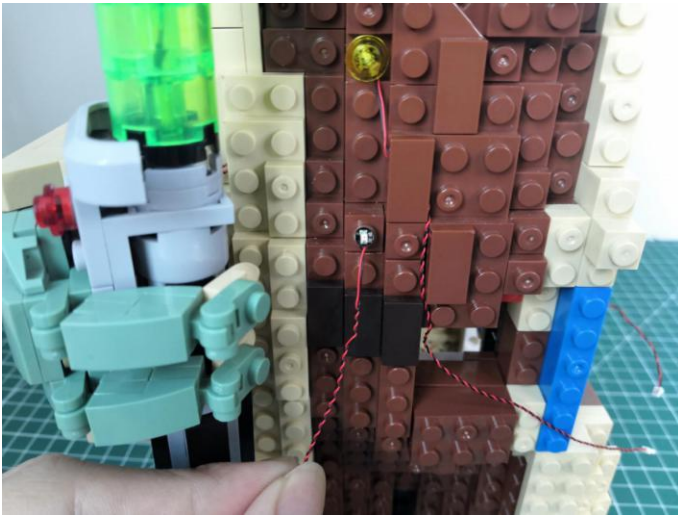


31

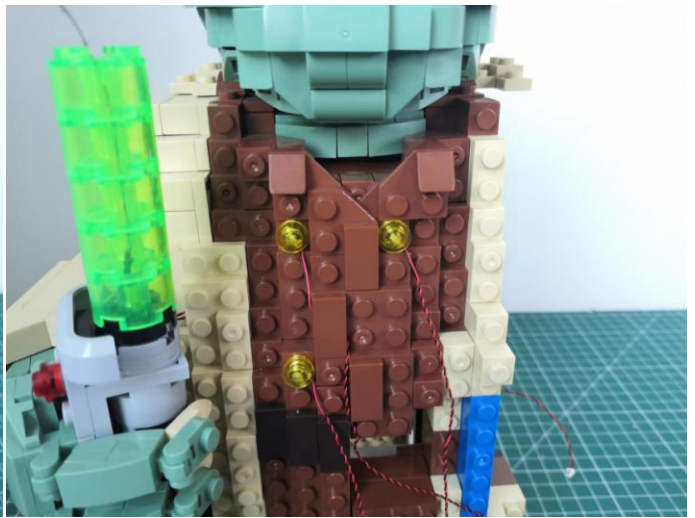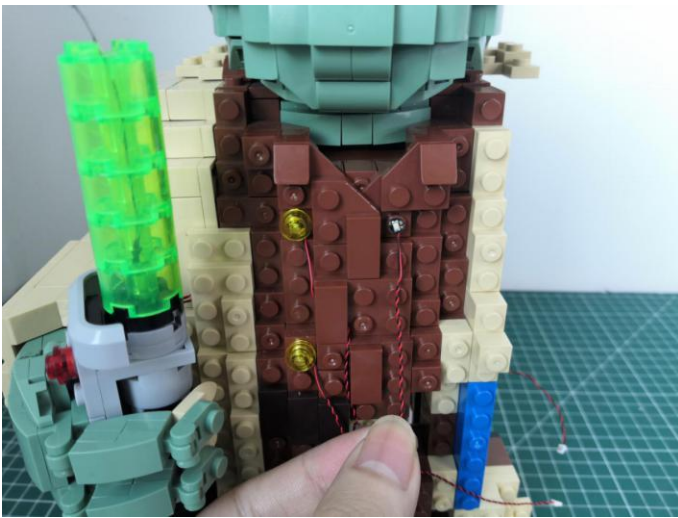


32

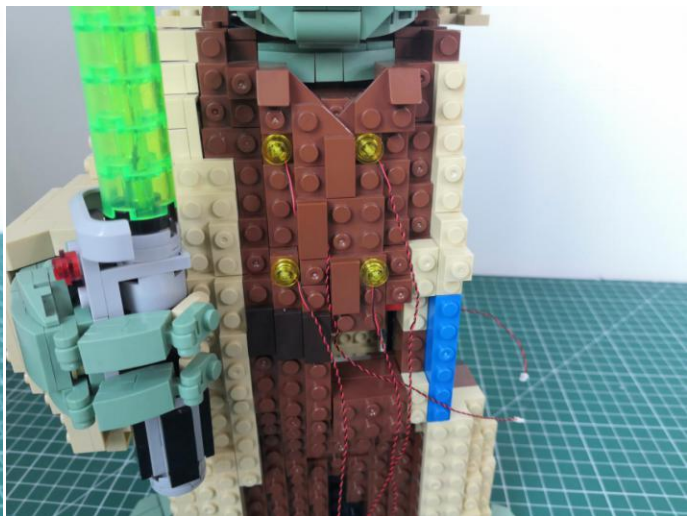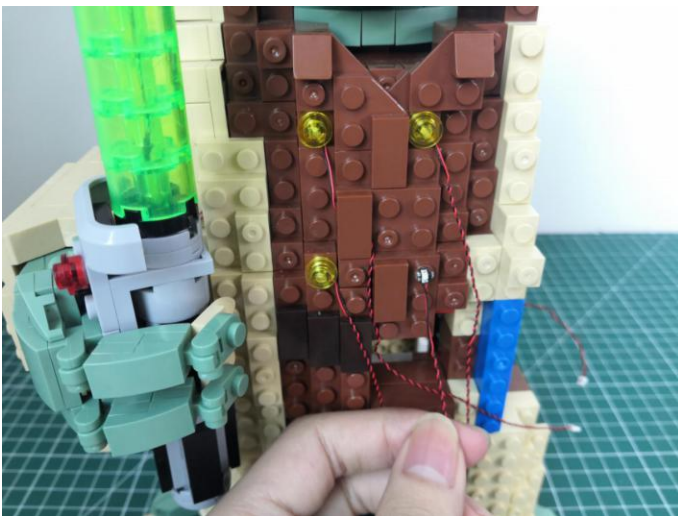


33

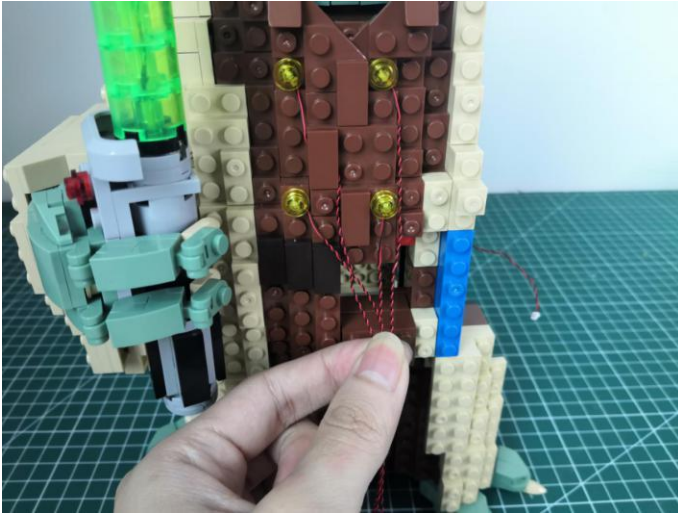

34

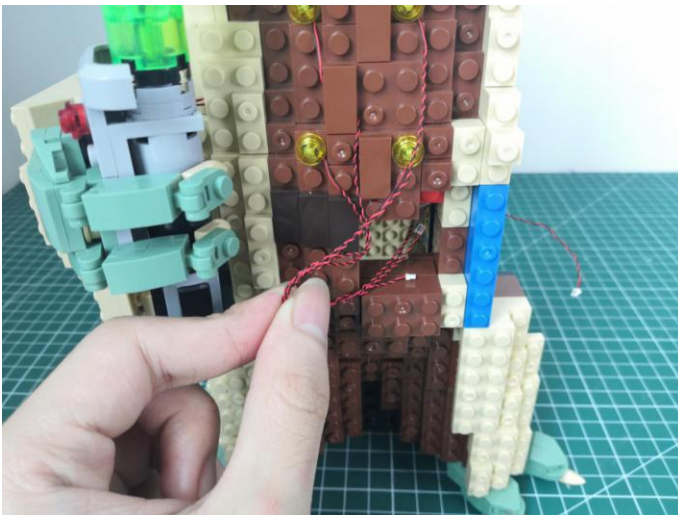



35

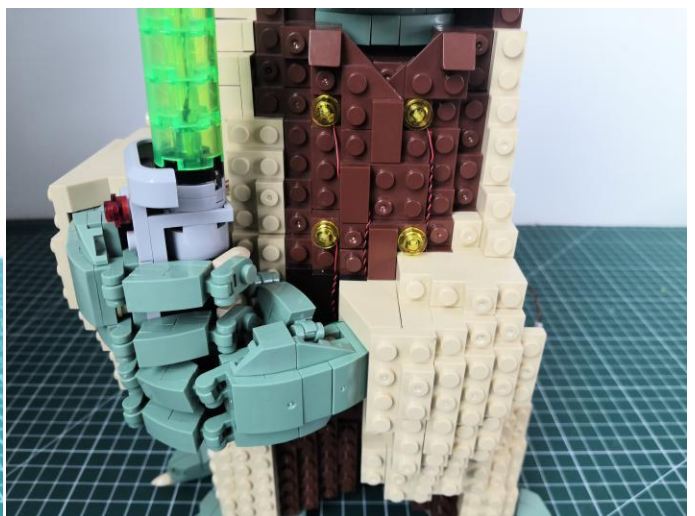


36





37

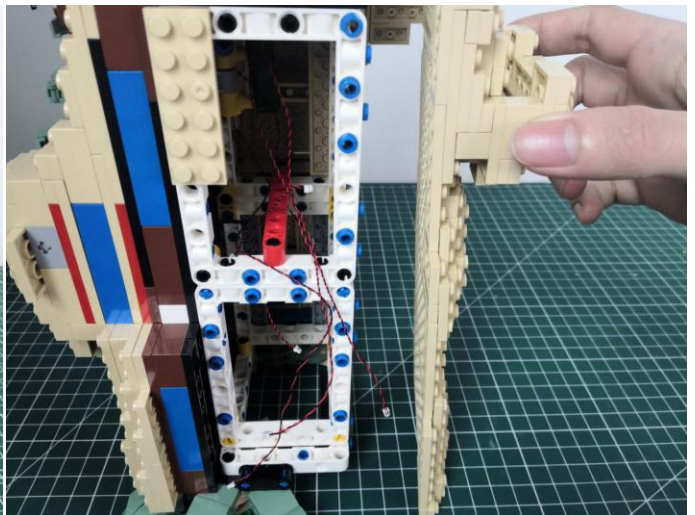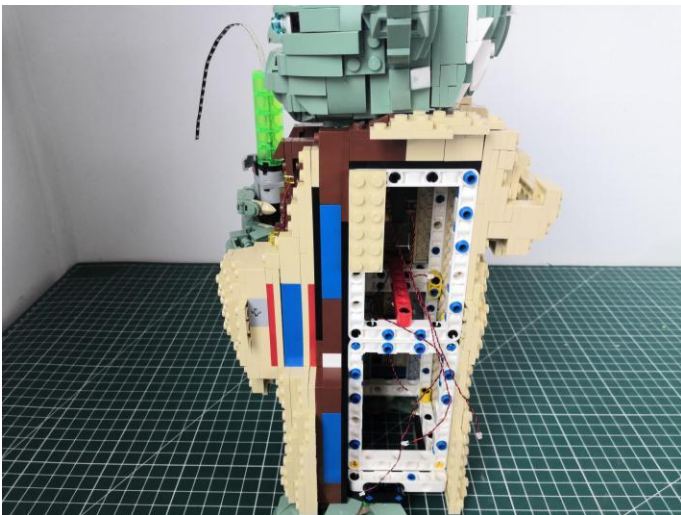



38

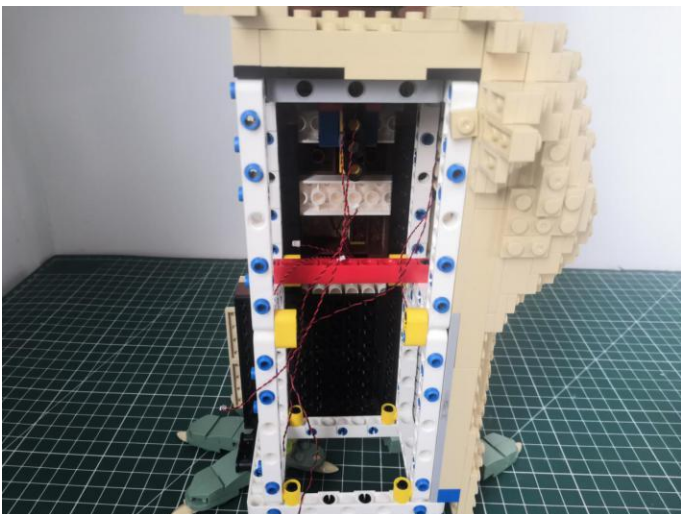


Take a 5cm connecting cable, a 4-port expansion board, connect the connecting cable the expansion board.

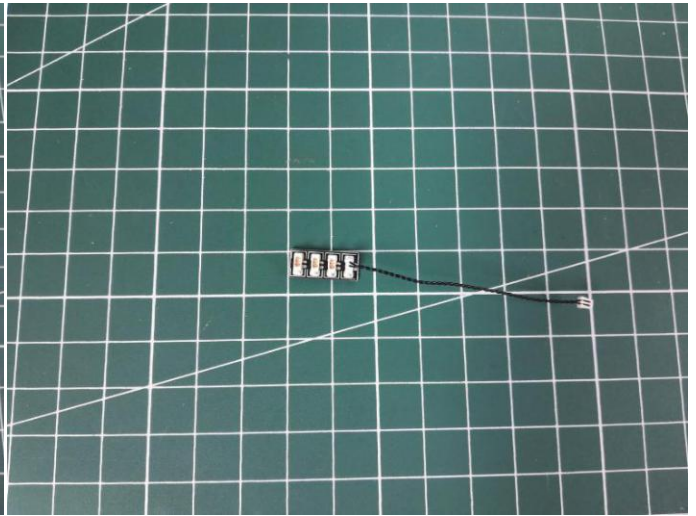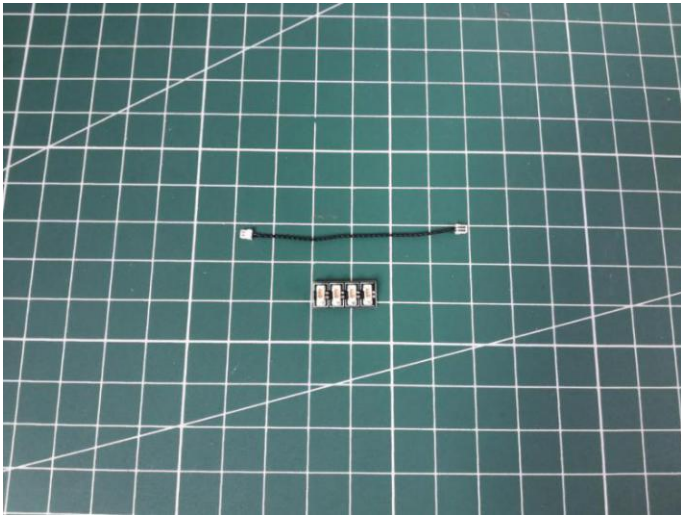



39

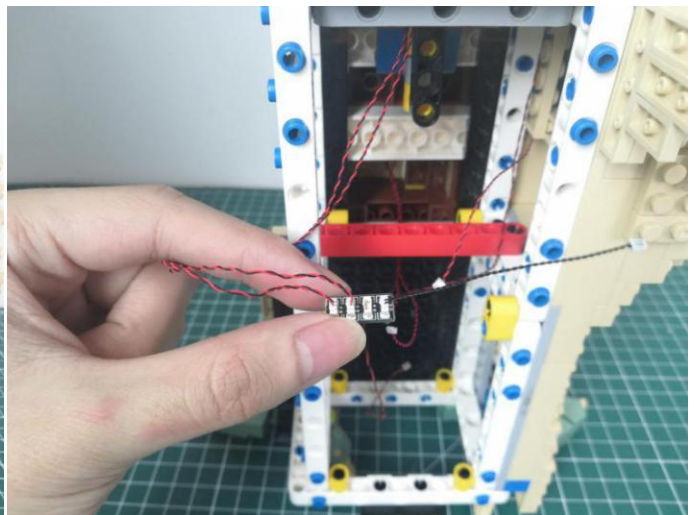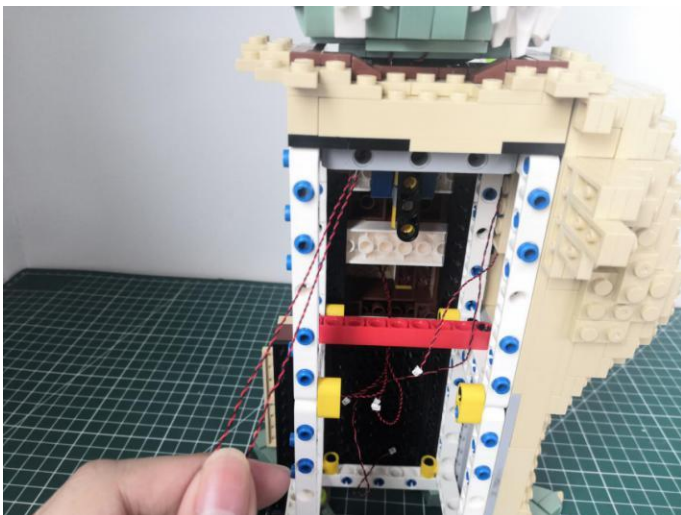



Take 2 adhesive squares.

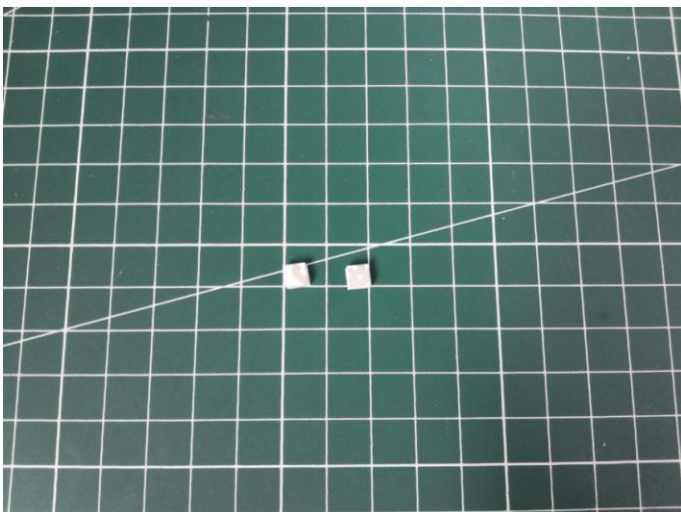



40

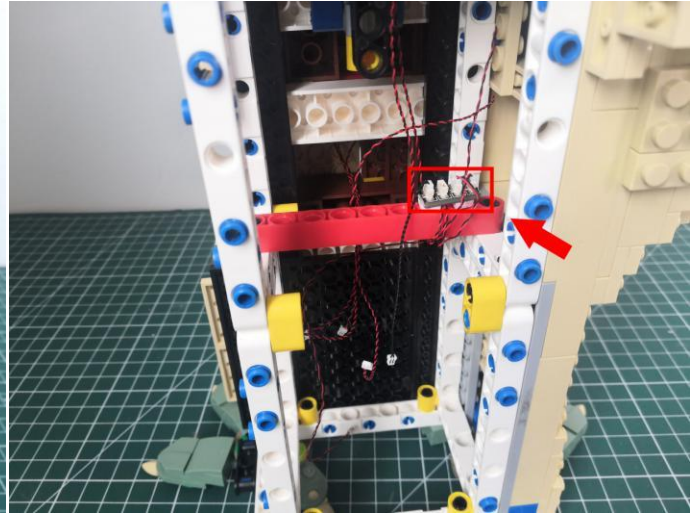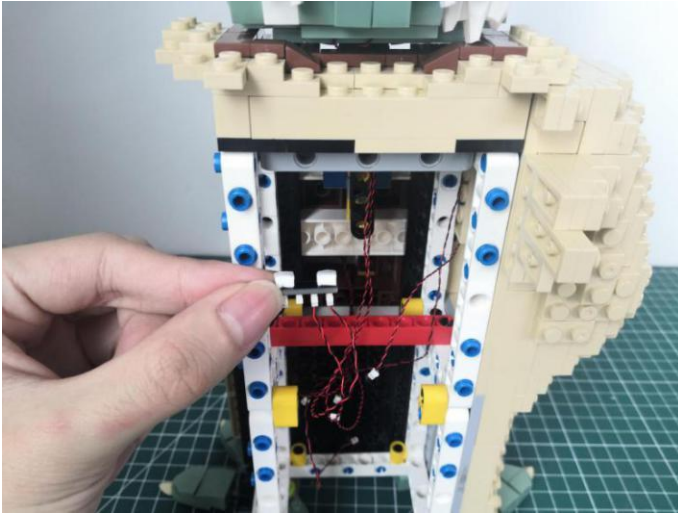


Take a 6-port expansion board, a 5cm connecting cable, connect the connecting cable the expansion board.

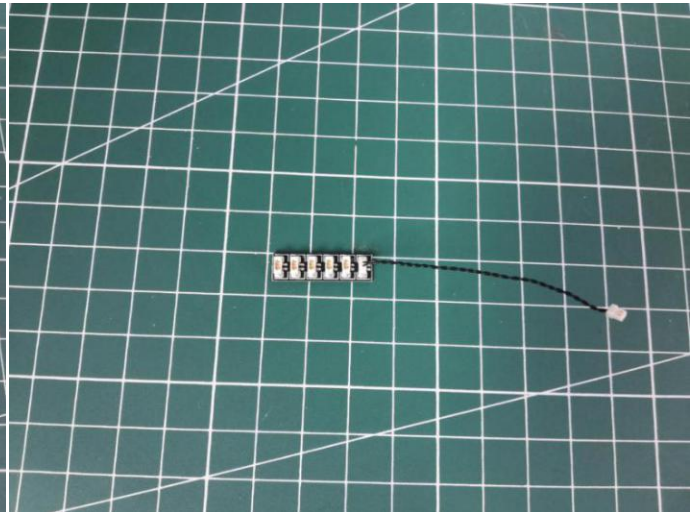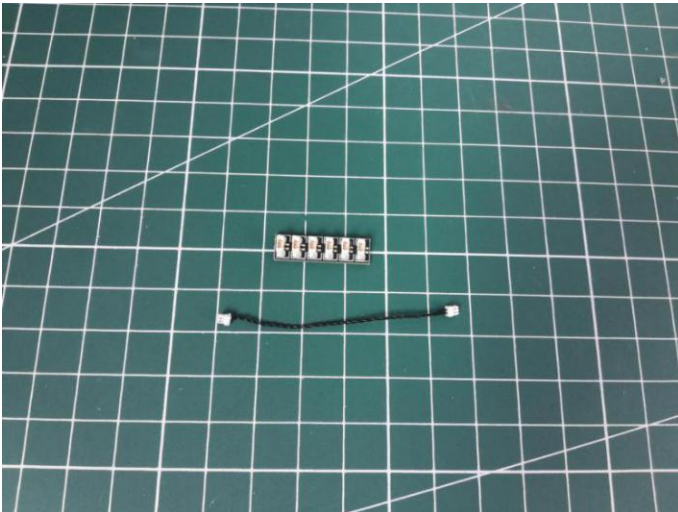



41

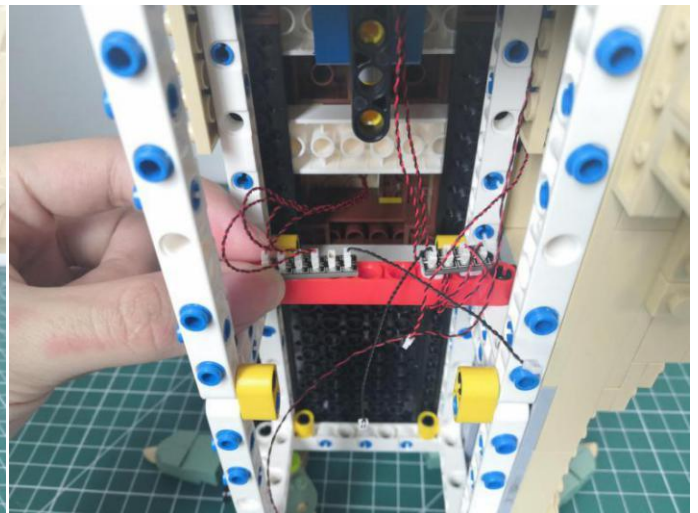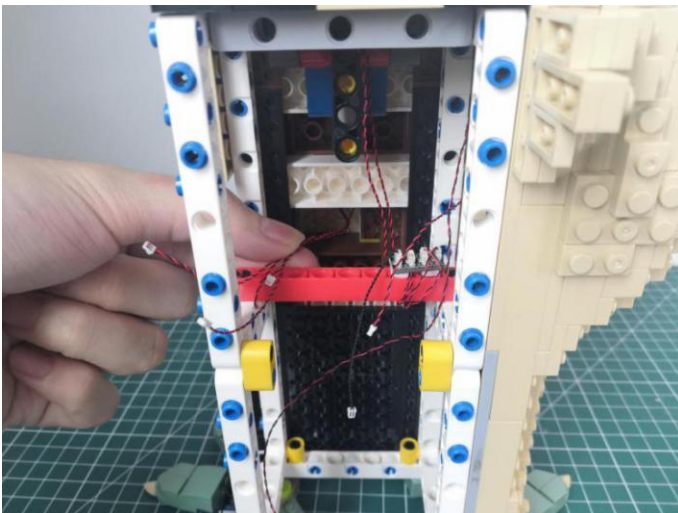



Take 2 adhesive squares.

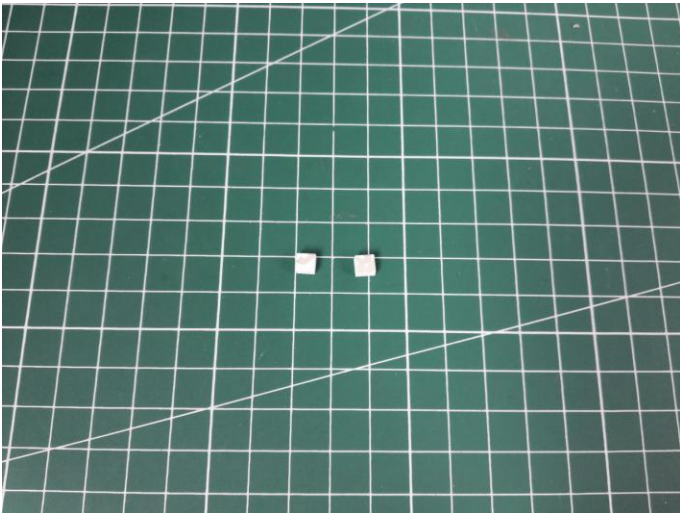

42

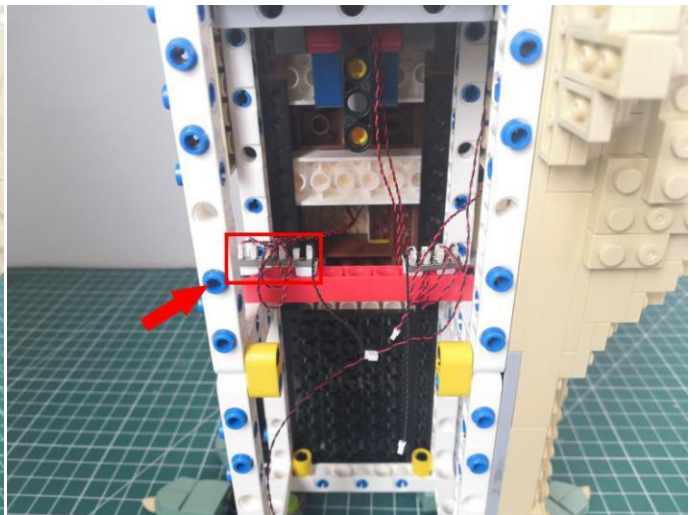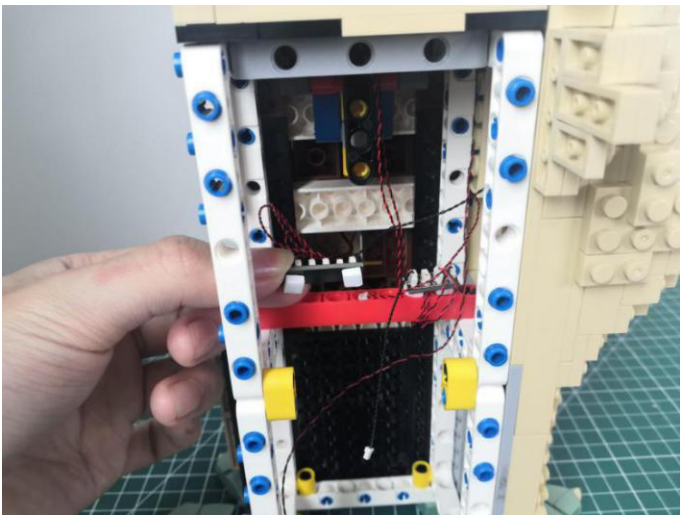


Take an AAA battery pack, a Remote Control Switch Board, connect the cable of the battery pack to the Remote Control Switch Board as per below.

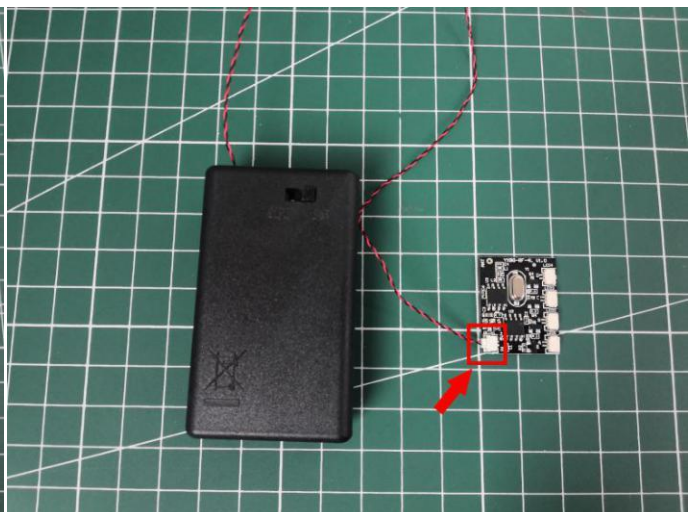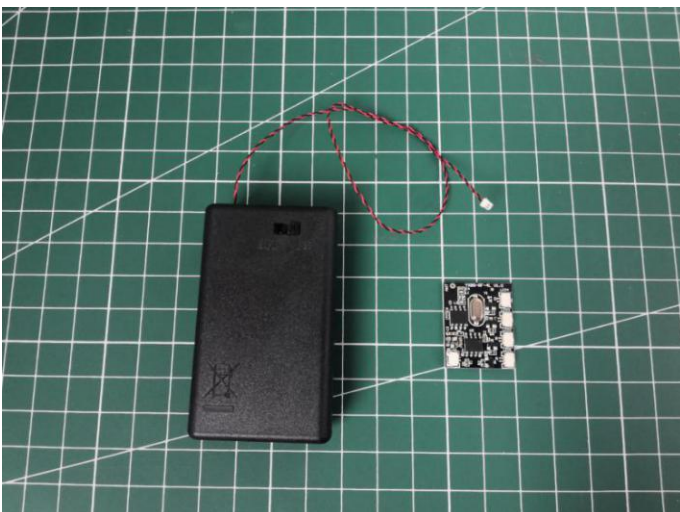

43



Remote control function description




The image shows a black remote control with several buttons: ON/OFF, SHUNT (A, B, C, D), EFFECT (FS, BLN), and BRIGHTNESS (+/-). To the right is a small PCB with an 'INPUT' label and four colored LEDs (A, B, C, D).

ON: All branches are opened
OFF: all branches are closed
A: open/close A road
B: open/close B road
C: open/close C road
D: open/close D road
FS: Turn on blinking for the last open channel
BLN: Start breathing for the last opened path
↑: Increase blinking/breathing rate
↓: Increase blinking/breathing rate
Brightness+: Increase brightness
Brightness -: Reduce brightness



The remote control does not contain batteries, please buy a CR2025 or CR2032 button battery in the nearest store and install it in the remote control.

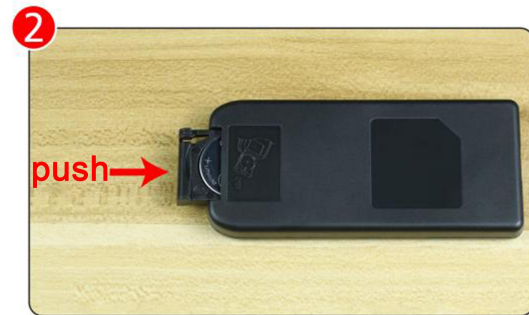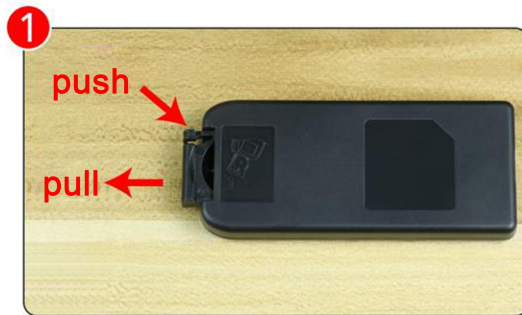



44

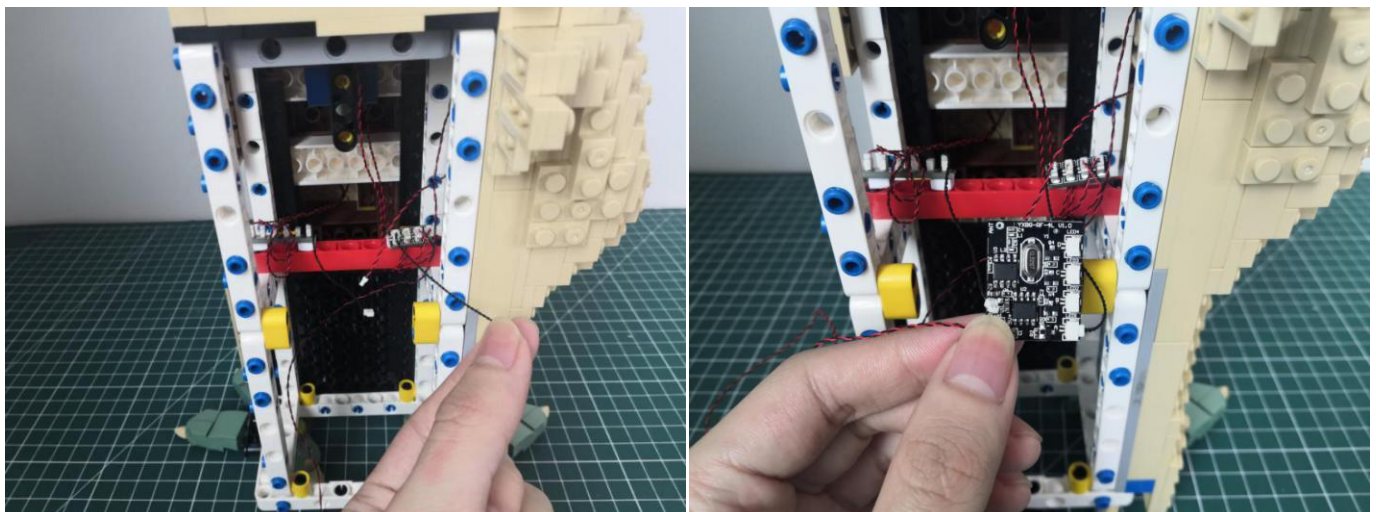



45

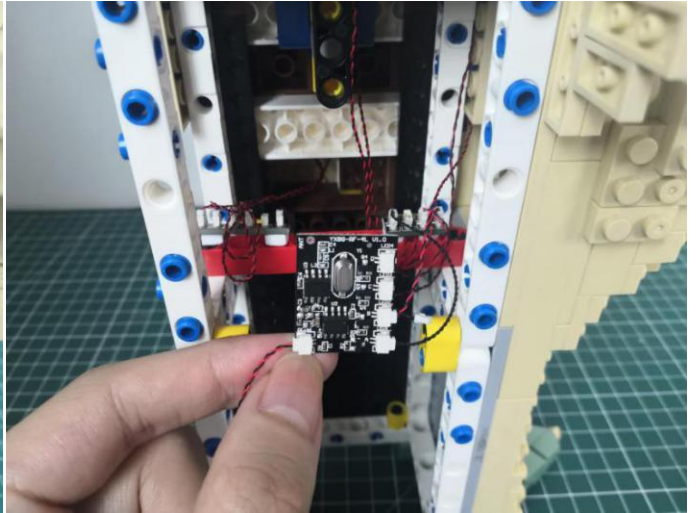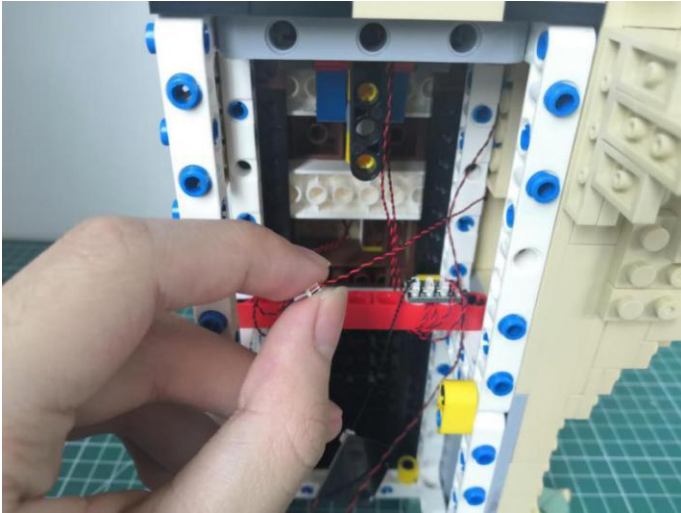


46

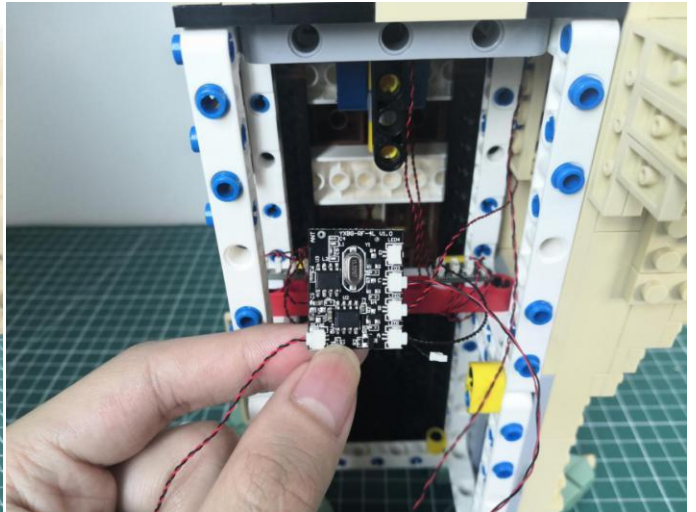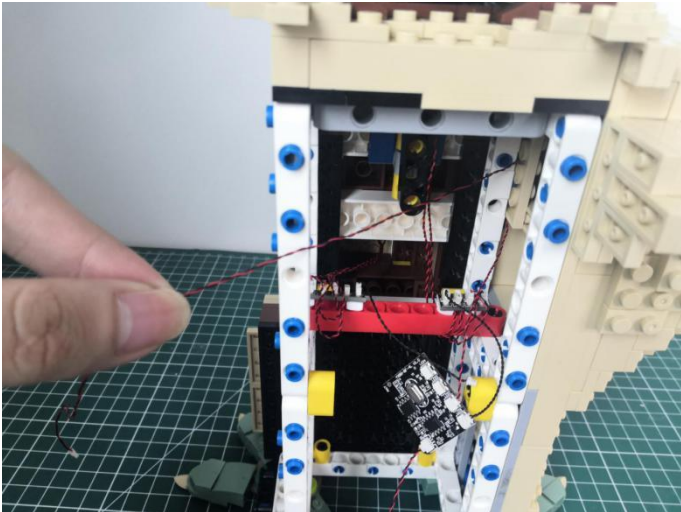



47

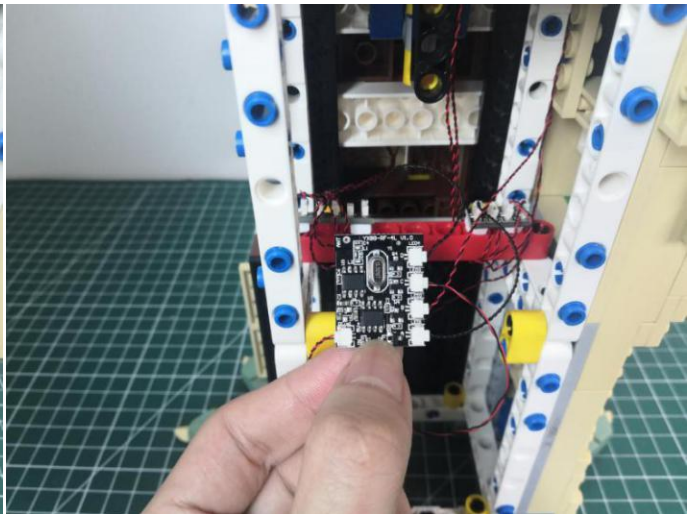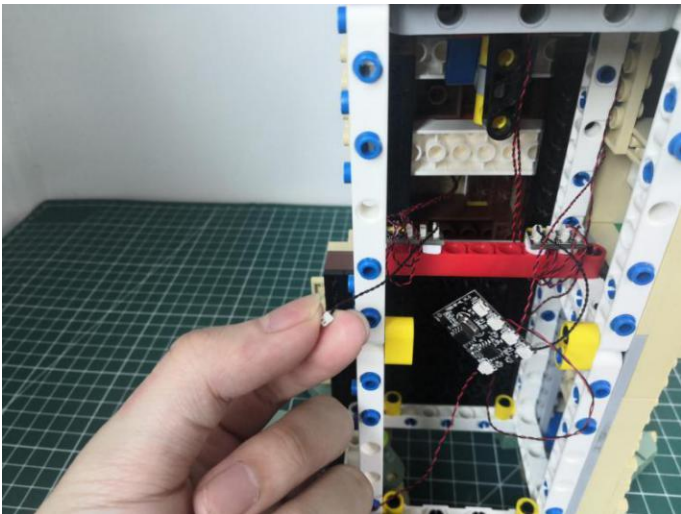


Take 2 adhesive squares.

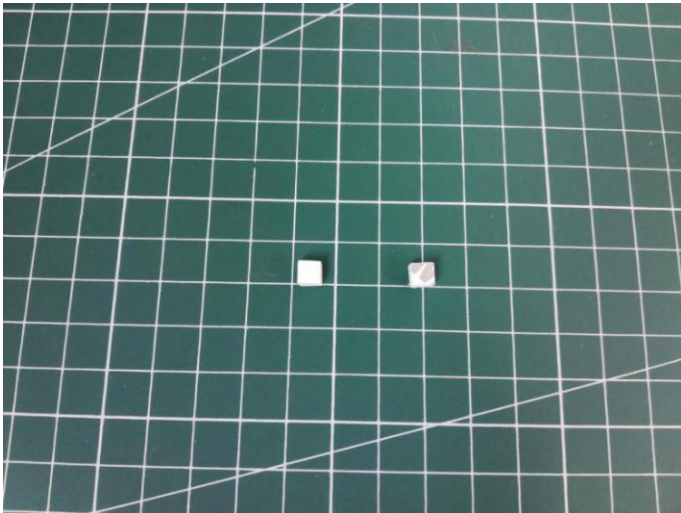


48

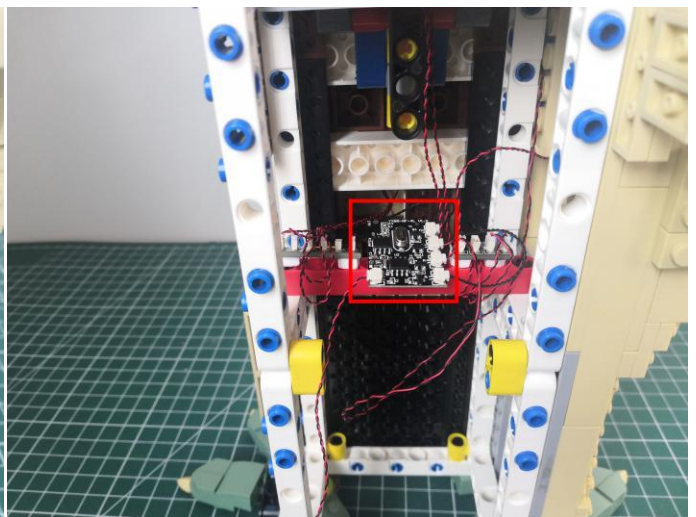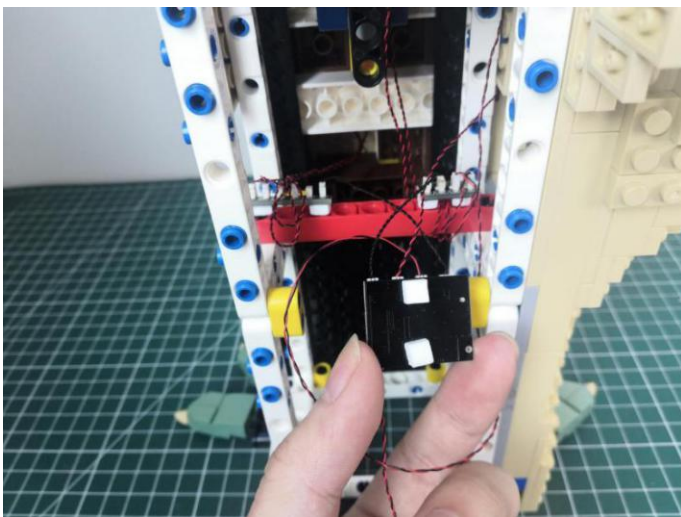



Take 4 adhesive squares.

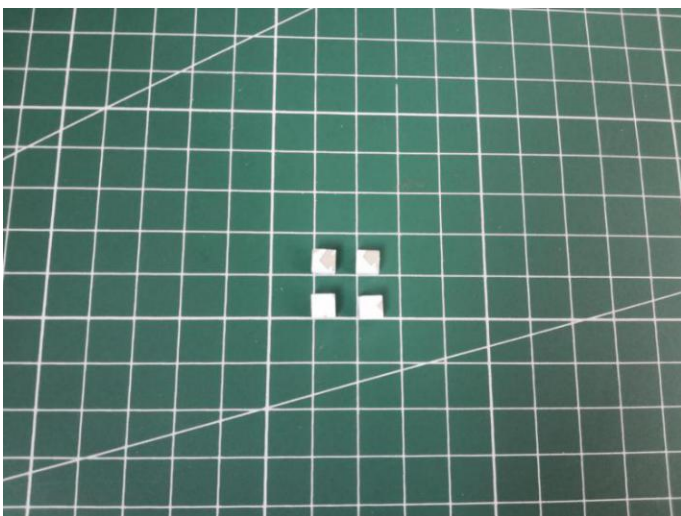

49

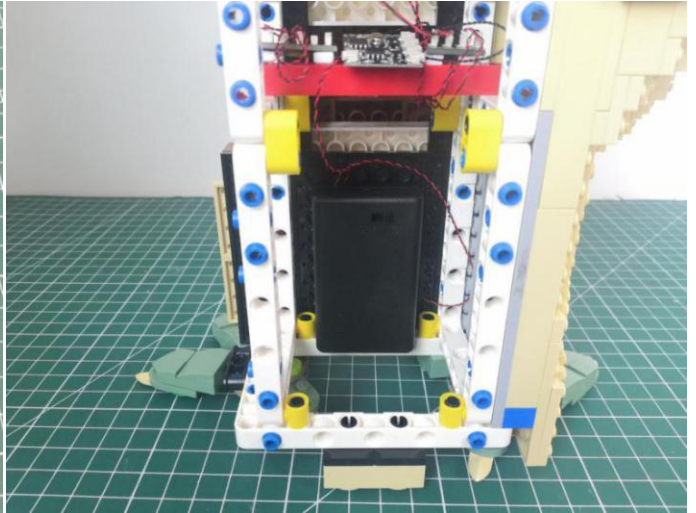

50

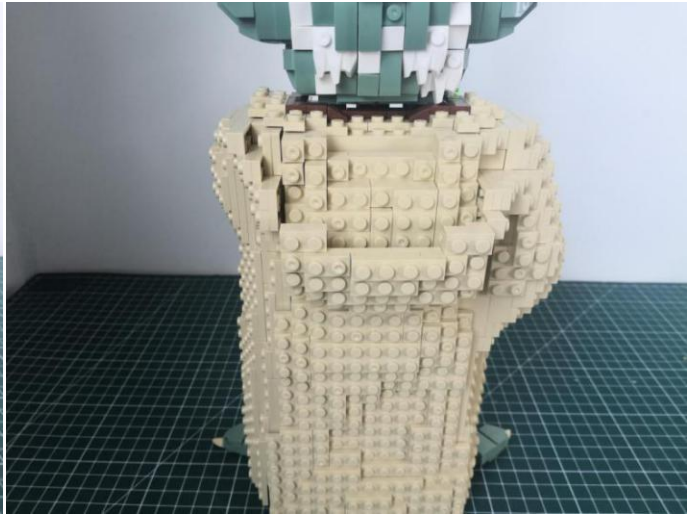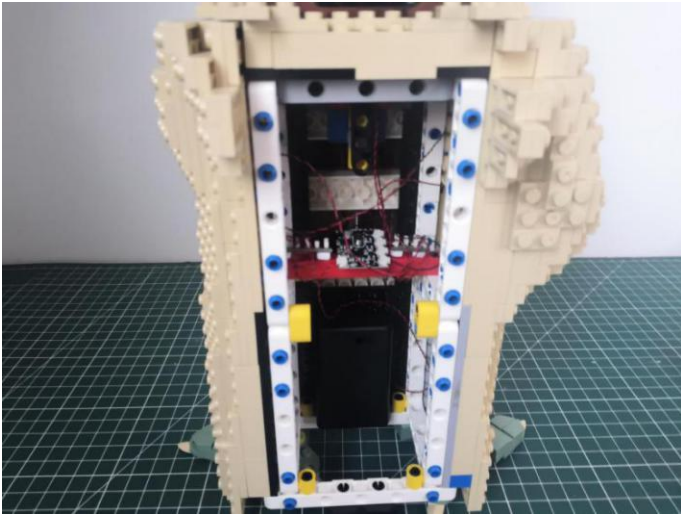

Good job, you've done all the installation steps, power it up and enjoy your work.

