

# 10290 Pickup Truck P27702

- **P27702 is the unique code of lighting set, we use this to accurately identify the product you purchased and the corresponding manuals and services you need to obtain. Please make sure your product code is the same as the label on the back of the box shown “10290 P27702”.**
- **Installation requires a lot of patience and great observation that your LEGO bricks will come alive when you get this finished. The bricks with lighting as below, so make sure you're ready and let's get started.**



# Strategies for the Installation

This instruction divides three sections to complete the installation of the lighting set.

## **Section A:** Check the type and quantity of components.

The quantity and type of components of each products are different and it needs to be carefully checked to make sure there do have enough material. The type of components is indicated by the label on the bag.

## **Section B:** Test that each components is working properly.

Each components is made individually so it is necessary to test that each components is working properly to avoid the situation that the lighting does not work .

## **Section C:** laying out components following the instruction.

Our material is very small but not fragile, just be reminded that don't to pull the wires too hard. For different people, there may be some installation steps that you can't understand. Please look at the previous and later installation steps.

## **Section A: Check the type and quantity of components.**

There are 12 bags in this set. The name and quantities of specific components are as shown , please check carefully.

<b>Label</b>	<b>Content</b>	<b>Quantity</b>
<b>Bit Lights-15CM-Warm White</b>	<b>Bit Lights-15CM-Warm White</b>	<b>2</b>
<b>Bit Lights-15CM-White</b>	<b>Bit Lights-15CM-White</b>	<b>2</b>
<b>Bit Lights-15CM-Red</b>	<b>Bit Lights-15CM-Red</b>	<b>2</b>
<b>LED Strip Lights-Warm White</b>	<b>LED Strip Lights-Warm White</b>	<b>3</b>
<b>USB Power Cable</b>	<b>USB Power Cable-30CM</b>	<b>1</b>
<b>AAA Battery Box</b>	<b>AAA Battery Box</b>	<b>1</b>
<b>Connecting Cables-30CM</b>	<b>Connecting Cables-30CM</b>	<b>3</b>
<b>Light Strips-Blue -7</b>	<b>Light Strips-Blue -7</b>	<b>1</b>
<b>Expansion Board</b>	<b>4 Socket Expansion Board</b>	<b>3</b>
<b>Connecting Cables-10CM</b>	<b>Connecting Cables-10CM</b>	<b>3</b>
<b>Remote Control Boards</b>	<b>Remote Control Boards</b>	<b>1</b>
<b>Parts package</b>		

**Please contact us immediately if there have any missing components.**


## Section B: Test that each components is working properly.

We need a structure to test all lights, so take out the bag with label “USB Power Cord”and “Expansion Boards”as follows.



It is worth reminding that our products are all customized. They have a unique way of connecting. The white plug on wire and the socket of the expansion board need to be connected together to transmit power.


Note that on one side of the white plug you can see two very small golden wires that should be connected to the two golden needles in socket of the expansion board.shown as blow.

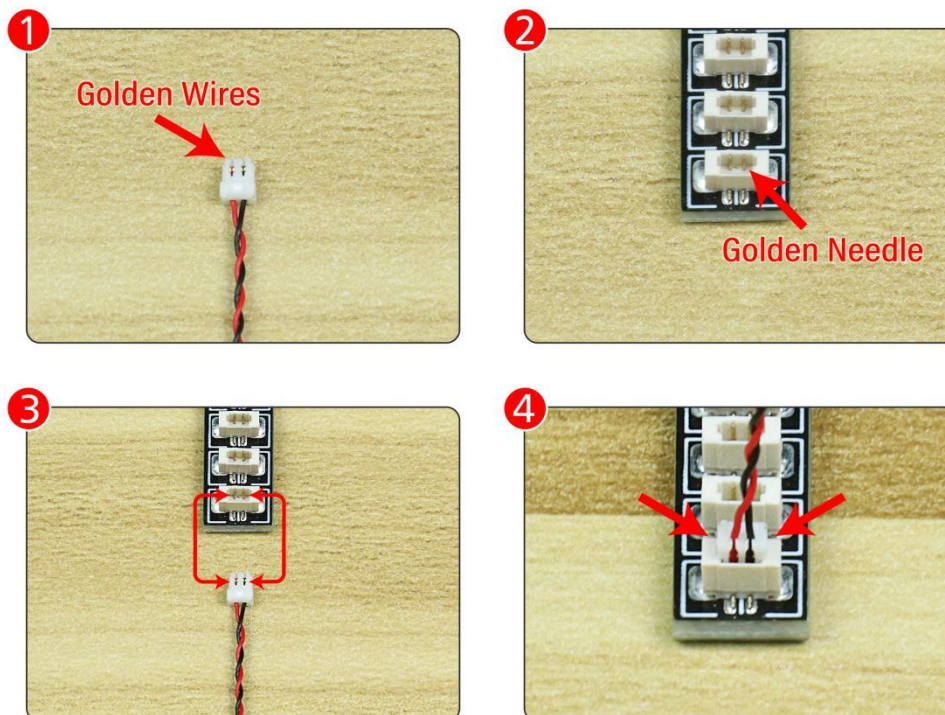




All our connections between plug and socket are all the same as shown above. So for any such structure with plug and socket, please pay attention to the golden wire of the plug and the golden needle of the socket, they must be touched together.

The connection method between the USB Power Cord and Expansion Boards is as follows:

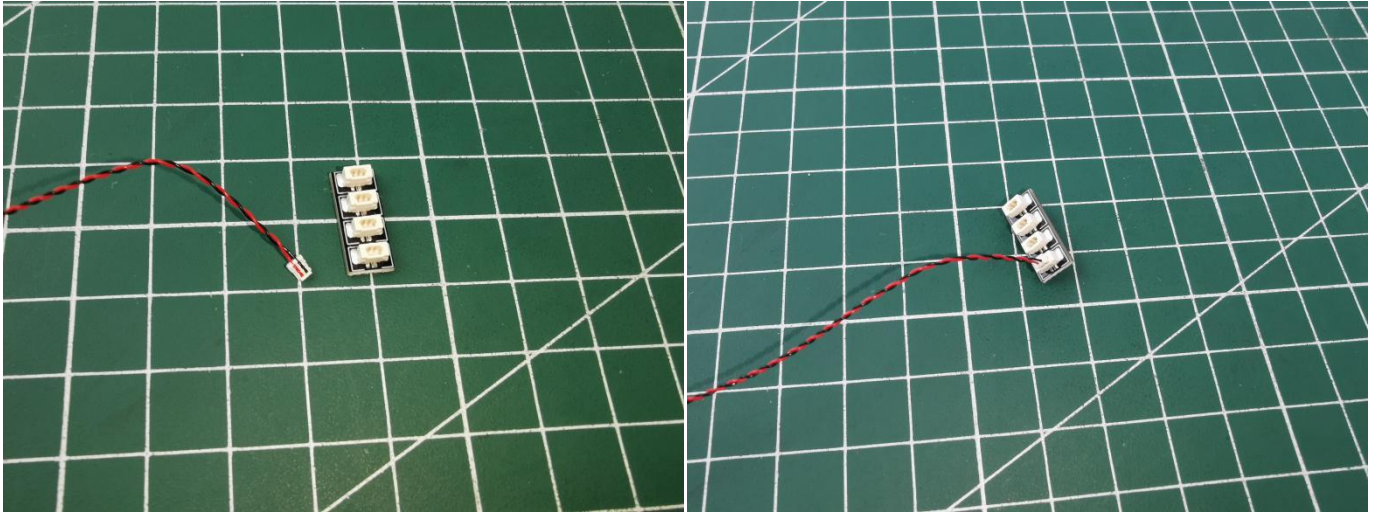

The USB Power Cord can be powered by phone chargers, power banks, etc.


USB connectors to connect devices

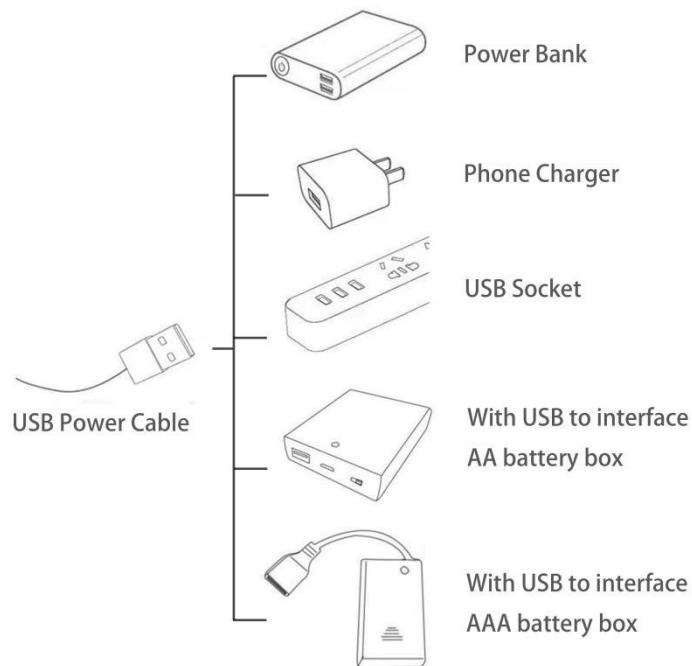

**This instruction will use the power bank as power supply . The test structure is shown as follow. All lamp in this set will be tested by this structure.**



**when we test "Bit Lights-15CM-White" particles,Take out the bag labelled "Bit Lights-15CM-White".Take out two of the light and connect it to the socket. Turn on the power bank, the light will turn on normally as shown below.**

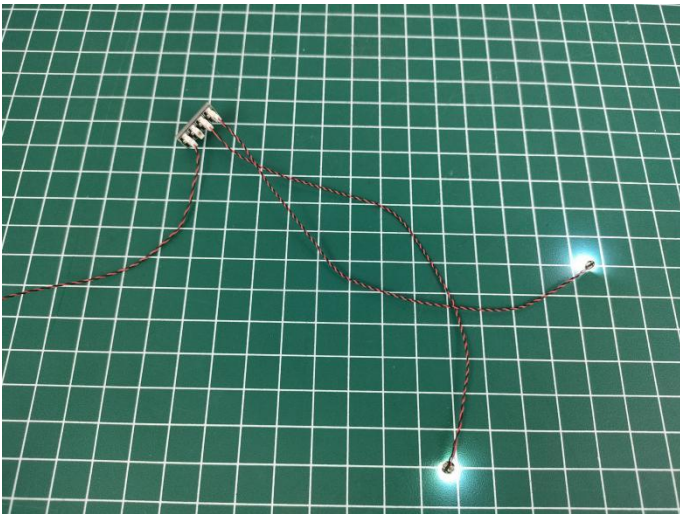

**Test each lamp according to this method. It should be noted that after the test, the lamp must be returned to the corresponding bag to avoid confusion of types.**



**The components needs to be tested in this set is 2\*Bit Lights-15CM-Warm White,2\*Bit Lights-15CM-White,2\*Bit Lights-15CM-Red,3\*LED Strip Lights-Warm White,1\*Light Strips-Blue-7.**

**Please contact us immediately if any components don't work.**



**Section C:** laying out components following the instruction.



1



2





3

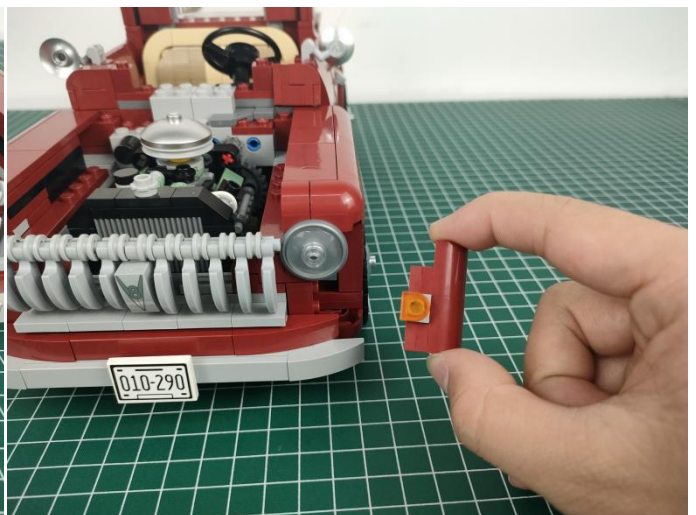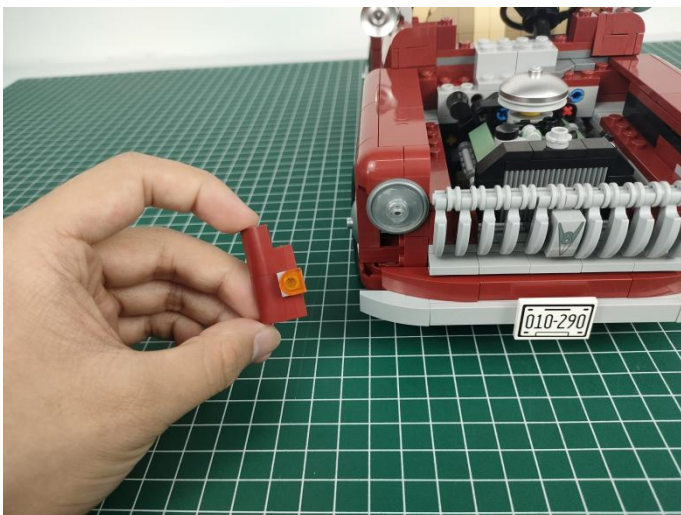




4

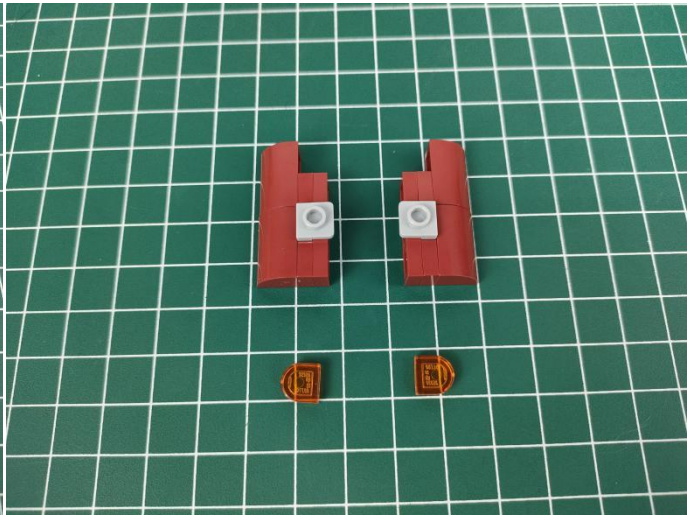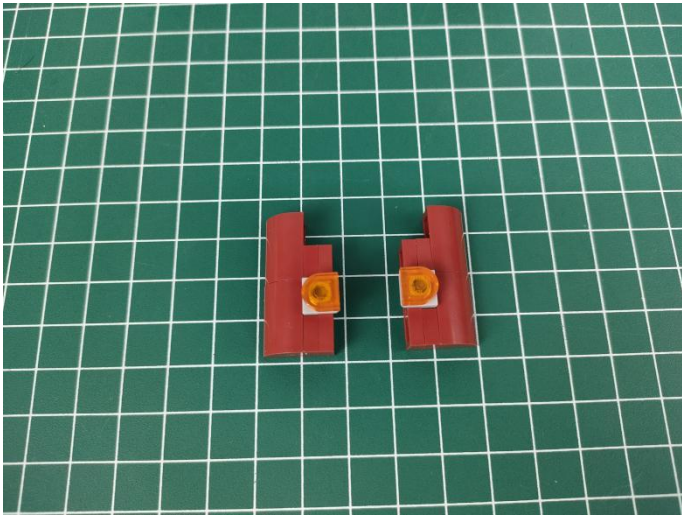

5



6

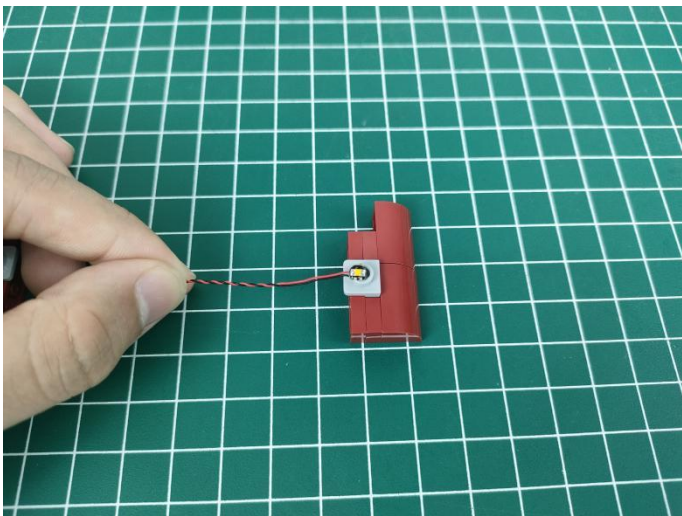


# Tips

The slit on the the plate round 1X1 are hand-made to avoid squeeze the wire and cause short circuit and abnormal heat during installation.

The plate without slit:

## **The plate without slit:**


The squeeze causes the protective layer of the wire to be torn apart, the positive and negative wires touch together, and the set is short-circuited and the hot or wire is crushed, the wire to be disconnected and don't work.

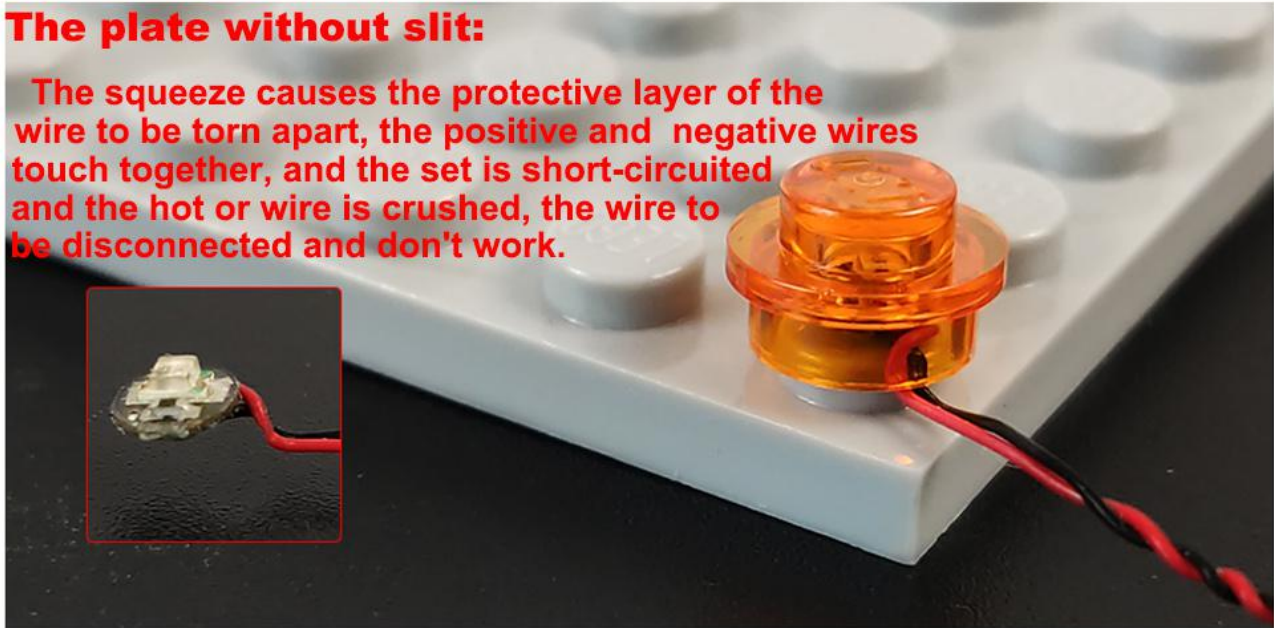

The plate with slit:



## **The plate with slit:**

The wire has enough space to avoid being squeezed endowed with longer service life and more stable effect.


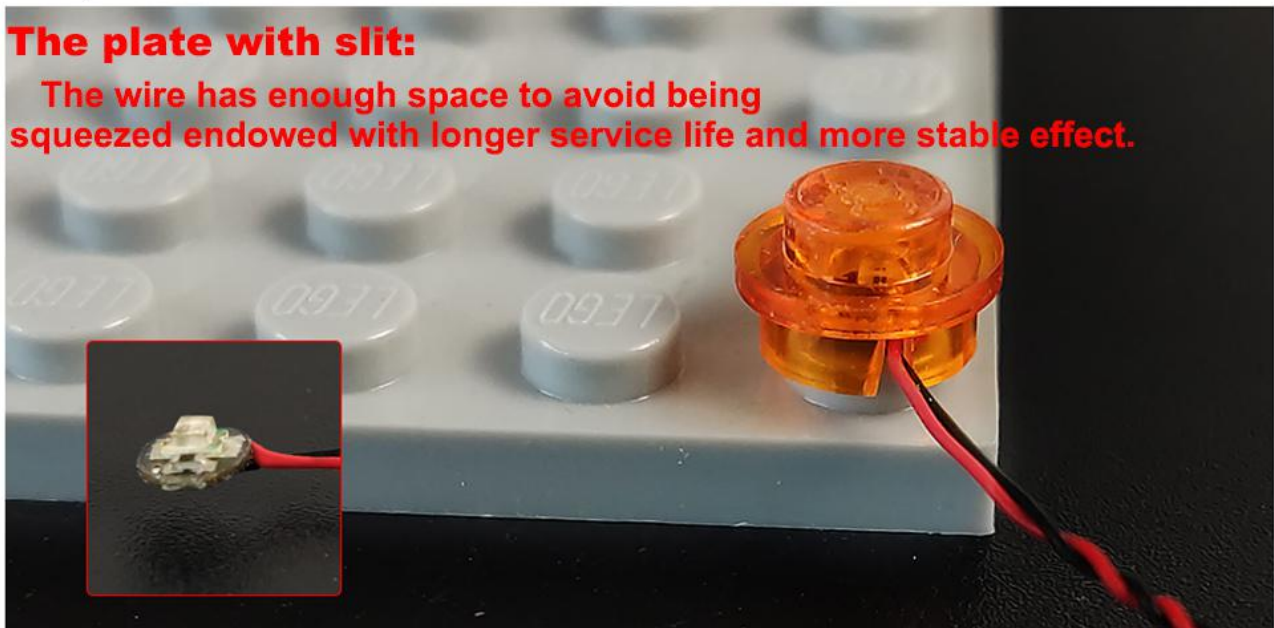





7

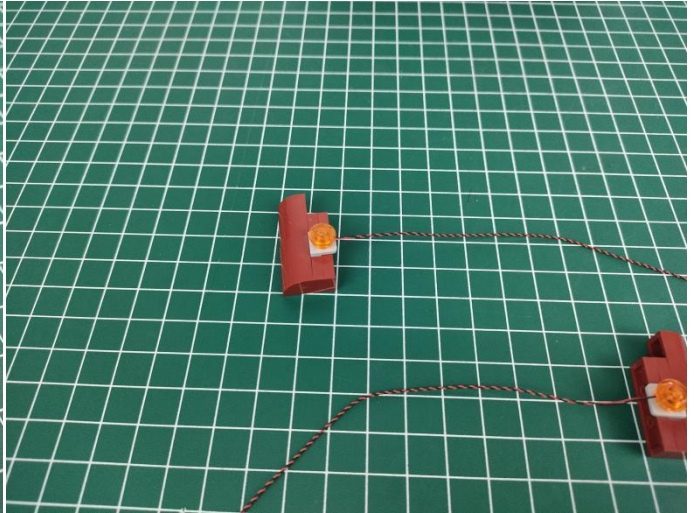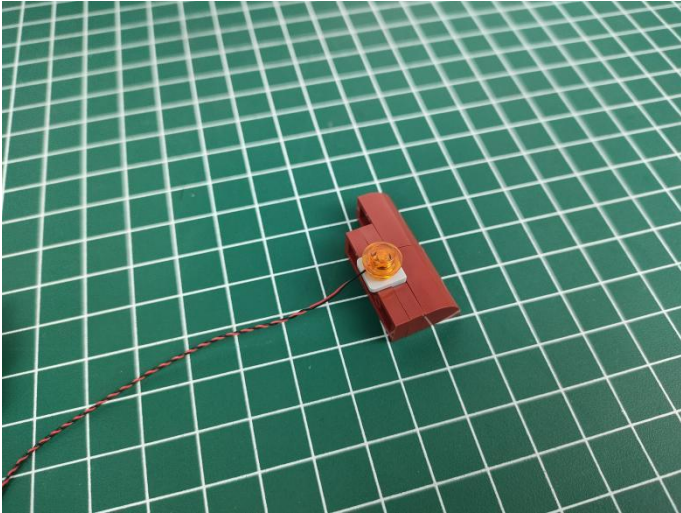

8

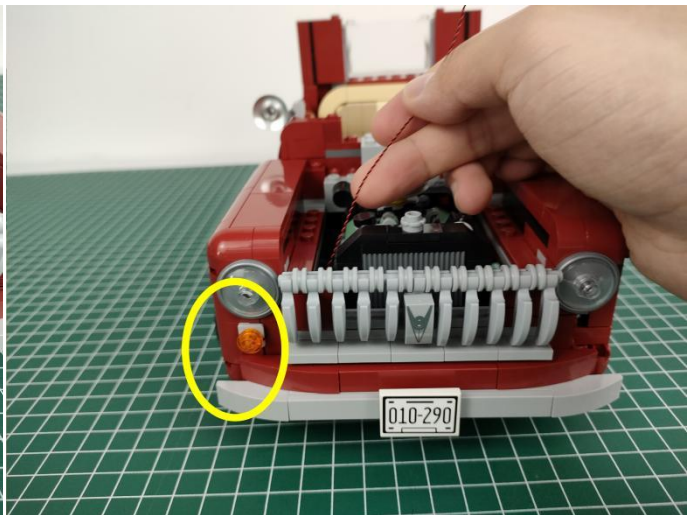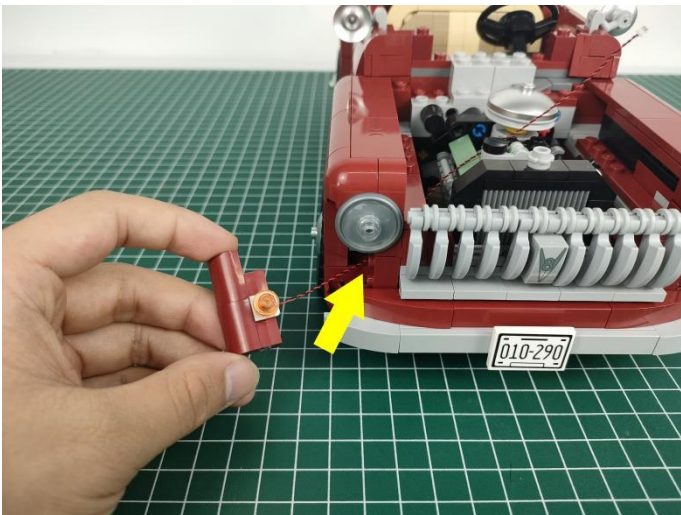

9

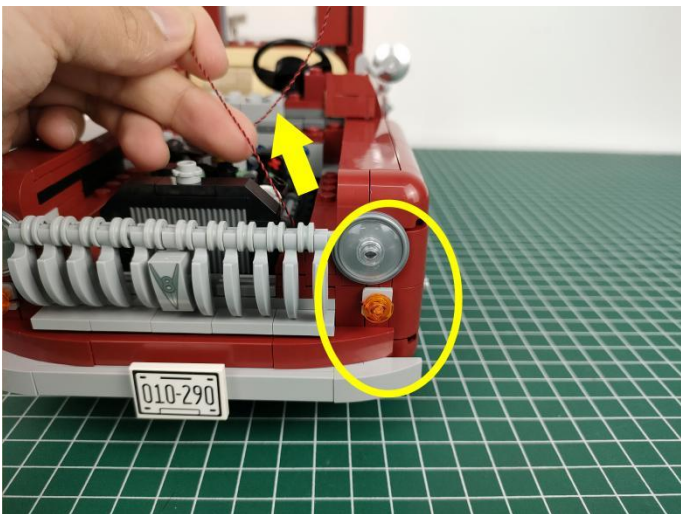





10




11

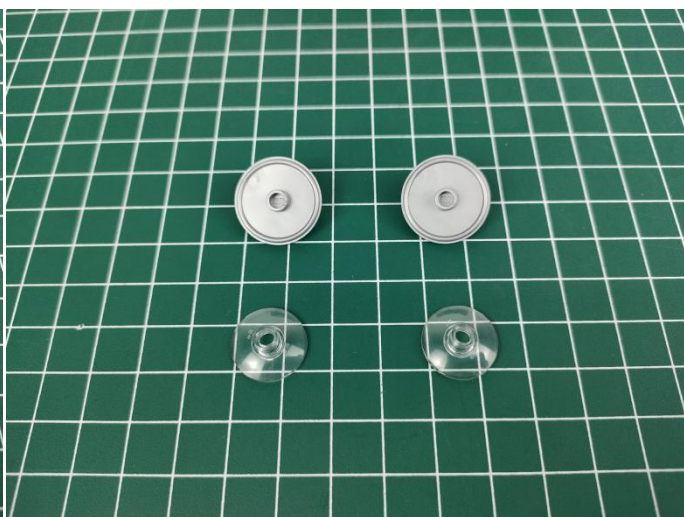

12

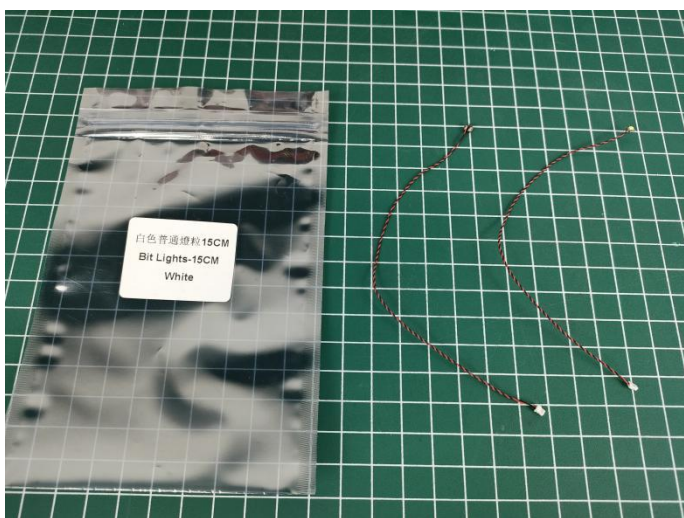



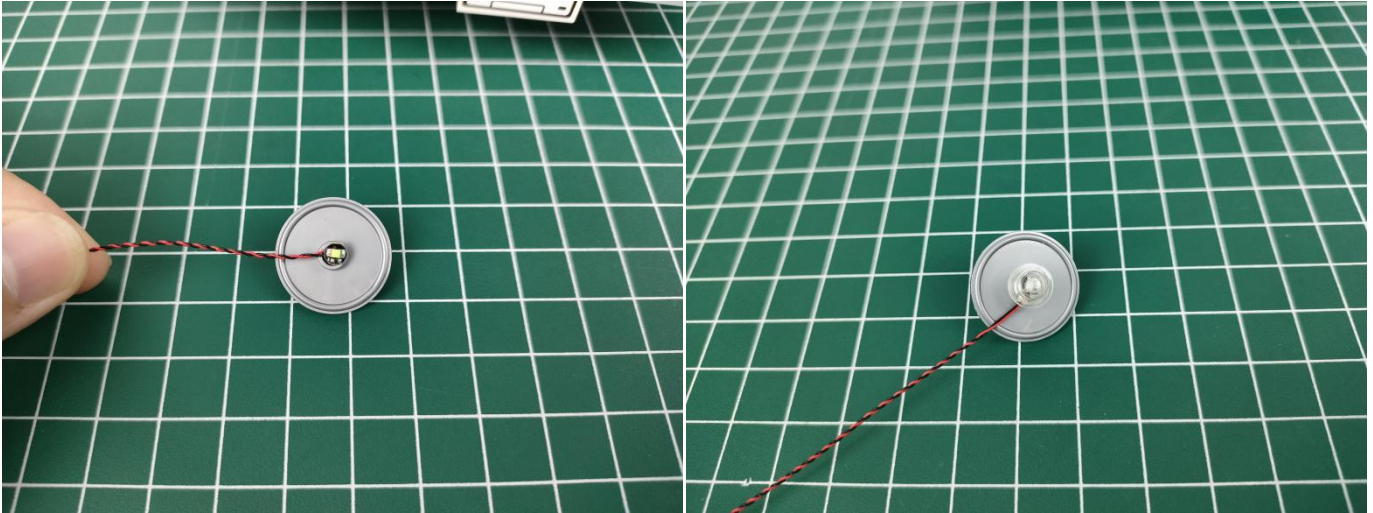


## Tips

The slit on the the plate round 1X1 are hand-made to avoid squeeze the wire and cause short circuit and abnormal heat during installation.

The plate without slit:

### **The plate without slit:**



The squeeze causes the protective layer of the wire to be torn apart, the positive and negative wires touch together, and the set is short-circuited and the hot or wire is crushed, the wire to be disconnected and don't work.

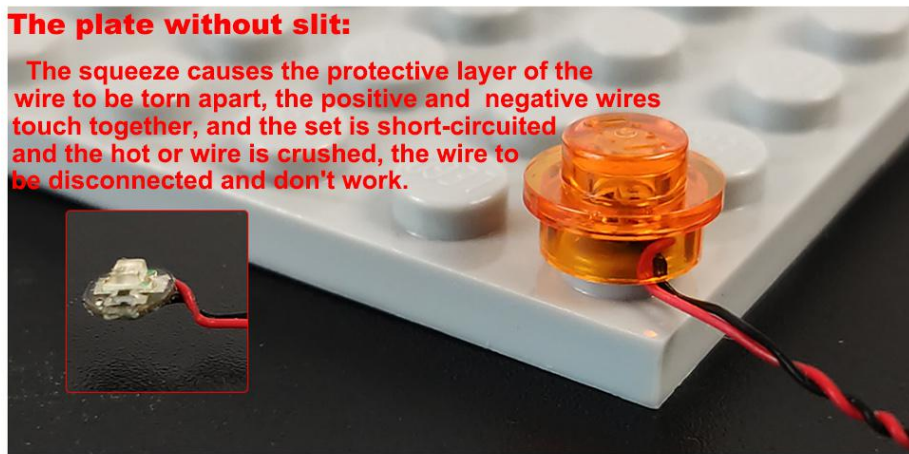

The plate with slit:



### **The plate with slit:**

The wire has enough space to avoid being squeezed endowed with longer service life and more stable effect.

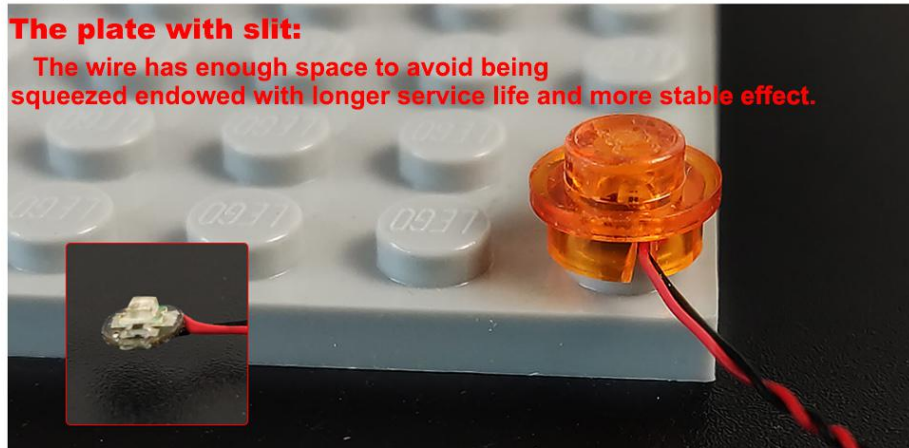





14

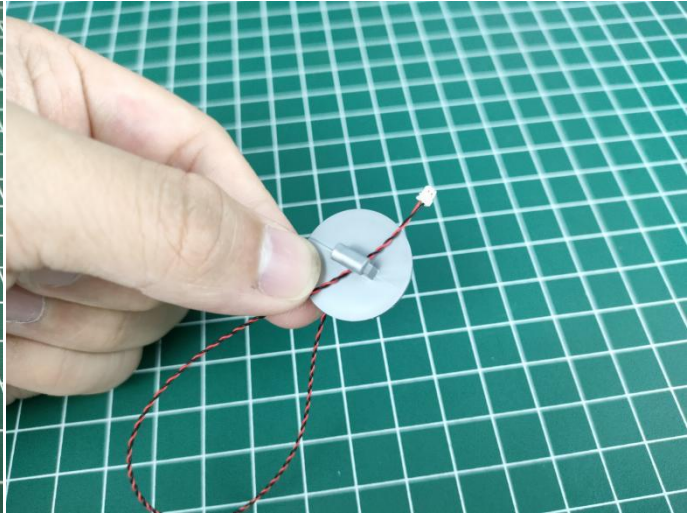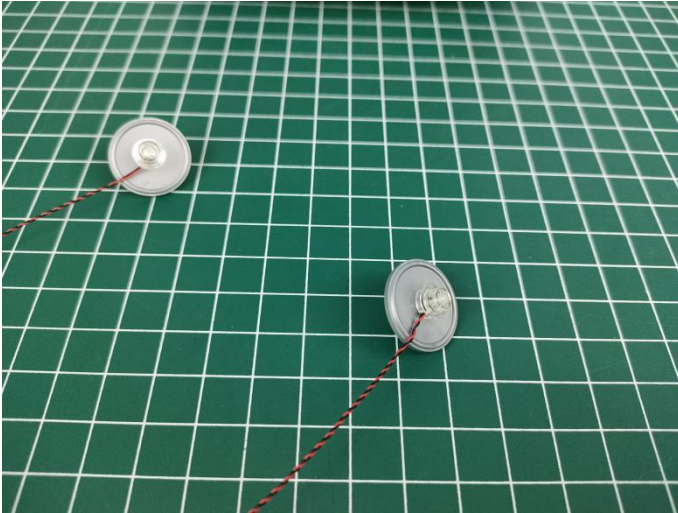

15

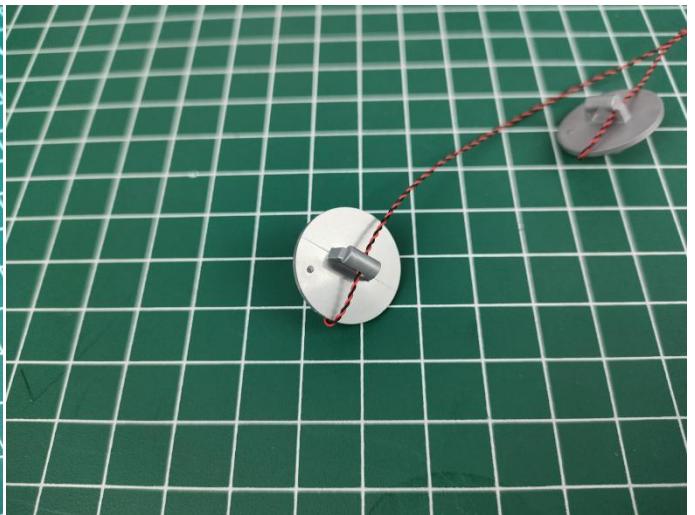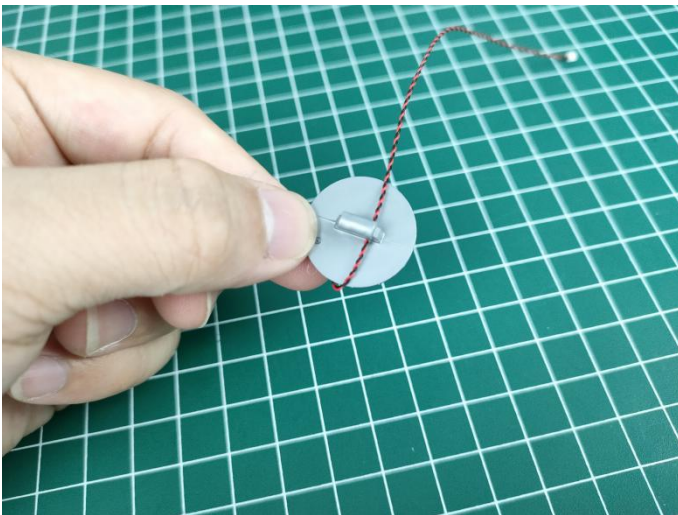


16








17

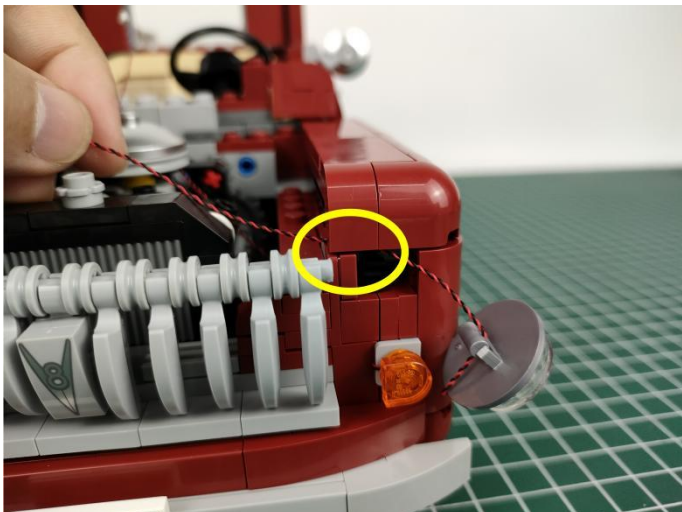

18

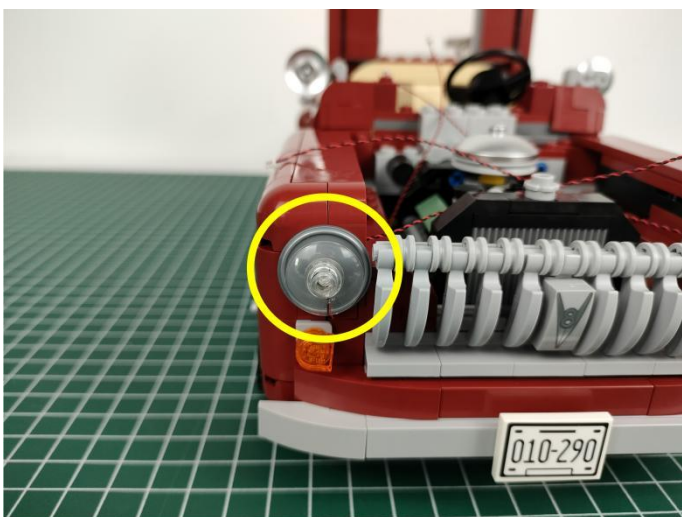

19

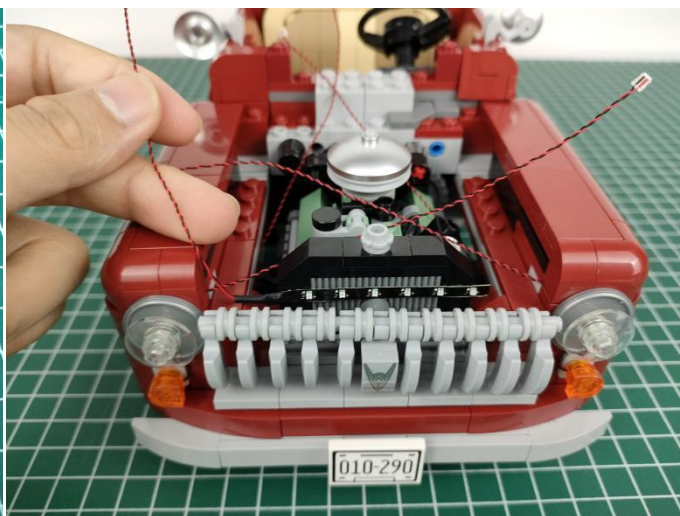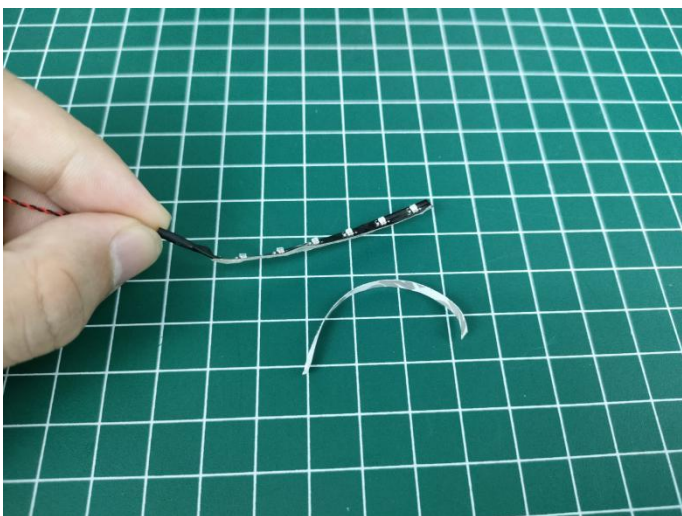





20



21

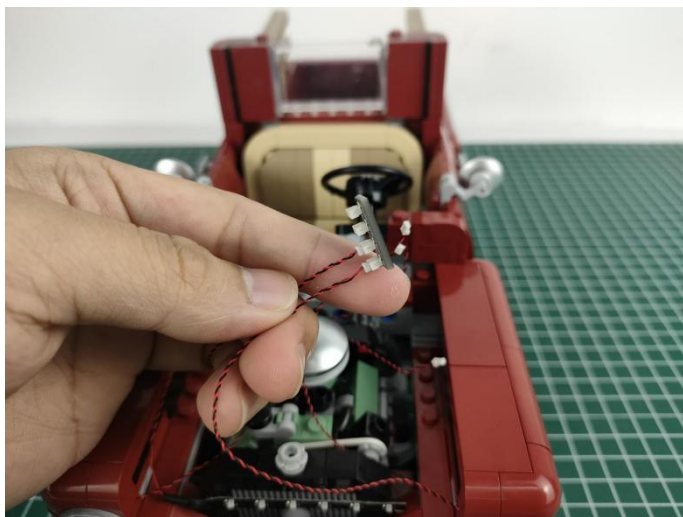


22


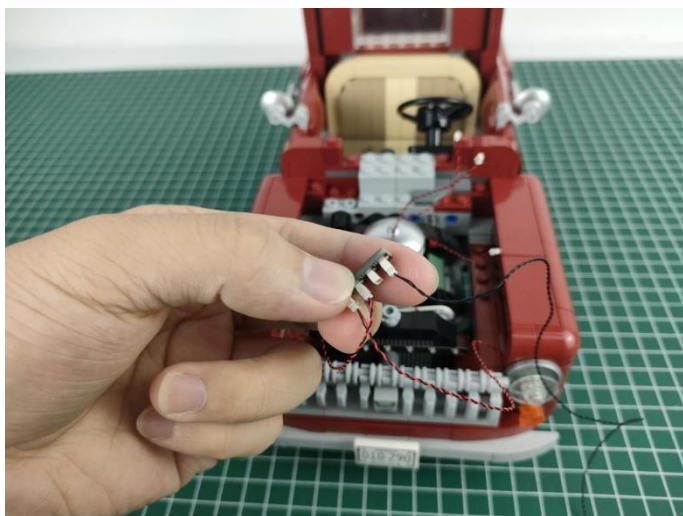





23

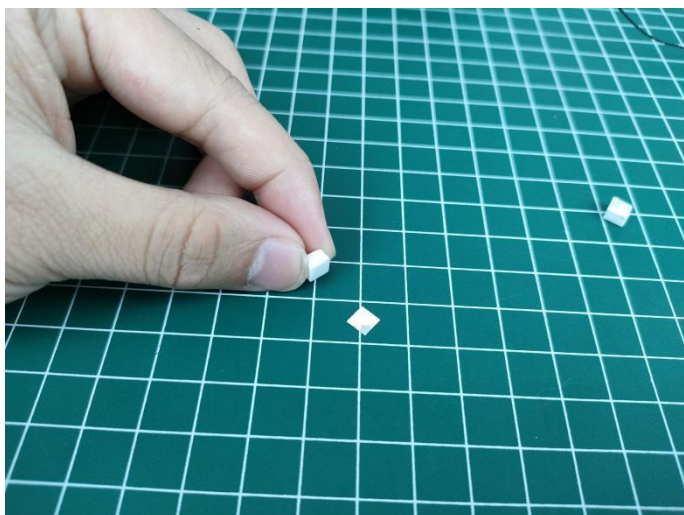

24

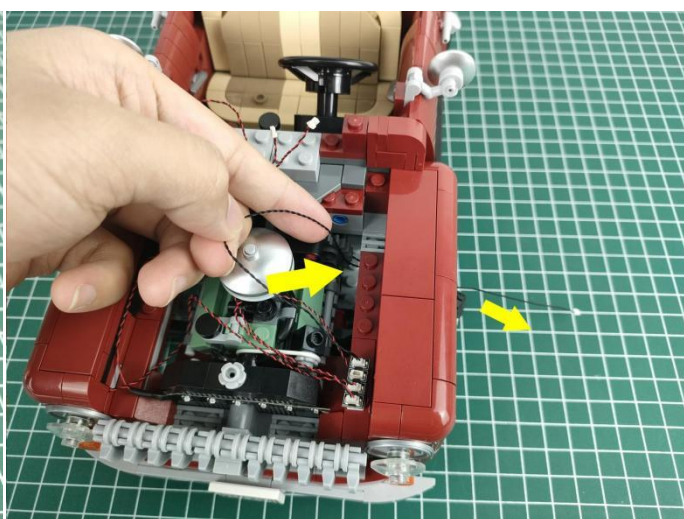
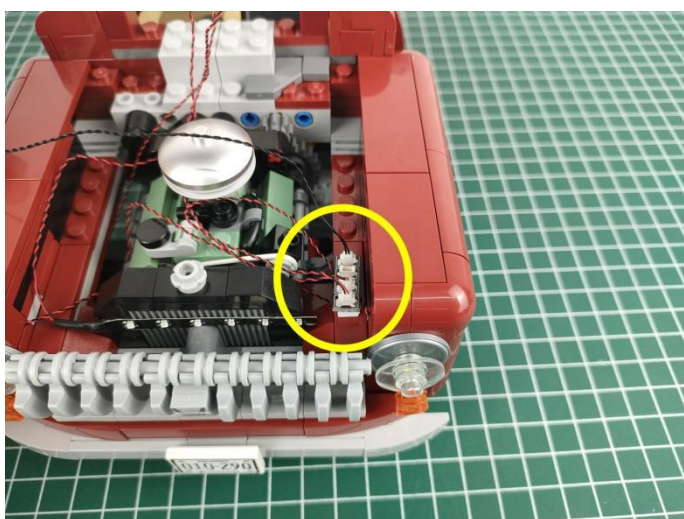


25

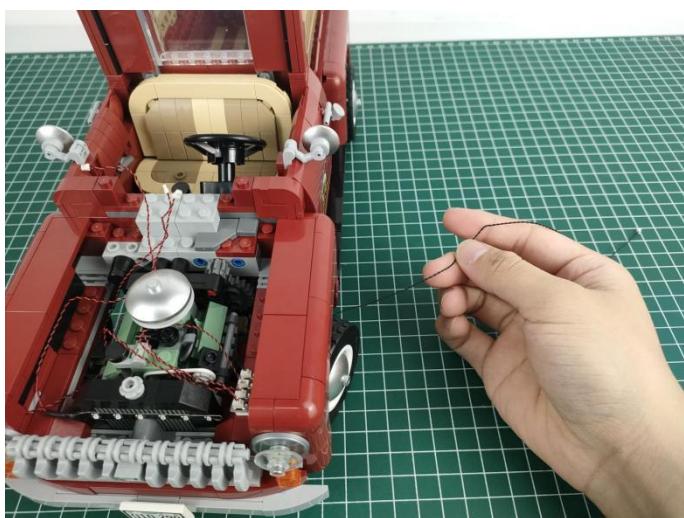




26

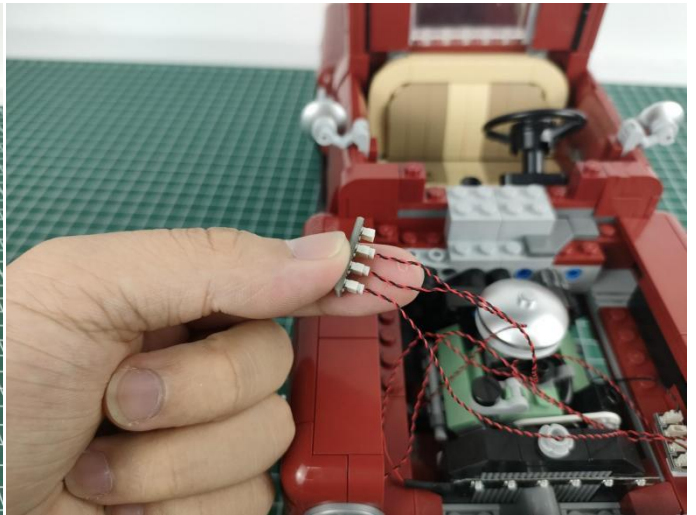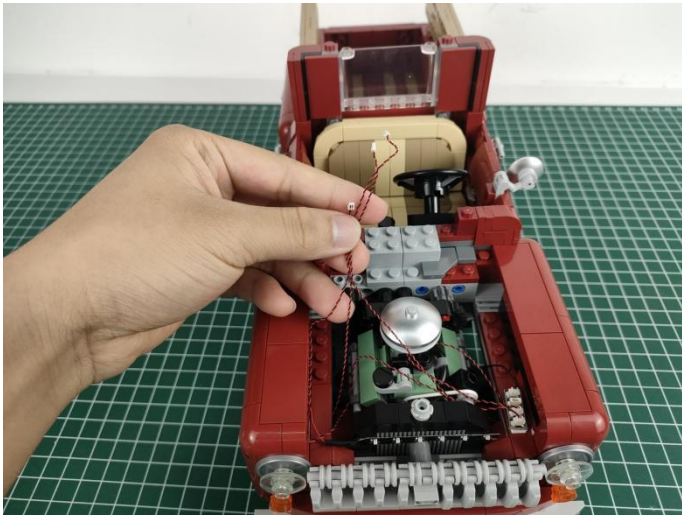

27





28

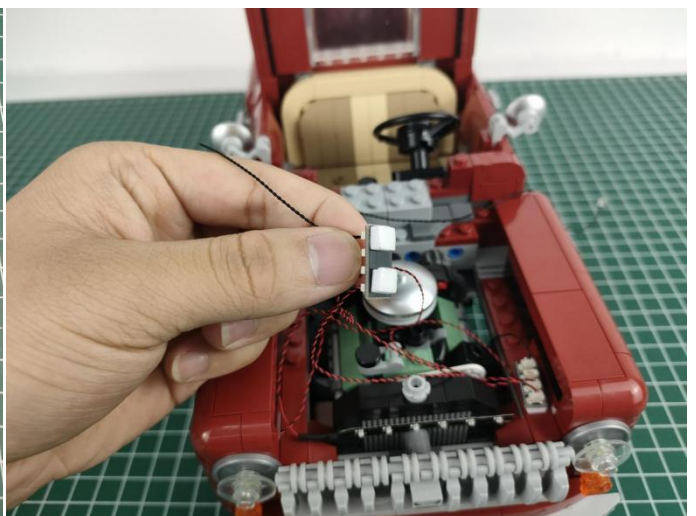



29

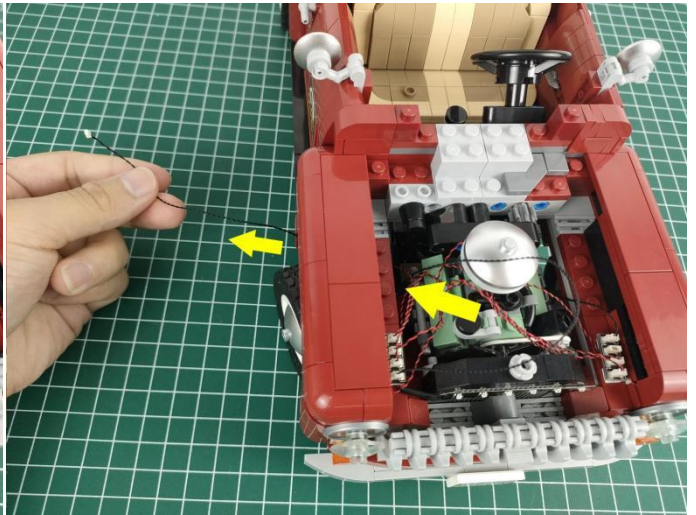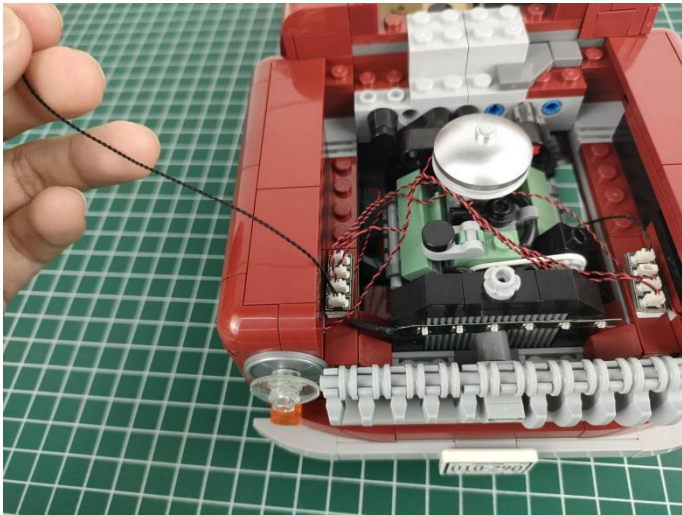

30



31







32



33


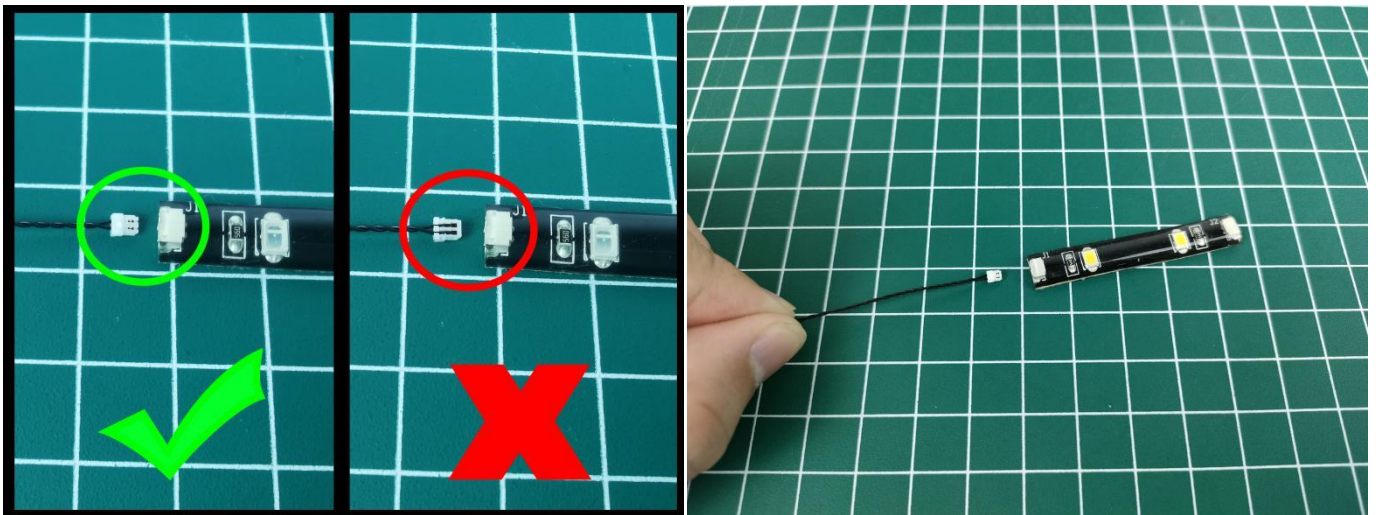


34


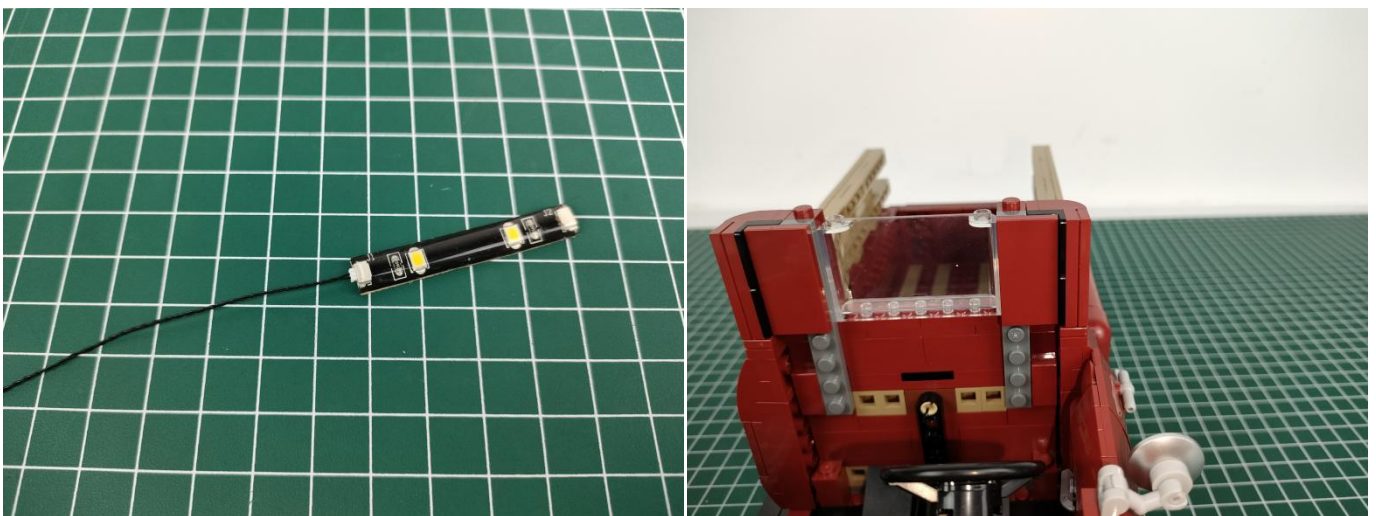






35

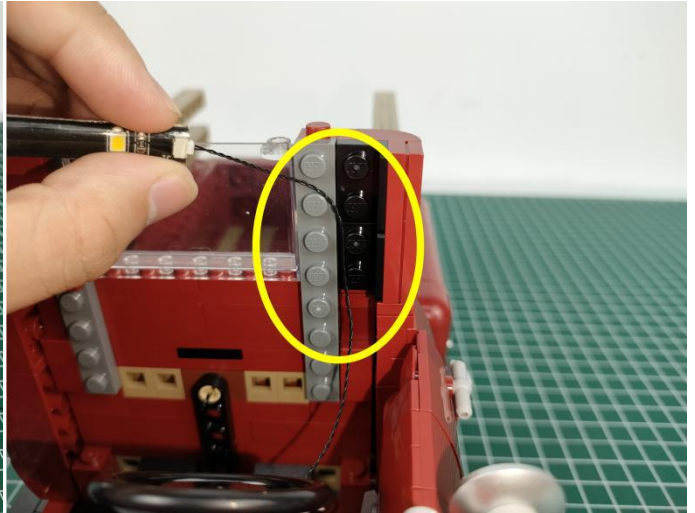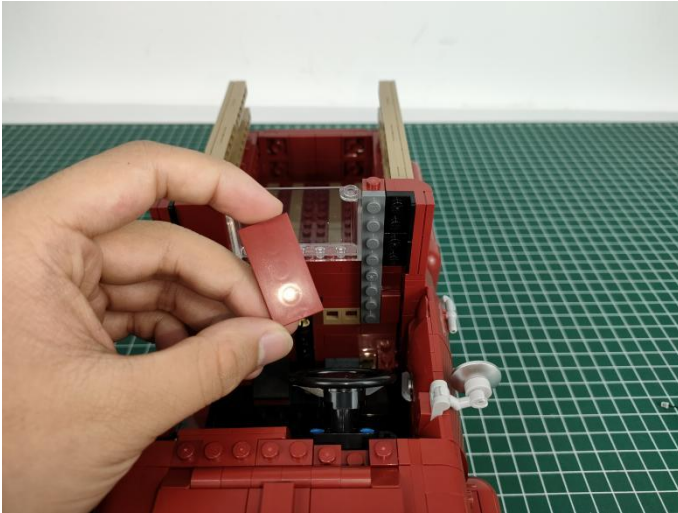

36

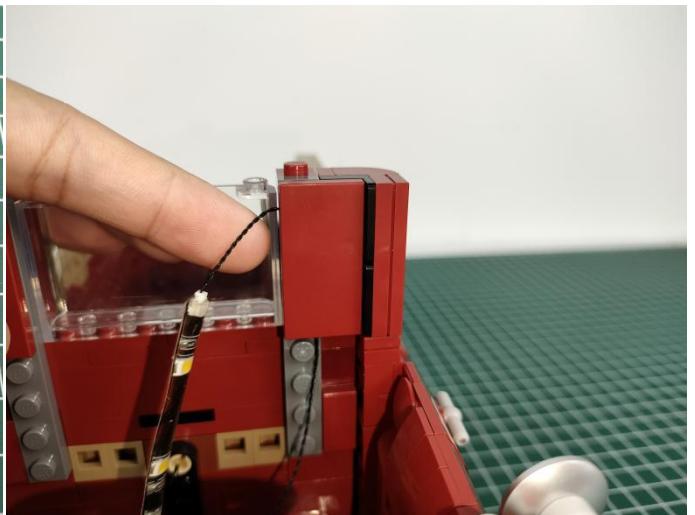
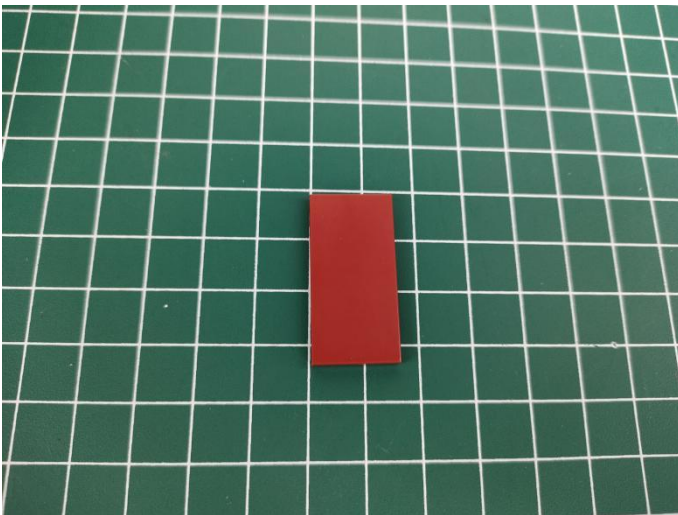


37

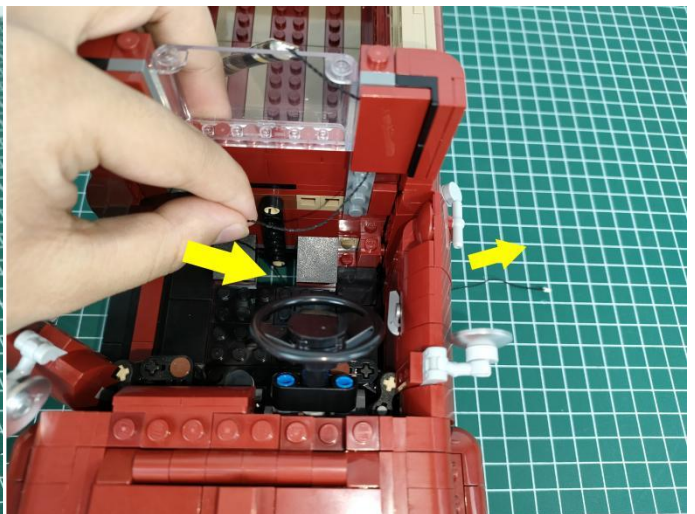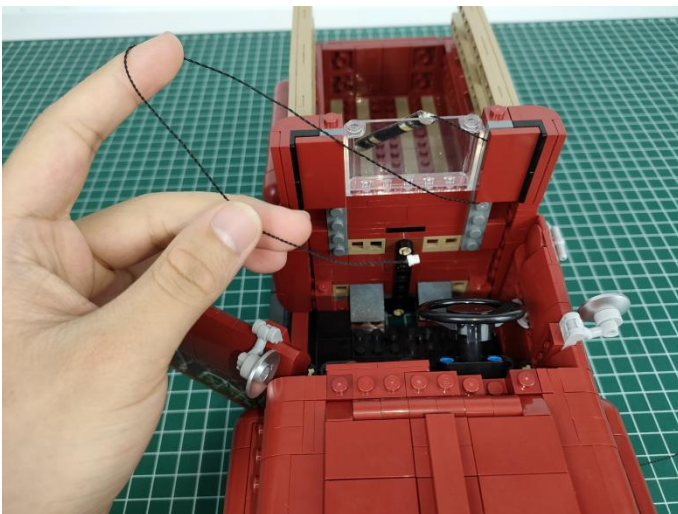



38

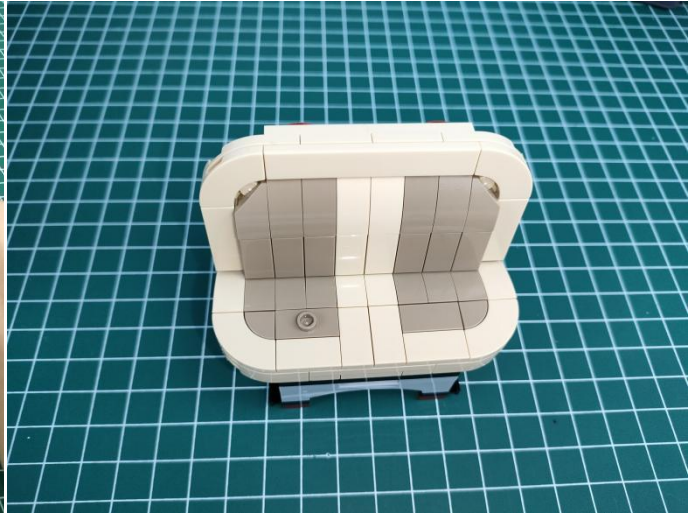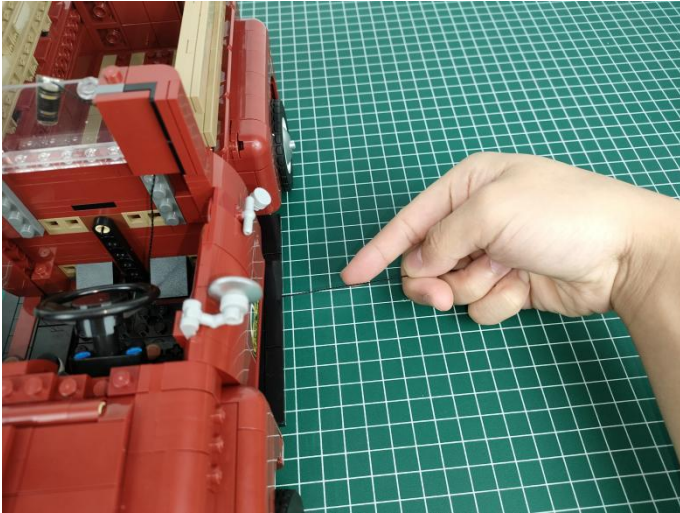

39




40






41

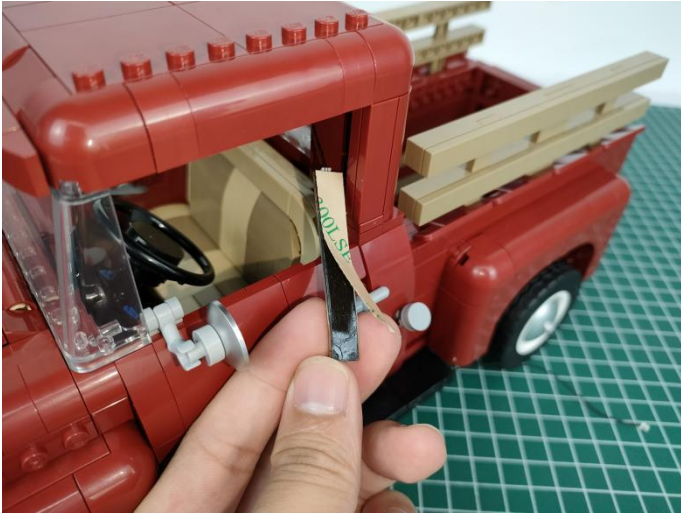

42



43

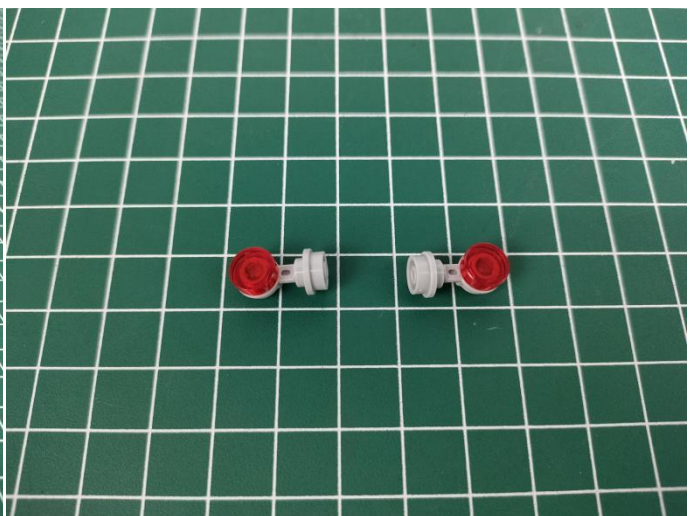





## Tips

The slit on the the plate round 1X1 are hand-made to avoid squeeze the wire and cause short circuit and abnormal heat during installation.

The plate without slit:

### The plate without slit:


The squeeze causes the protective layer of the wire to be torn apart, the positive and negative wires touch together, and the set is short-circuited and the hot or wire is crushed, the wire to be disconnected and don't work.



The plate with slit:

### The plate with slit:

The wire has enough space to avoid being squeezed endowed with longer service life and more stable effect.


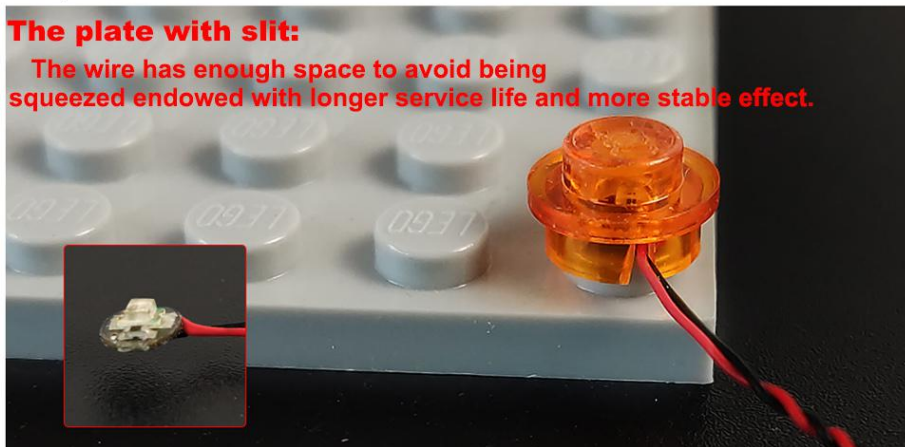






45



46

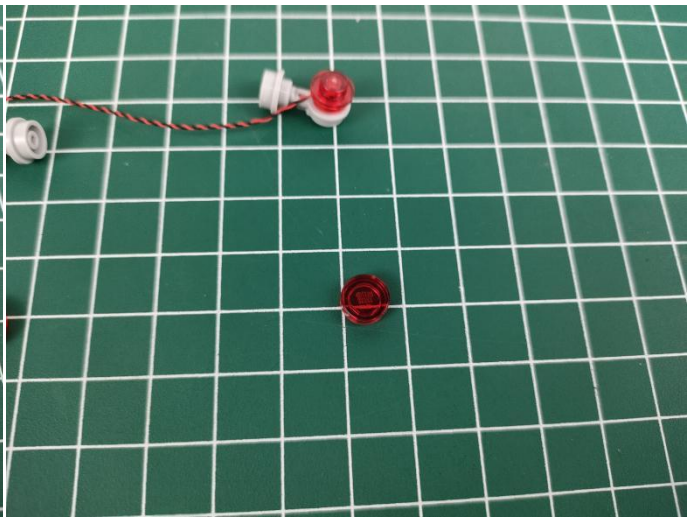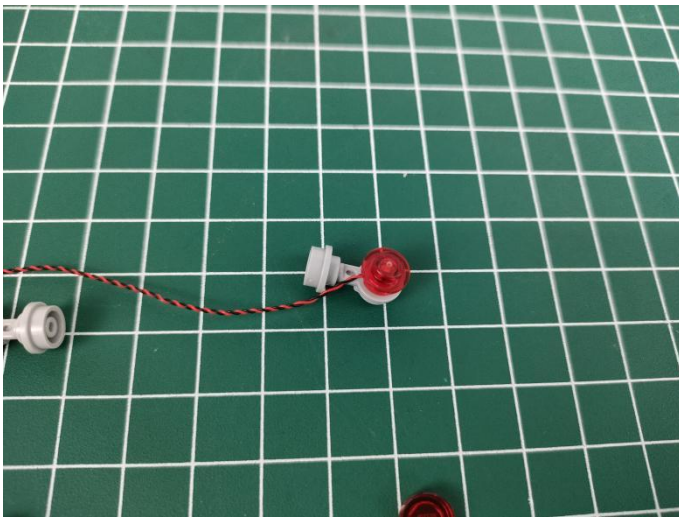


47

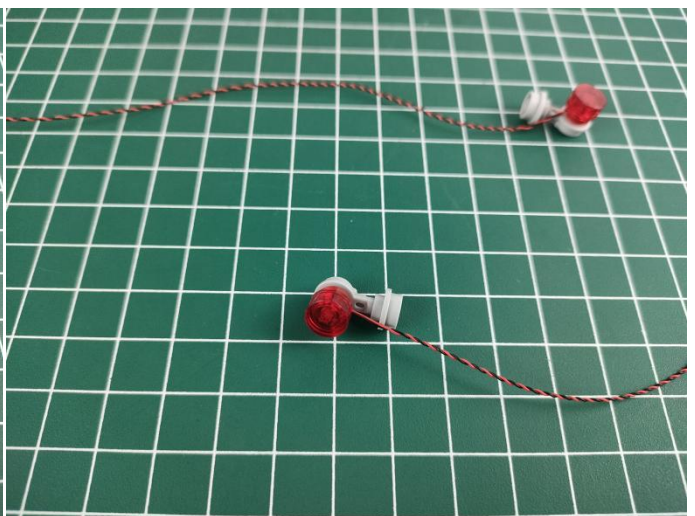
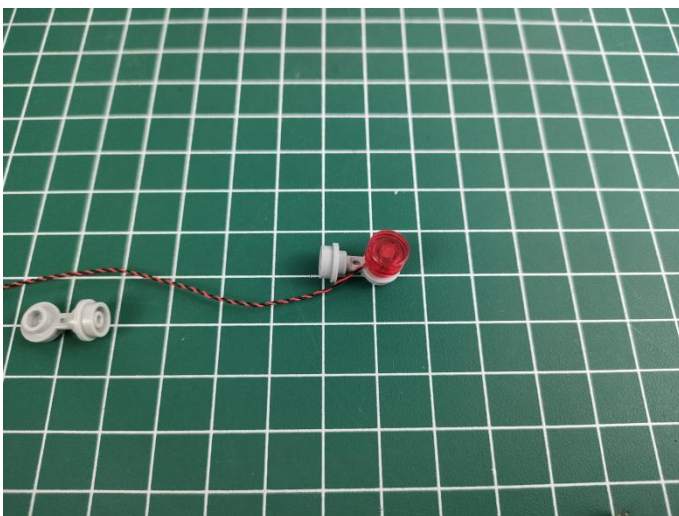






48

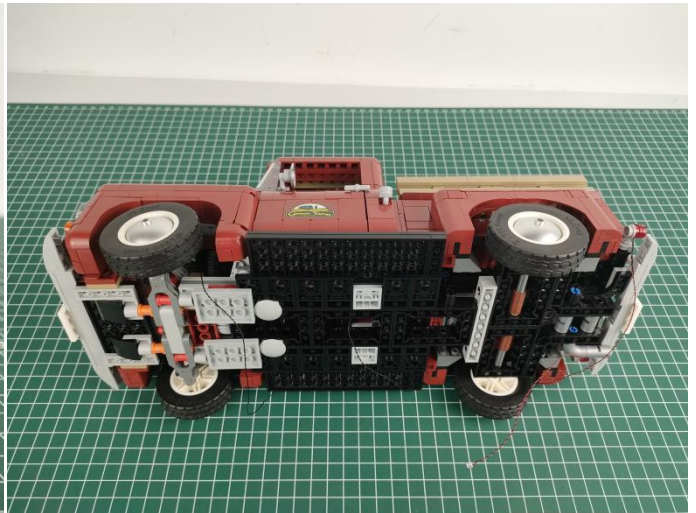

49

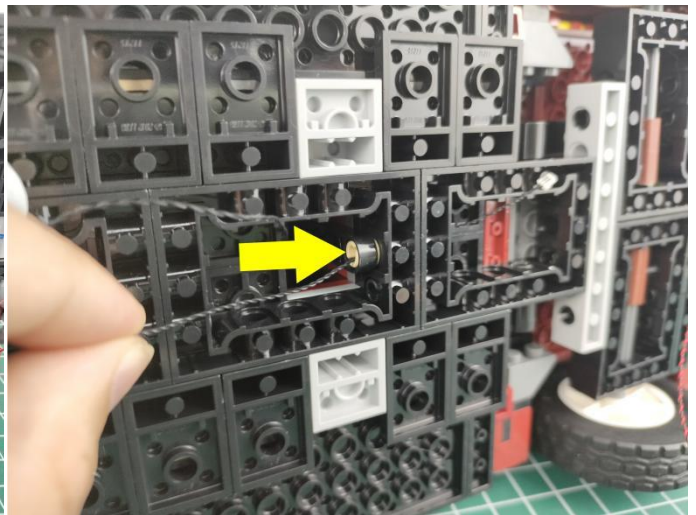
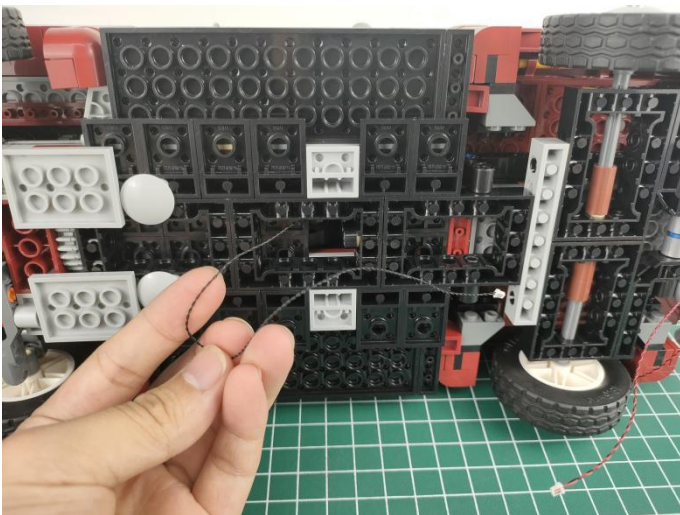


50

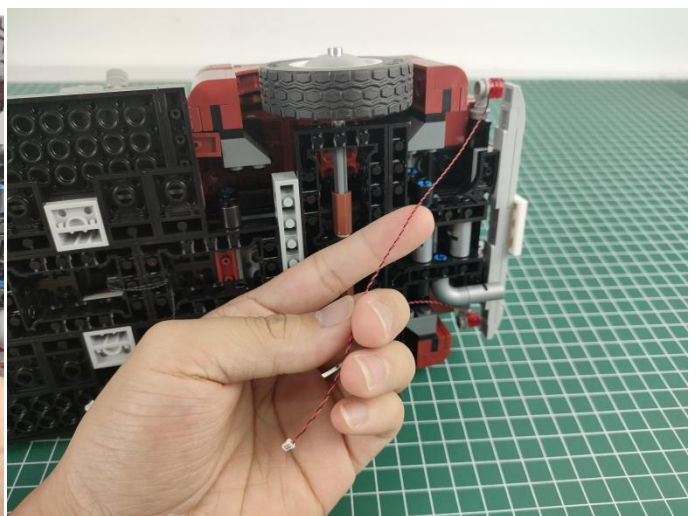
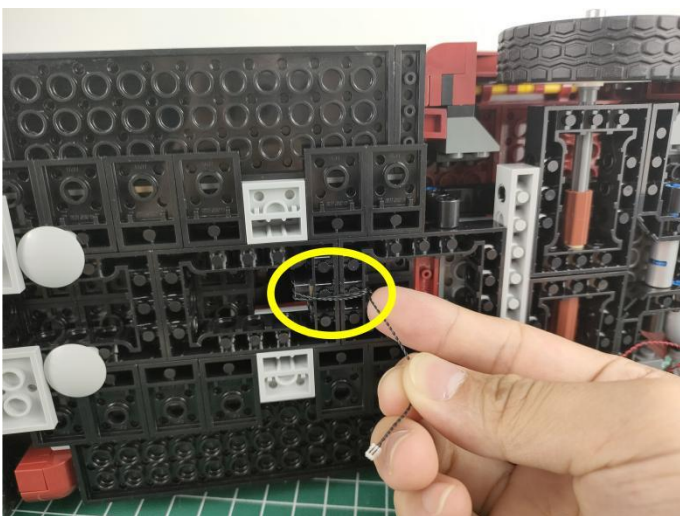






51

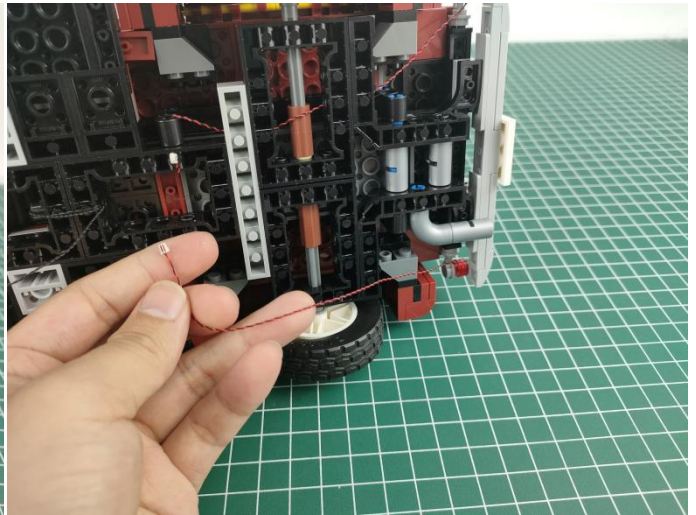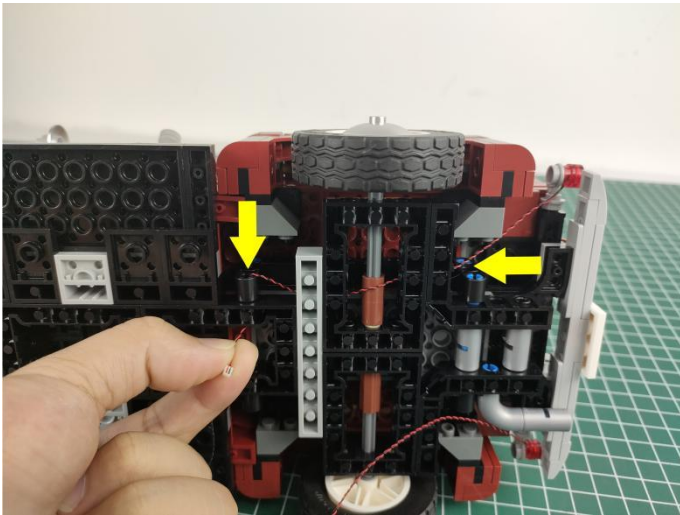

52

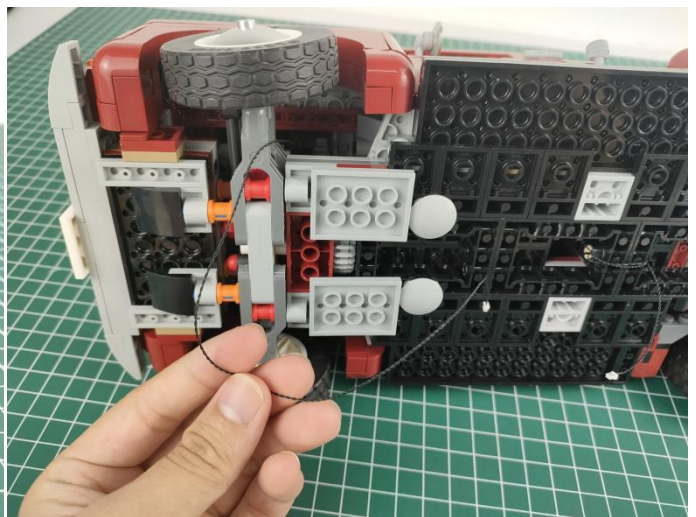
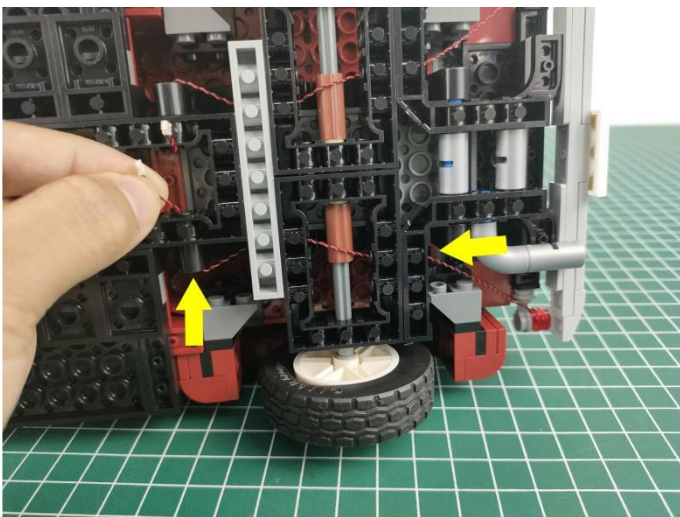


53

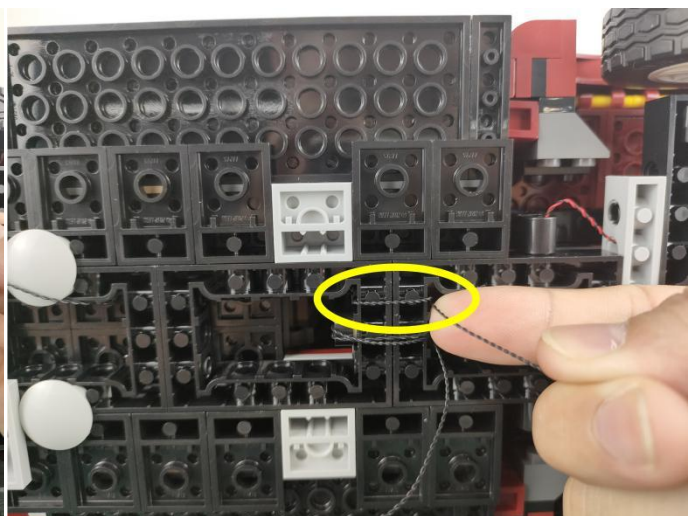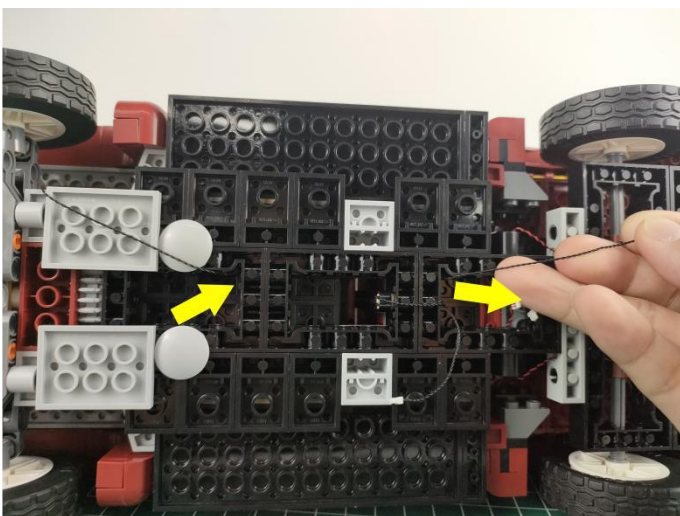




54

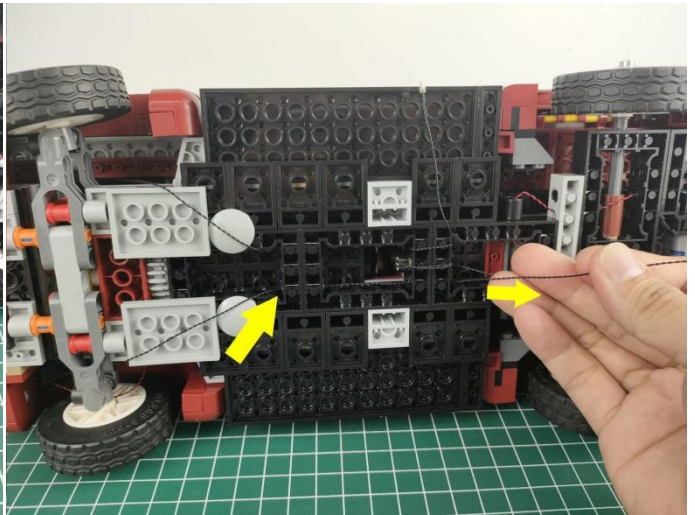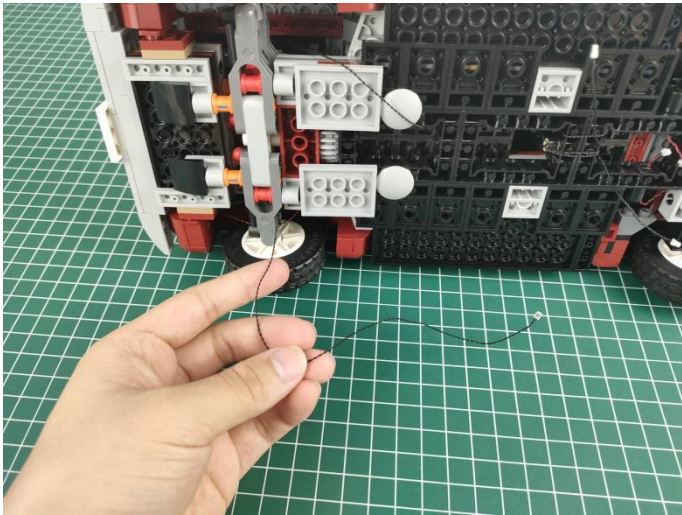

55

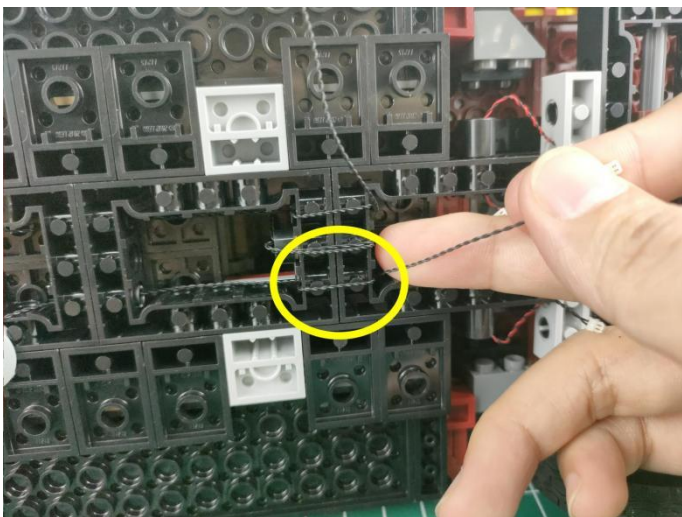


56








57

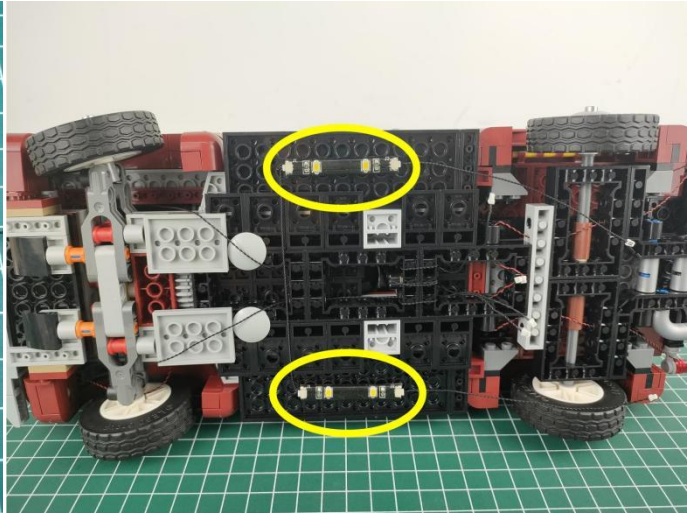

58

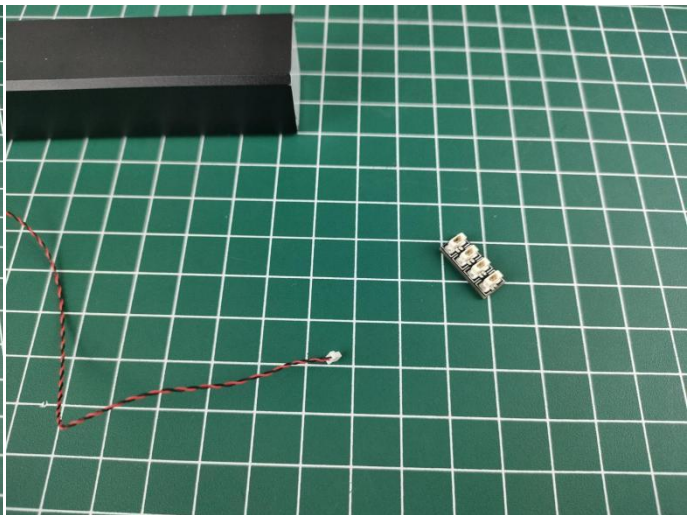


59

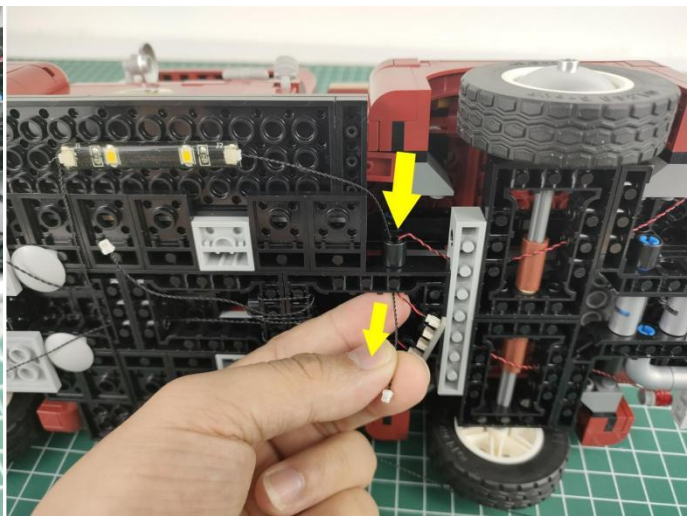
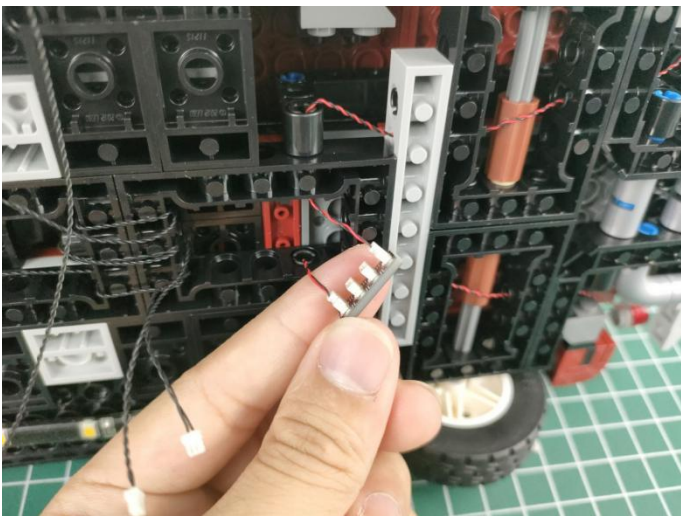






60

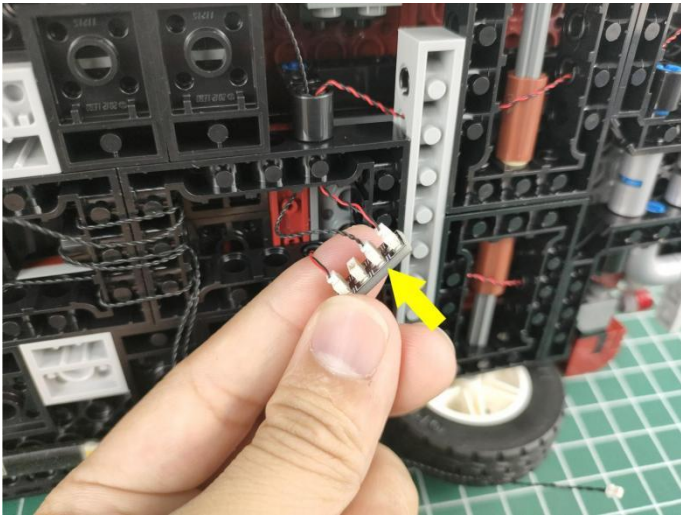

61

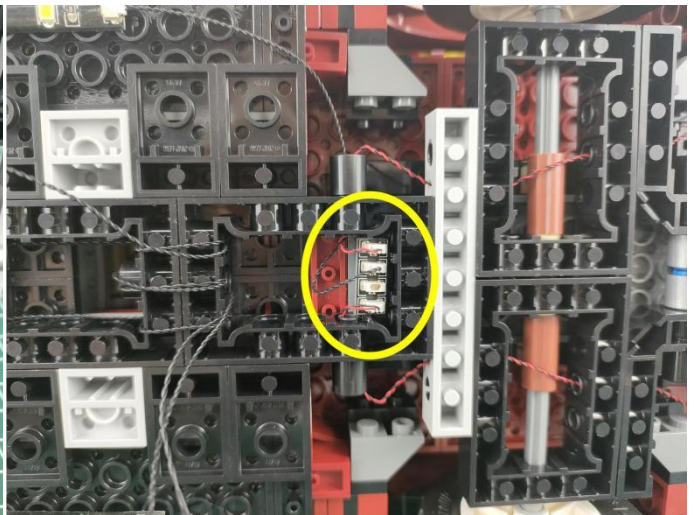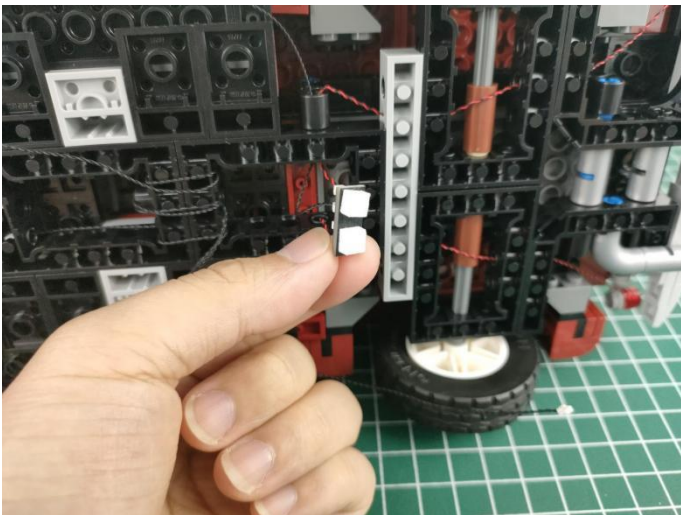

62

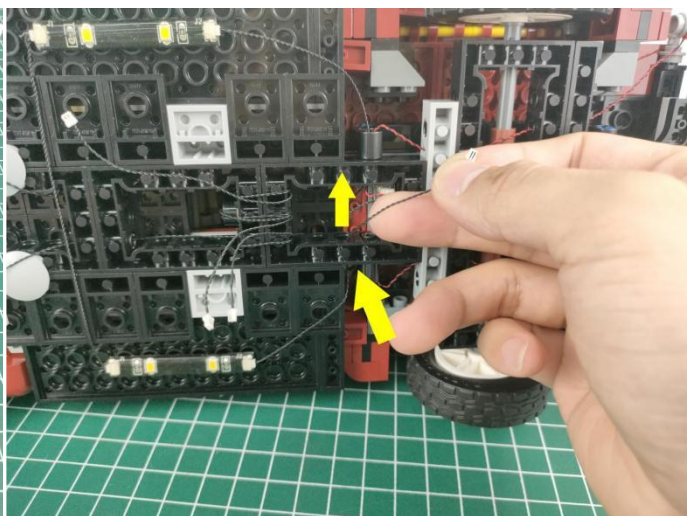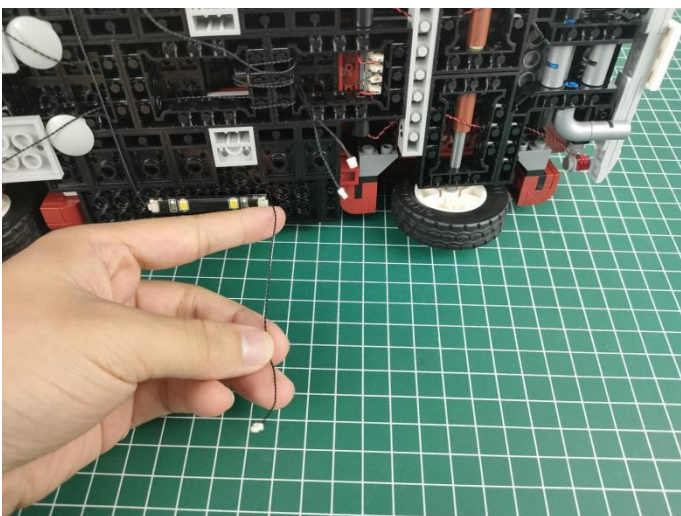







Remote control function description



ON: All branches are opened  
 OFF: all branches are closed  
 A: open/close A road  
 B: open/close B road  
 C: open/close C road  
 D: open/close D road  
 FS: Turn on blinking for the last open channel  
 BLN: Start breathing for the last opened path  
 ↑: Increase blinking/breathing rate  
 ↓: Increase blinking/breathing rate  
 Brightness+: Increase brightness  
 Brightness -: Reduce brightness

The remote control does not contain batteries, please buy a 2025 or 2032 button battery in the nearest store and install it in the remote control.

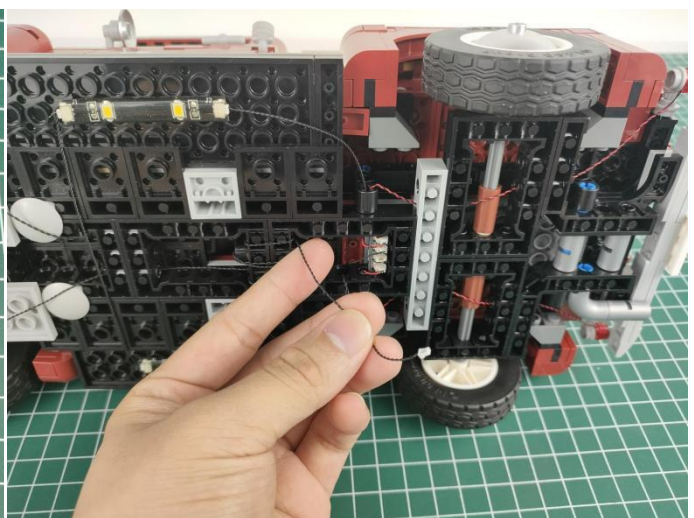
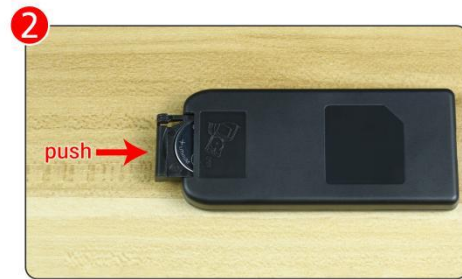






65

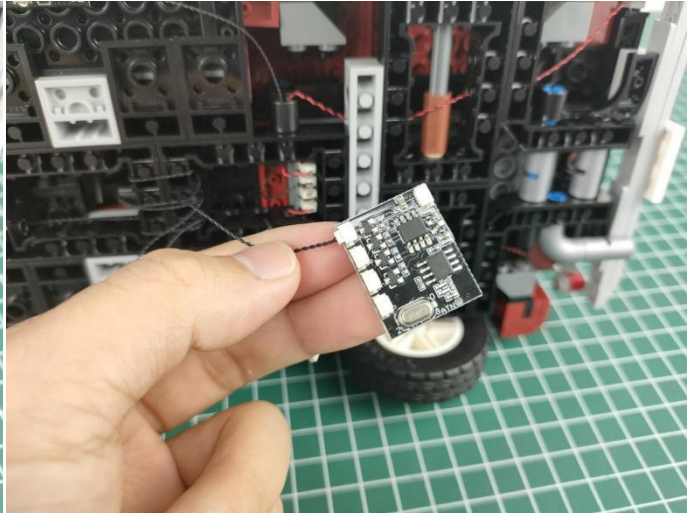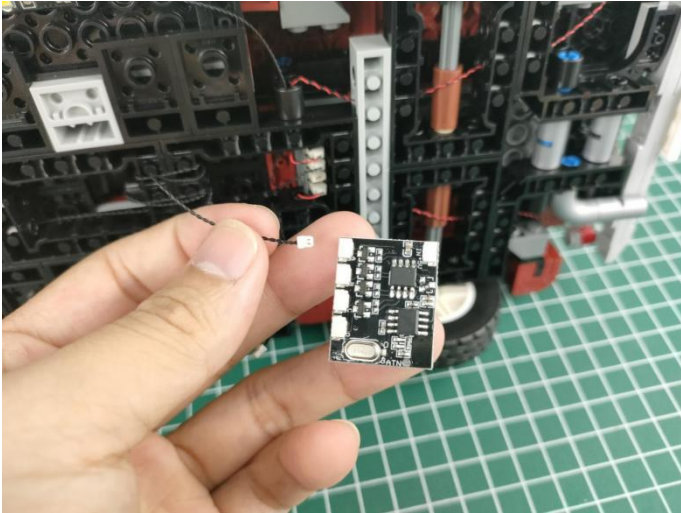

66

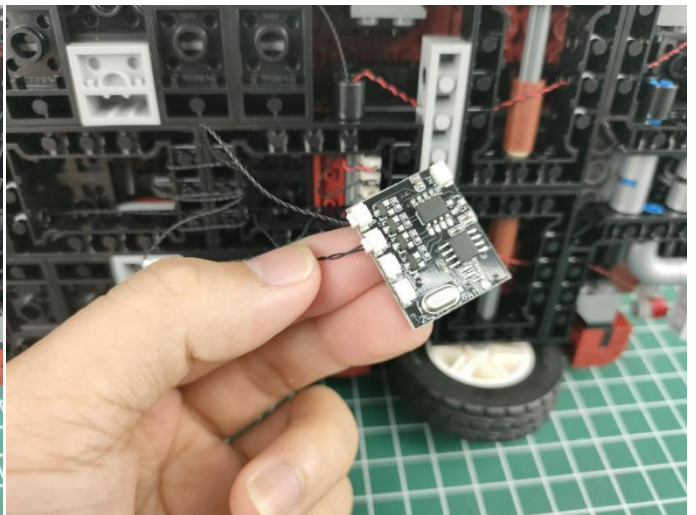
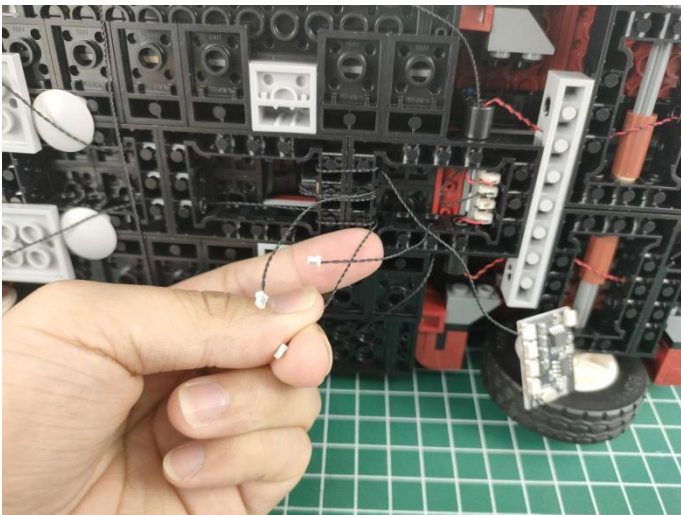


67

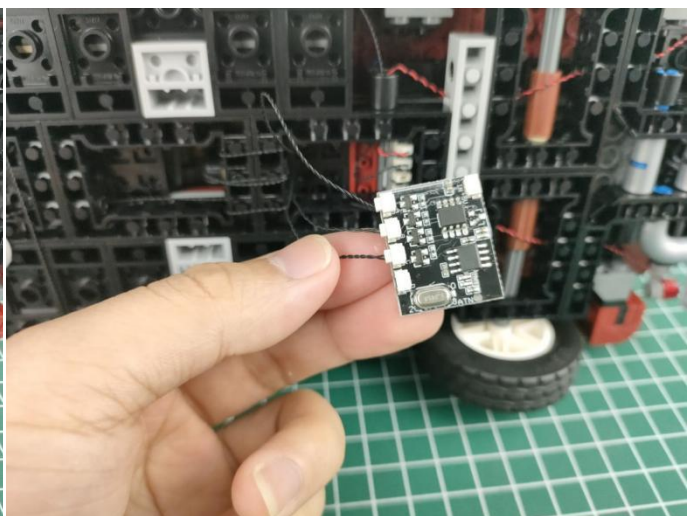
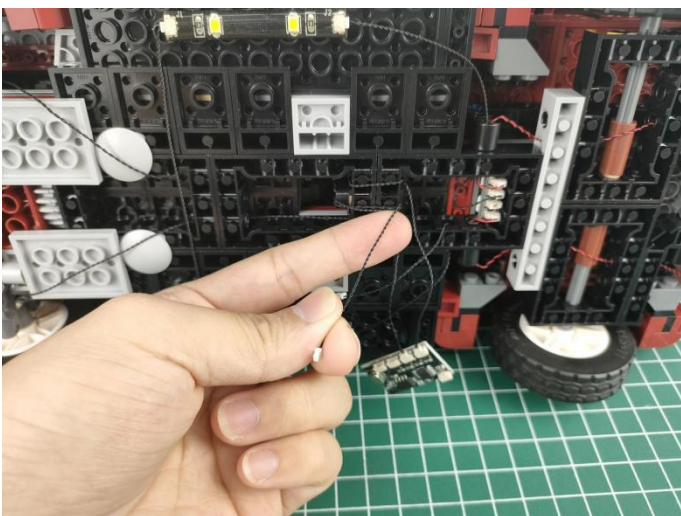





68

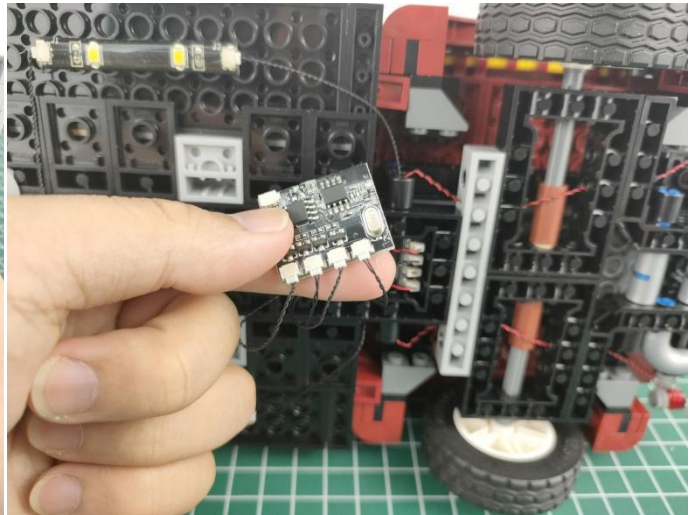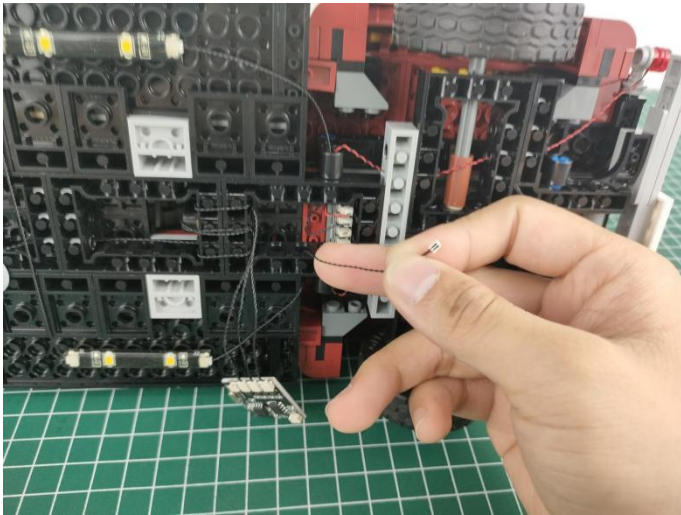


69

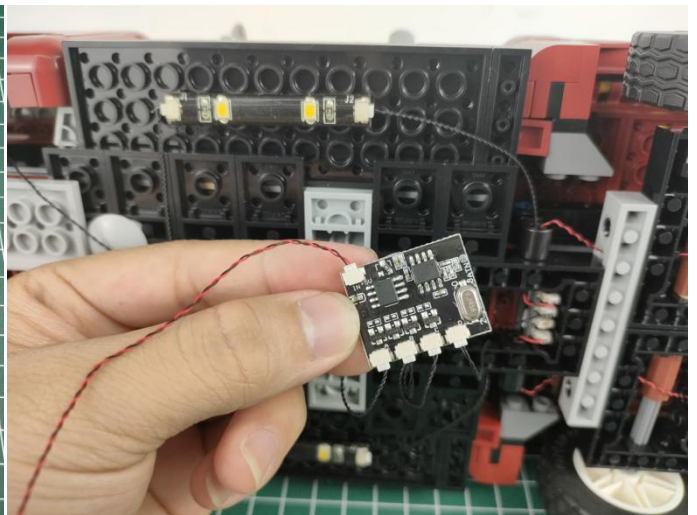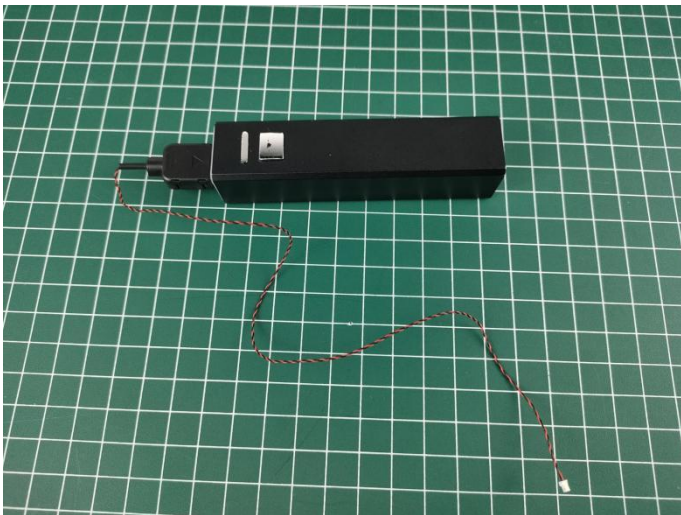

70

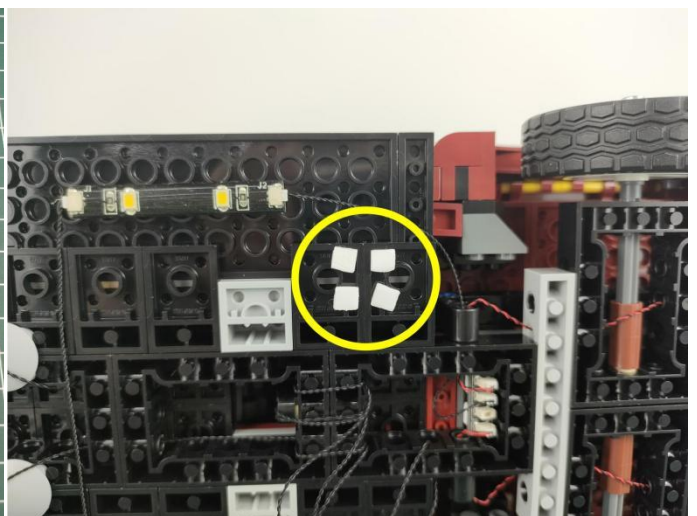

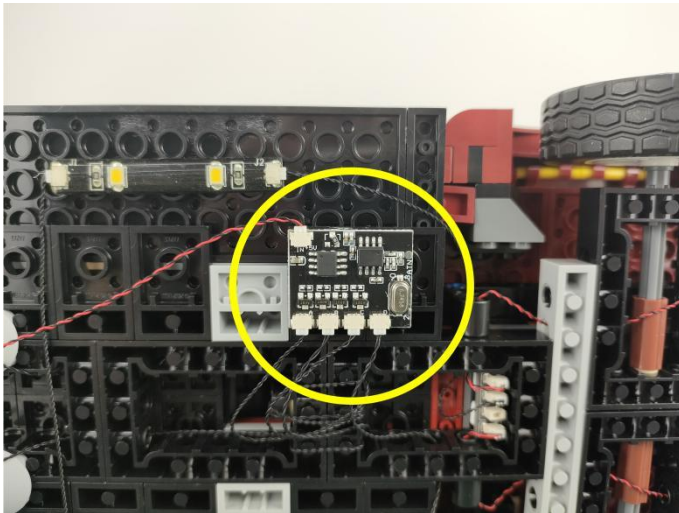

## Remote control function description



ON: All branches are opened

OFF: all branches are closed

A: open/close A road

B: open/close B road

C: open/close C road

D: open/close D road

FS: Turn on blinking for the last open channel

BLN: Start breathing for the last opened path

↑: Increase blinking/breathing rate

↓: Increase blinking/breathing rate

Brightness+: Increase brightness

Brightness -: Reduce brightness

**Good job, you've done all the installation steps, power it up and enjoy your work.**



The battery box can also power the set. If it is necessary to change the power supply , prepare three AAA batteries, install them in the battery box, turn on the switch on the battery box, remove the plug of the USB Power Cable from the socket of the expansion board, plug the plug of the battery box to the same socket in the expansion board to power the suit as well.

If everything is as excellent as expected, we'll be appreciate if a good review can be given.

**THANKS**