21330 Home Alone LED lighting Kit (Remote Control Version) P28703

Instructions for installing this kit:



Step 1 Test:

The lighting materials are as follows:


| Label | Content | Quantity |
|-----------------------------|-----------------------------|----------|
| Bit Lights-15CM-Warm White | Bit Lights-15CM-Warm White | 5 |
| Bit Lights-15CM-White | Bit Lights-15CM-White | 2 |
| Bit Lights-15CM-Red | Bit Lights-15CM-Red | 7 |
| Bit Lights-30CM-Blue | Bit Lights-30CM-Blue | 1 |
| Bit Lights-30CM-Red | Bit Lights-30CM-Red | 2 |
| Bit Lights-30CM-Warm White | Bit Lights-30CM-Warm White | 3 |
| Headlights-30CM-Warm White | Headlights-30CM-Warm White | 8 |
| Headlights-15CM-Warm White | Headlights-15CM-Warm White | 4 |
| LED Strip Lights-Warm White | LED Strip Lights-Warm White | 4 |
| Expansion Board | 6 Socket Expansion Board | 4 |
| | 8 Socket Expansion Board | 3 |
| | 4 Socket Expansion Board | 4 |
| USB Power Cable | USB Power Cable | 2 |
| Connecting Cables-5CM | Connecting Cables-5CM | 4 |
| Connecting Cables-50CM | Connecting Cables-50CM | 2 |
| Connecting Cables-20CM | Connecting Cables-20CM | 7 |
| Flicker-Effects Board | Flicker-Effects Board | 1 |
| Multi-Colour Light String | Multi-Colour Light String | 1 |
| Light Strips-Warm White-28 | Light Strips-Warm White-28 | 4 |
| Light Strips-Warm White-21 | Light Strips-Warm White-21 | 2 |
| Headlights-15CM-Green | Headlights-15CM-Green | 4 |
| Remote Control Board | Remote Control Board | 1 |
| Wireless Power Connectors | Wireless Power Connectors | 2 |

This set has a total of 22 bags.Take out the USB power cord .




The power supplies that can be used with the USB power cord are as follows (the voltage for normal use is 5V).

USB connectors to connect devices

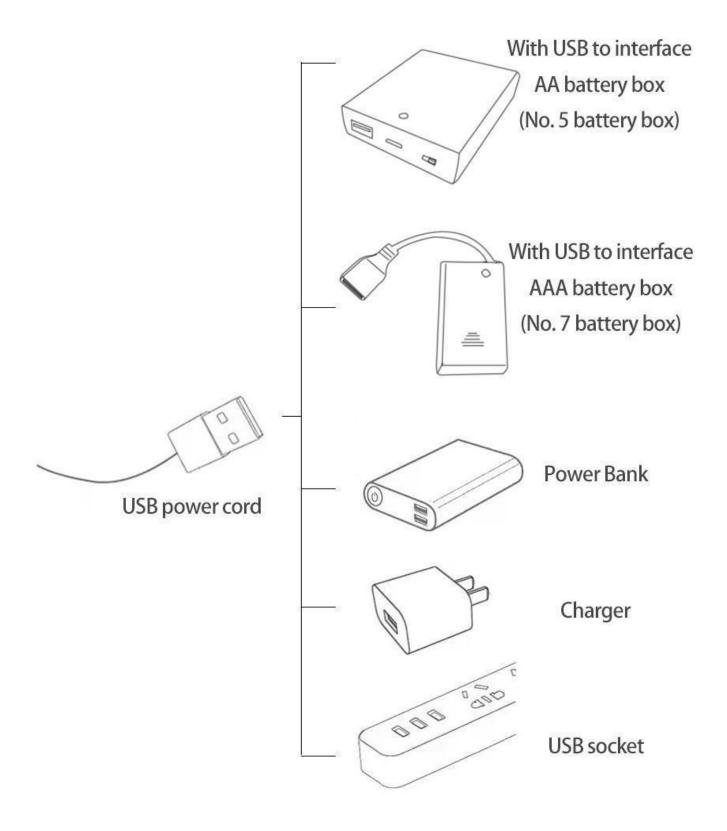


Connect the USB power cord to the mobile power supply (the power supply is self-provided, this article uses the mobile power supply, other power supply methods are shown in the figure above).

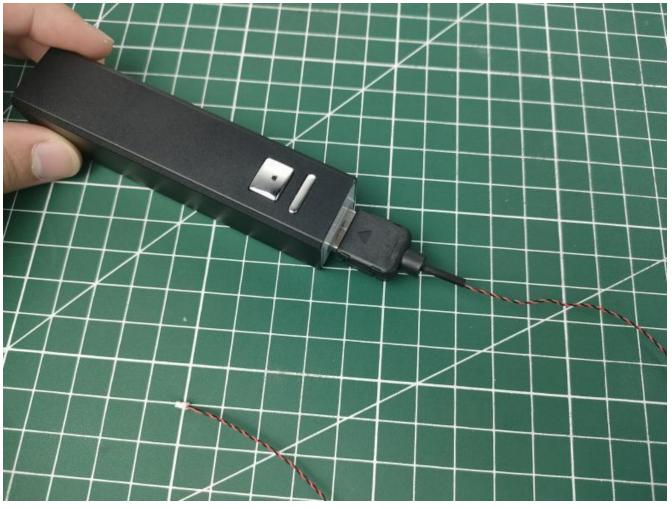


Take out a 6-seater expansion board.



Lift the seal of the expansion board.

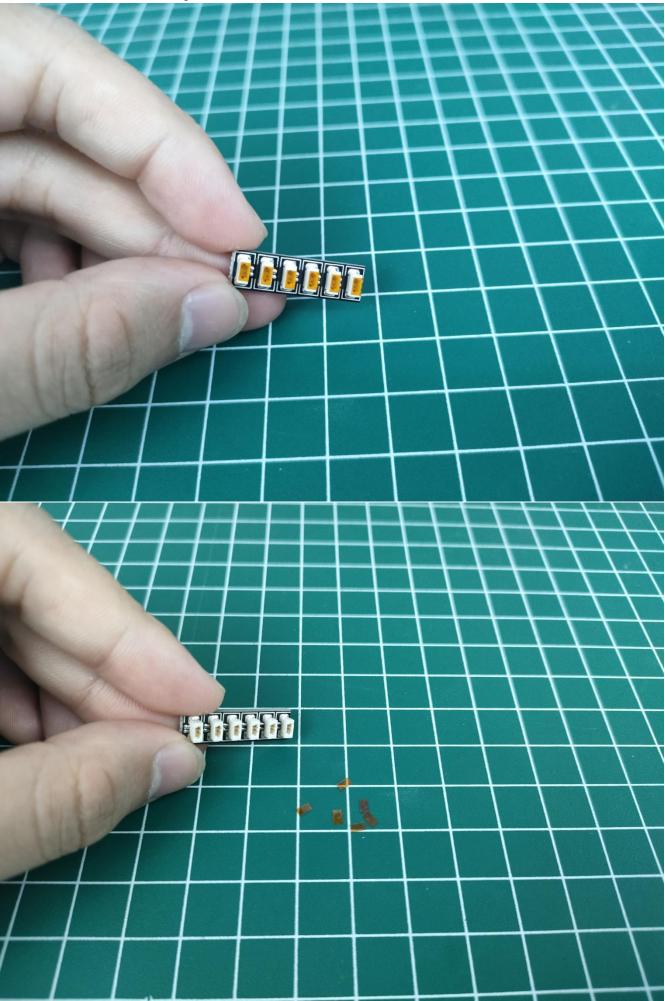



Please pay attention to the use of the interface. The interface is small. Please use it carefully: the = number of the 2P interface is aligned with the = number of the expansion board. The equal sign on the expansion board refers to the two solder joints on the outside, not the two inside the jack Metal pin.

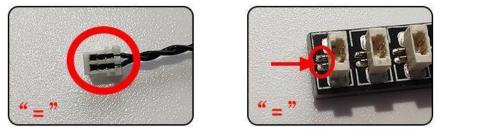



Connect the small plug of the USB power cord to the expansion board.

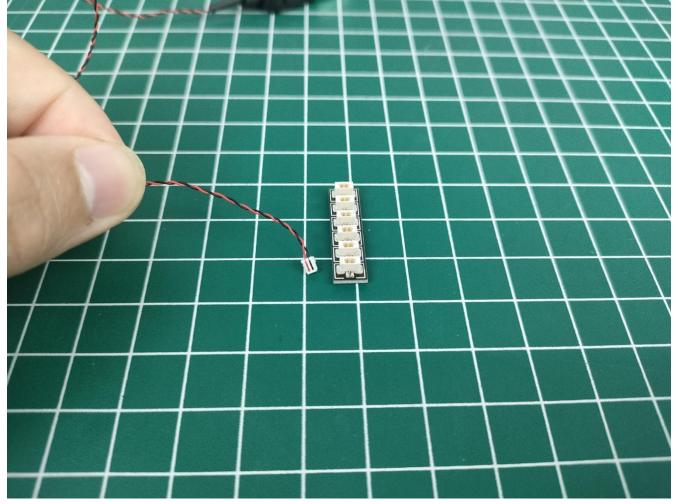


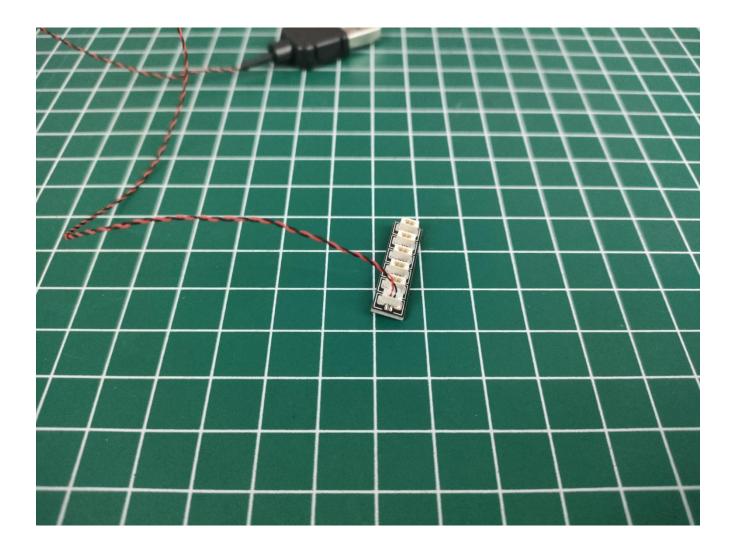


Take out the red light strip and prepare to test.




Connect them to the expansion board (you can test one by one). Turn on the power, test the lighting, and check whether it is normal. If there is any abnormality, please contact us in time.

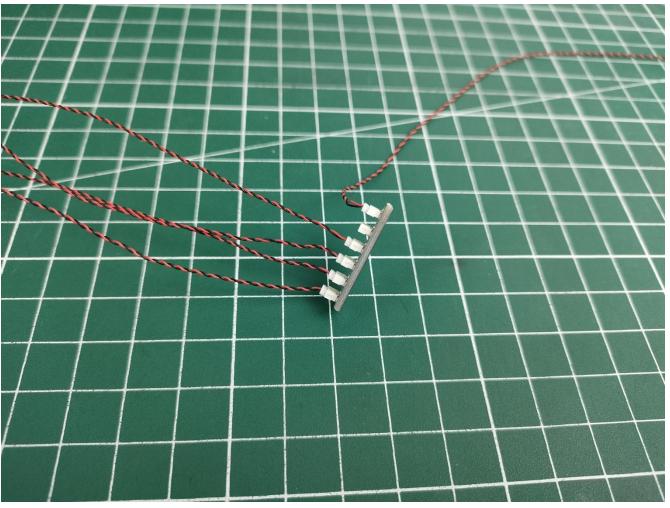

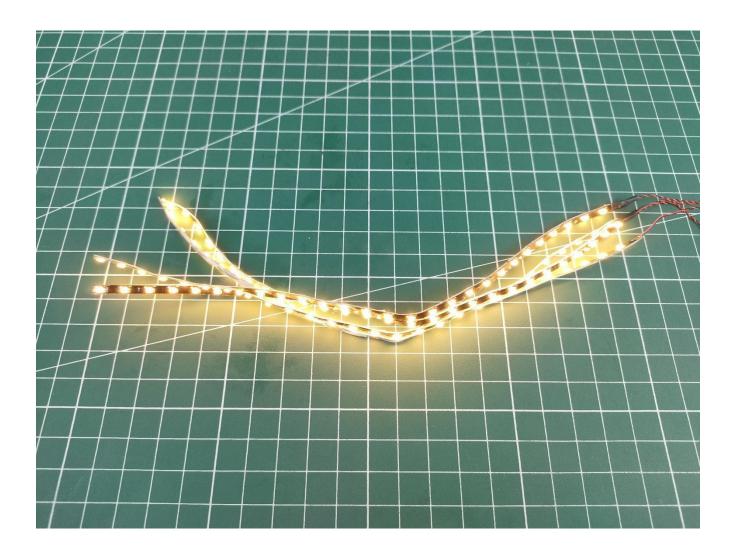

Pull out the lighting after the test is normal.

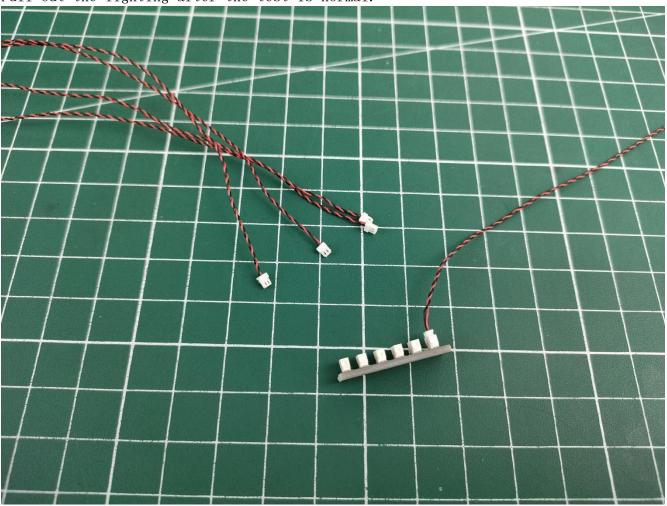


After there is no abnormality, first temporarily put the lighting back into the original bag, and prepare to test other lighting parts. In order to prevent the lighting from not bright after installation, the lighting in other bags are also tested in the same way. After testing a bag, please temporarily put it back in the original bag to avoid confusion with each other.



Note:


Please be careful when installing. The lamp wire is relatively slender and cannot be pressed on the raised position of the building block. It should pass along the gap, otherwise the lamp wire will be pinched.

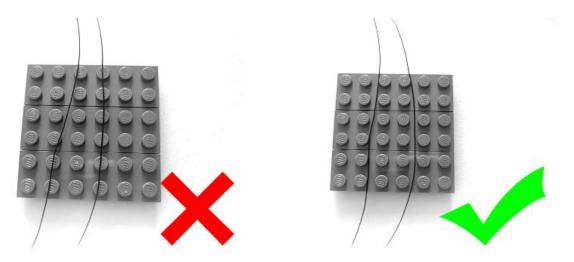


start installation:






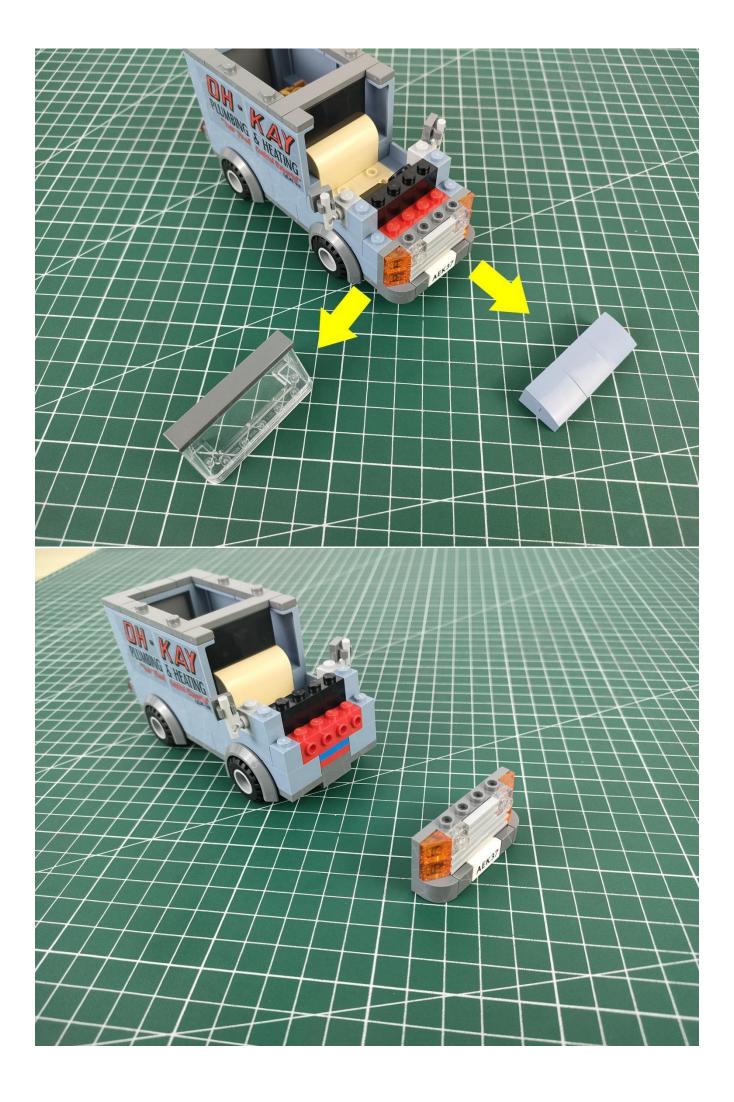


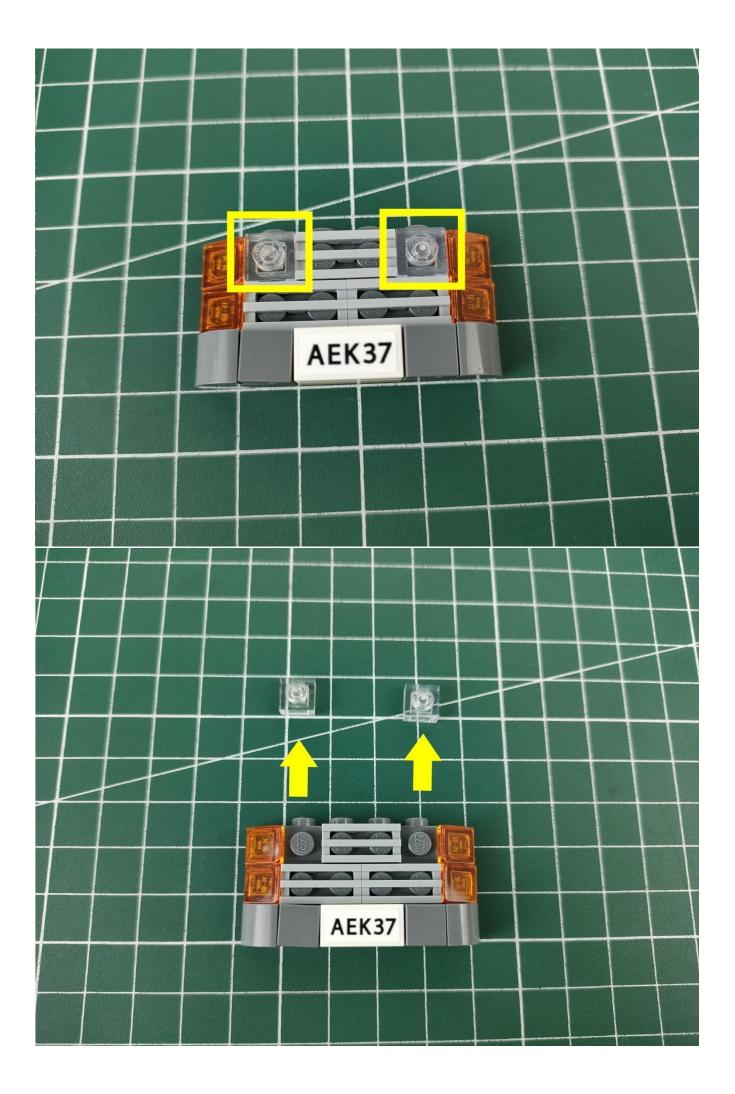




Fix the transparent building blocks on the lamp pellets. The light grain line is at the oblique angle of the square building block.

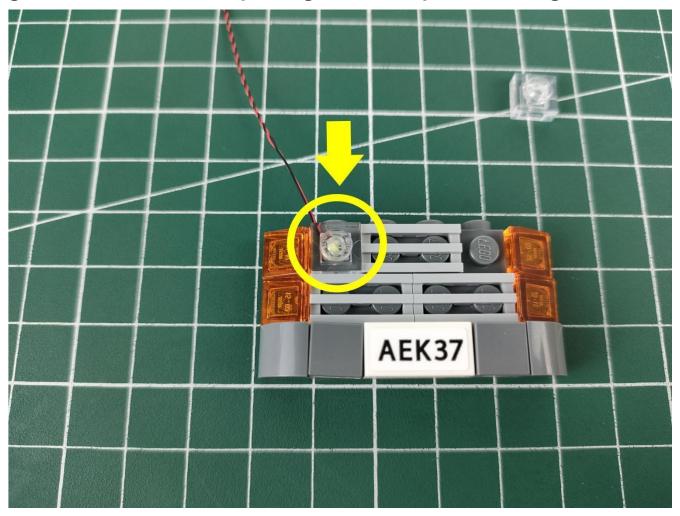


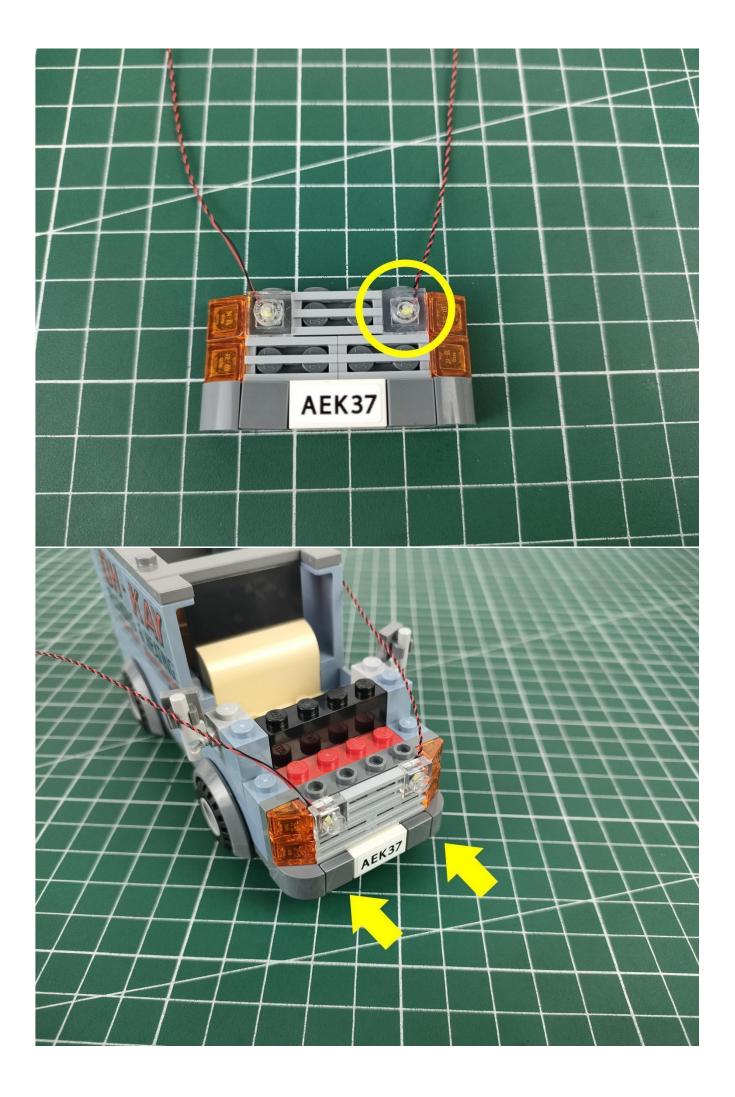


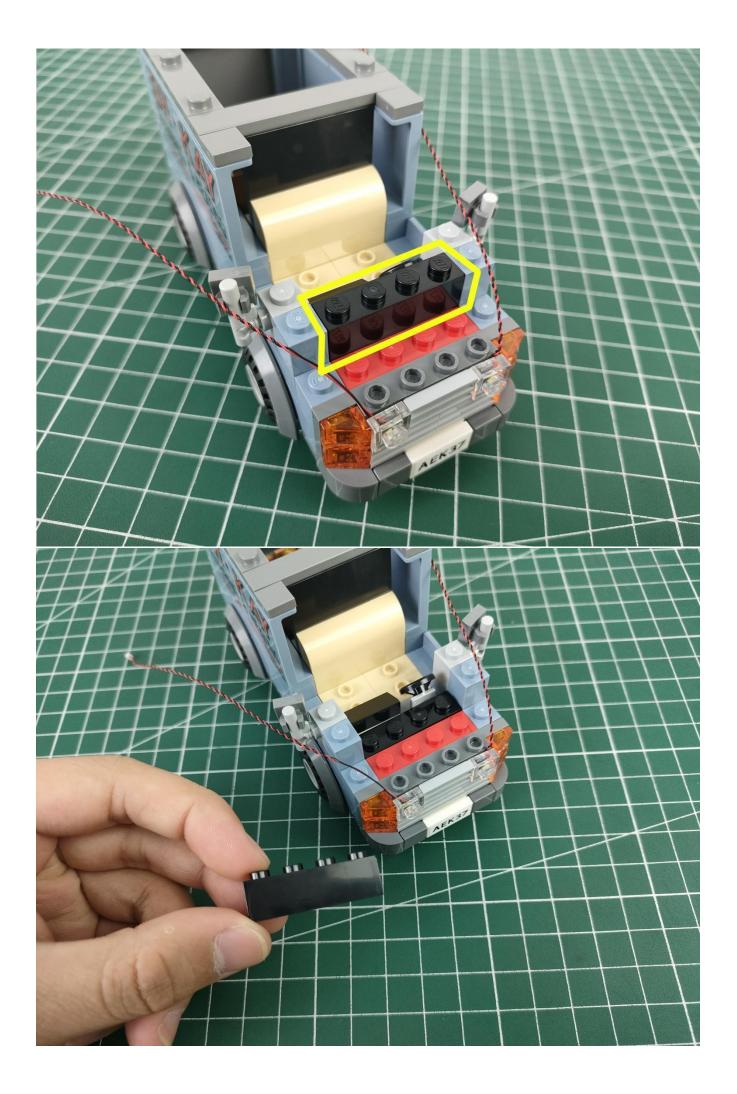



Note:


Please be careful when installing. The lamp wire is relatively slender and cannot be pressed on the raised position of the building block. It should pass along the gap, otherwise the lamp wire will be pinched.

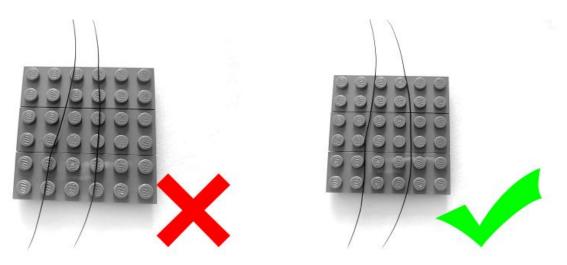


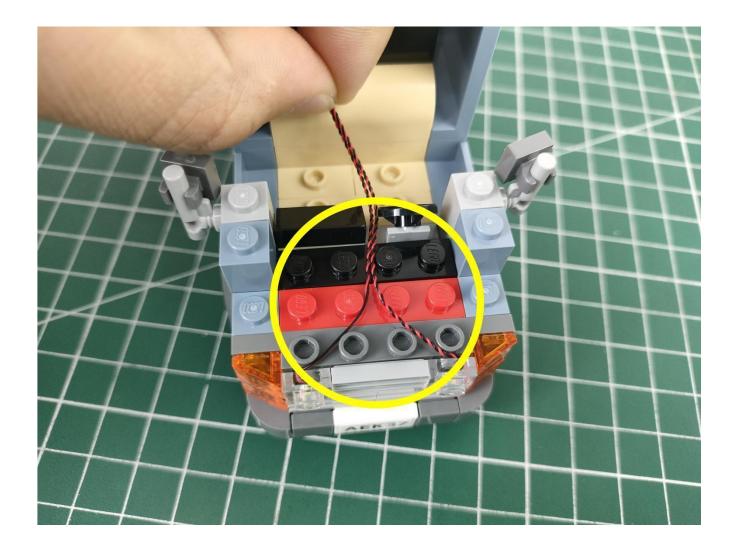

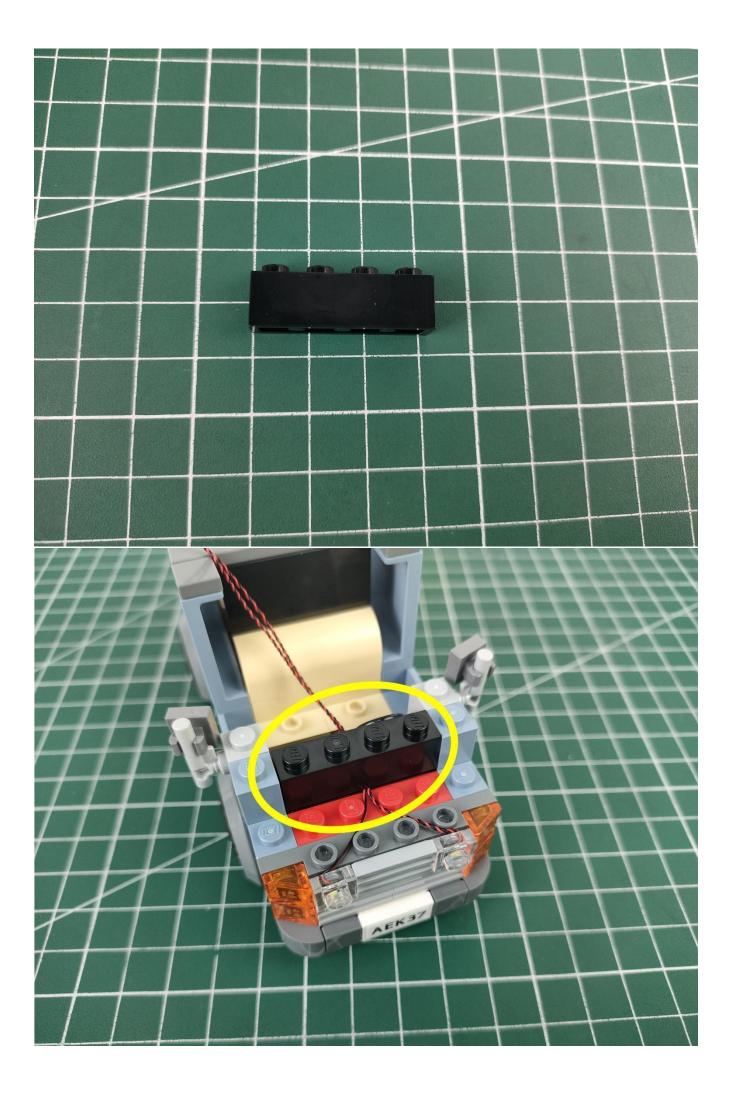


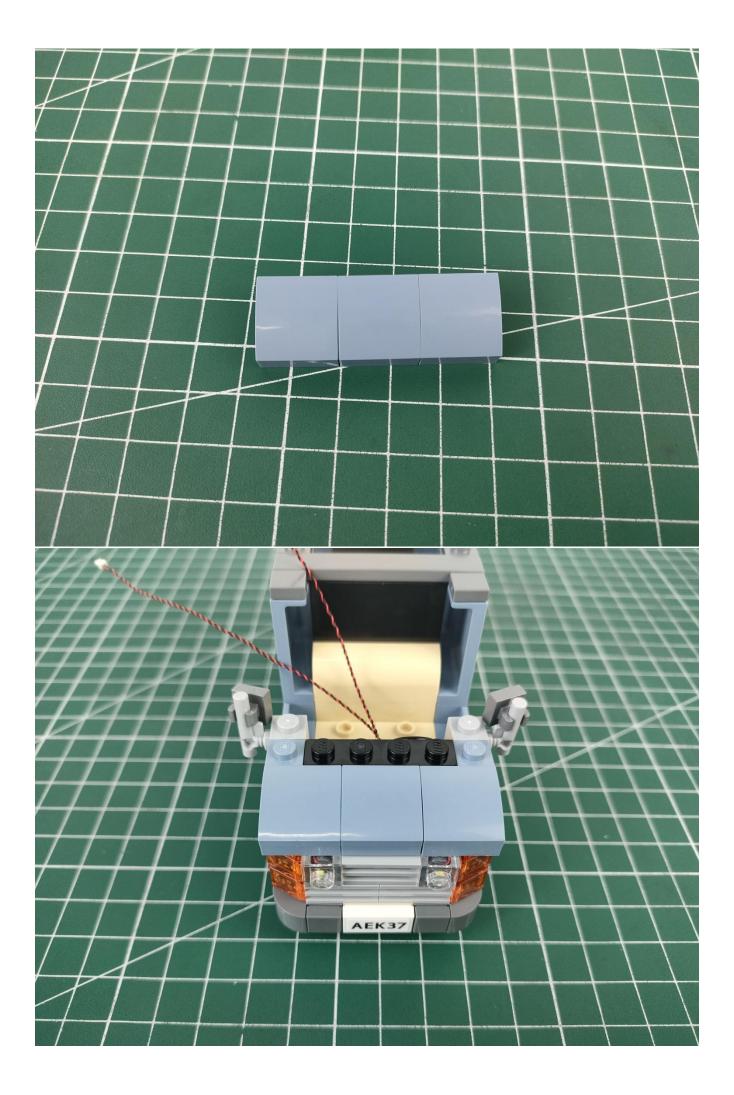


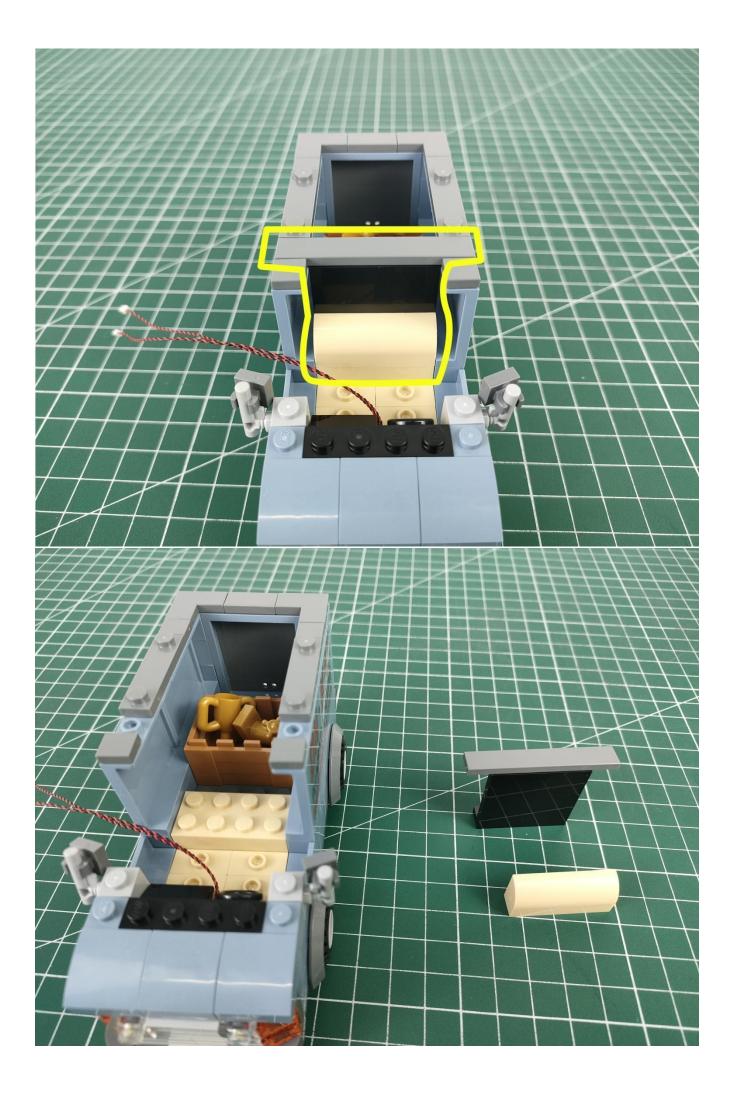

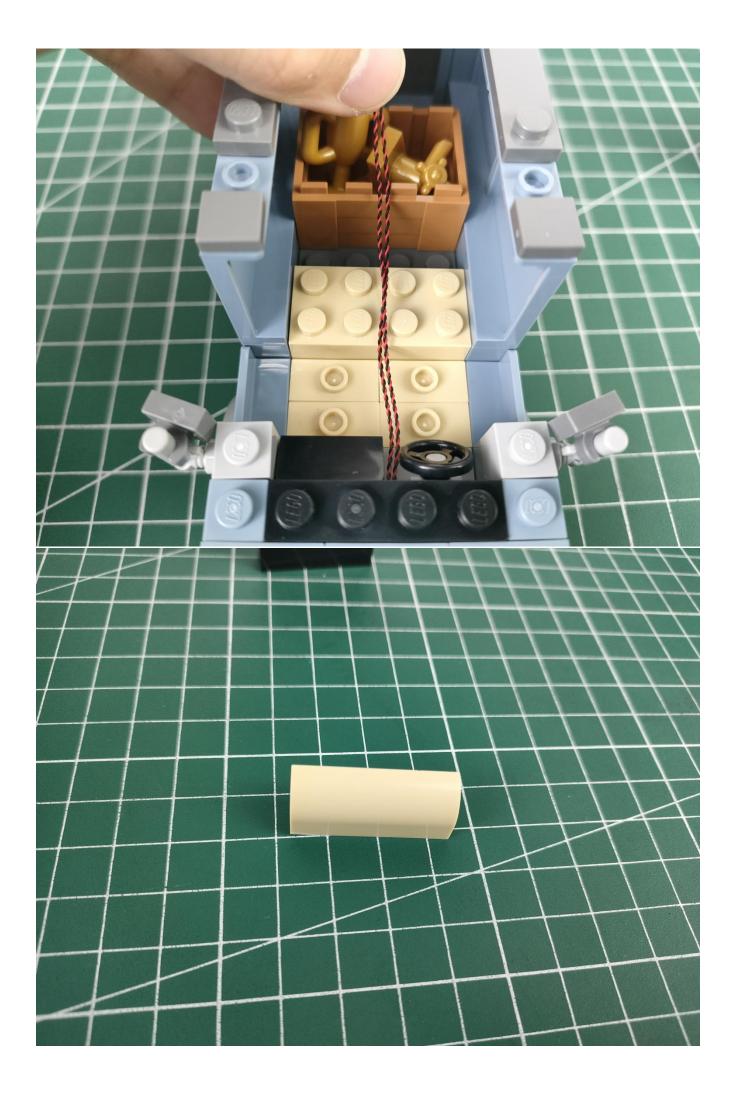



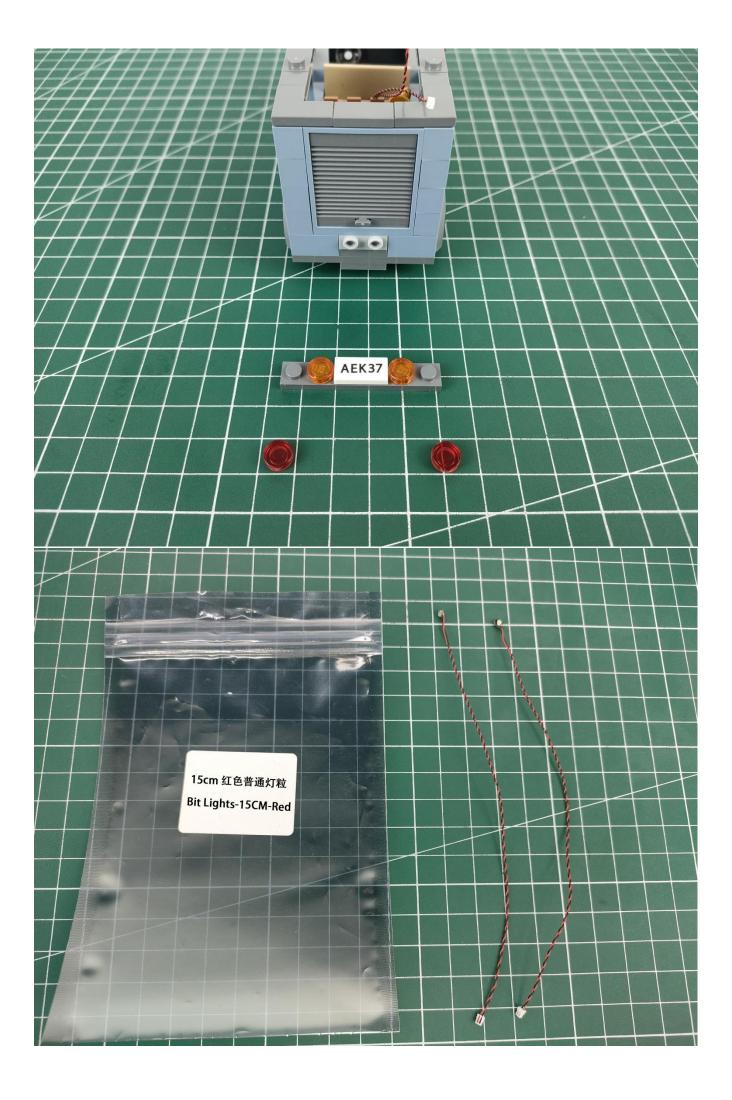

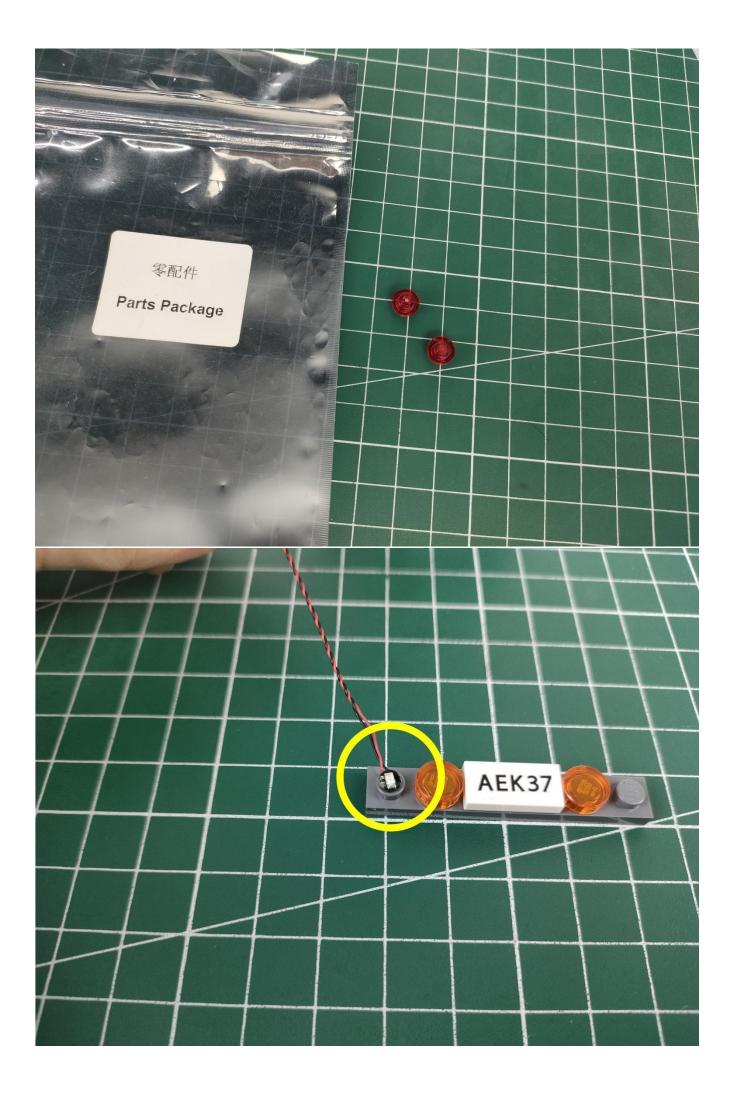





The plate without slit:


The plate without slit: The squeeze causes the protective layer of the wire to be torn apart, the positive and negative wires touch together, and the set is short-circuited and the hot or wire is crushed, the wire to be disconnected and don't work. The plate with slit:





The slit on the plate round 1X1 are hand-made to avoid squeeze the wire and cause short circuit and abnormalheat during installation.

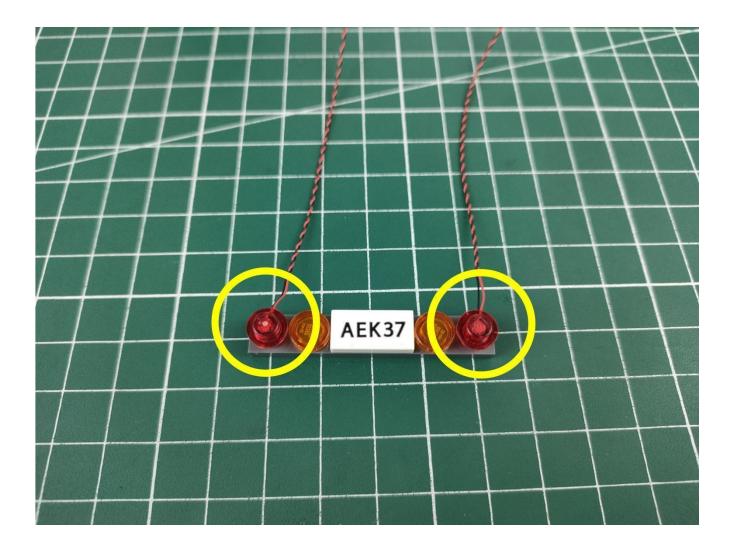


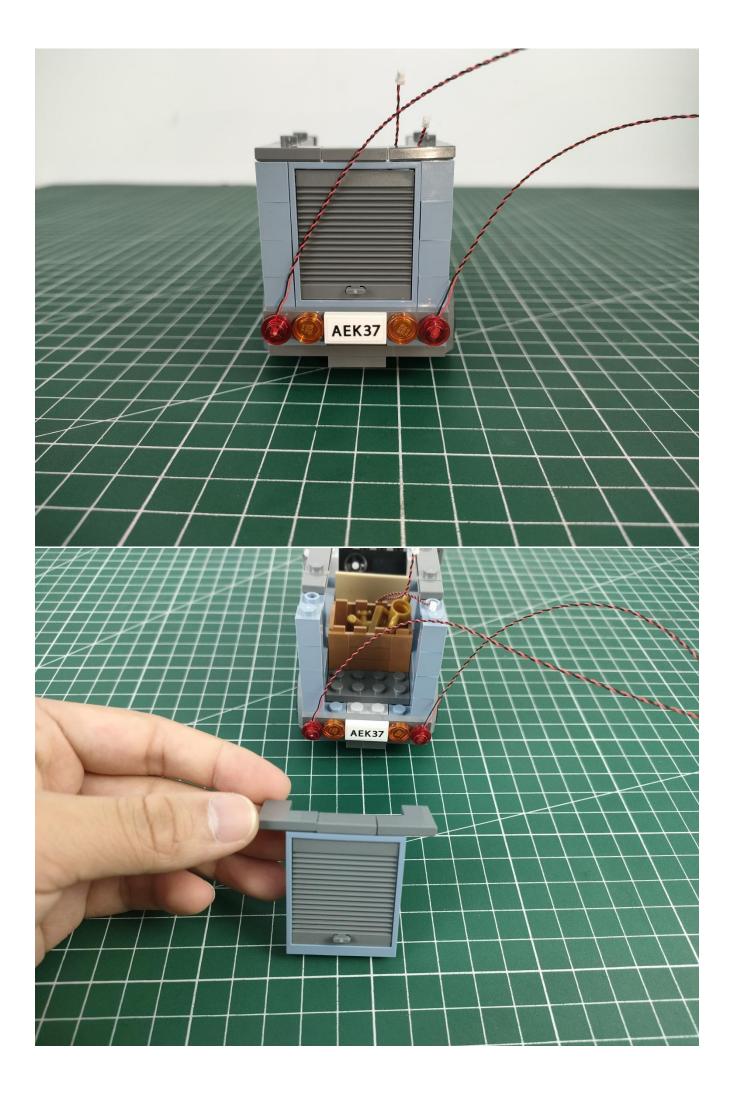


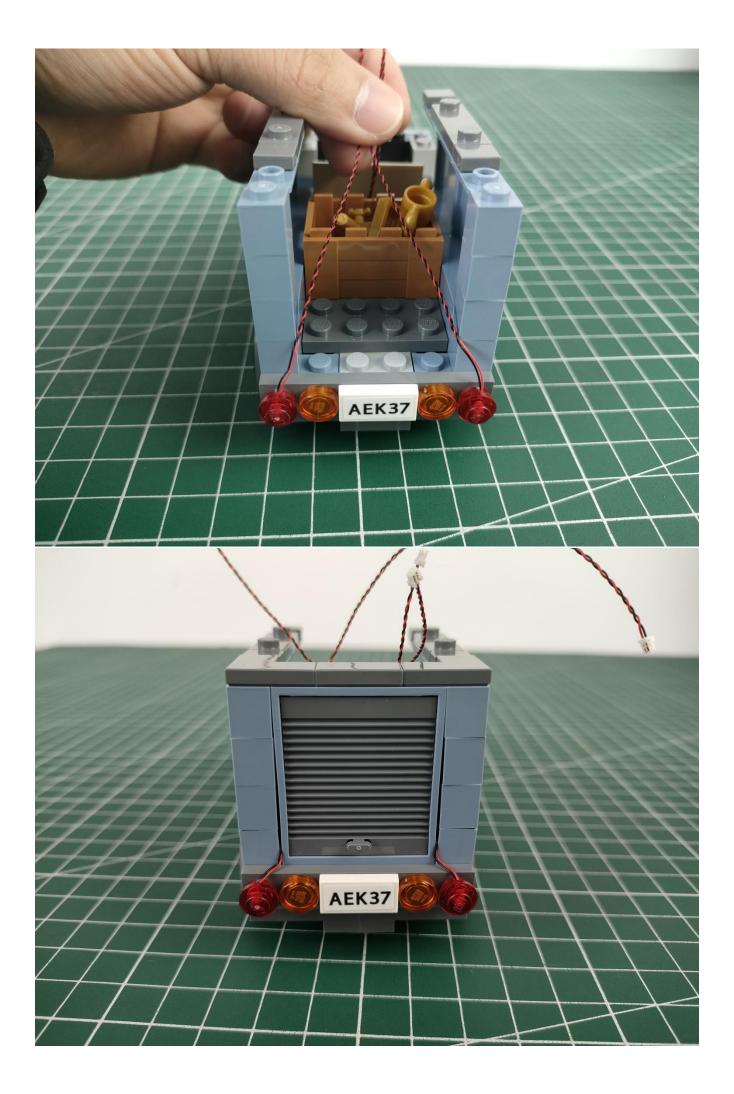


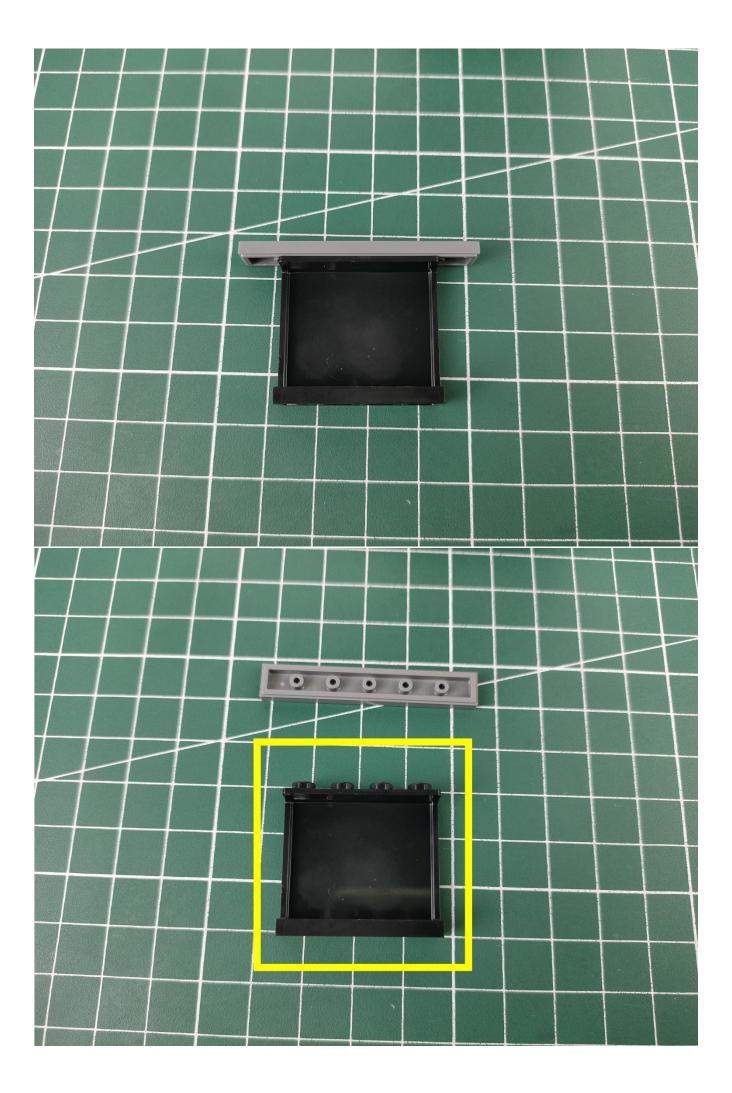

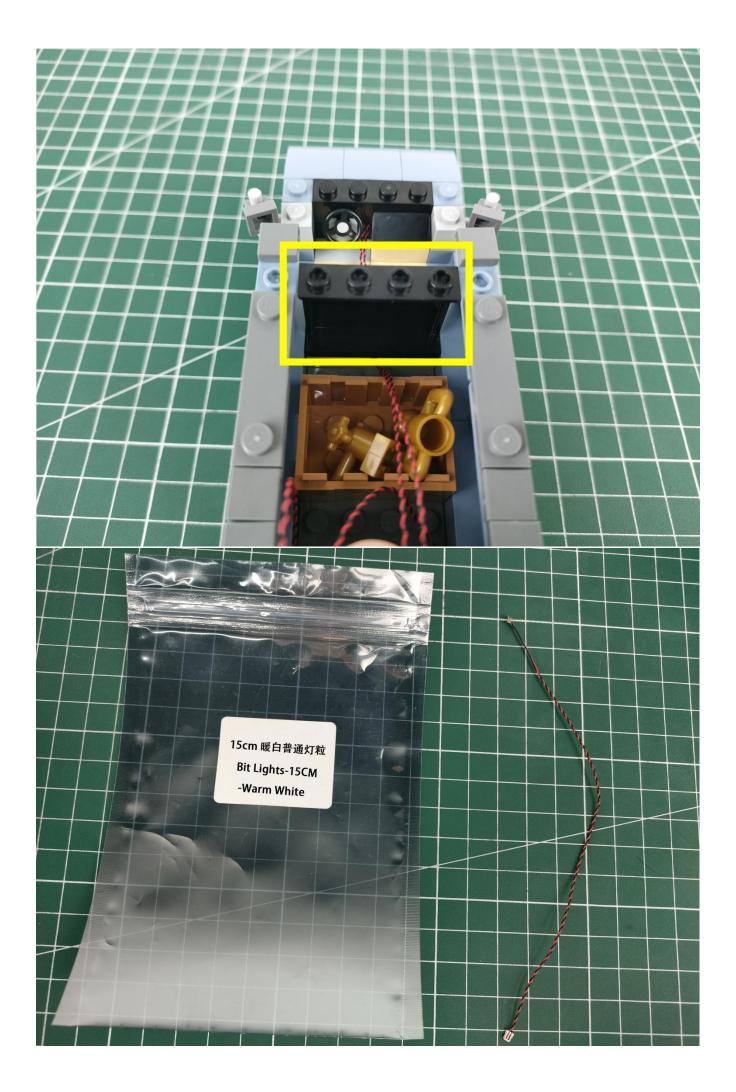


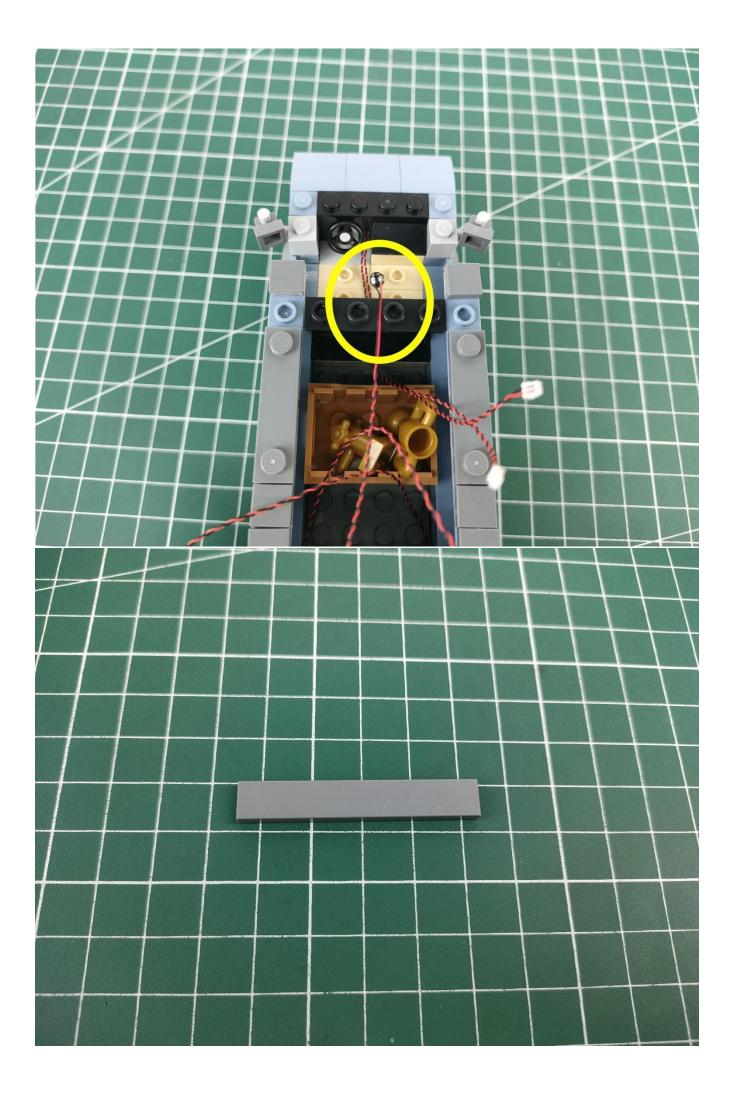

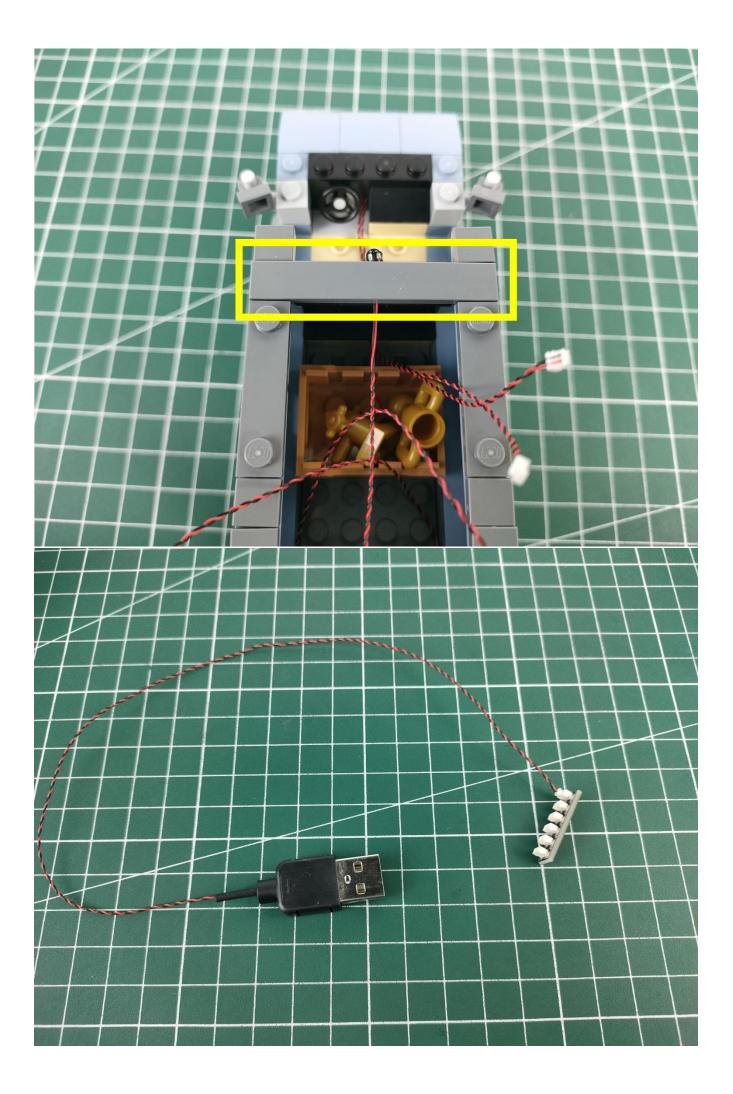

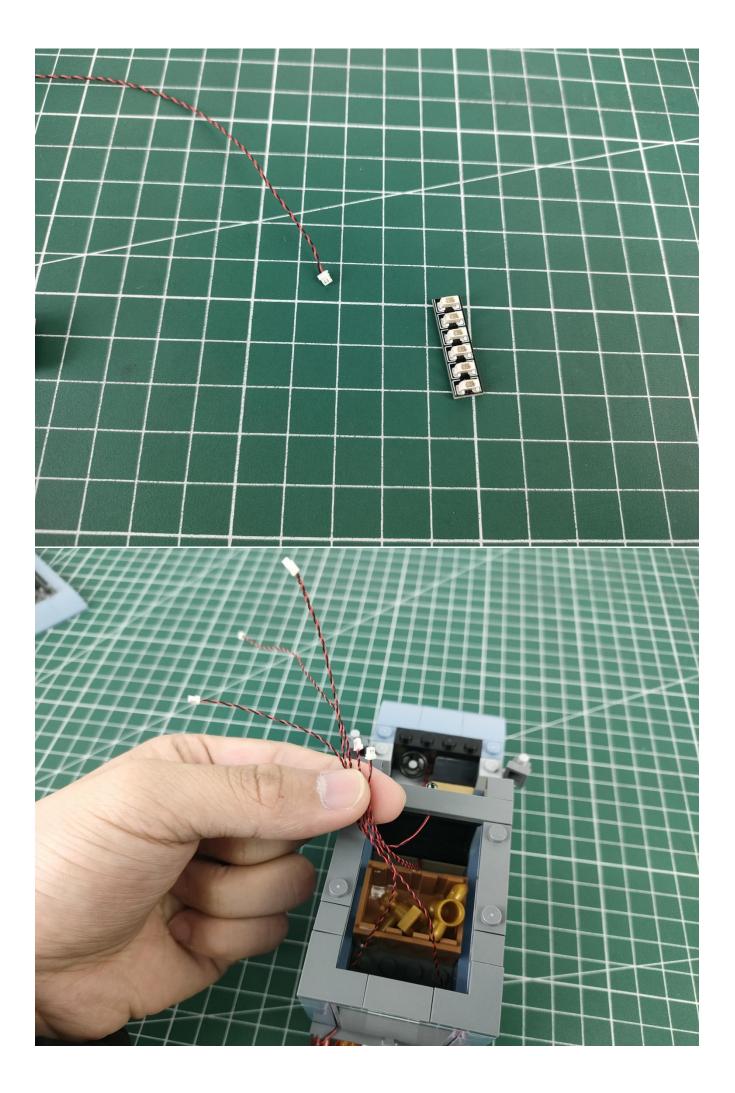




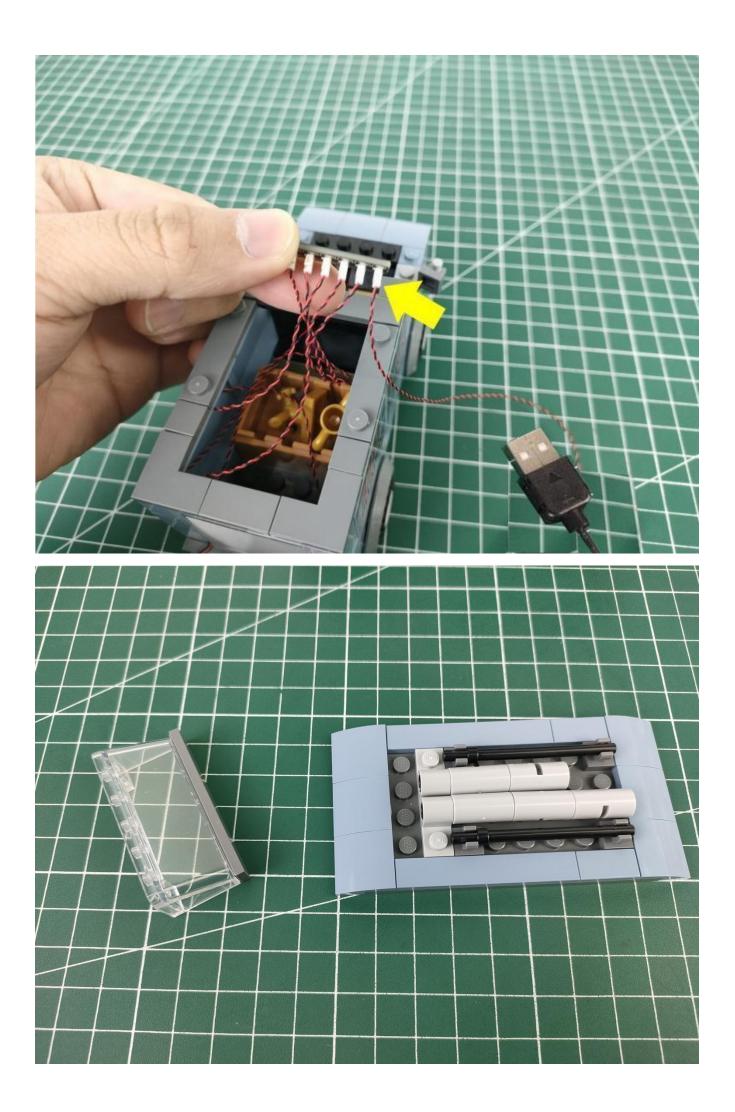








The solder joints of the lamp pellets face upwards.

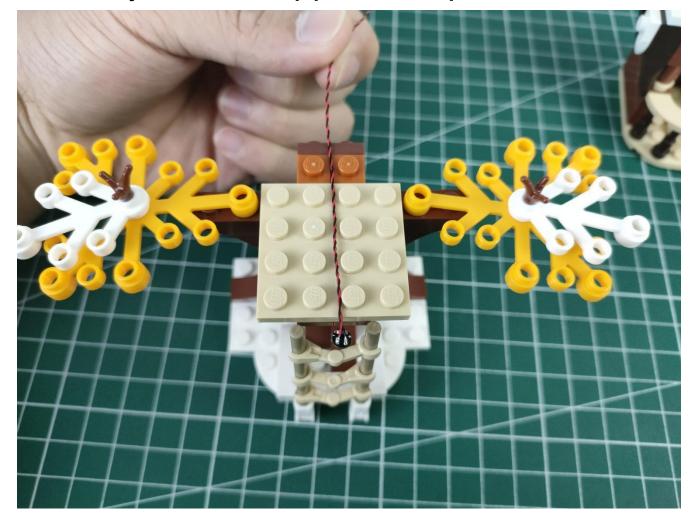


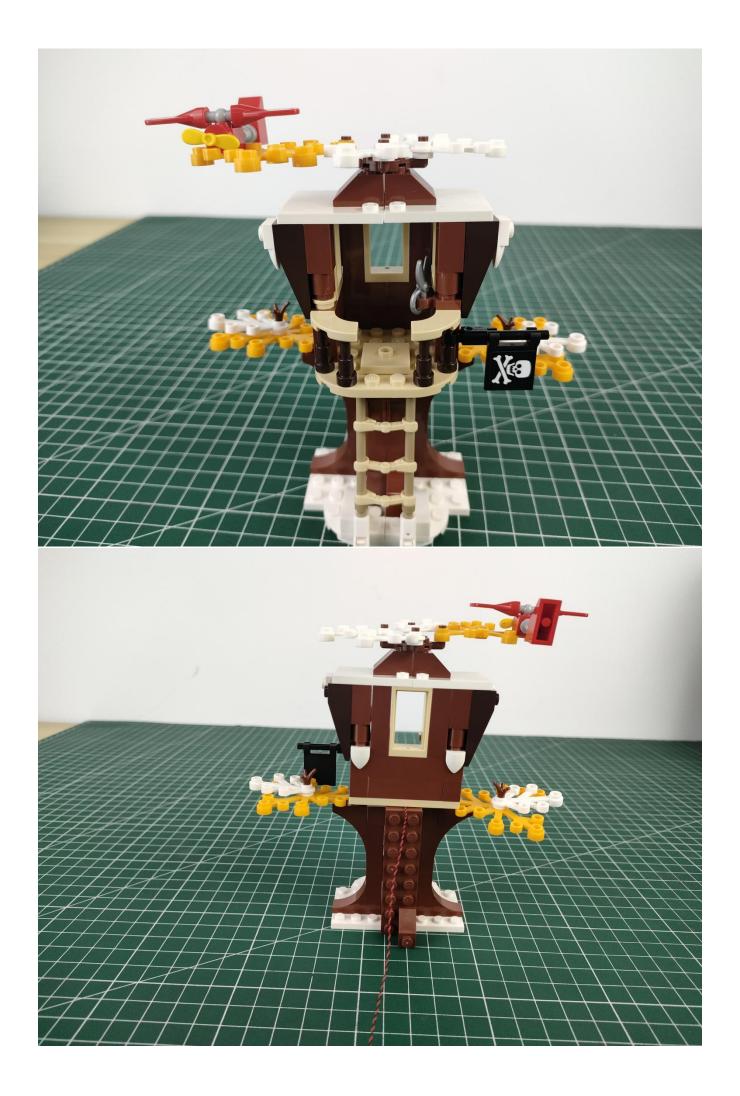

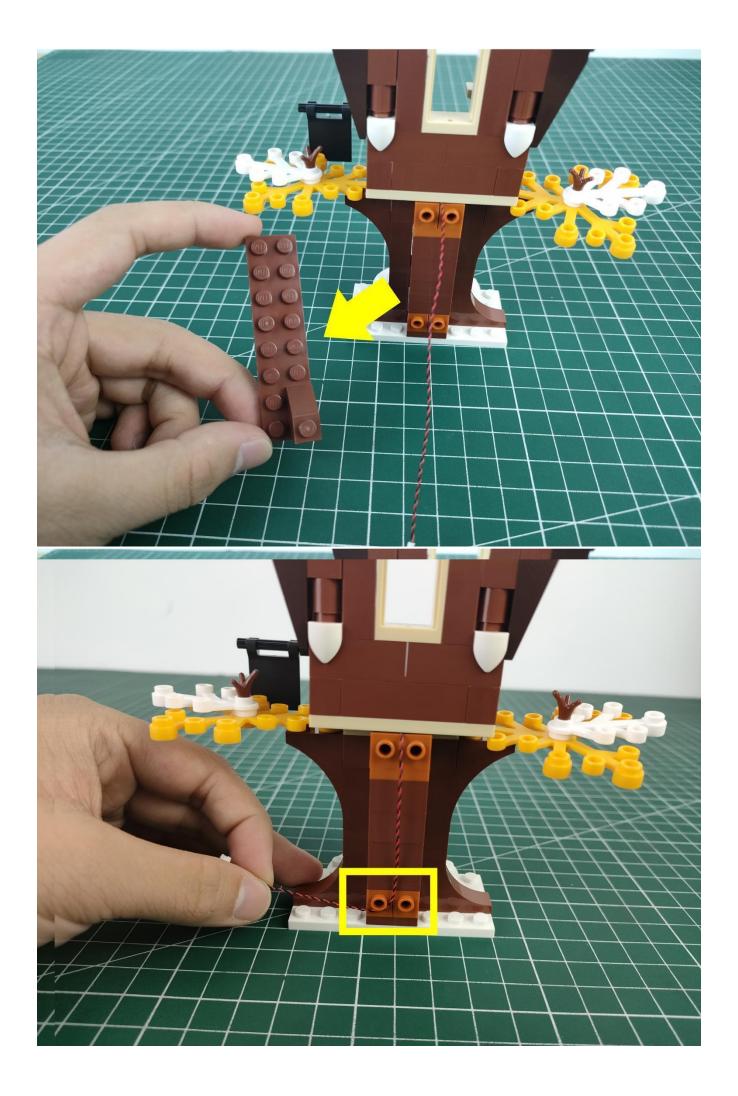

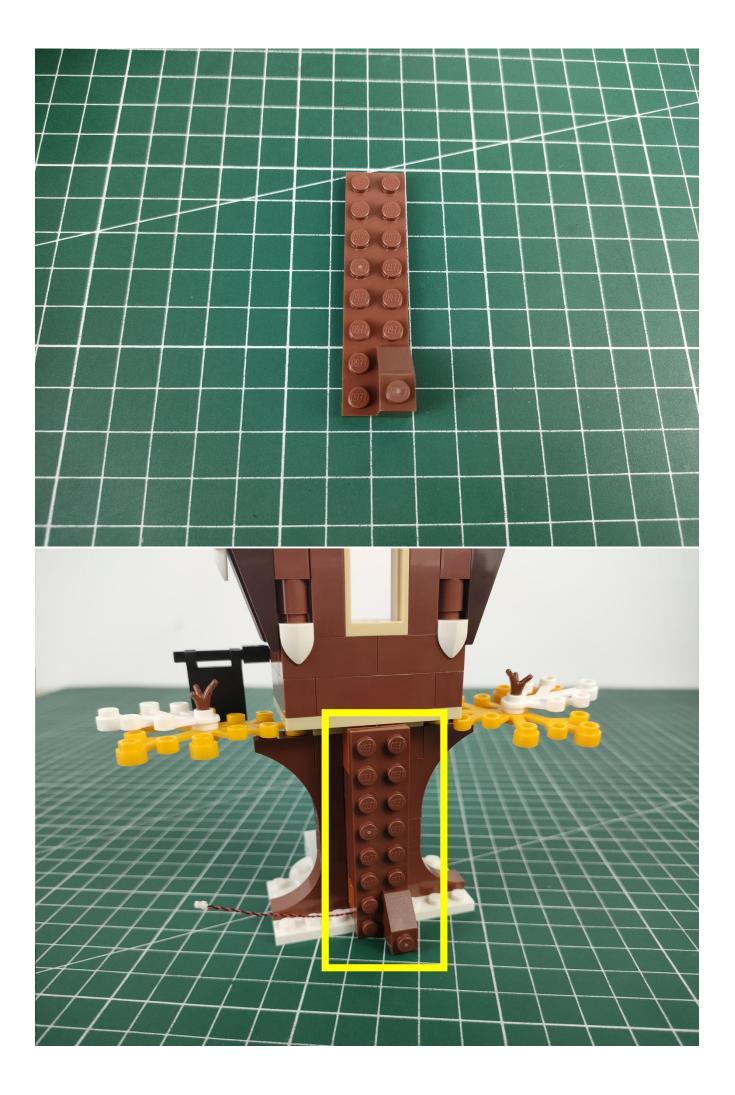




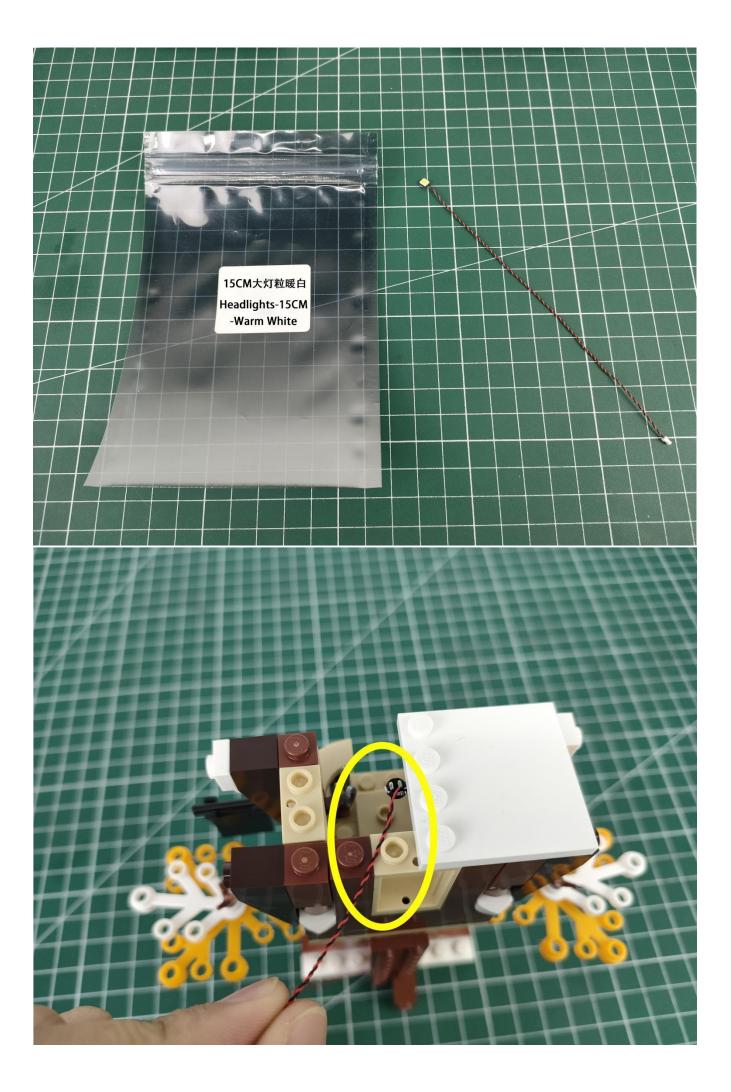

Restore the top blocks to fix the lamp pellets.





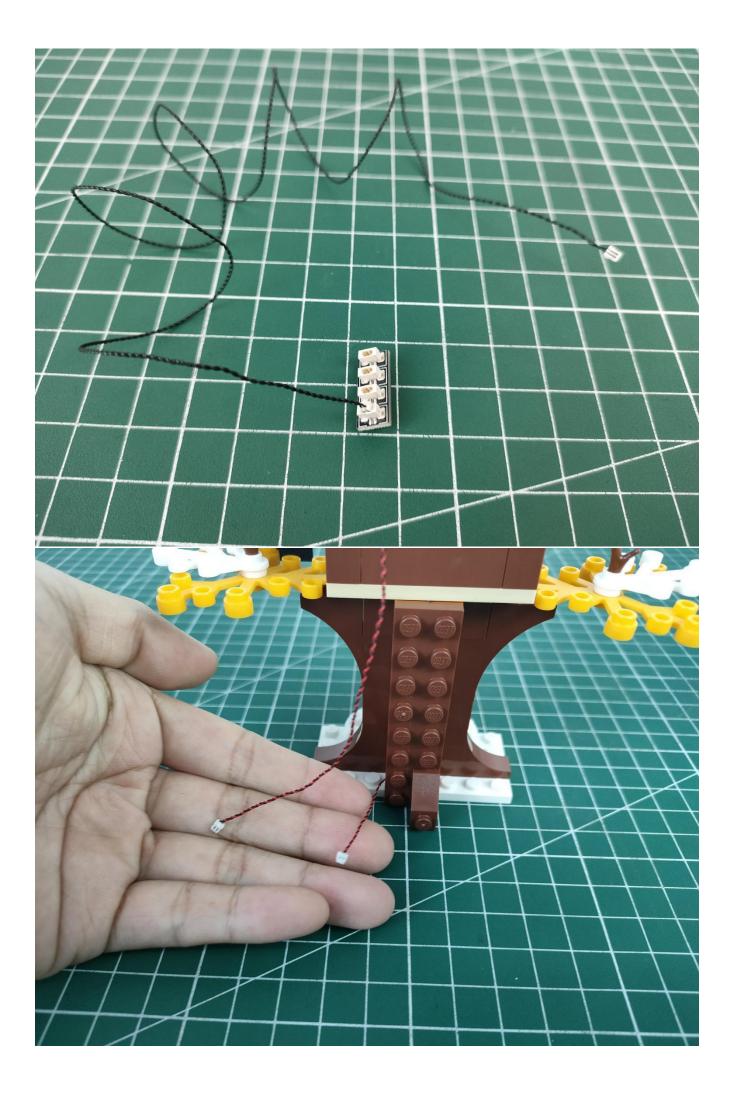














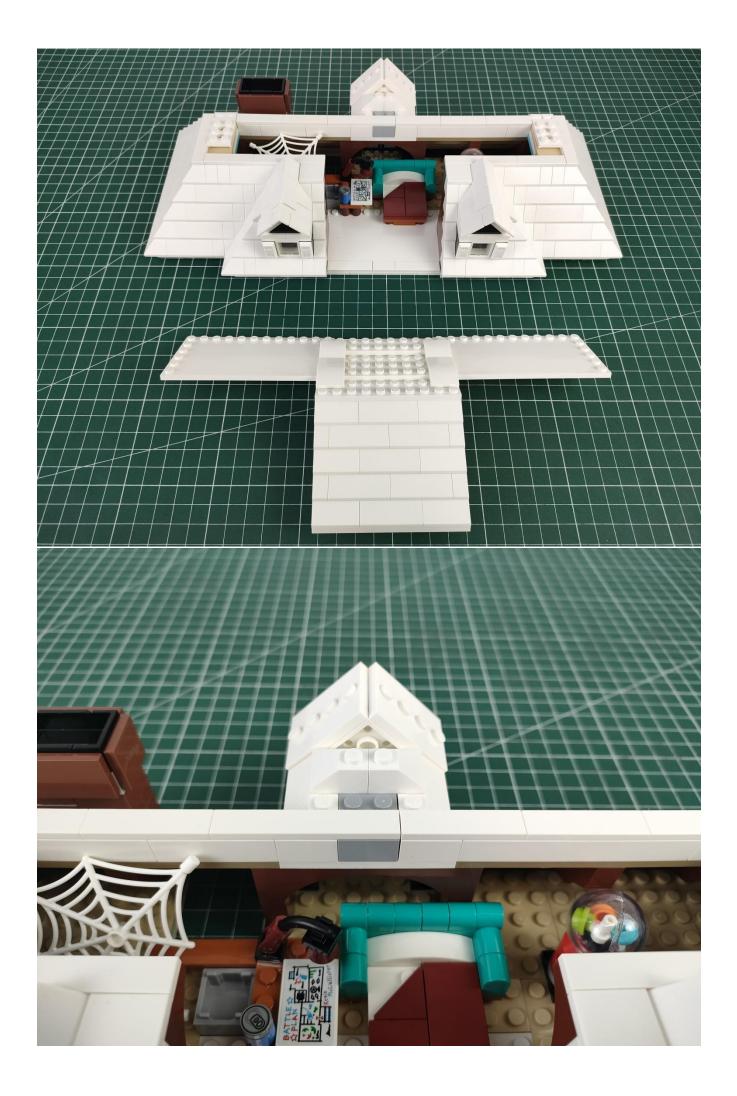


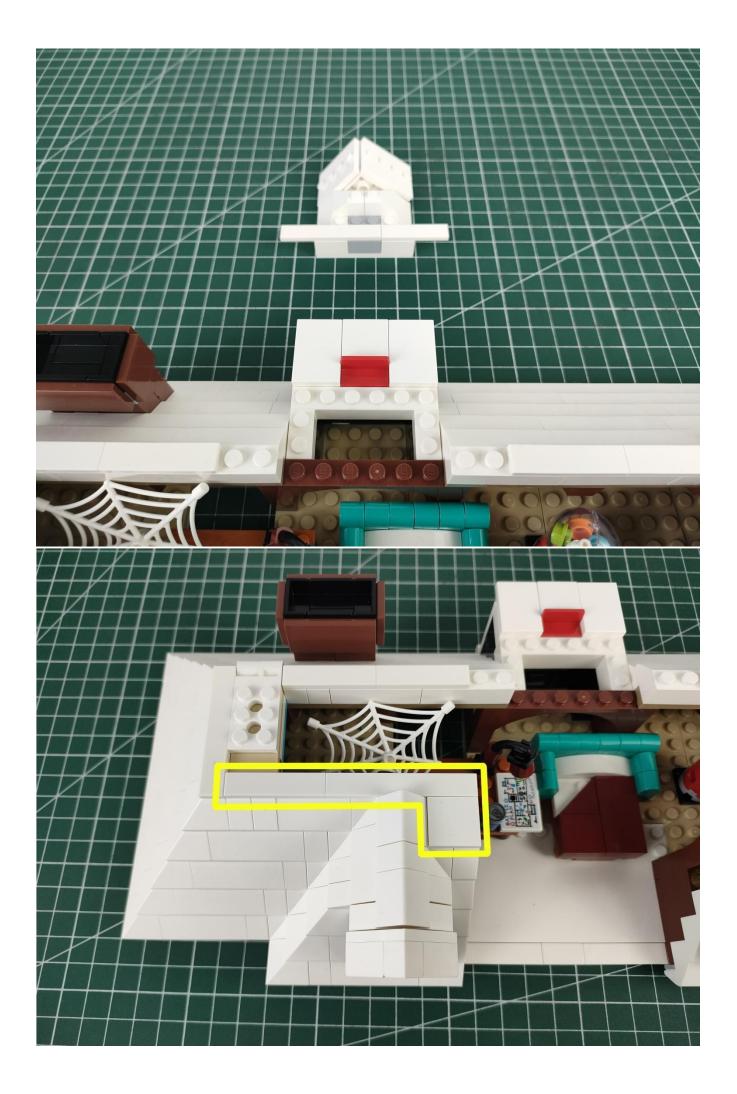


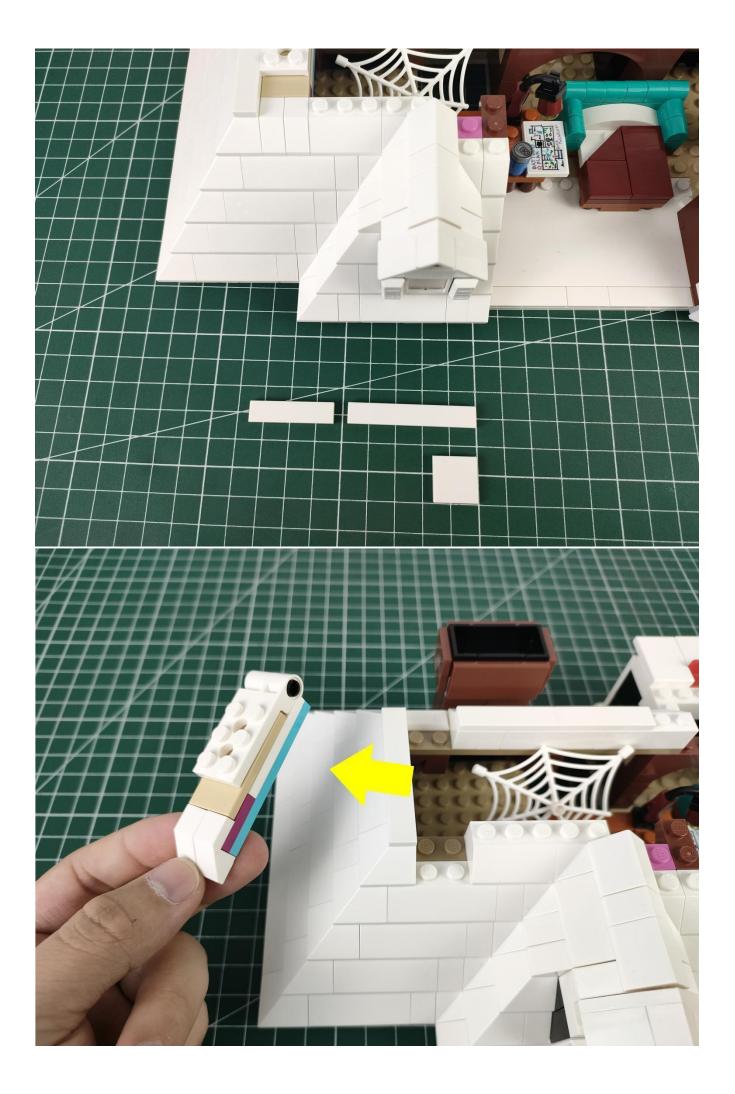

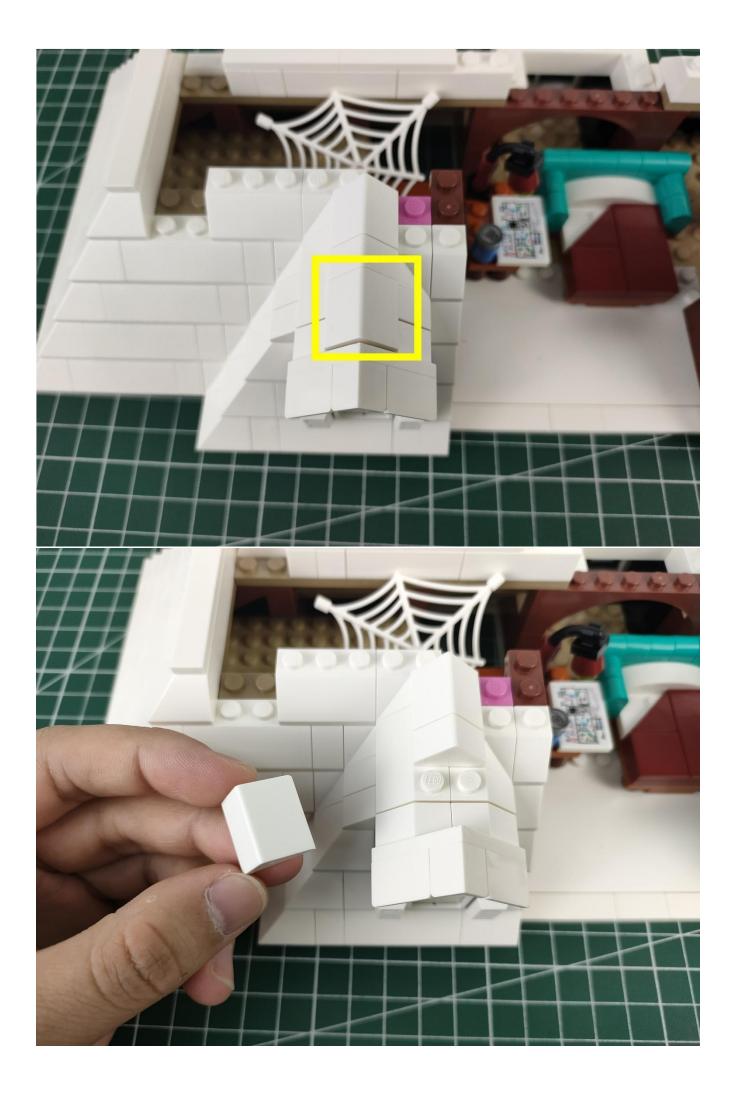

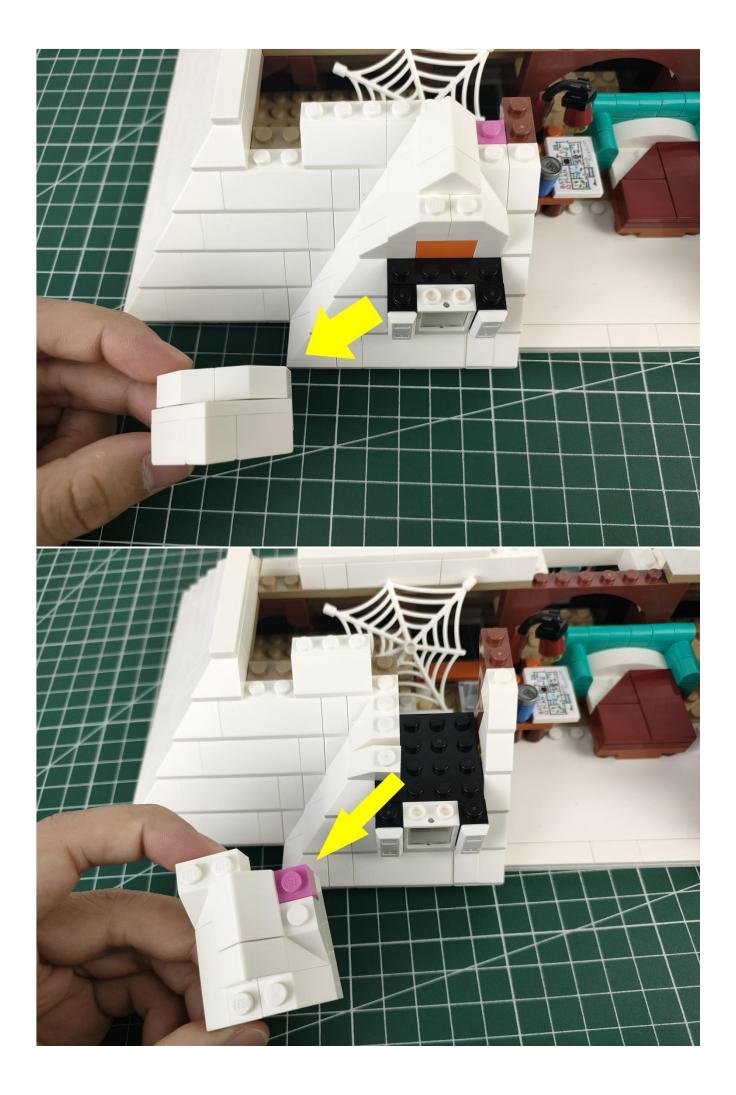


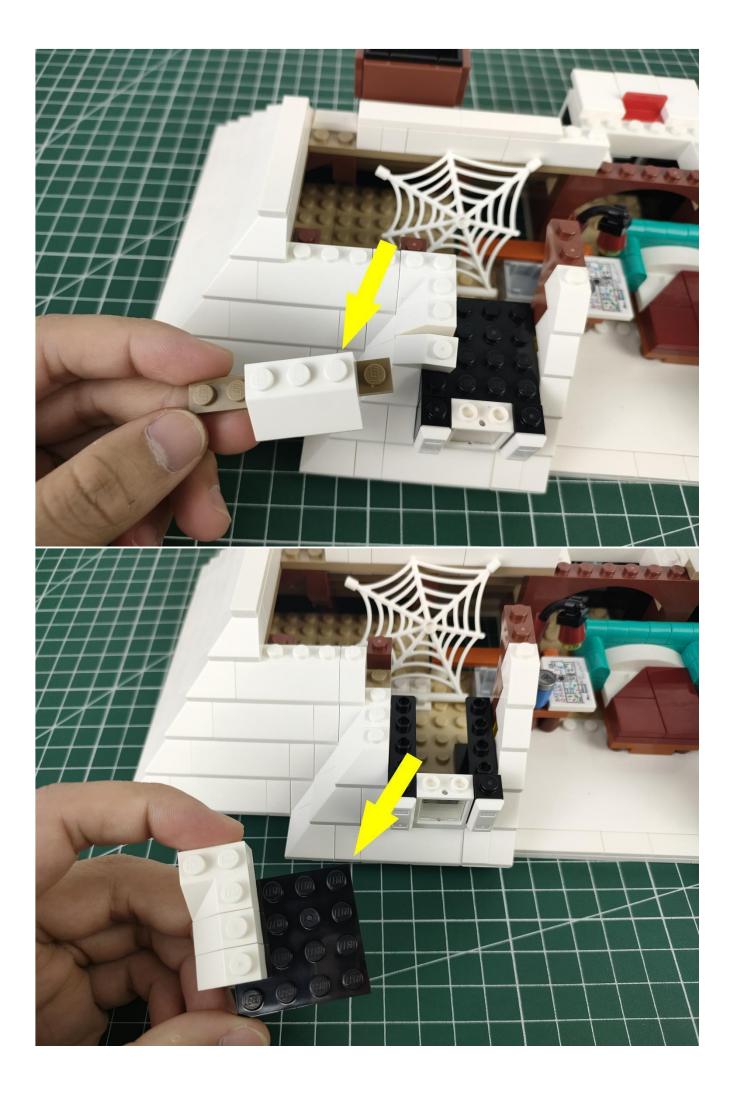


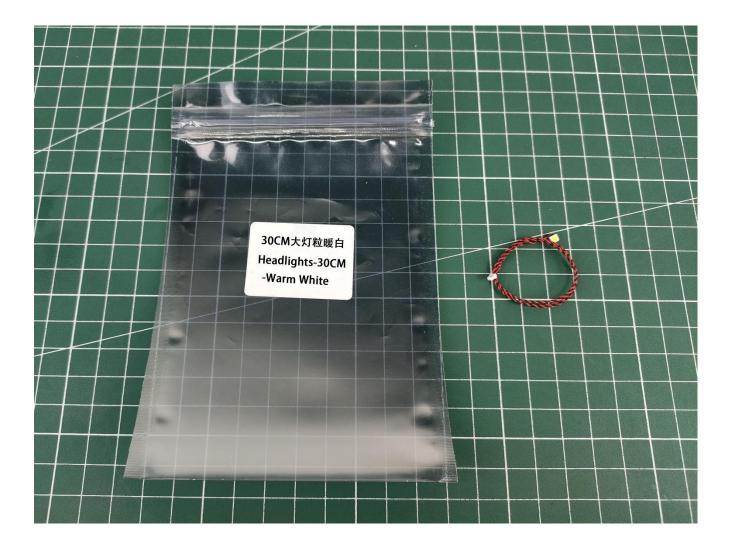



The small orange round plate has no cuts.




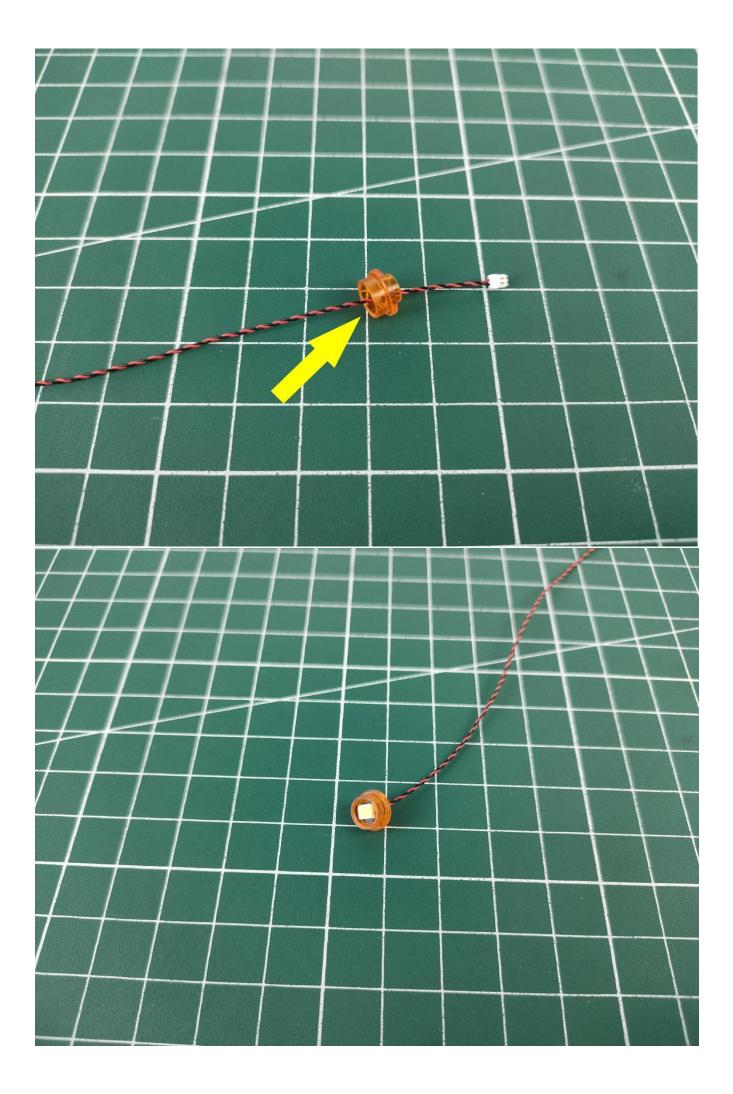


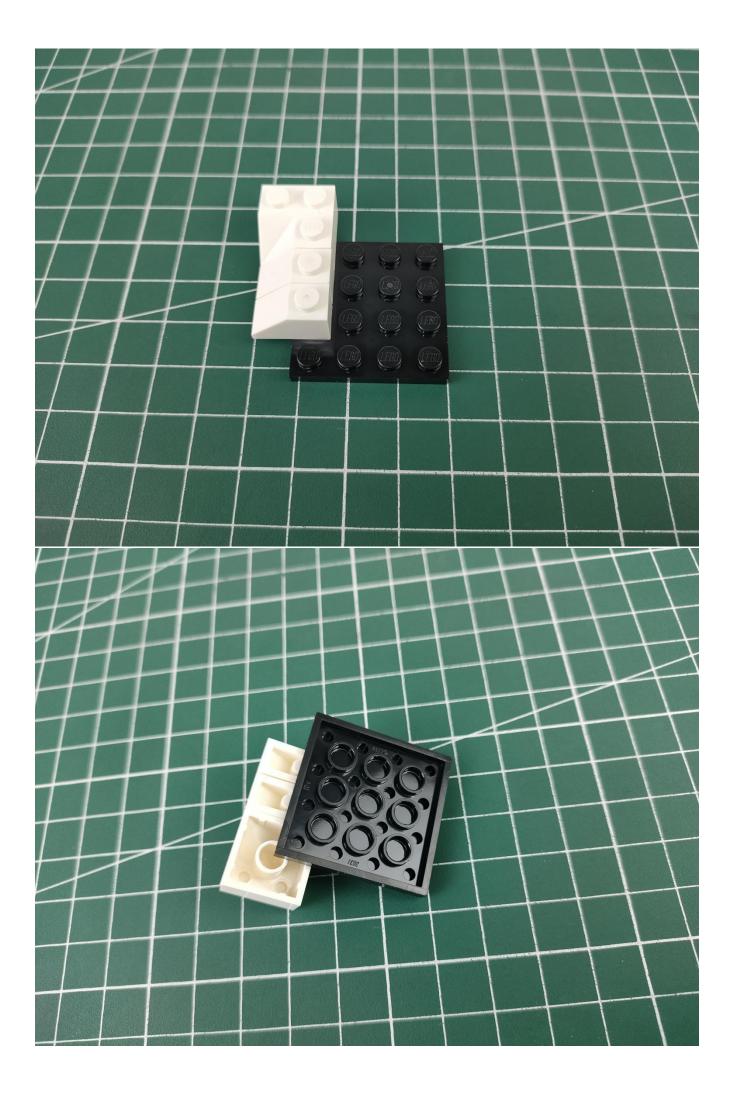

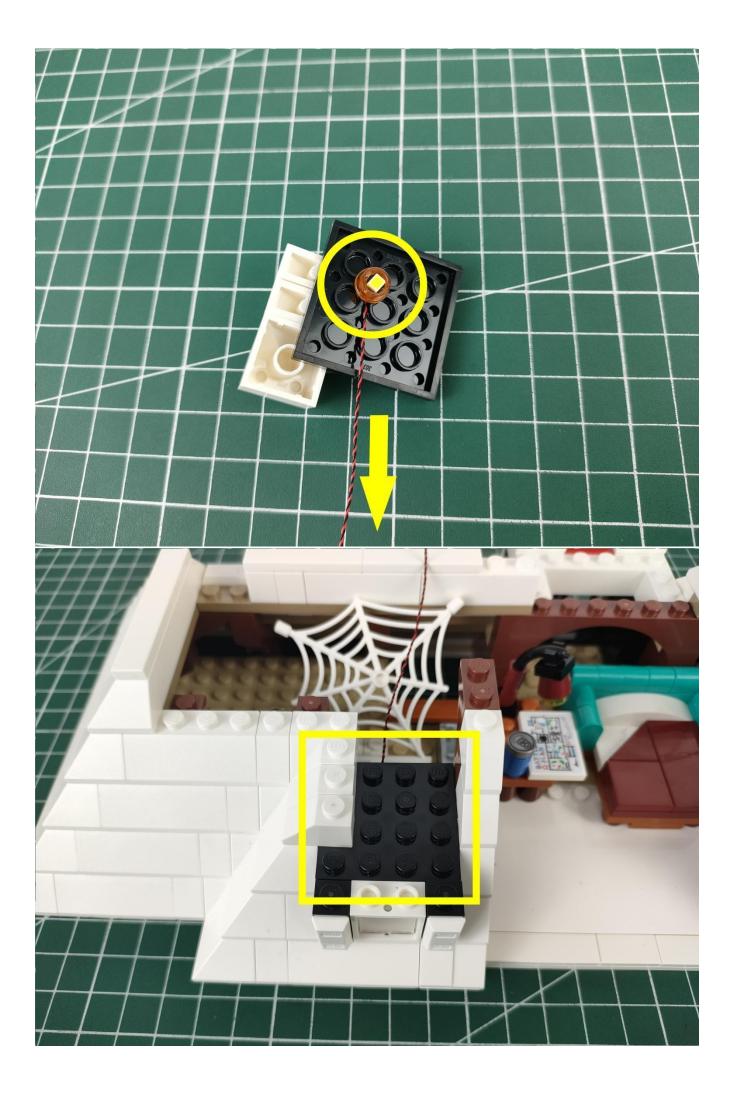


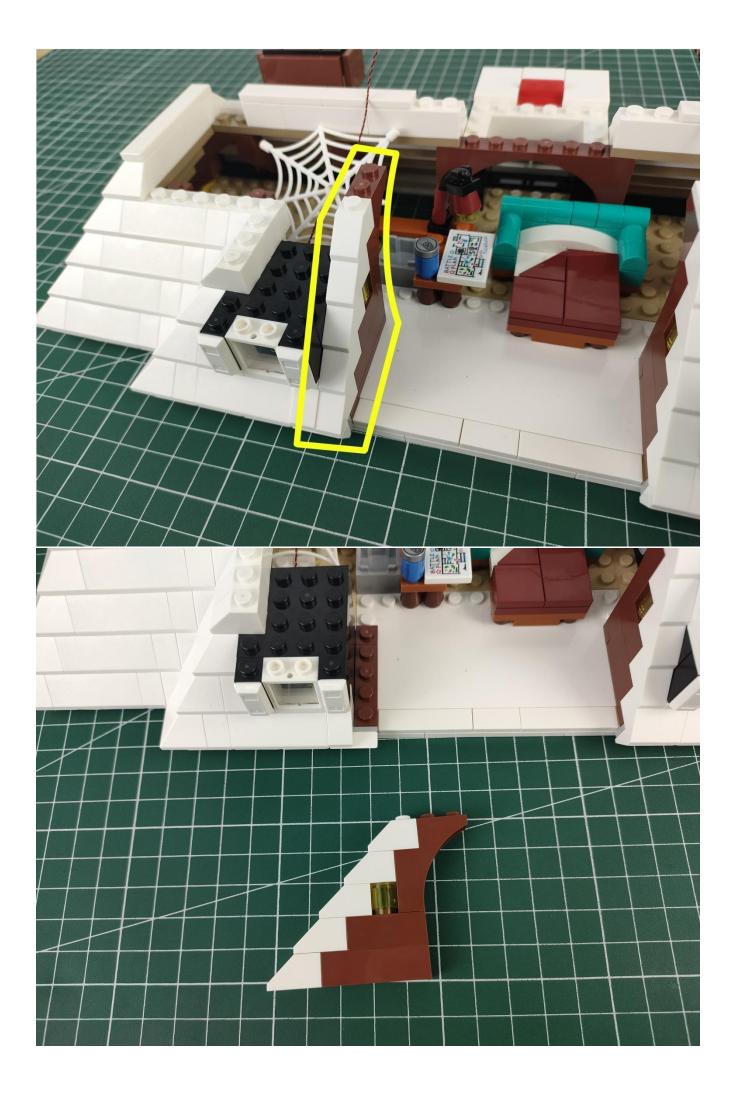


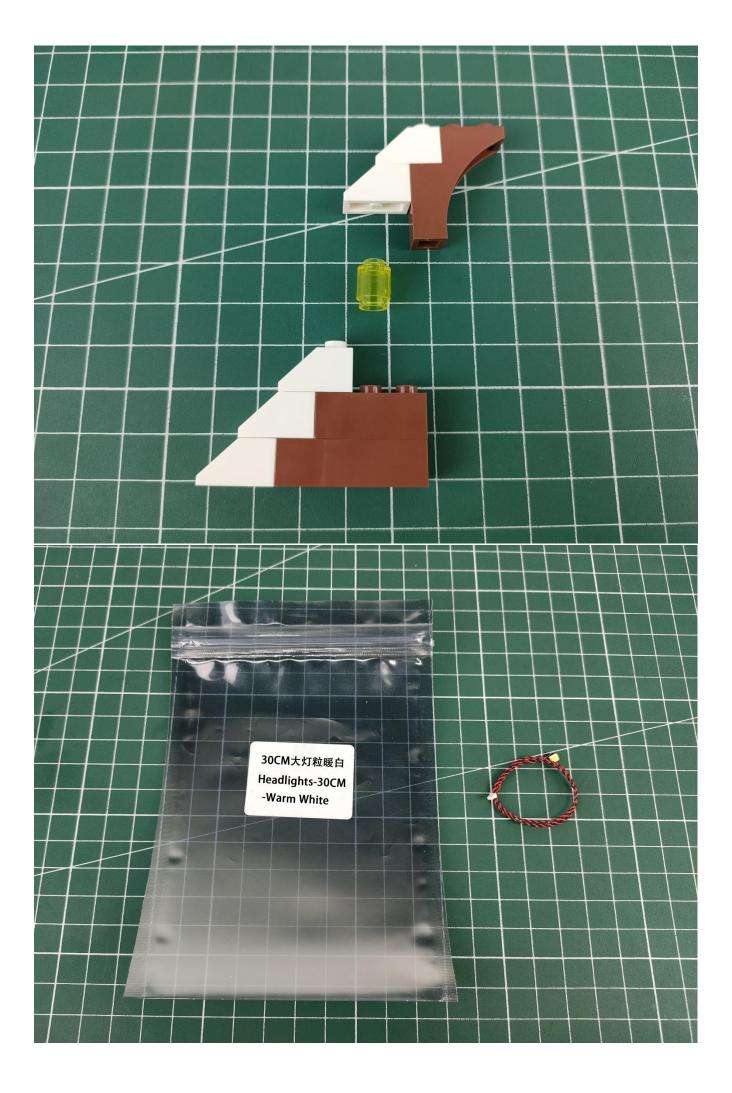


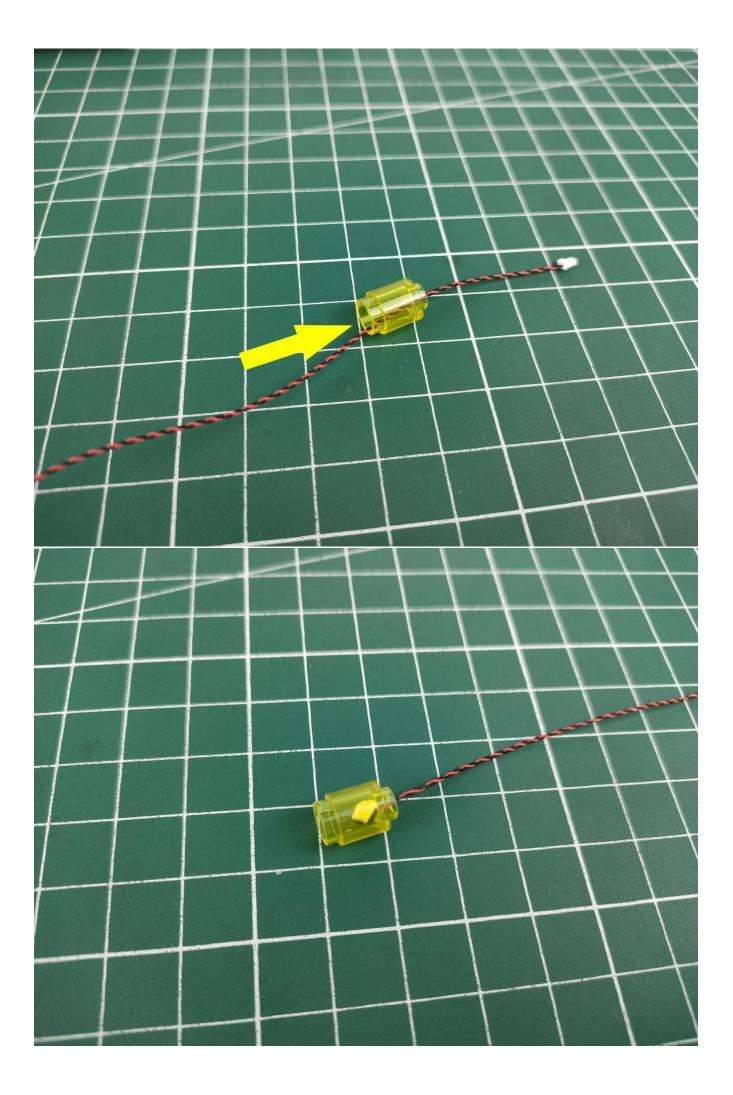



Restore the blocks. At this time, the light-emitting surface of the lamp particle faces itself.

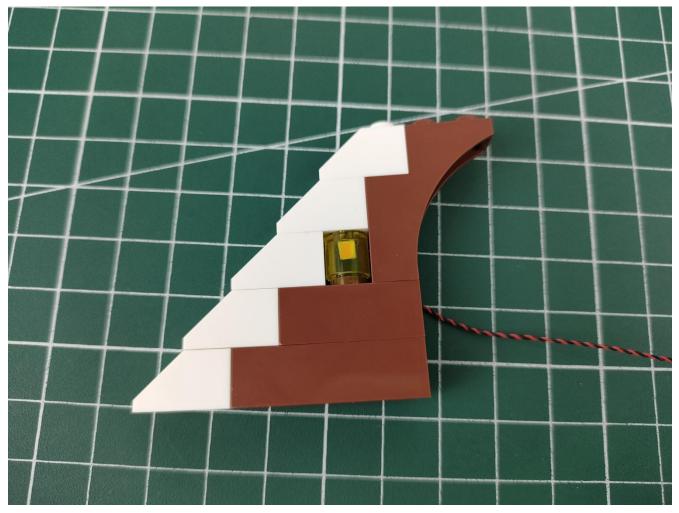

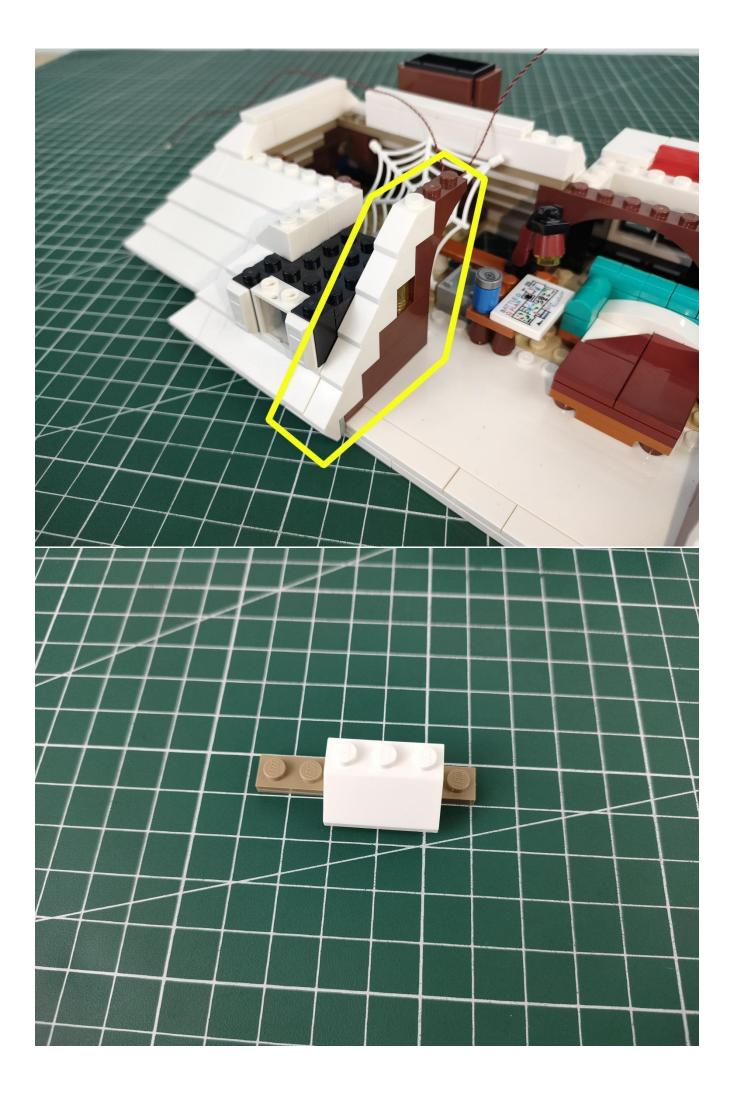


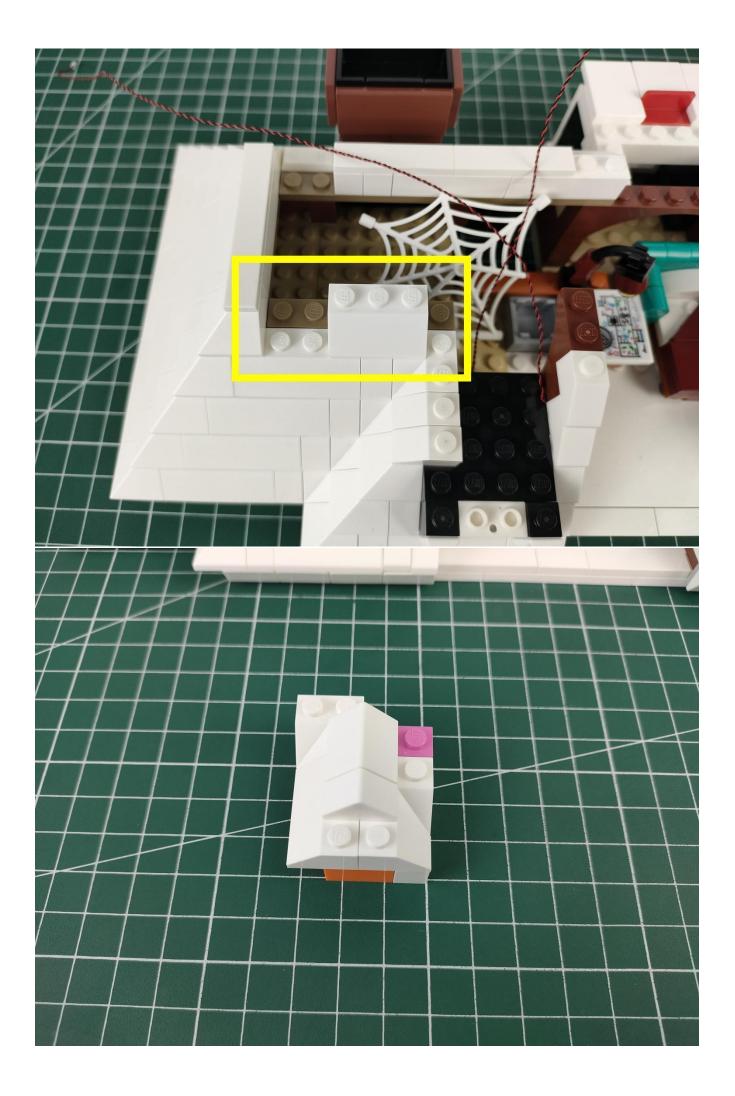


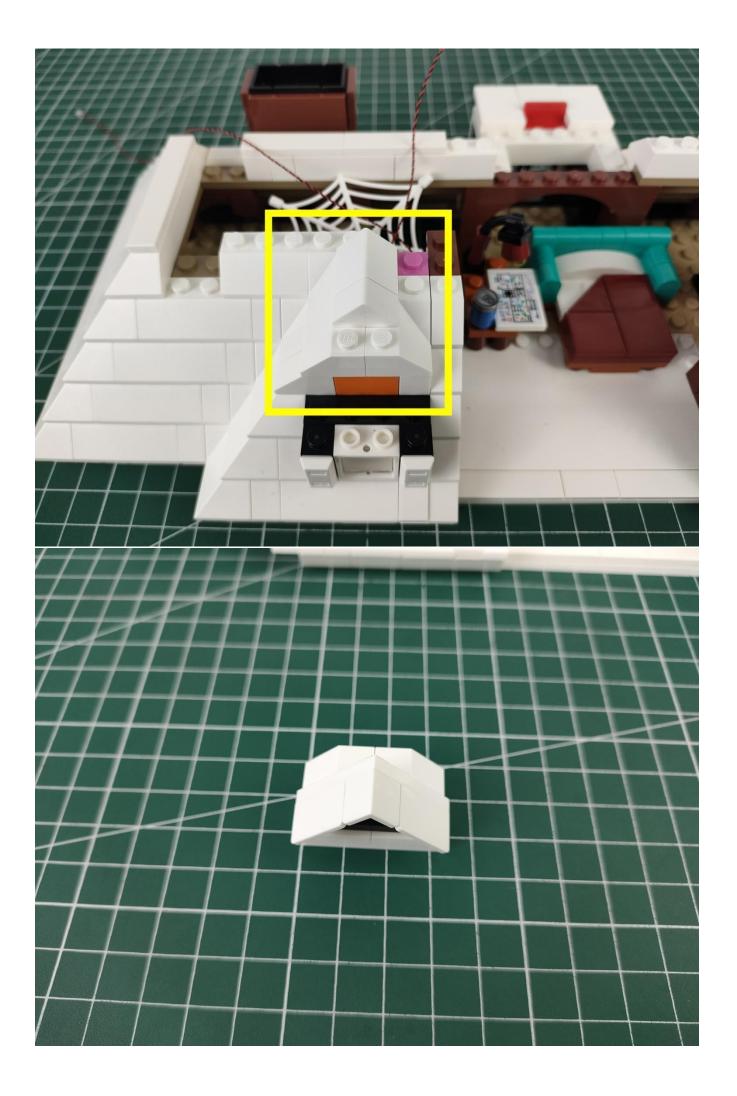


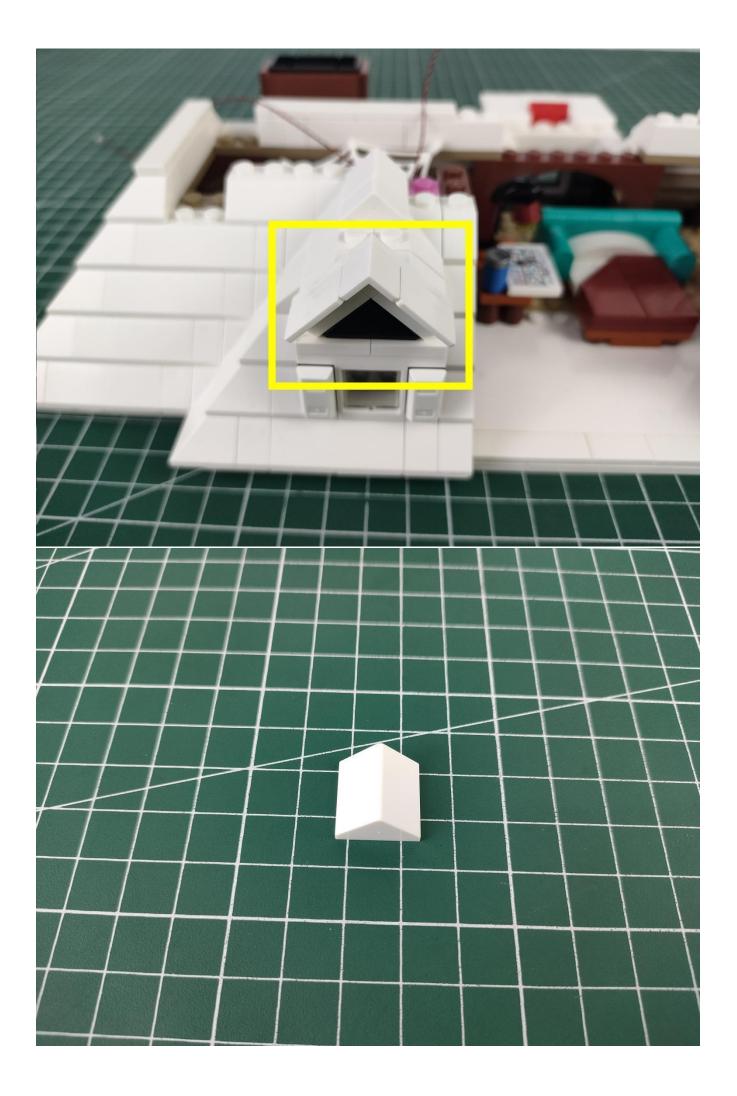





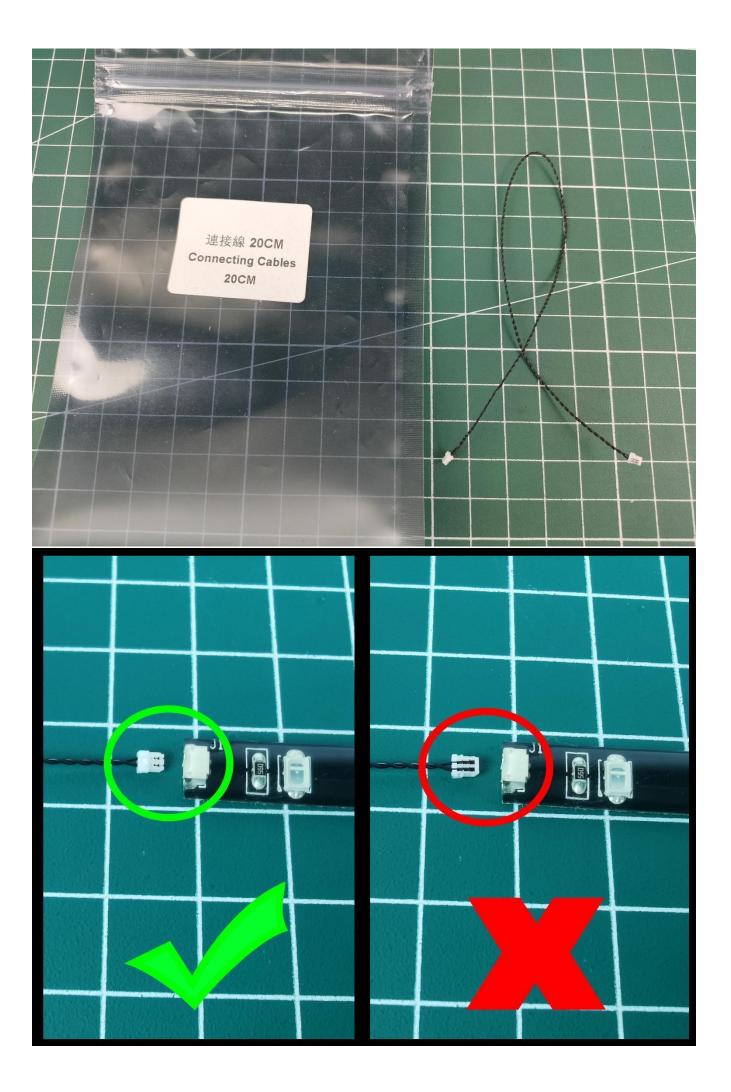


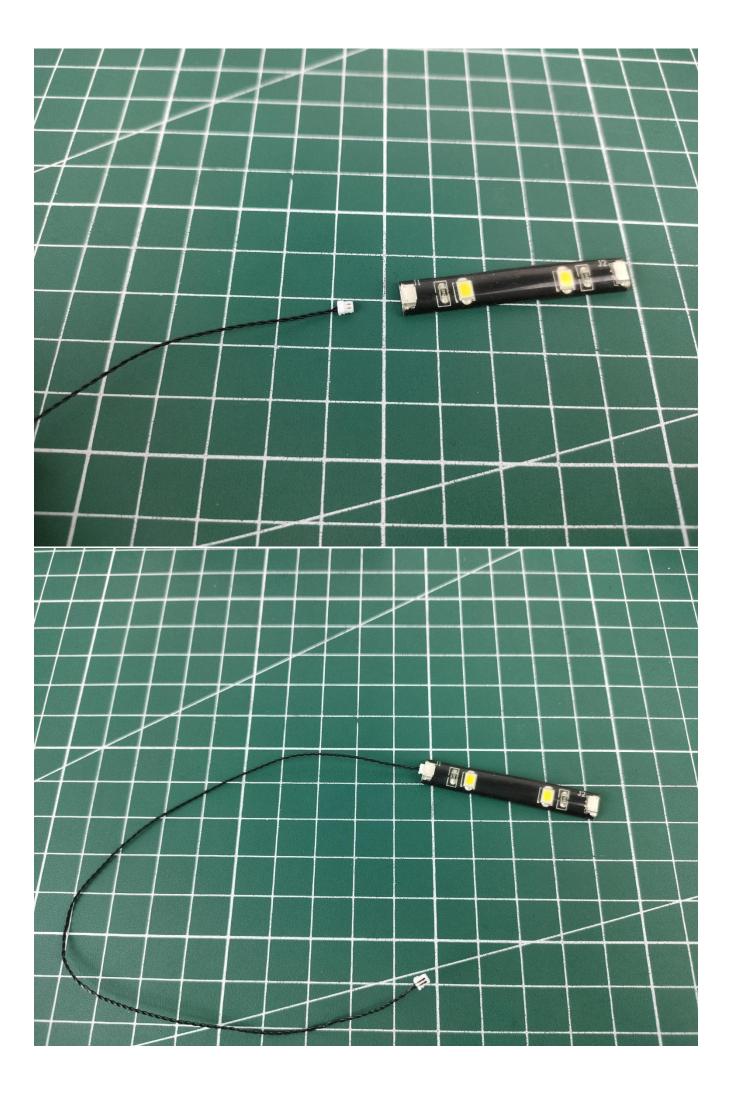


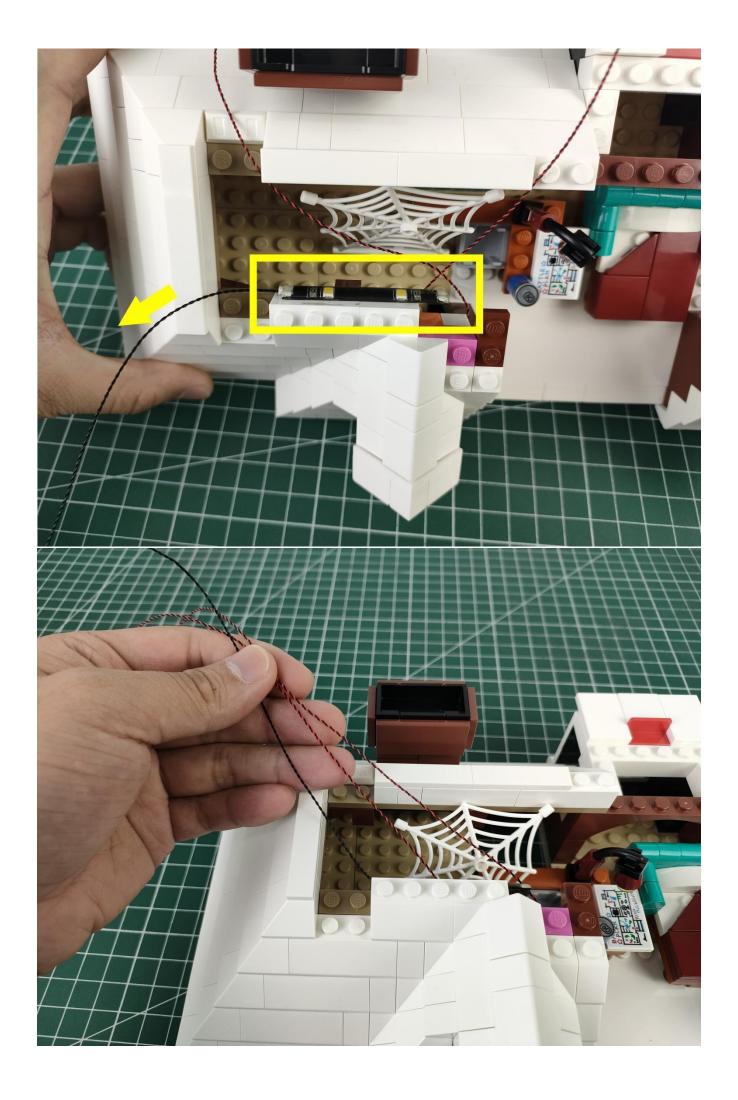


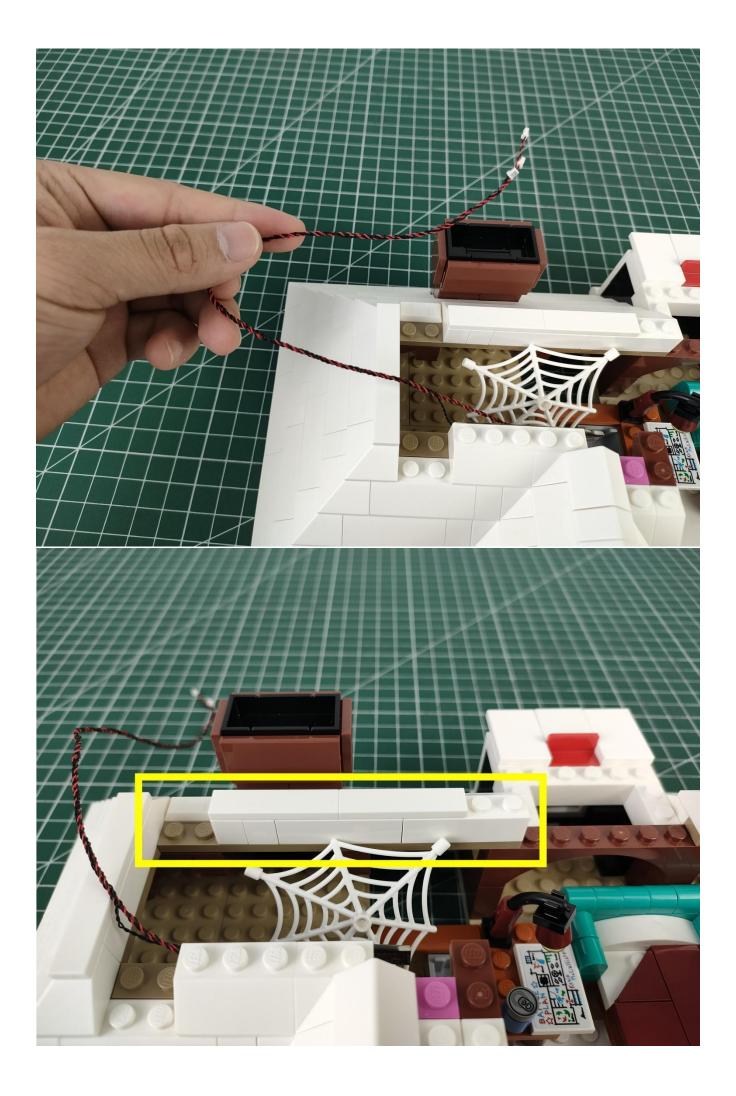


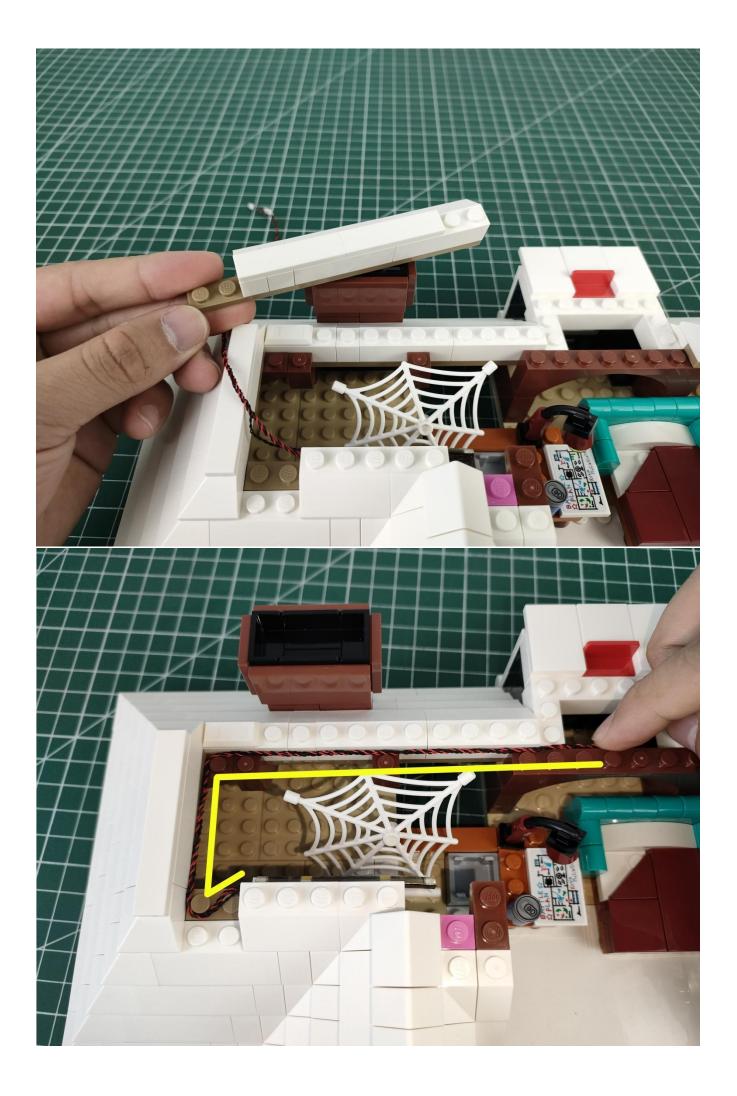


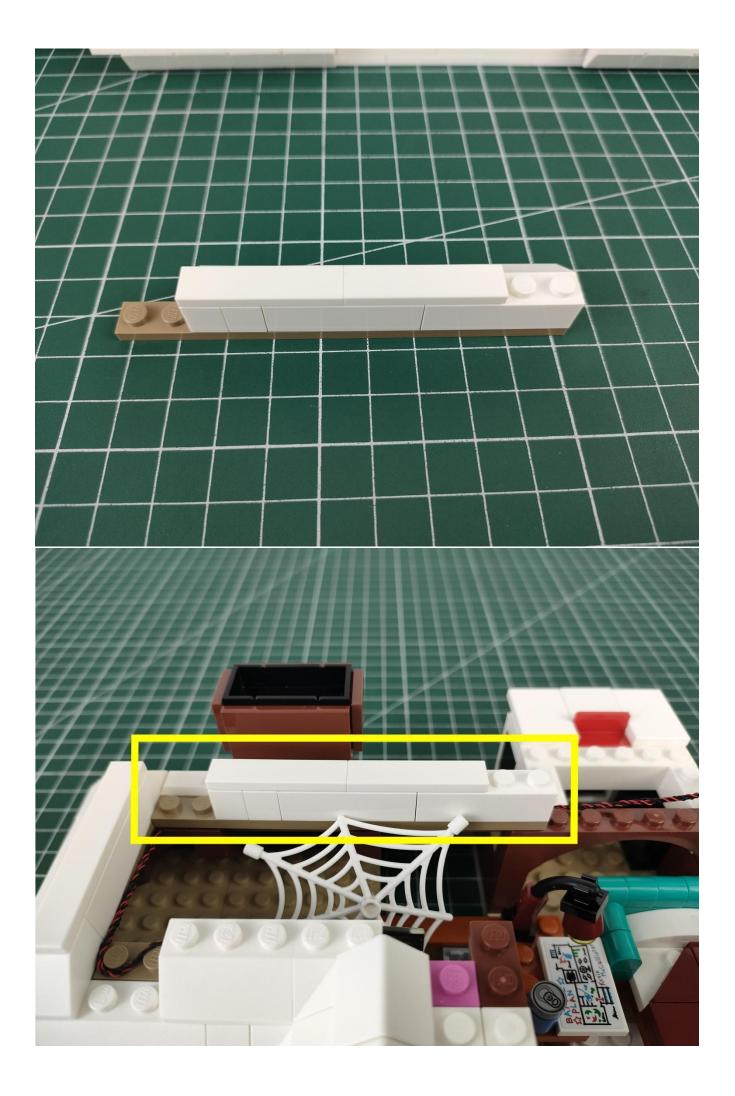


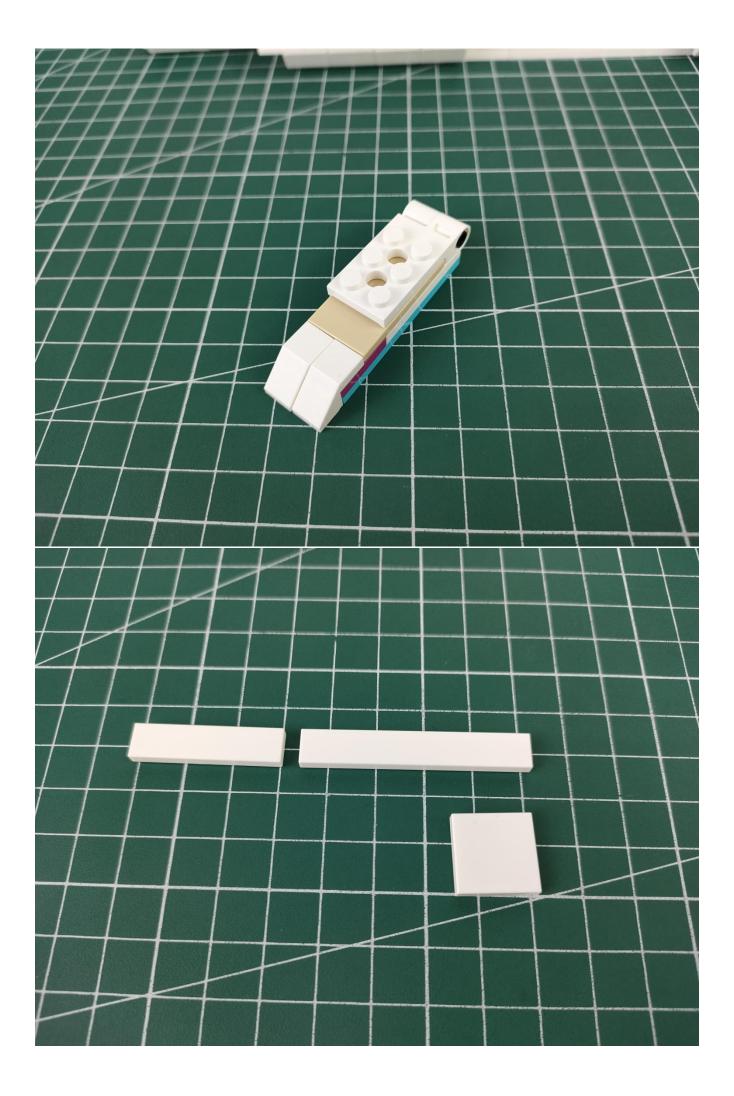


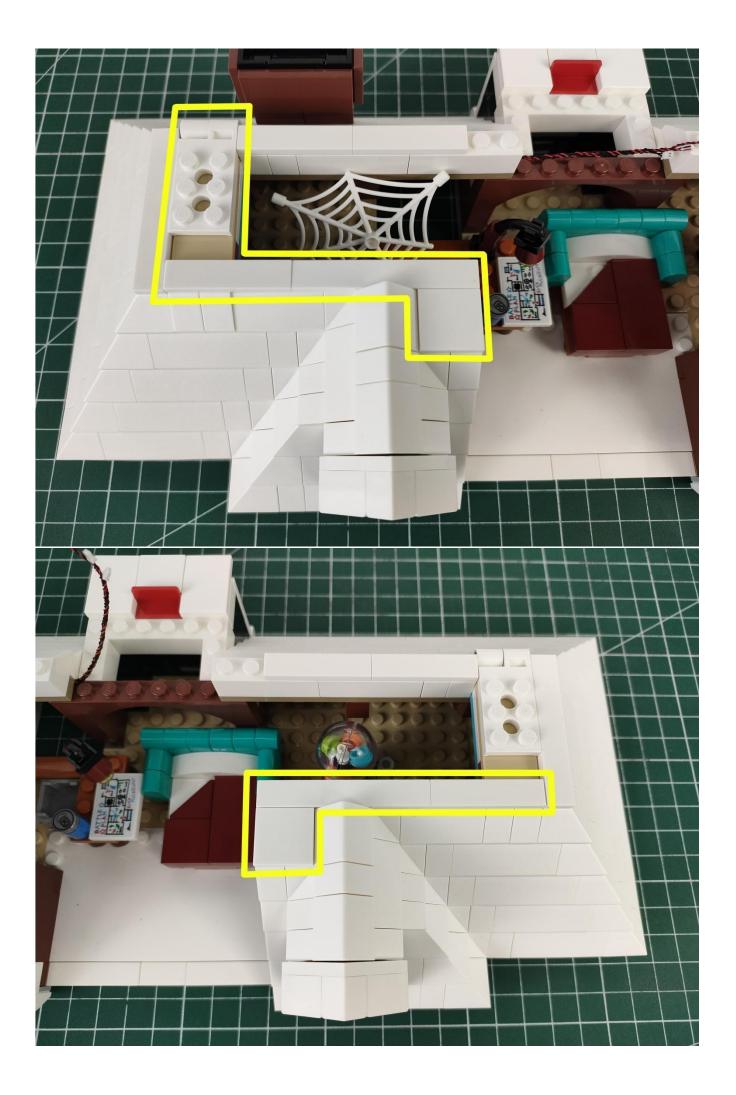


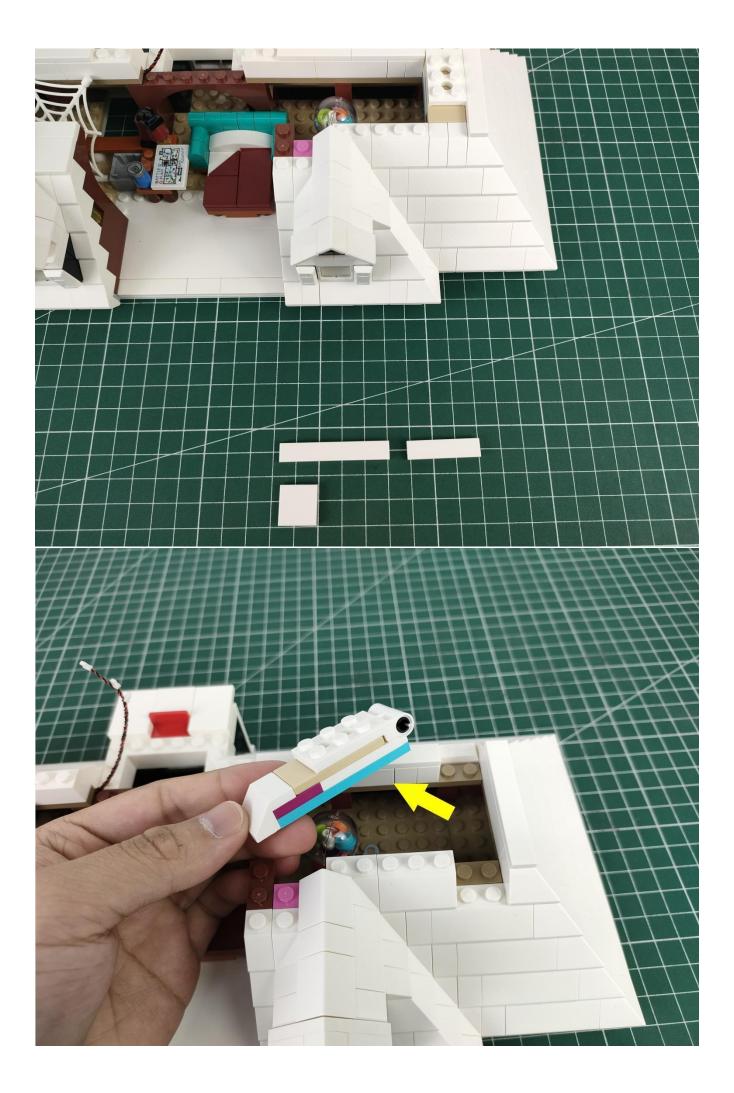

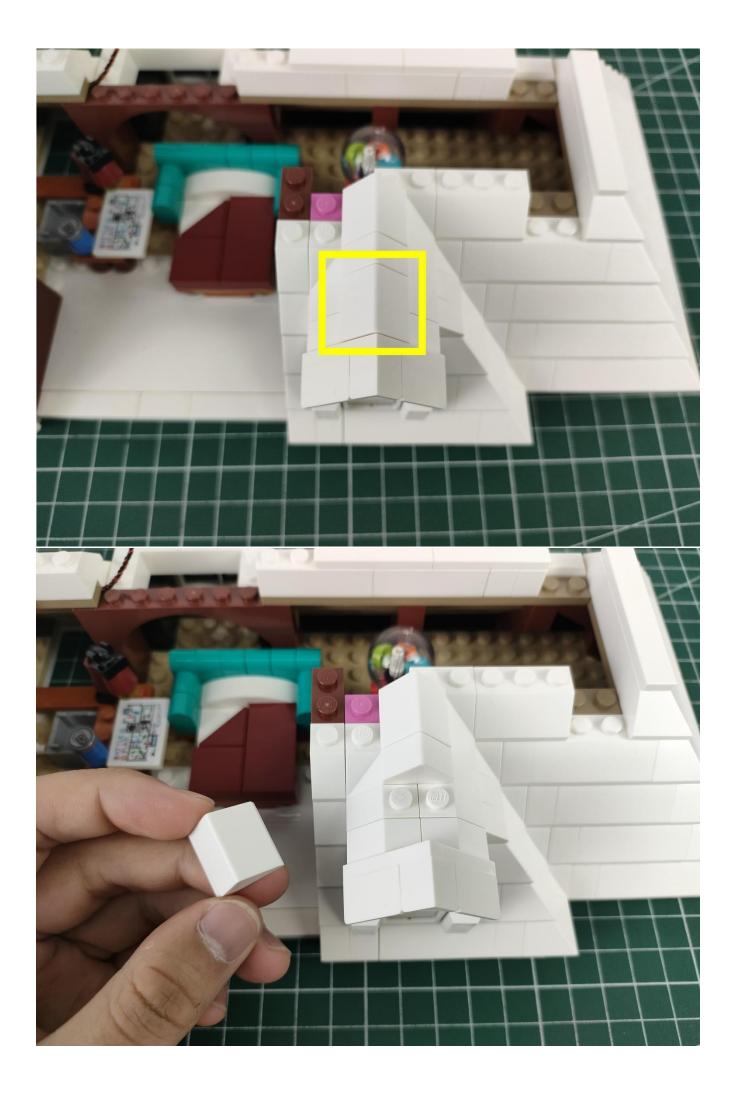

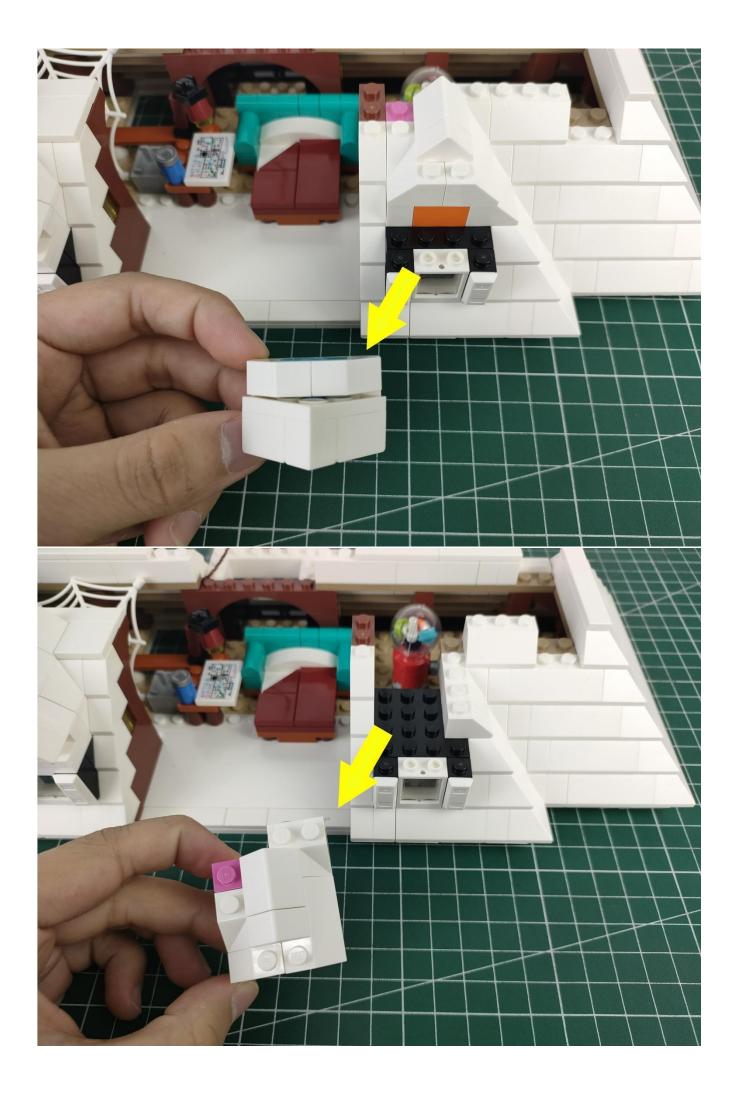


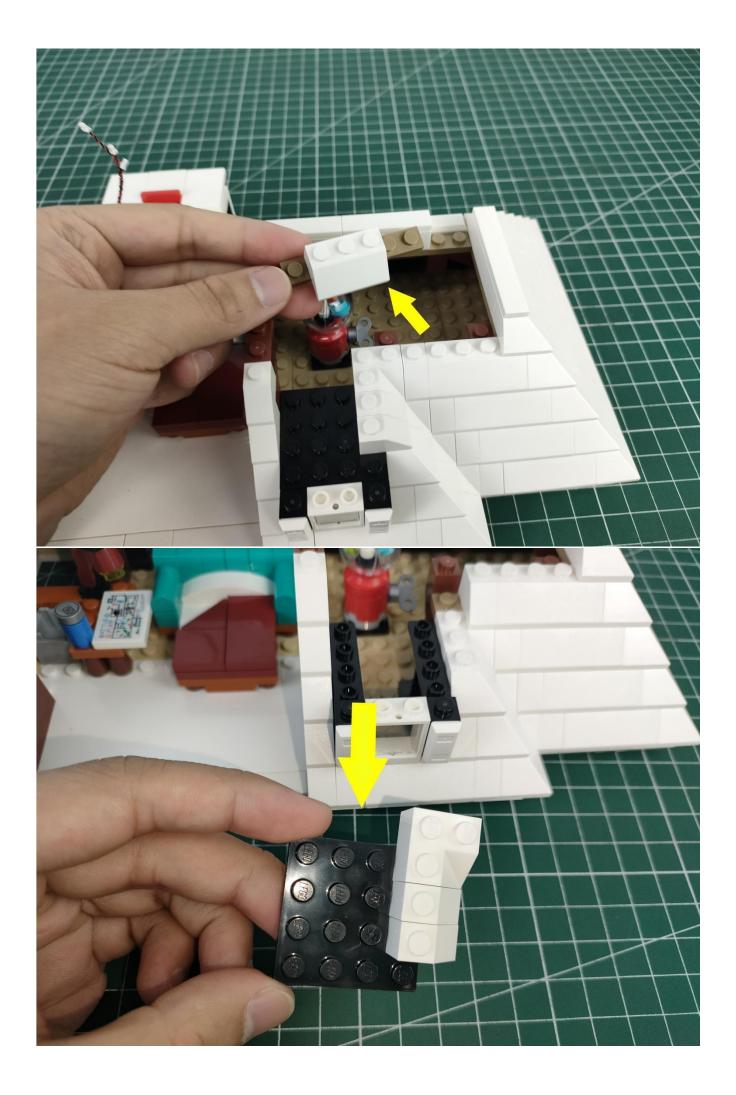


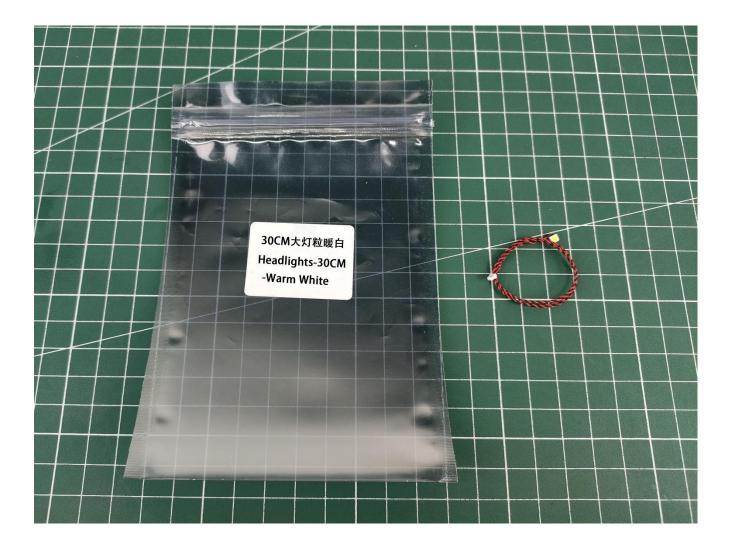



The small orange round plate has no cuts.




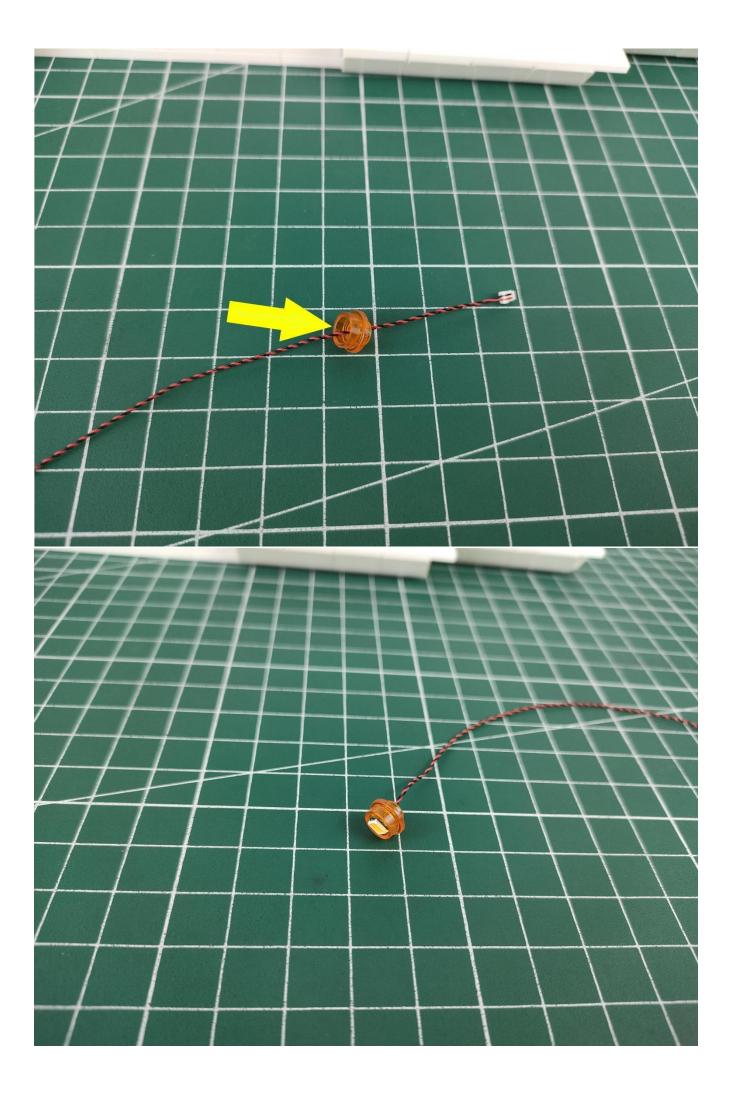


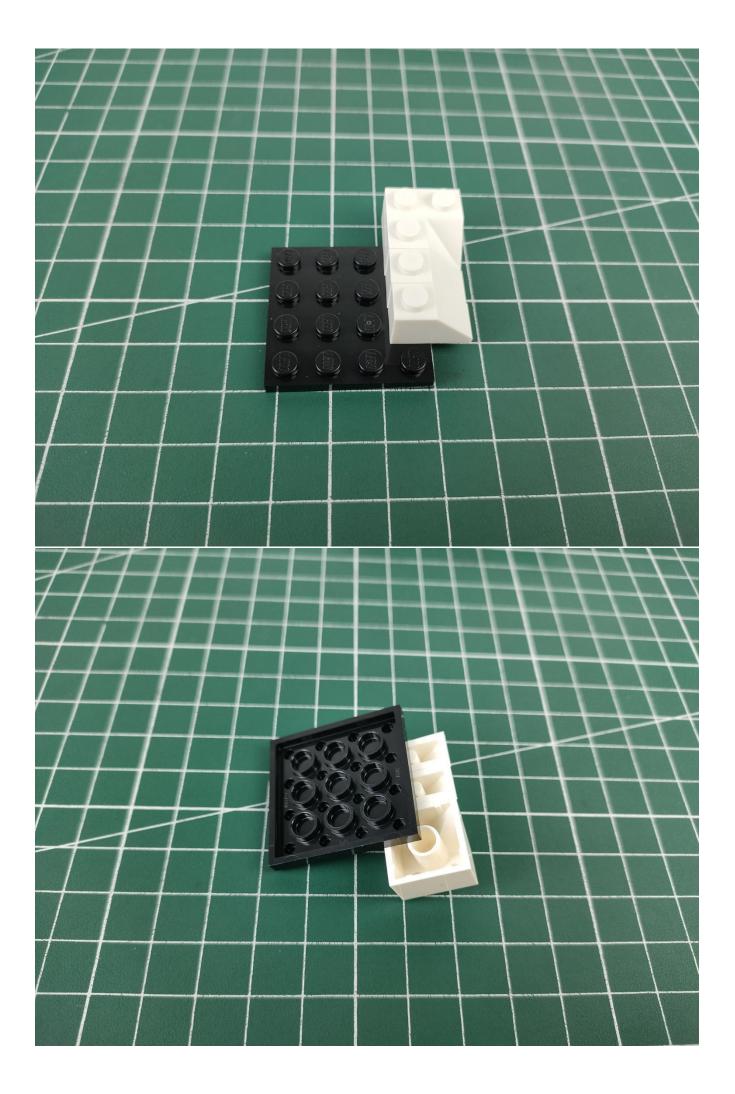

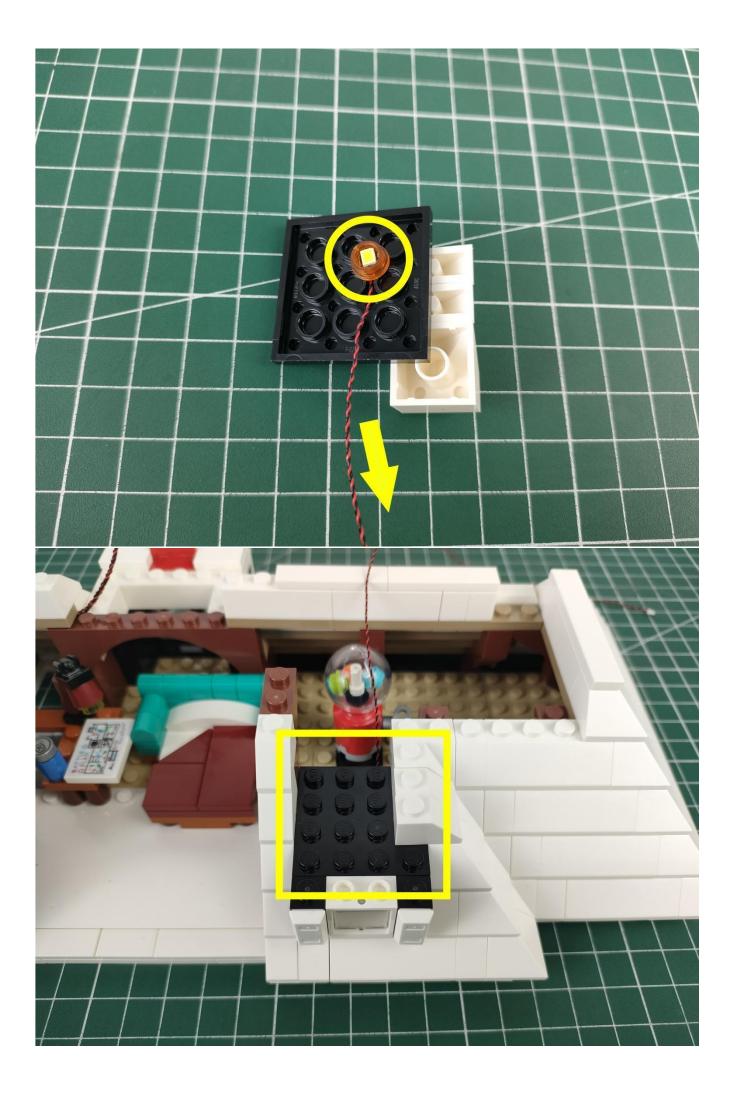


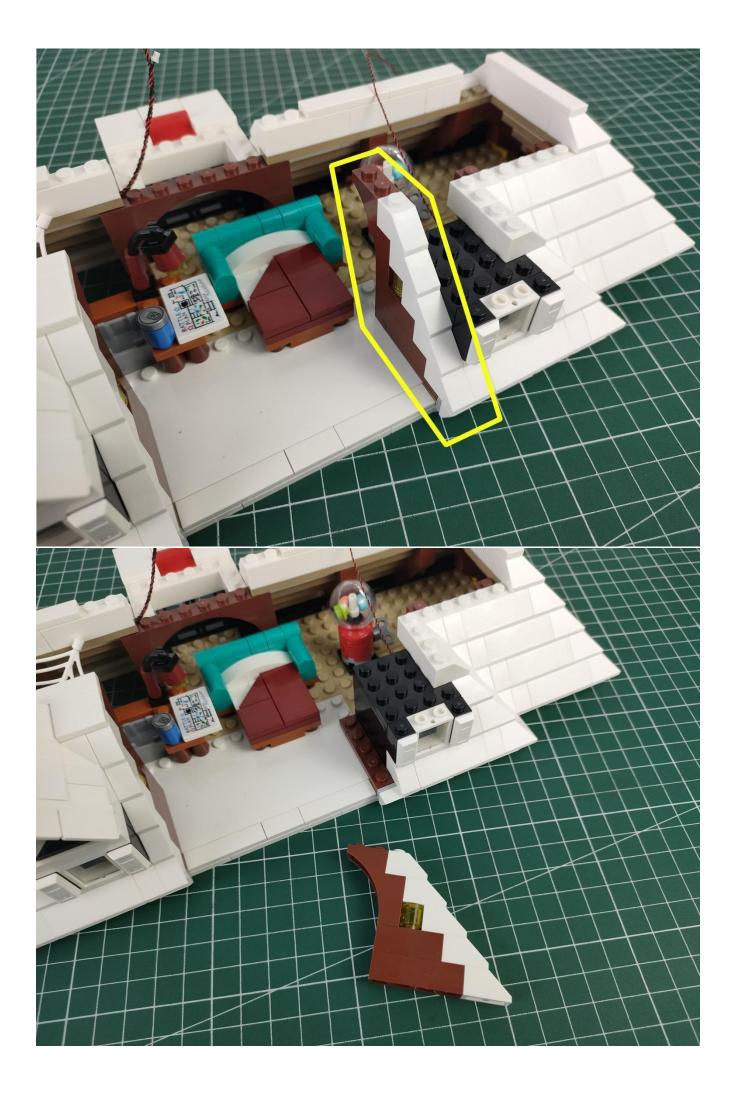


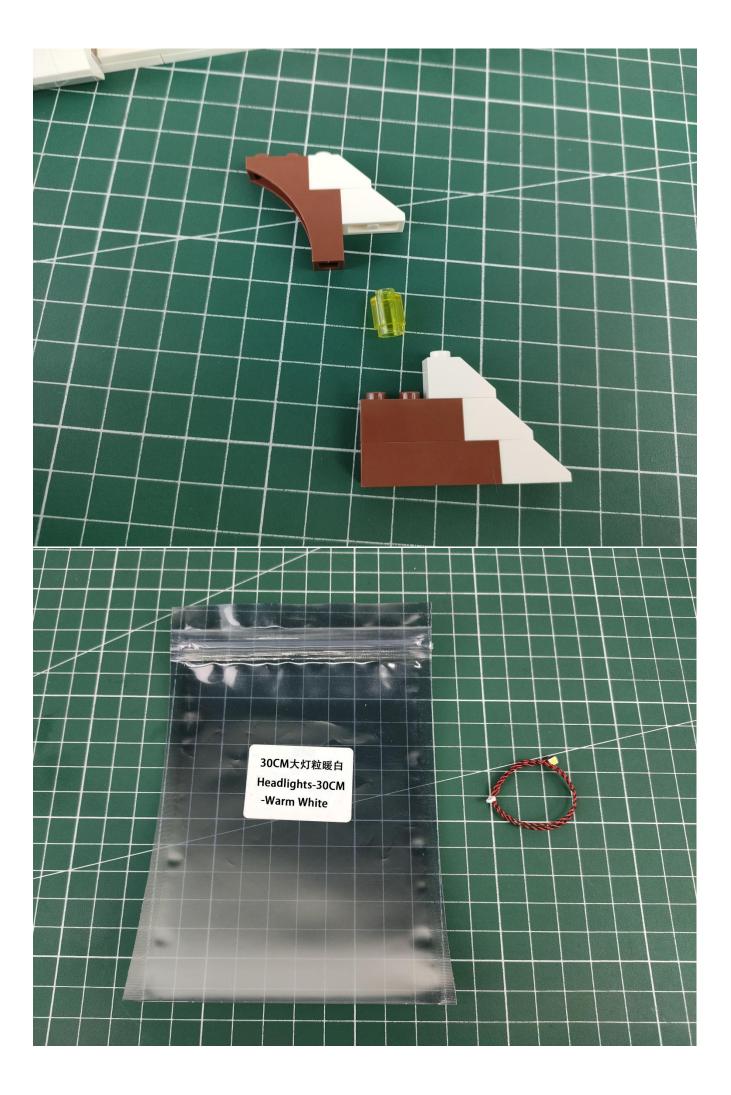


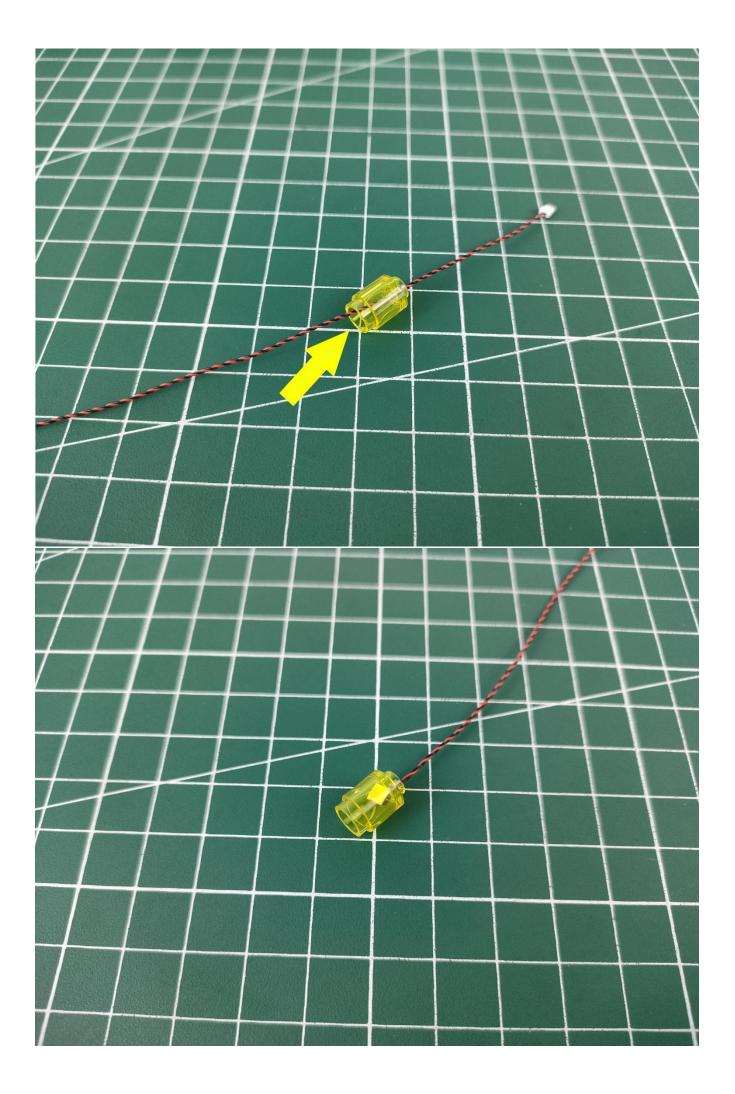



Restore the blocks. At this time, the light-emitting surface of the lamp particle faces itself.

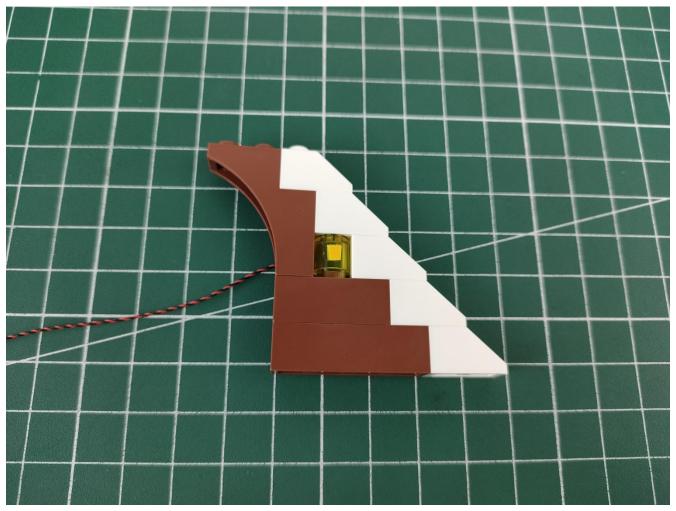


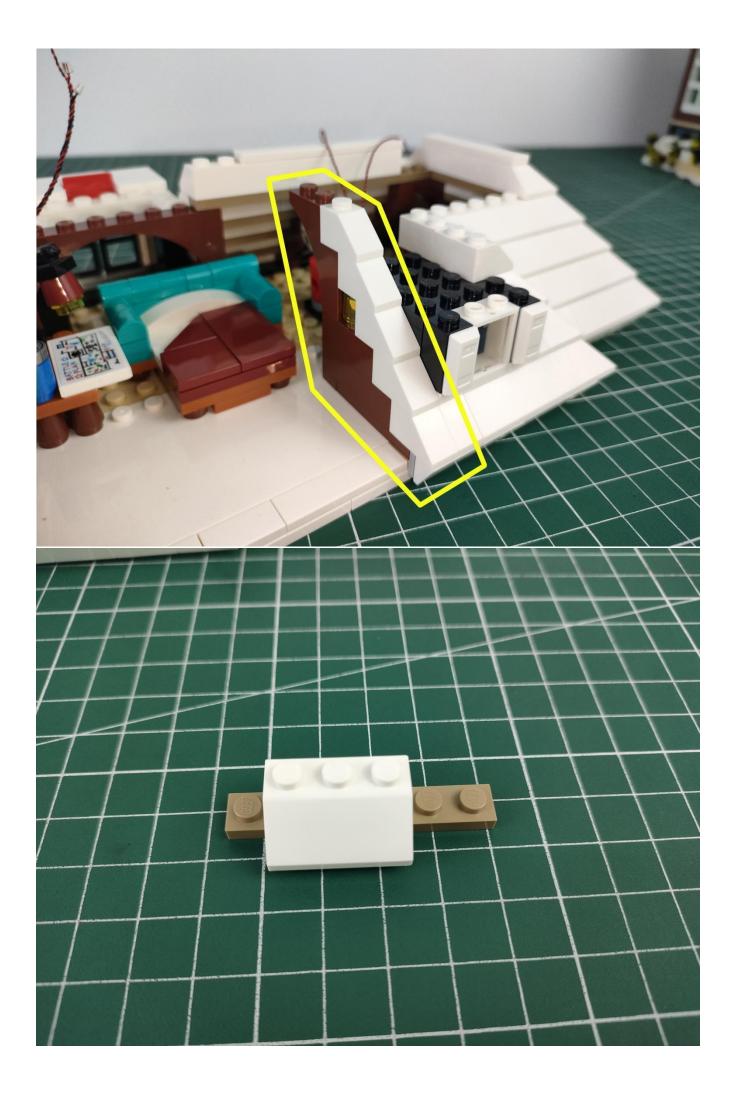


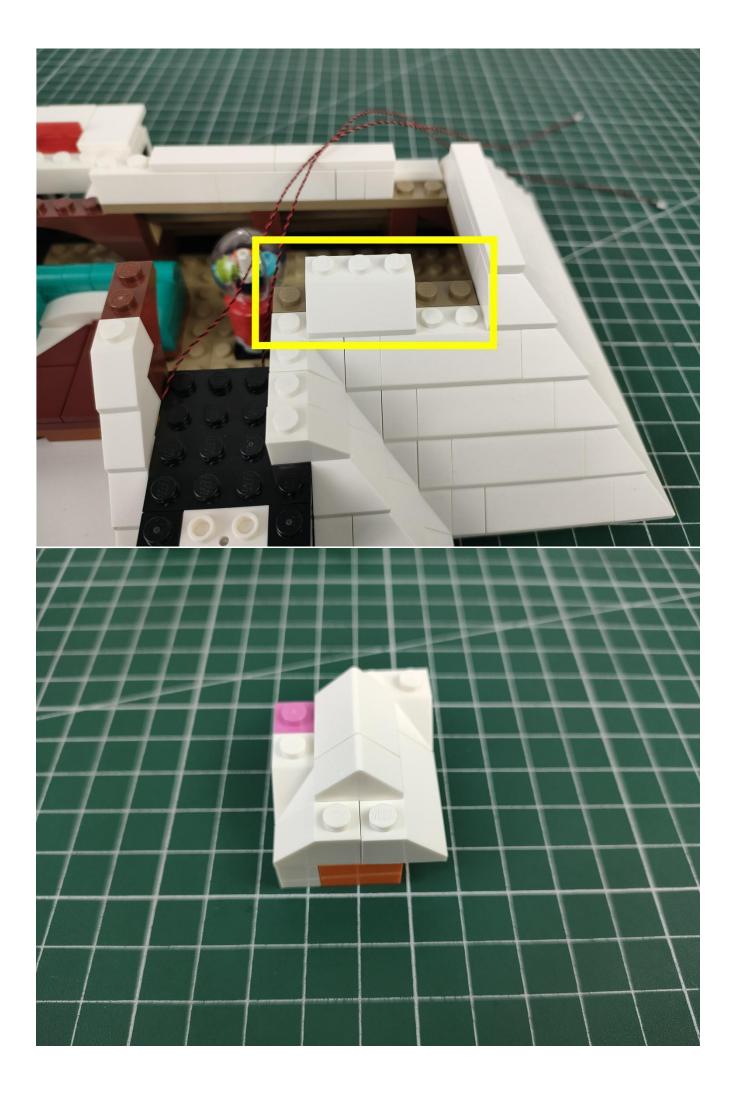


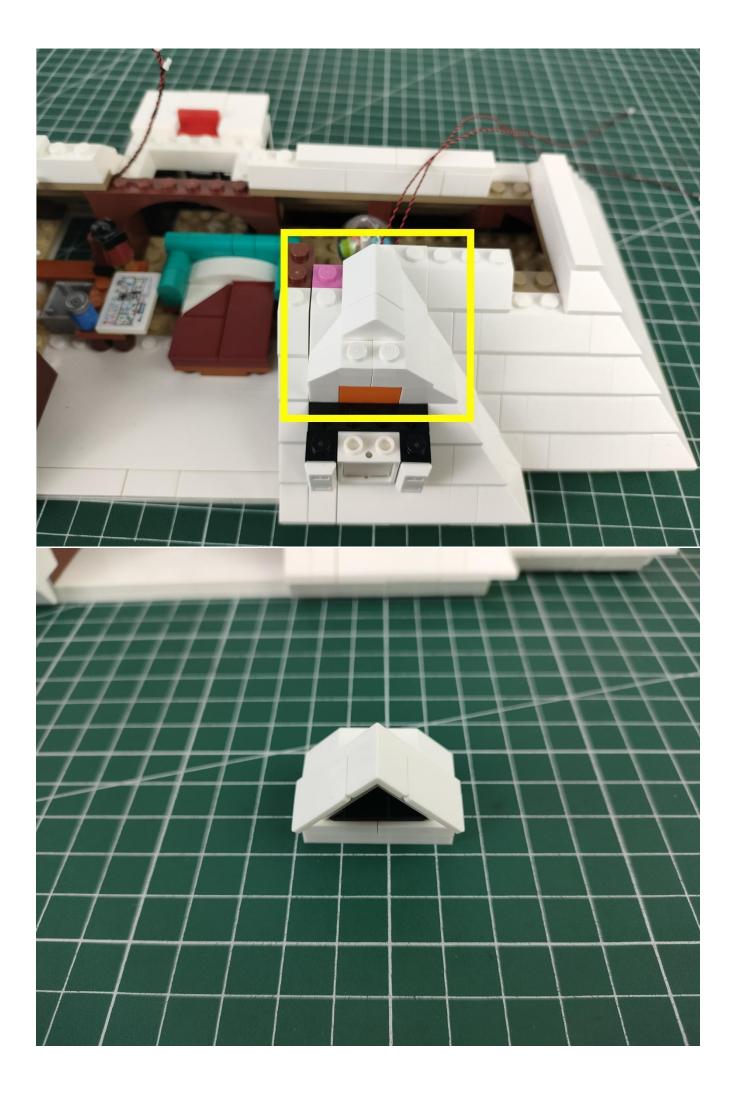


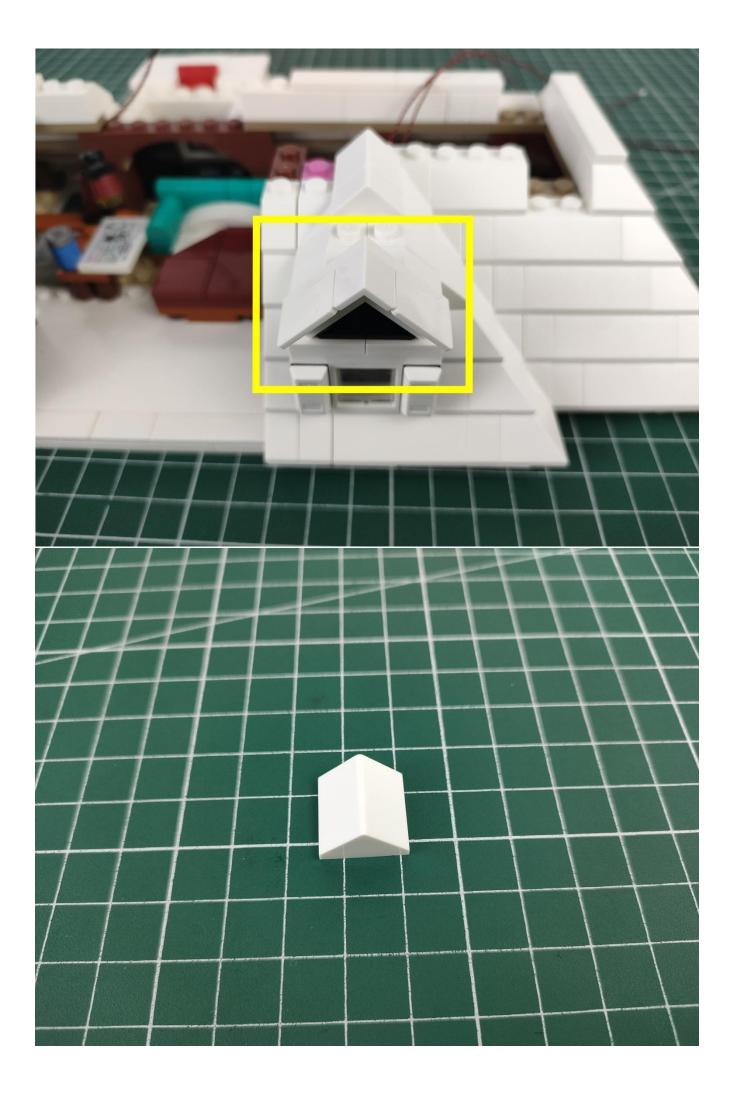


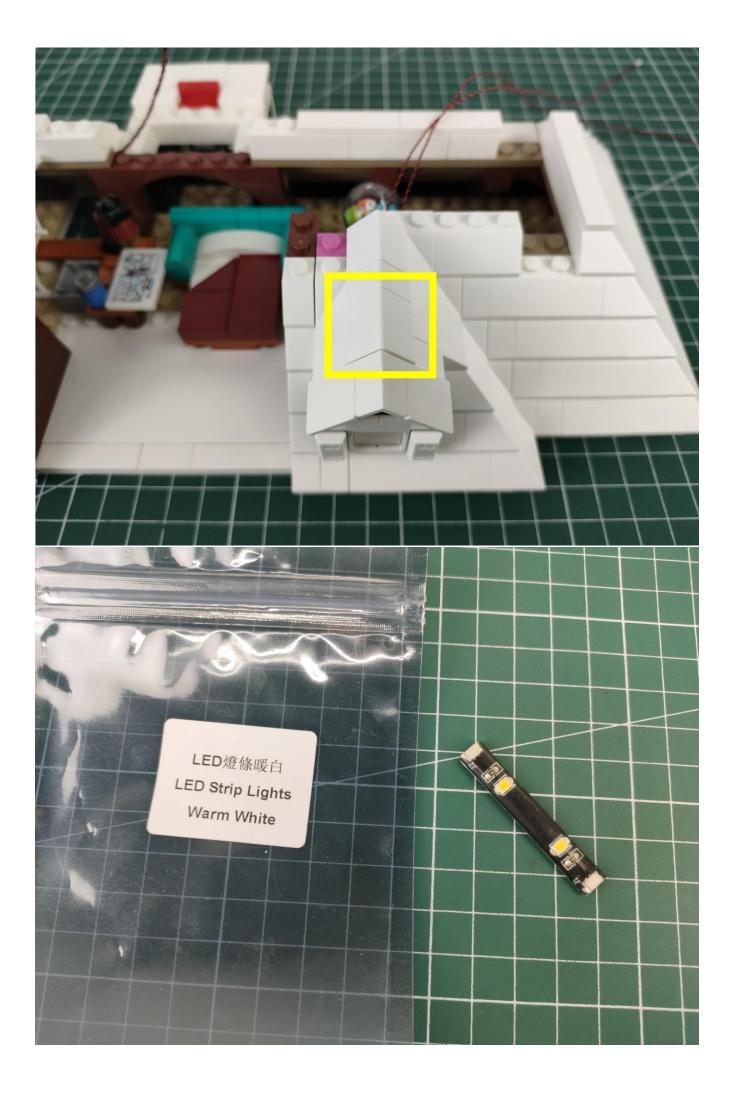


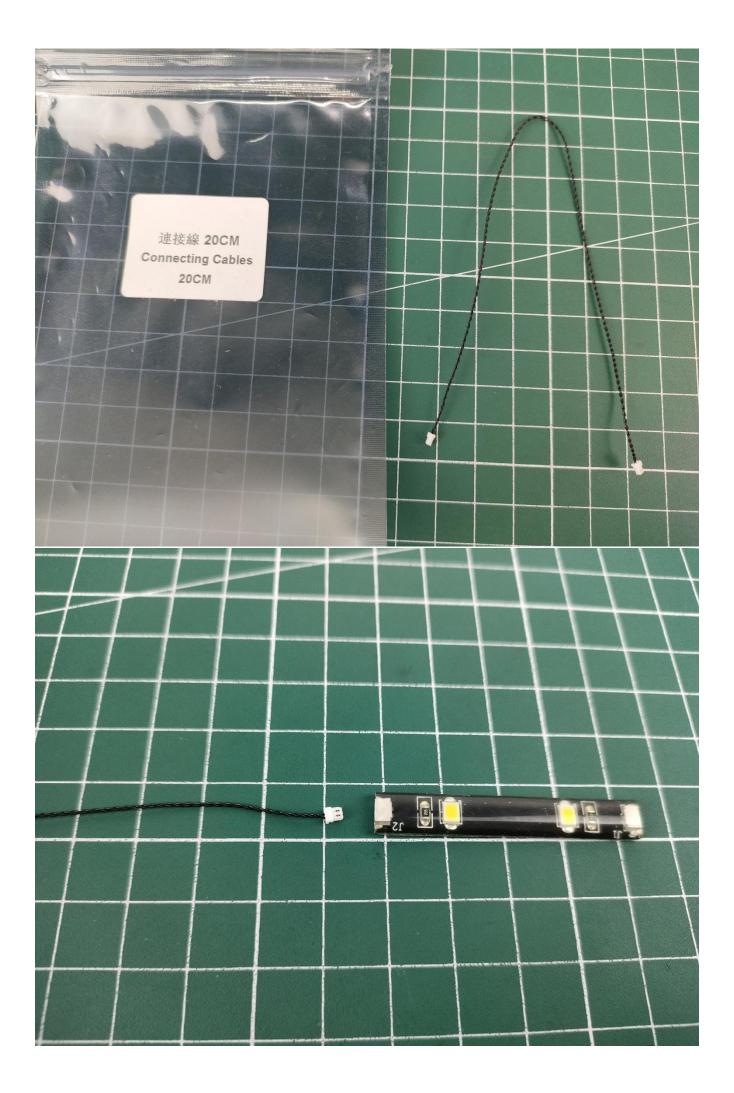


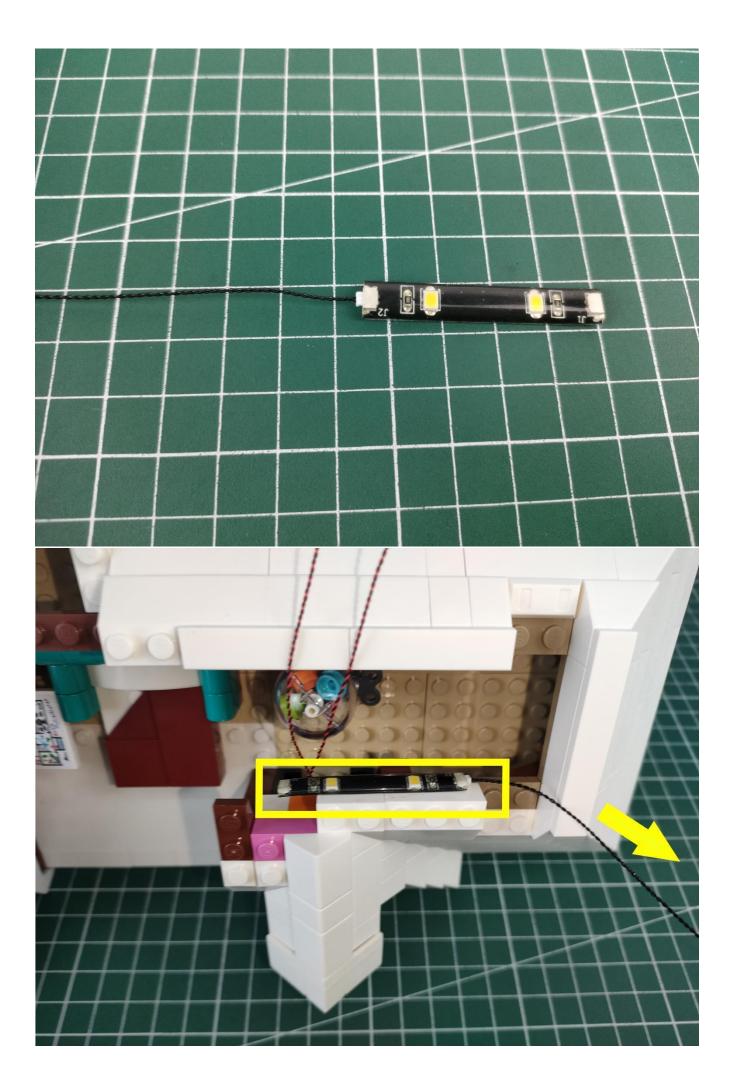


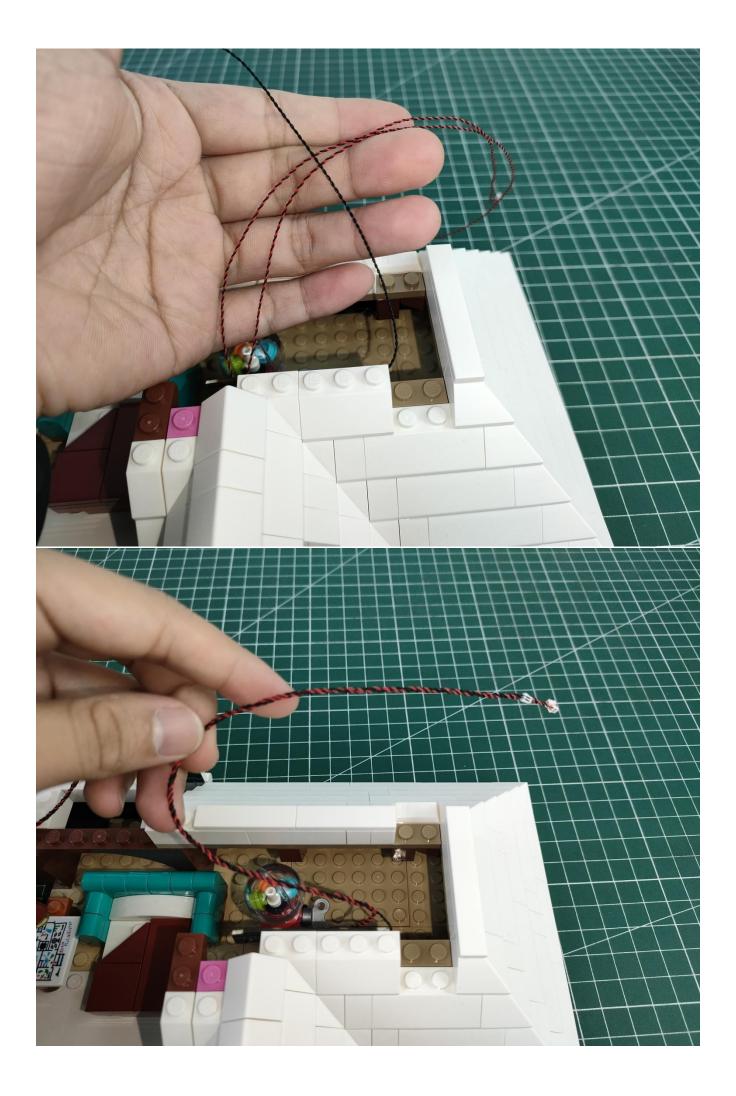


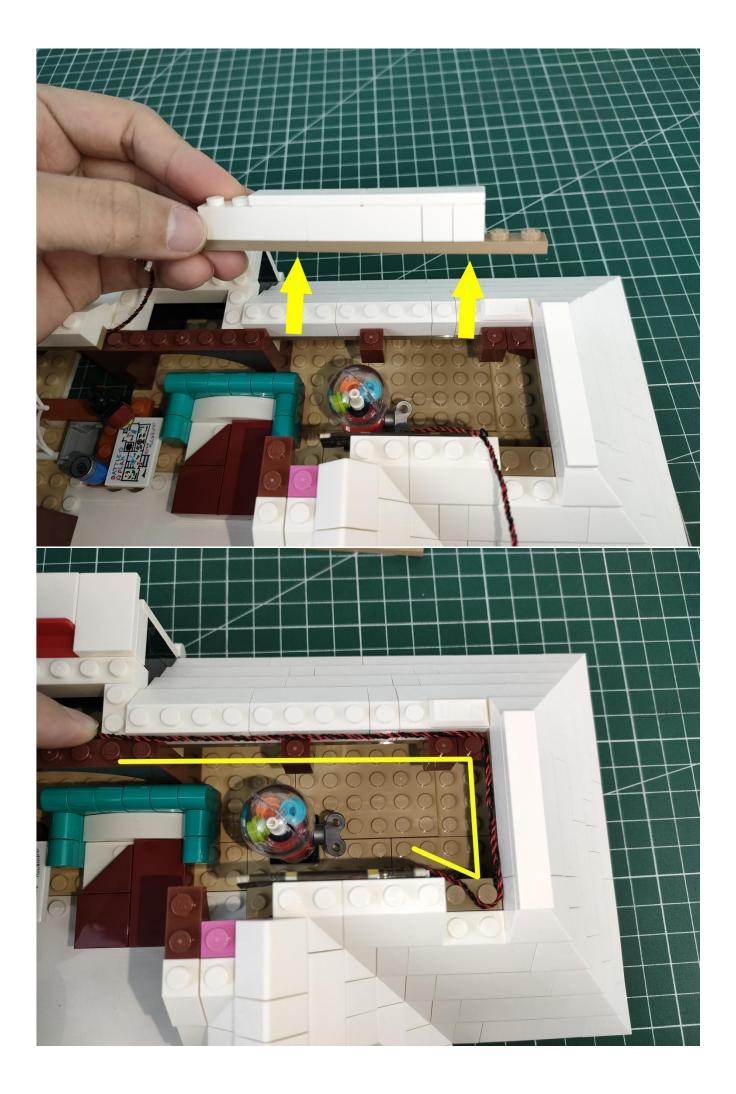

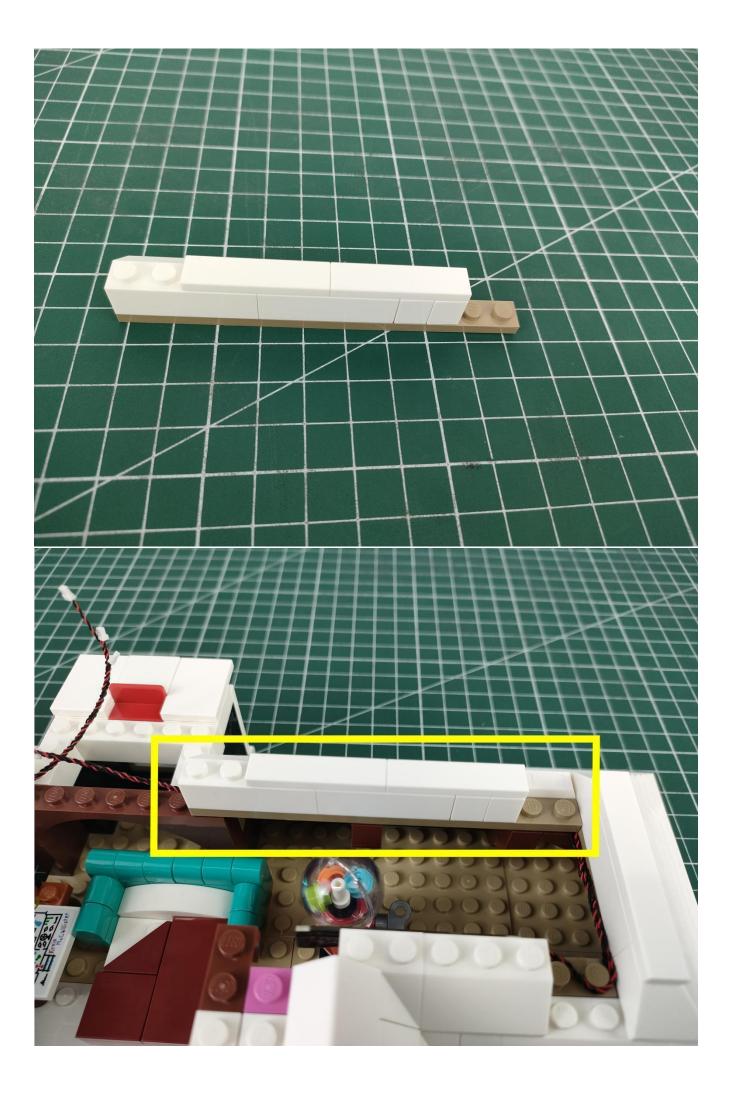

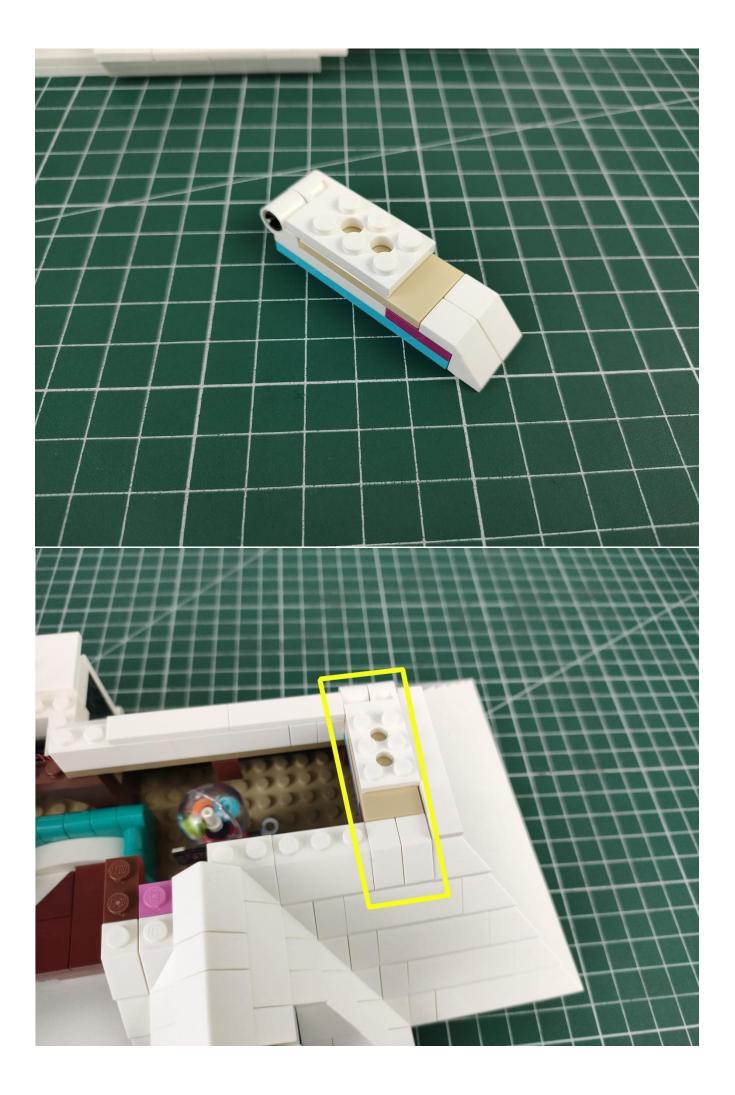

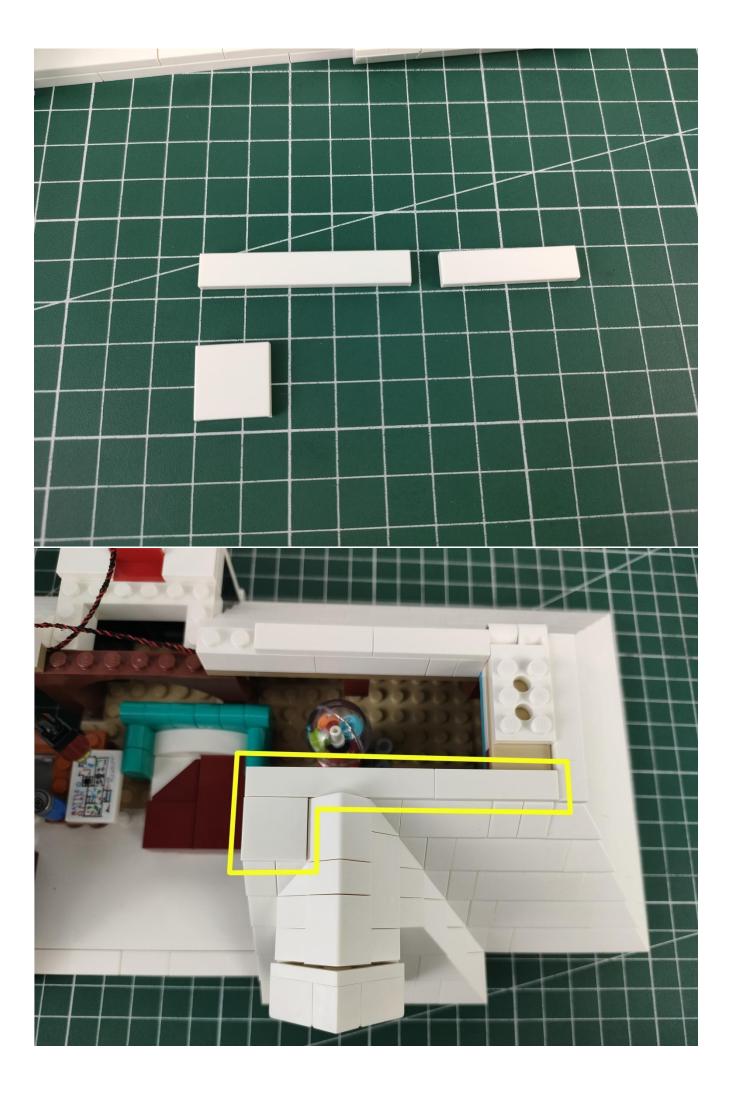


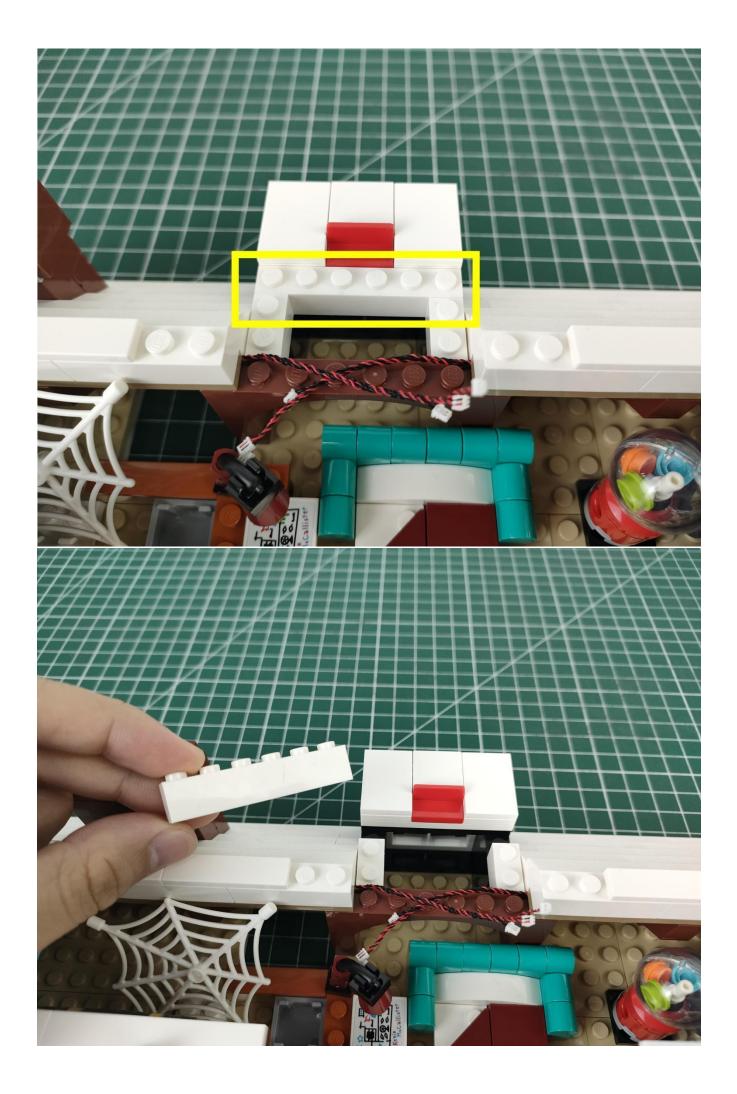




The small orange round plate has no cuts.



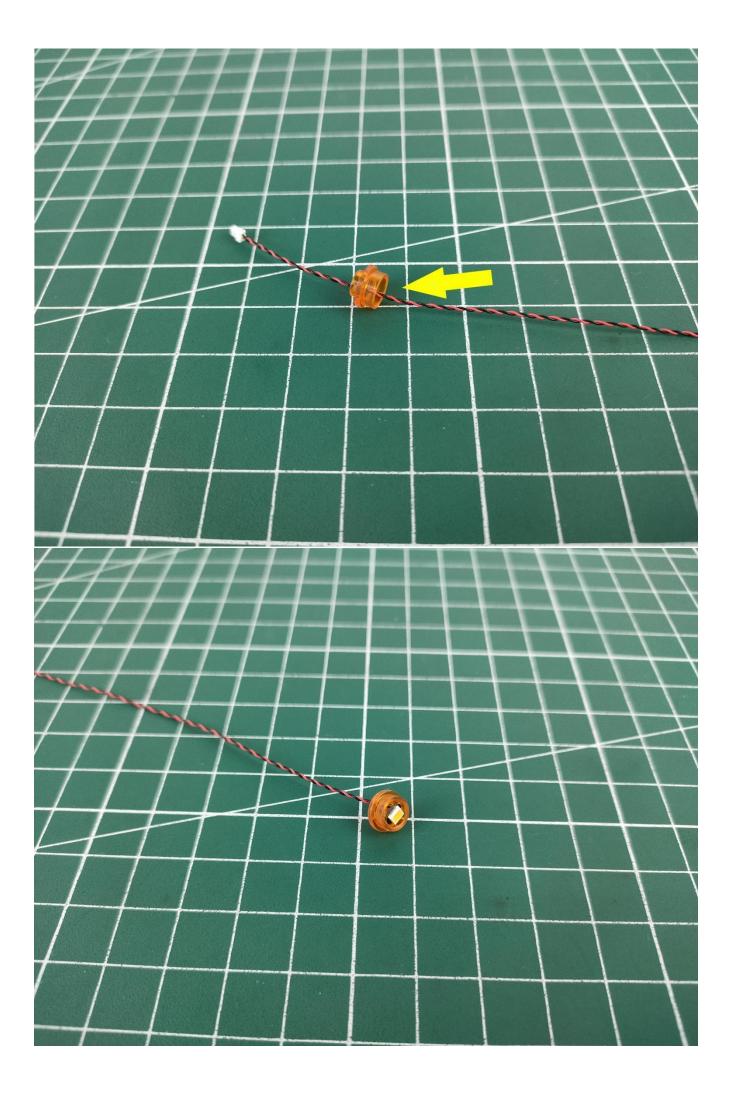


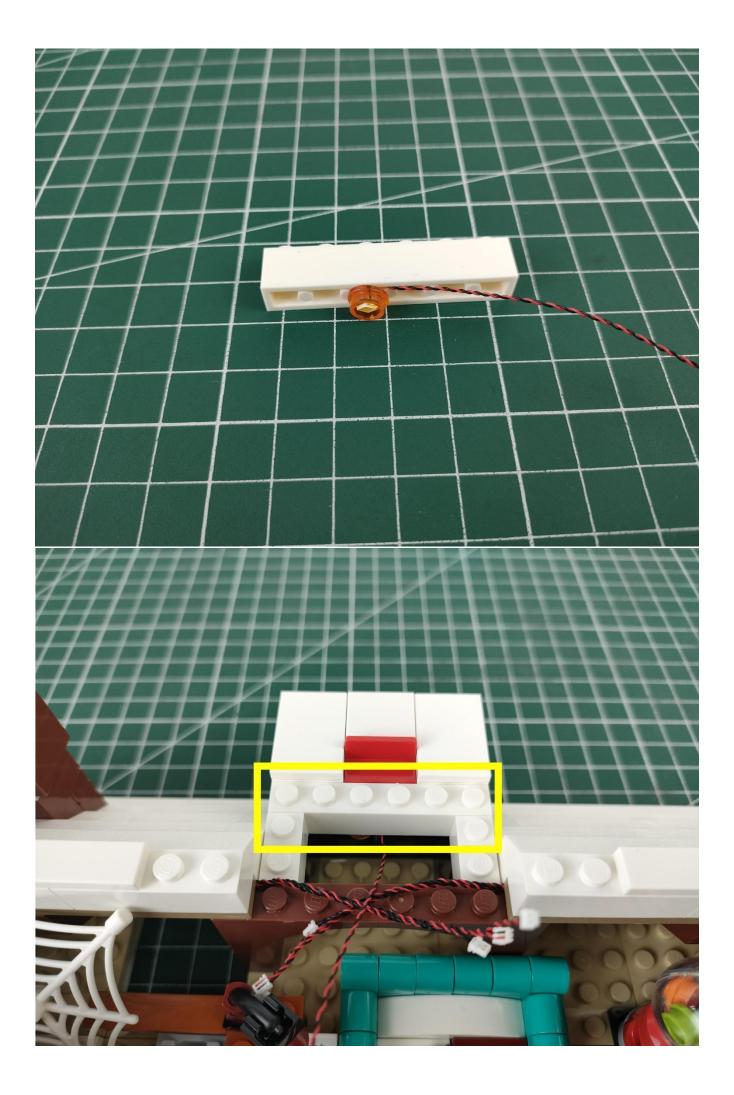









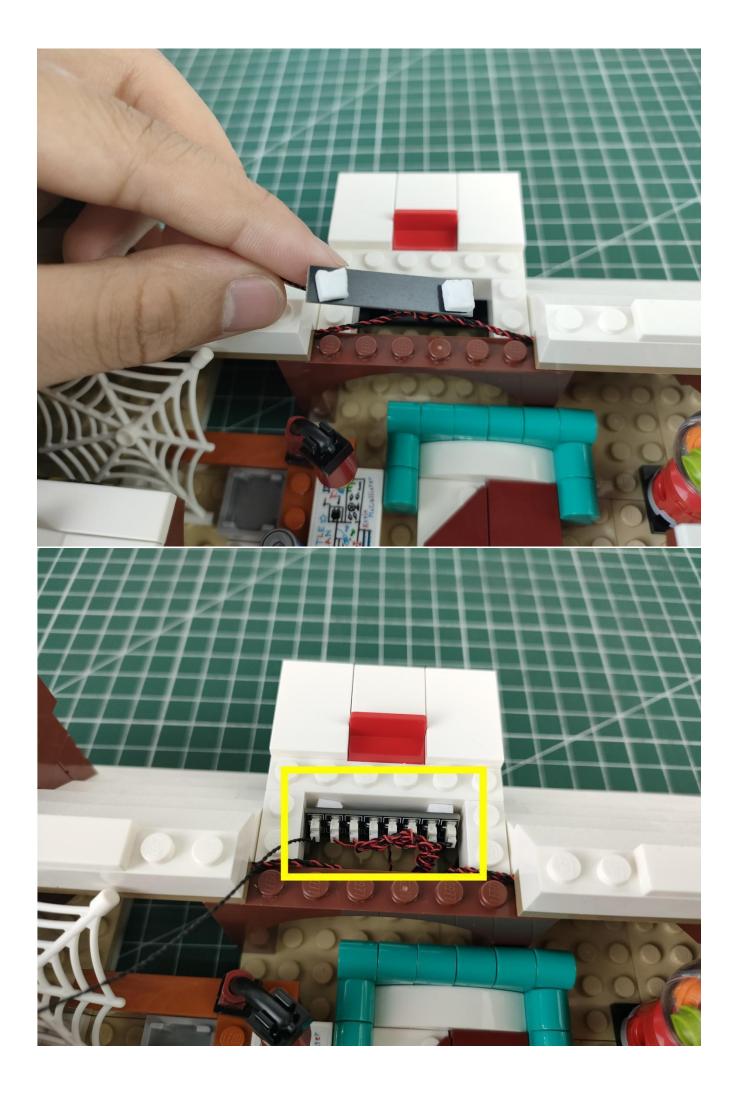


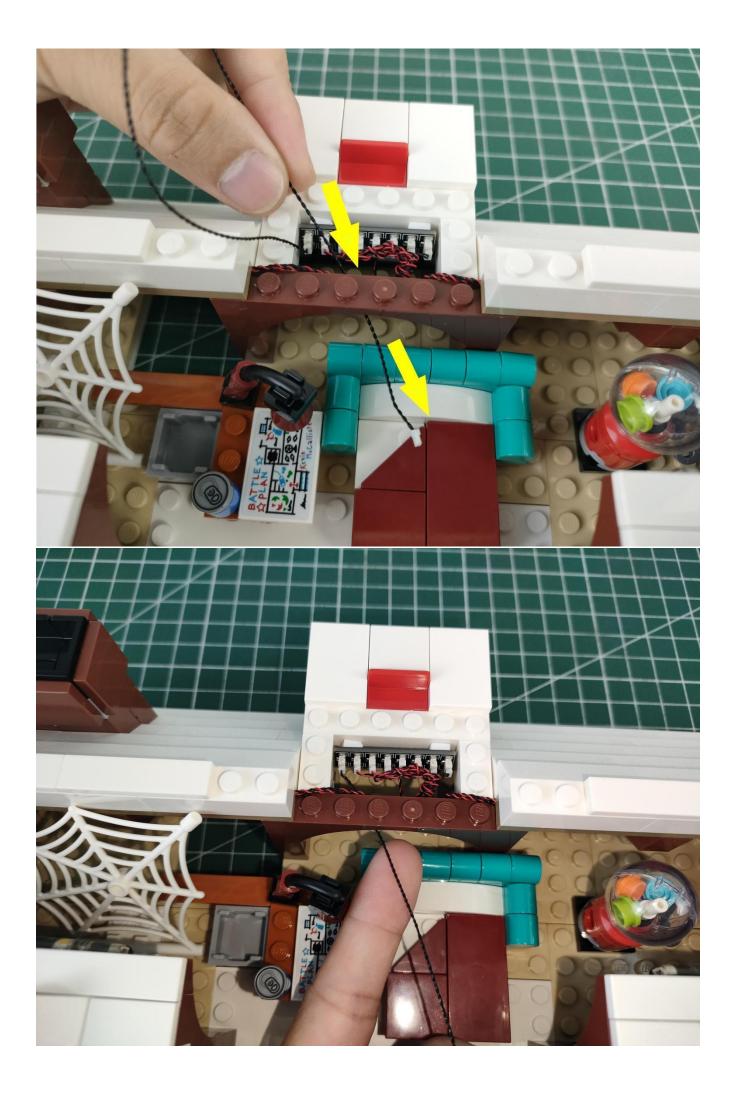



The black connecting wire is pulled down.




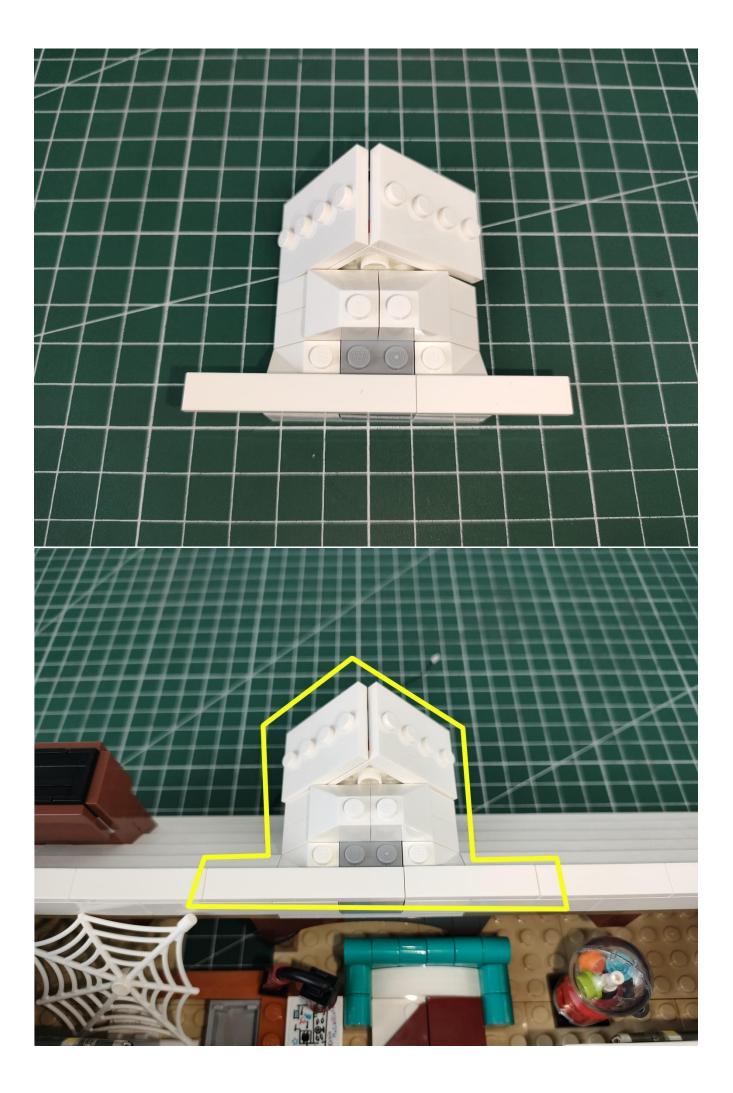

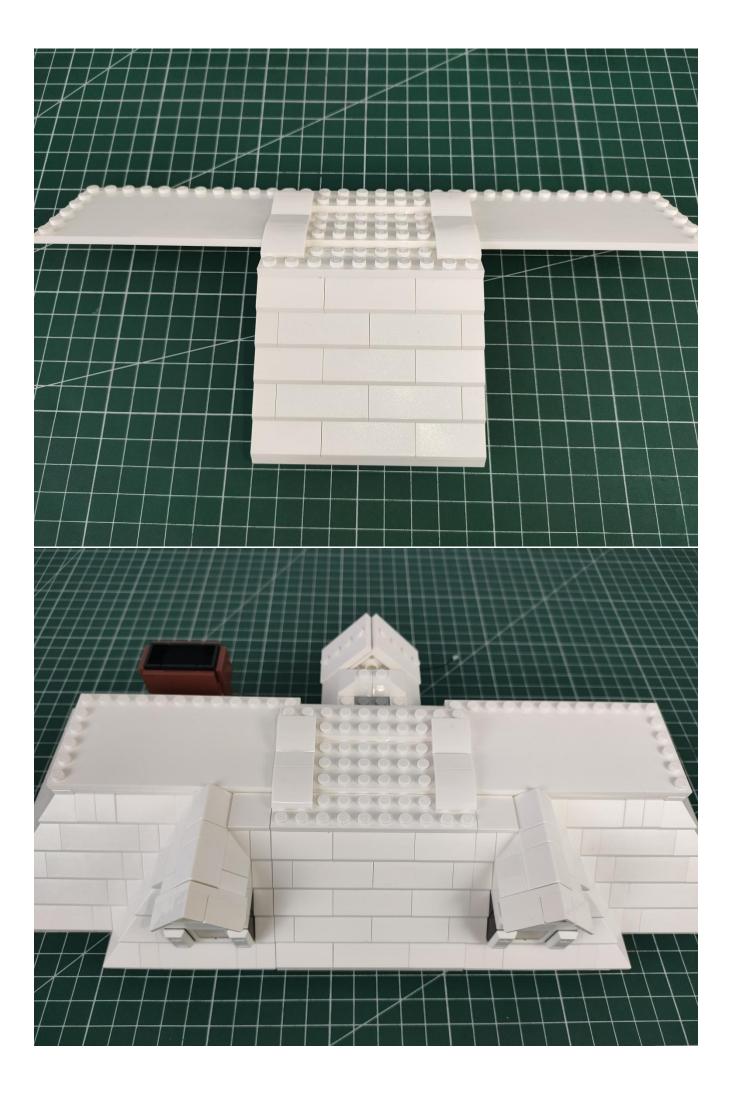


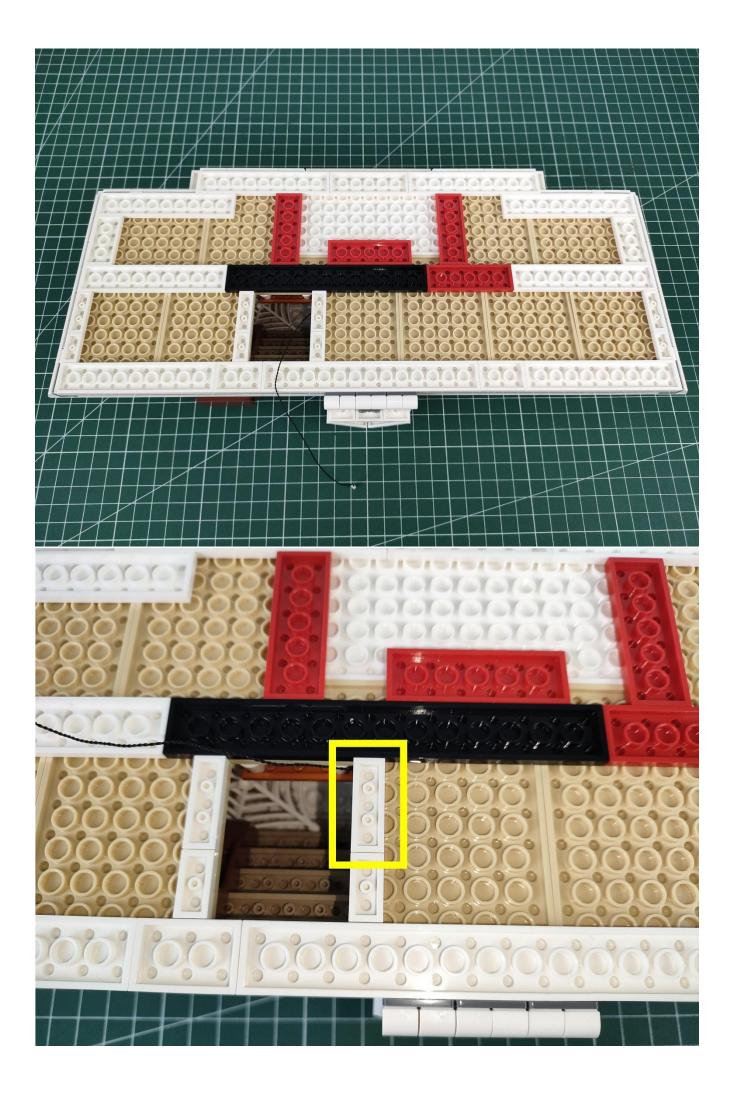


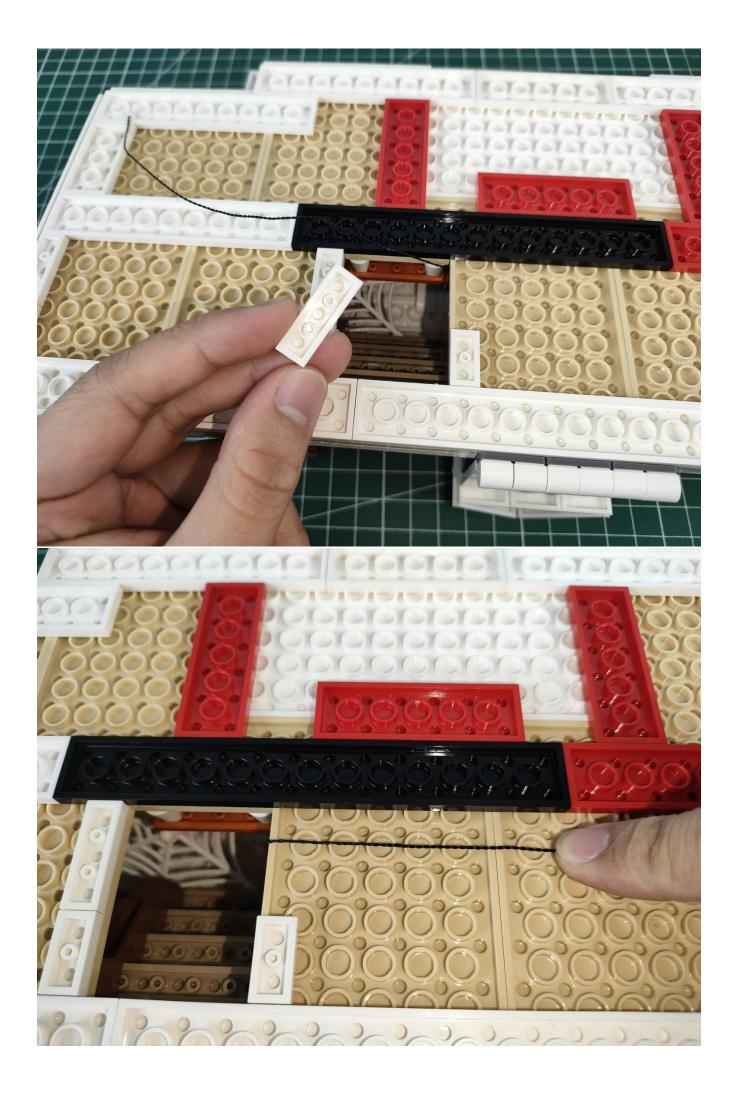


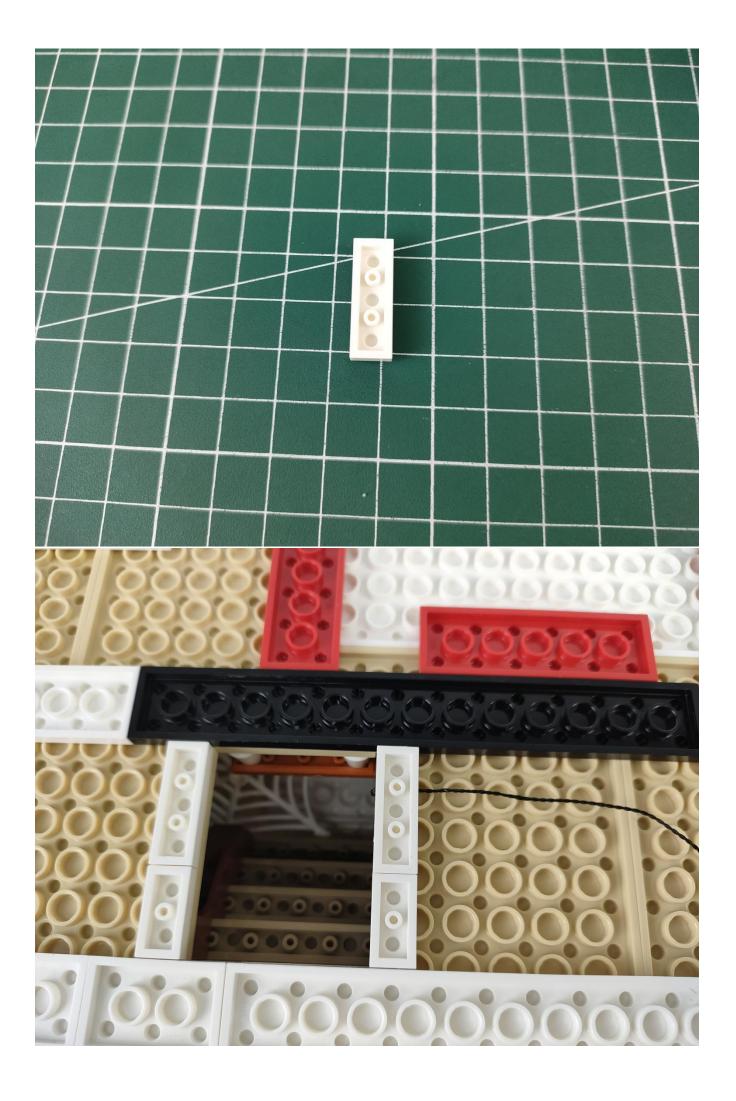





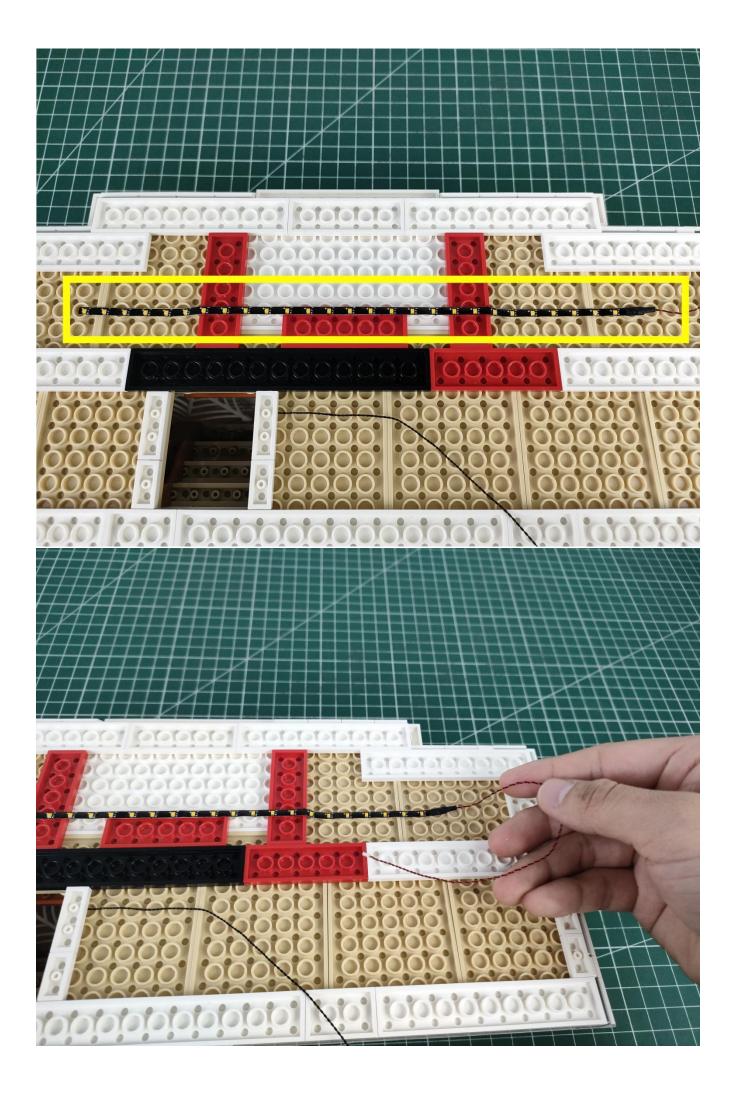

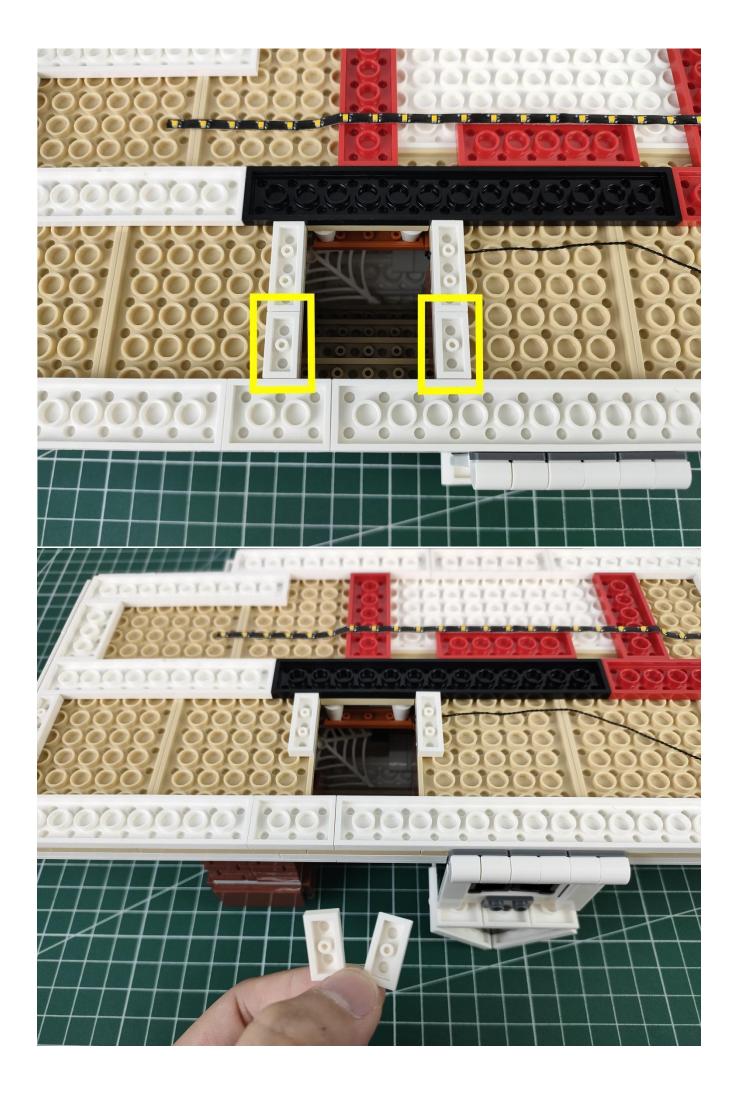


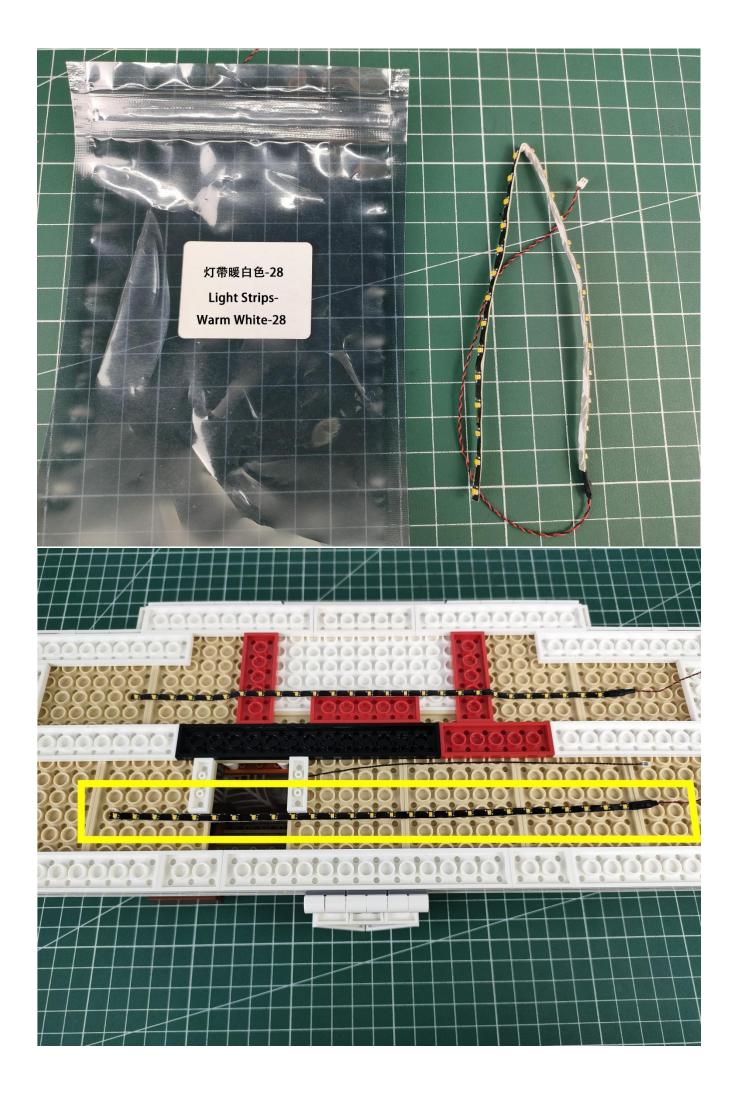


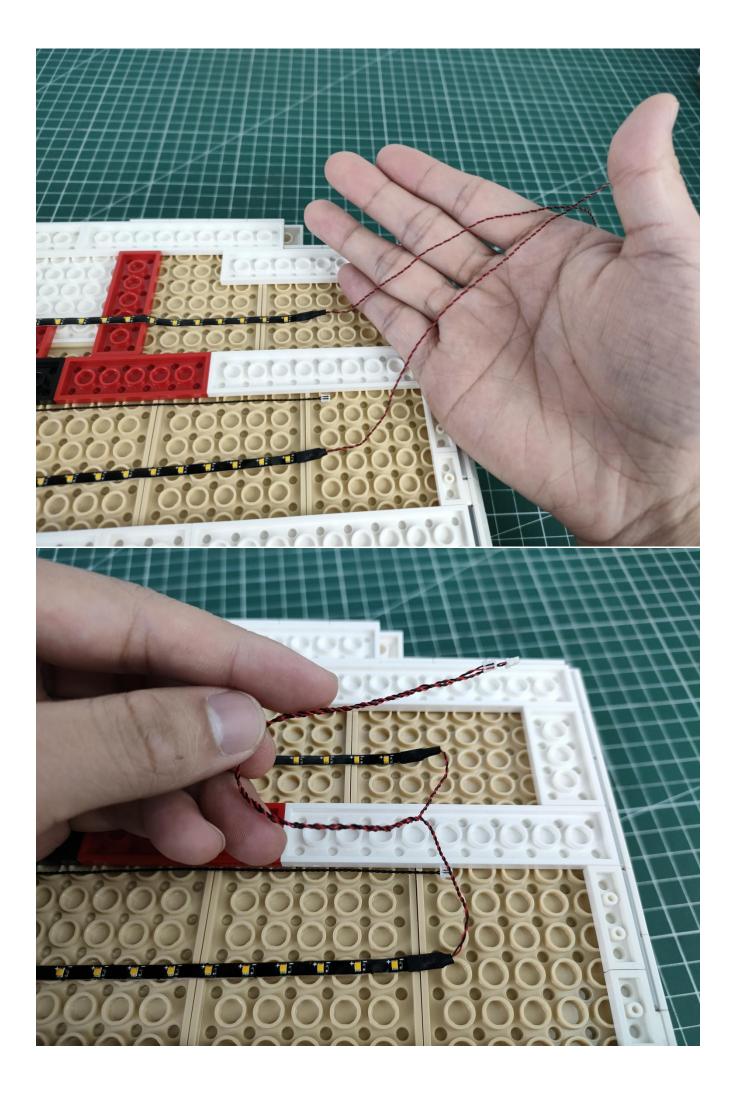

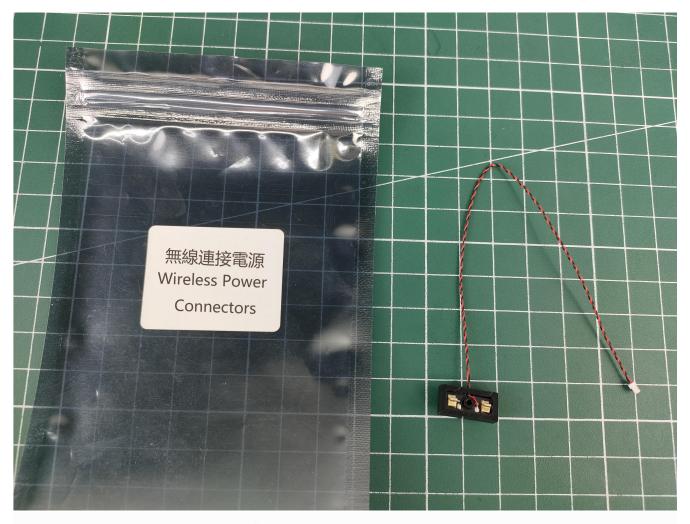


Wireless Power Connectors

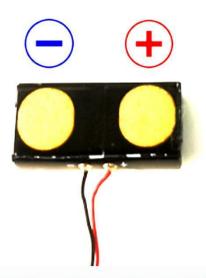





- 1. Wireless Power Connectors are divided into two parts.
- 2.The two parts need to be combined when connecting,The positive pole is connected to the positive pole,The negative pole is connected to the negative pole.

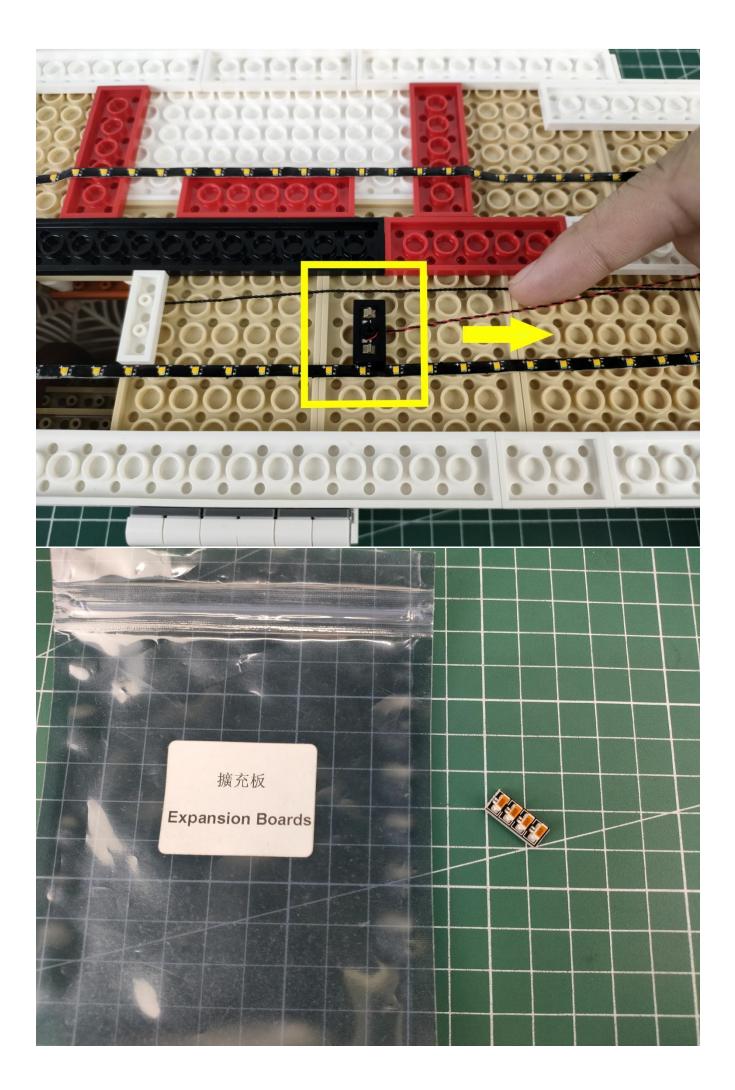



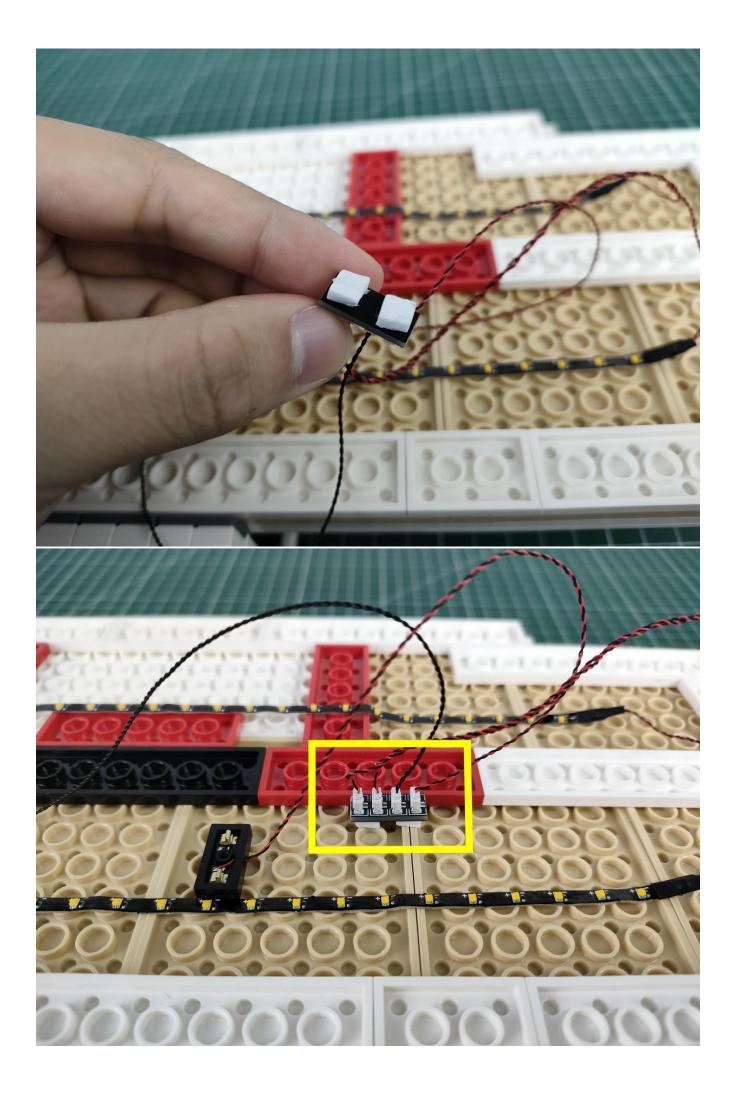


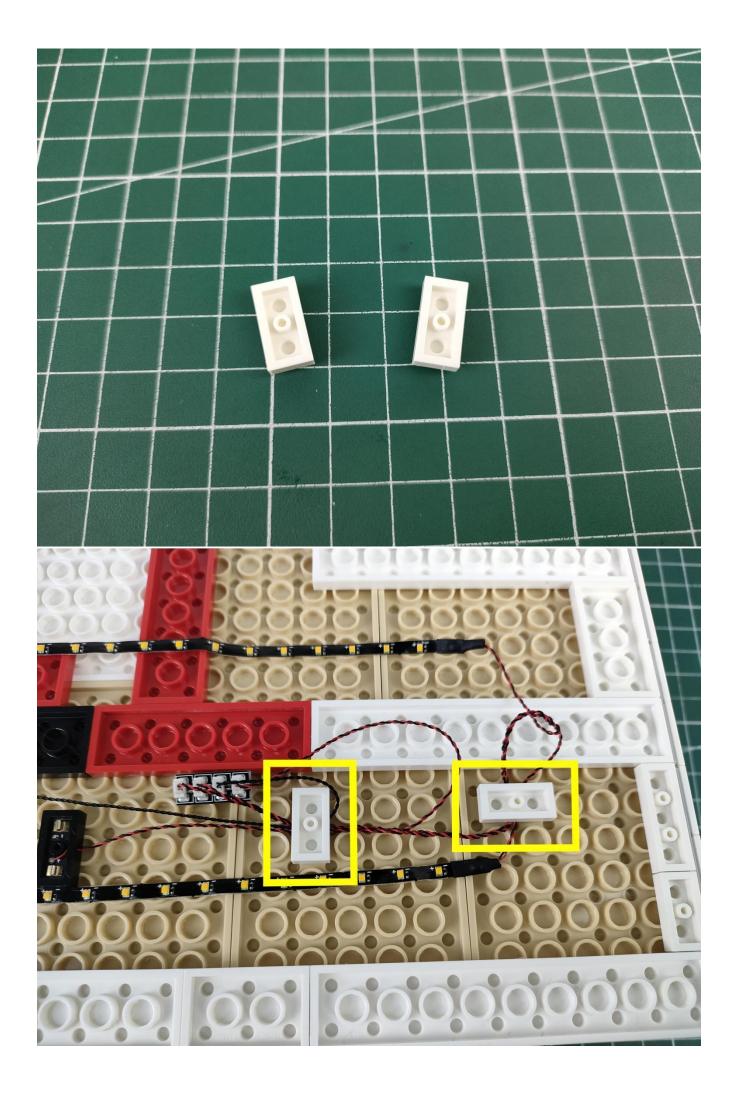








Remove the three white blocks in the picture.

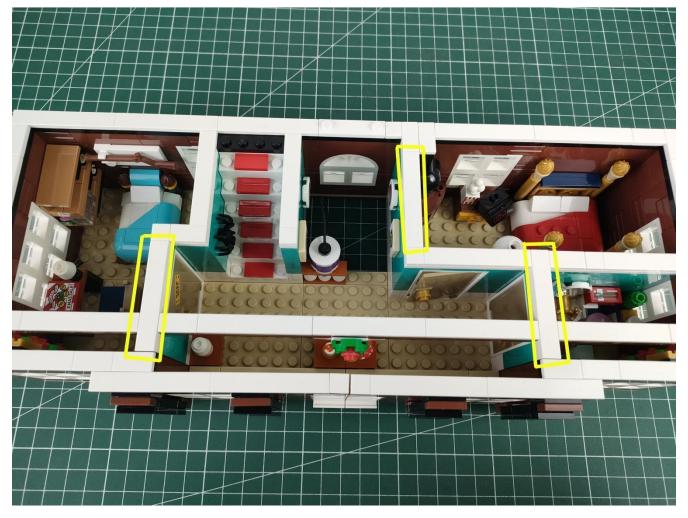


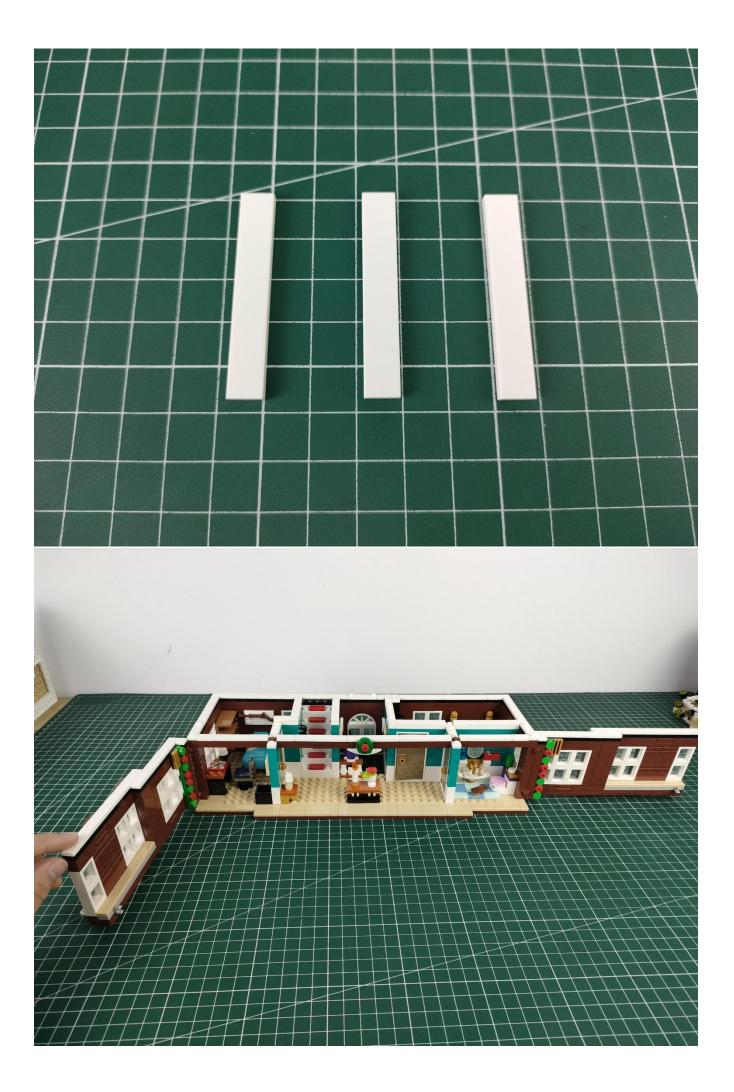

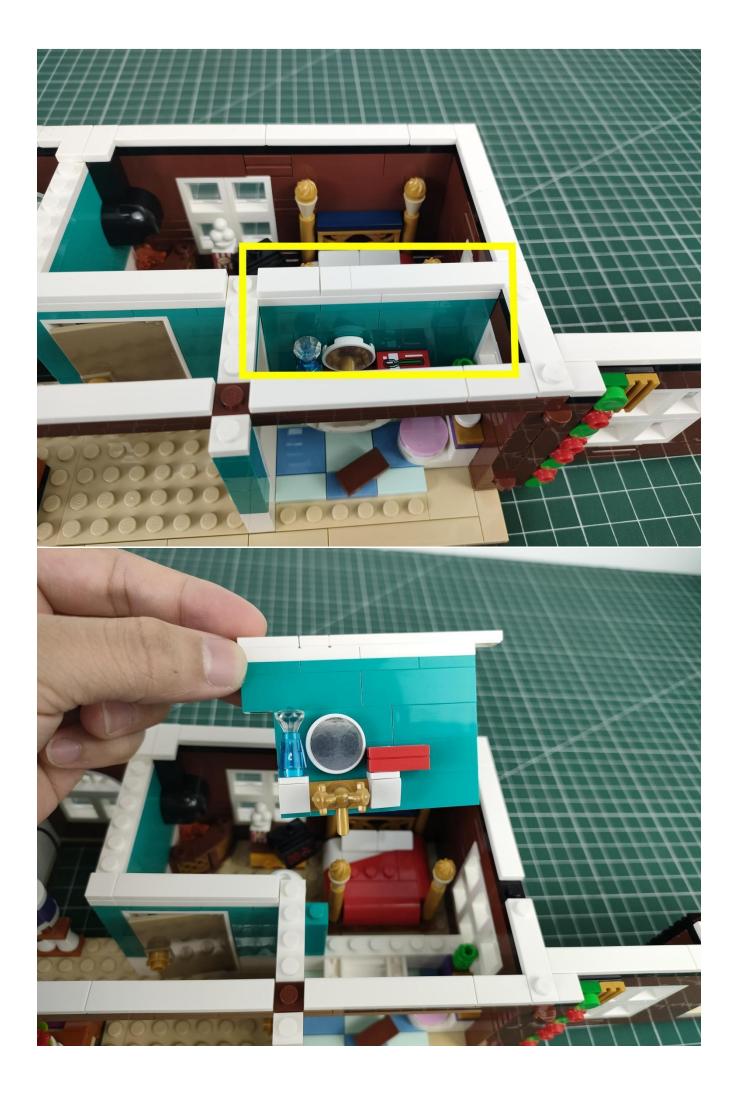




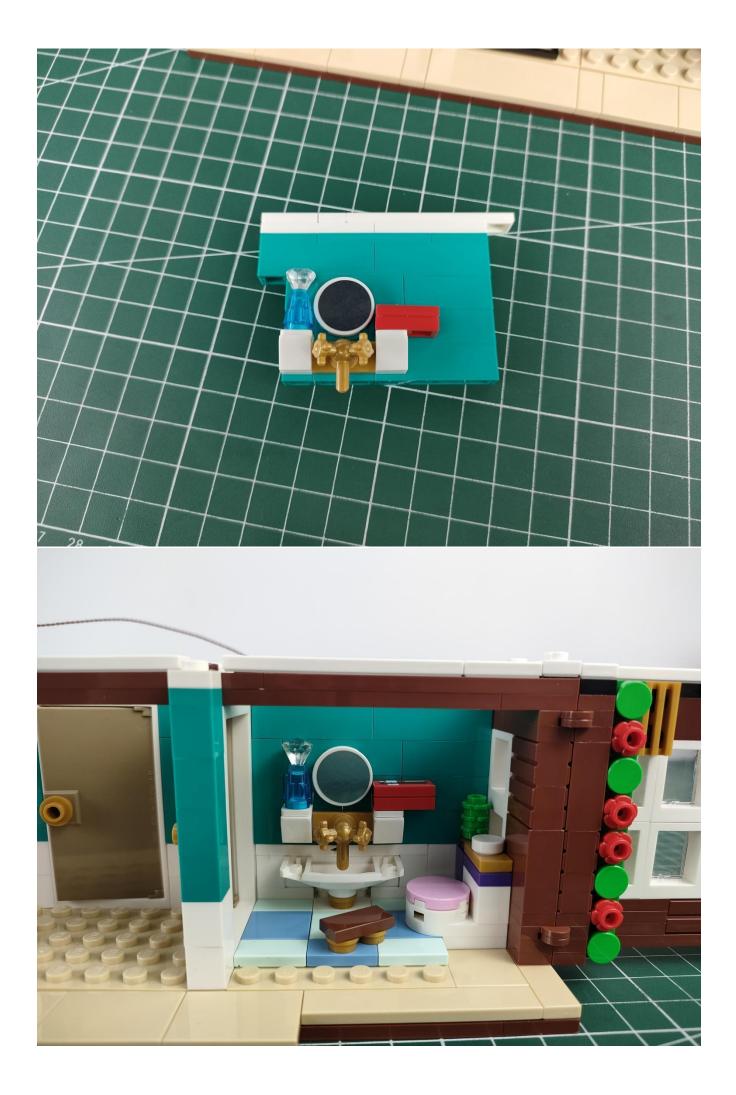


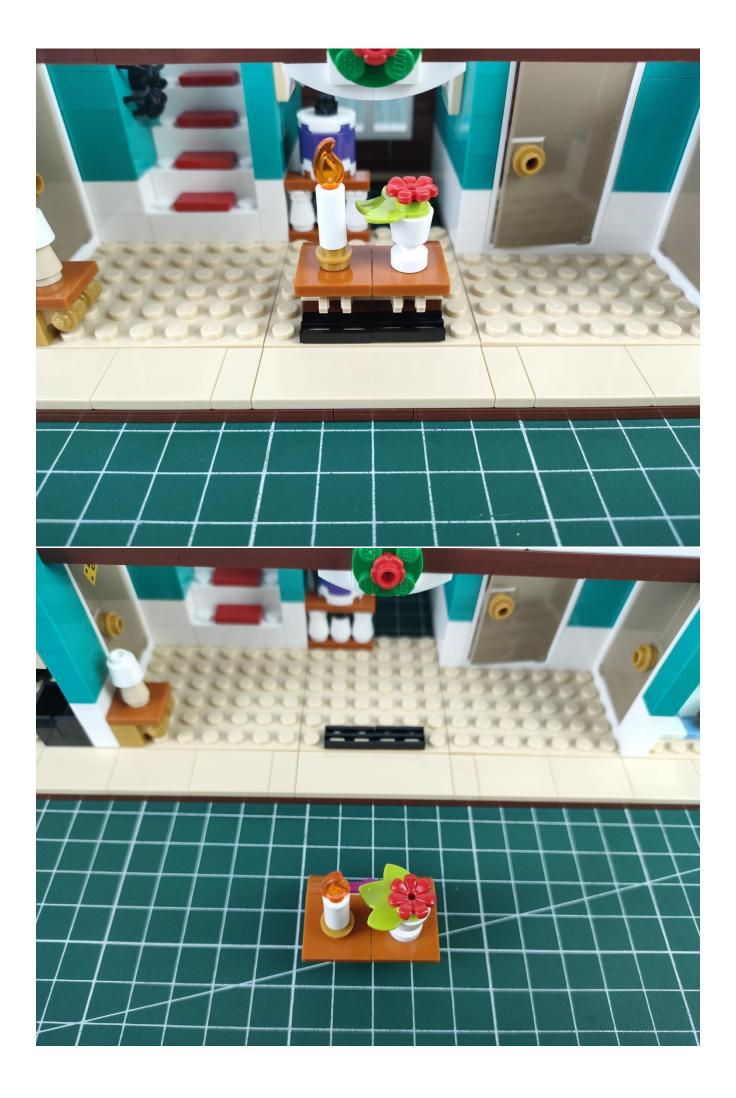






The lines between the lamp particles are separated.

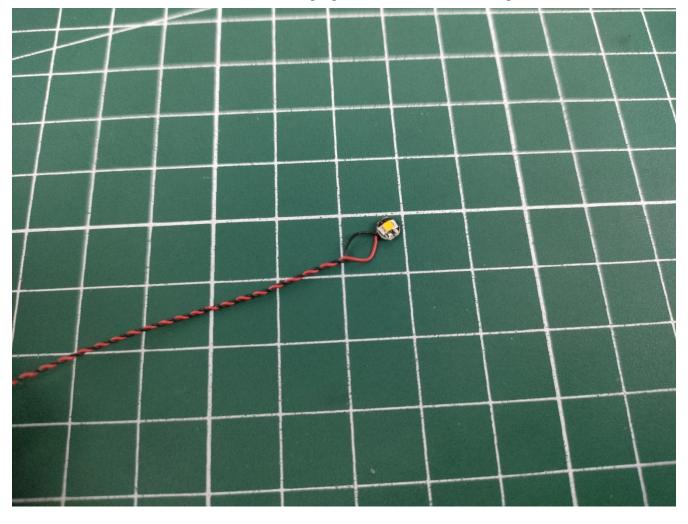


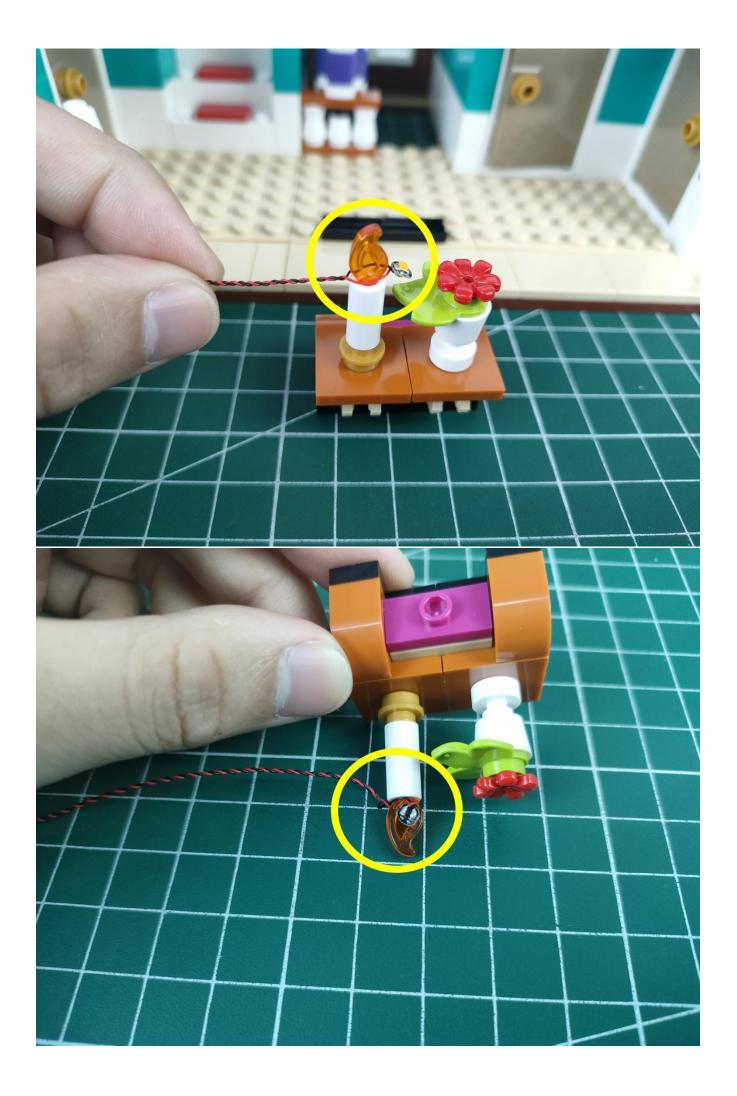

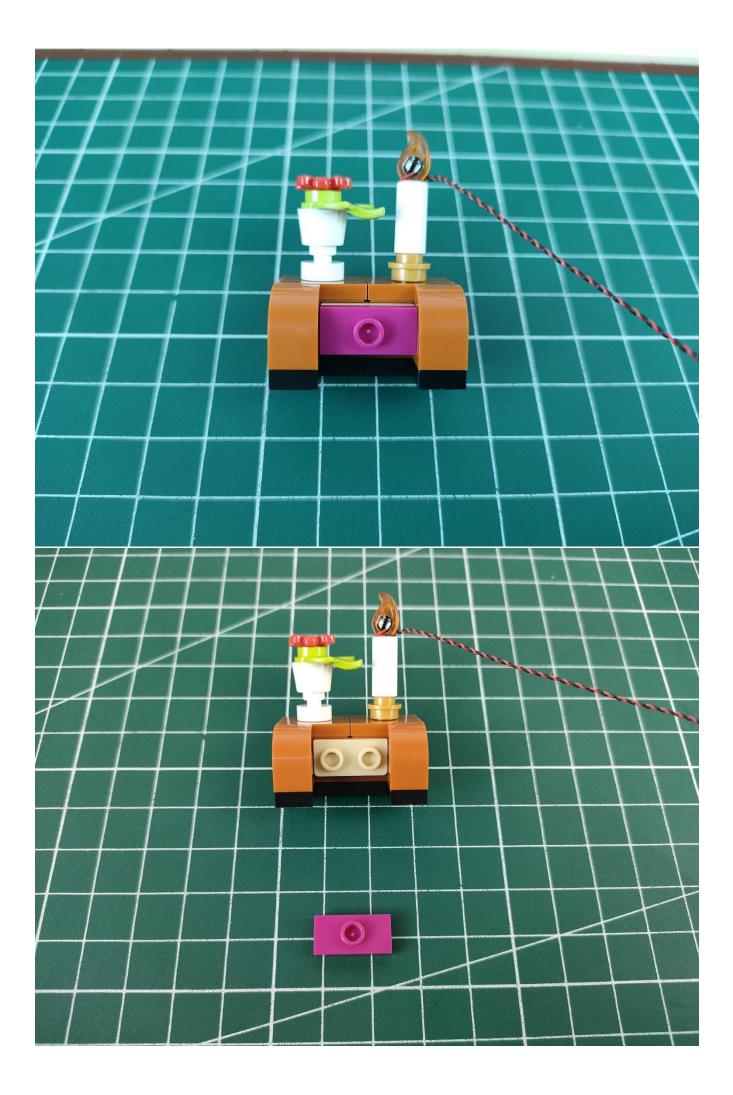


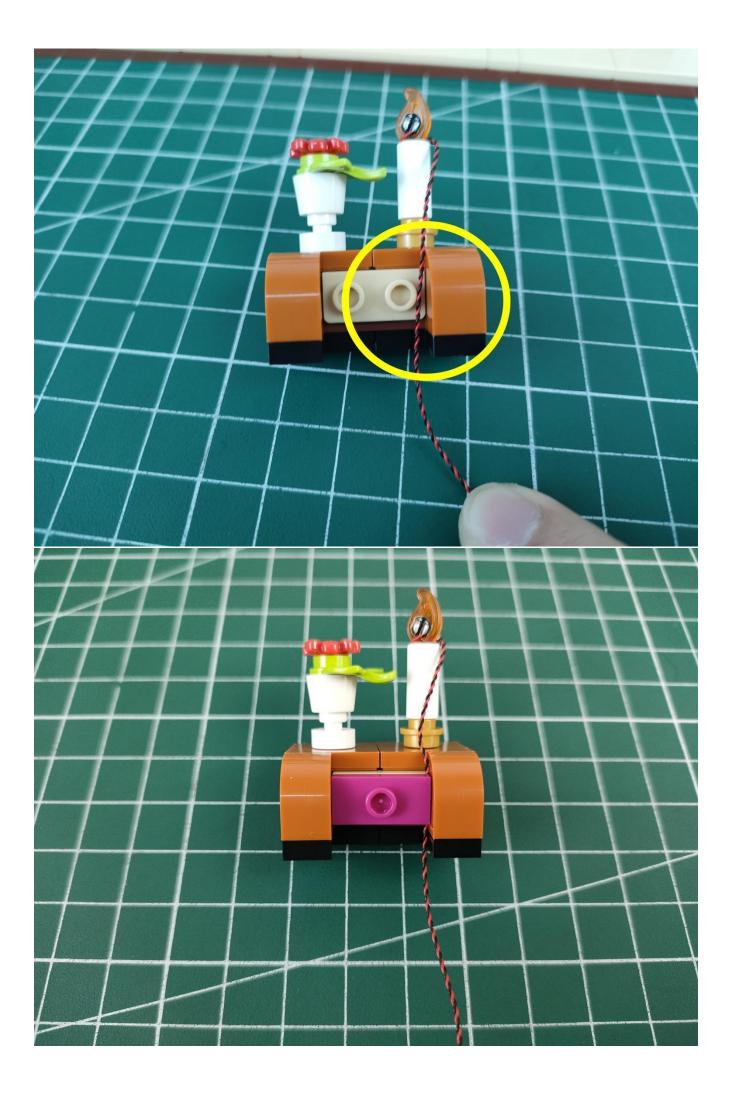


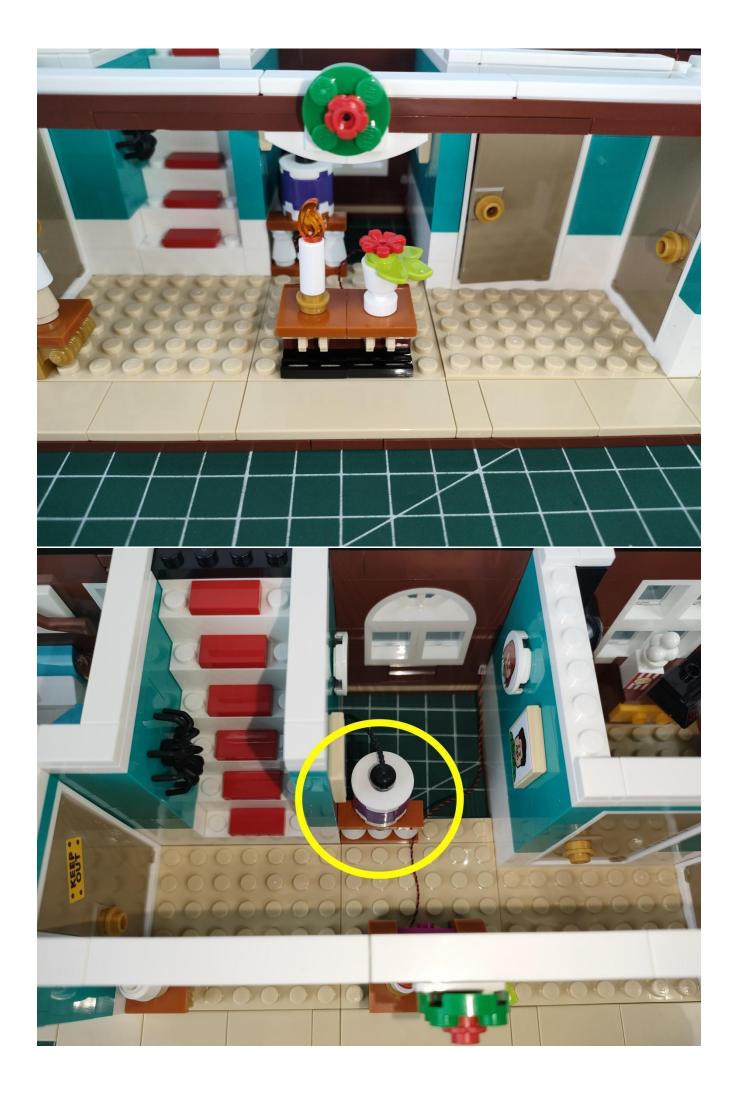

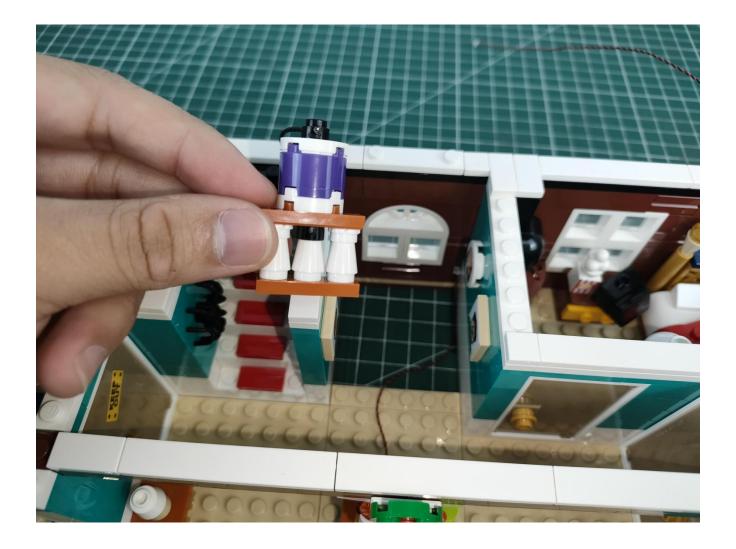

The lamp strand can be pressed with building blocks.

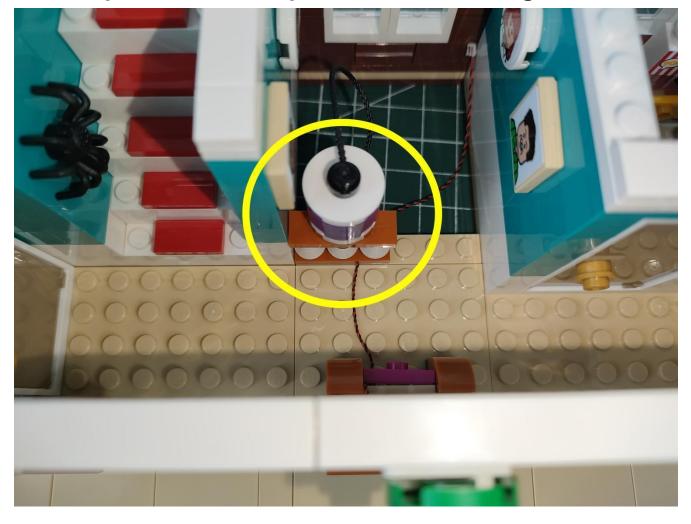

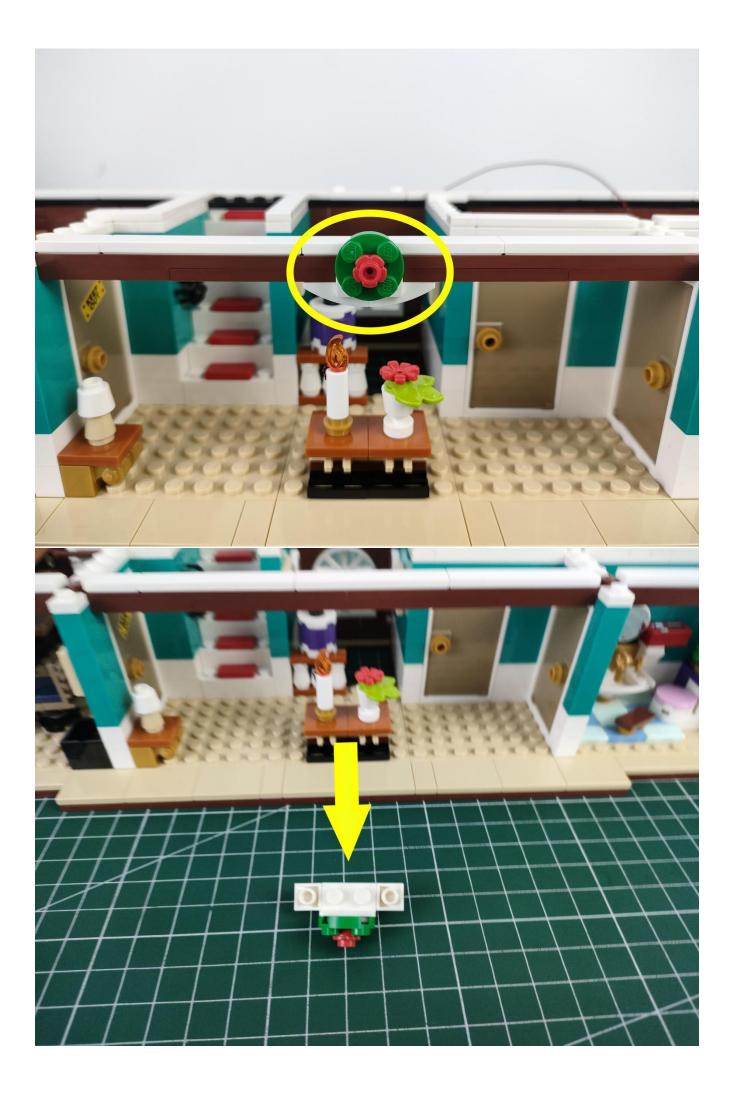









The plate without slit:


The plate without slit: The squeeze causes the protective layer of the wire to be torn apart, the positive and negative wires touch together, and the set is short-circuited and the hot or wire is crushed, the wire to be disconnected and don't work. The plate with slit:





The slit on the plate round 1X1 are hand-made to avoid squeeze the wire and cause short circuit and abnormalheat during installation.

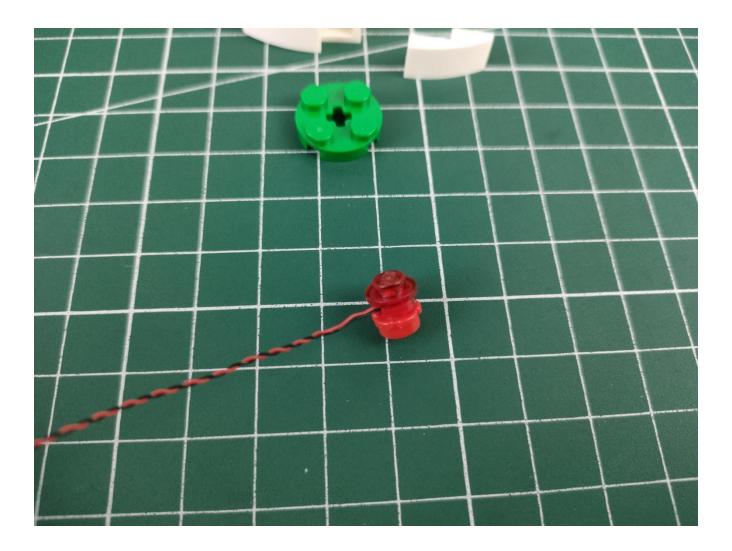


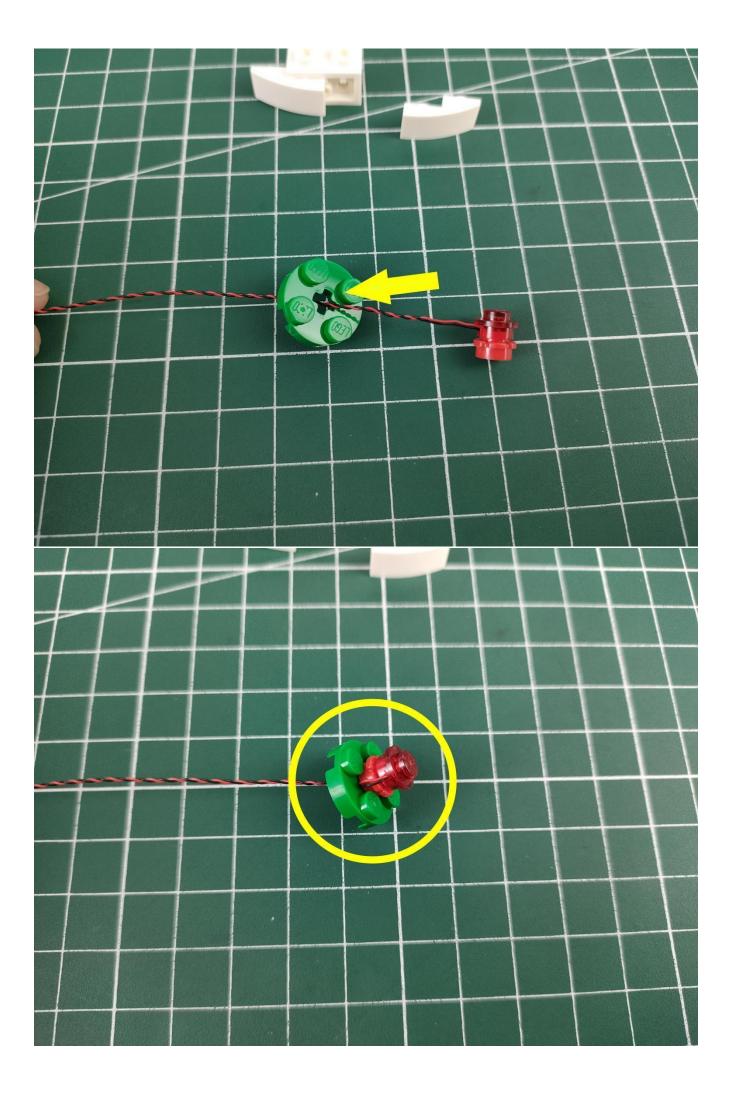


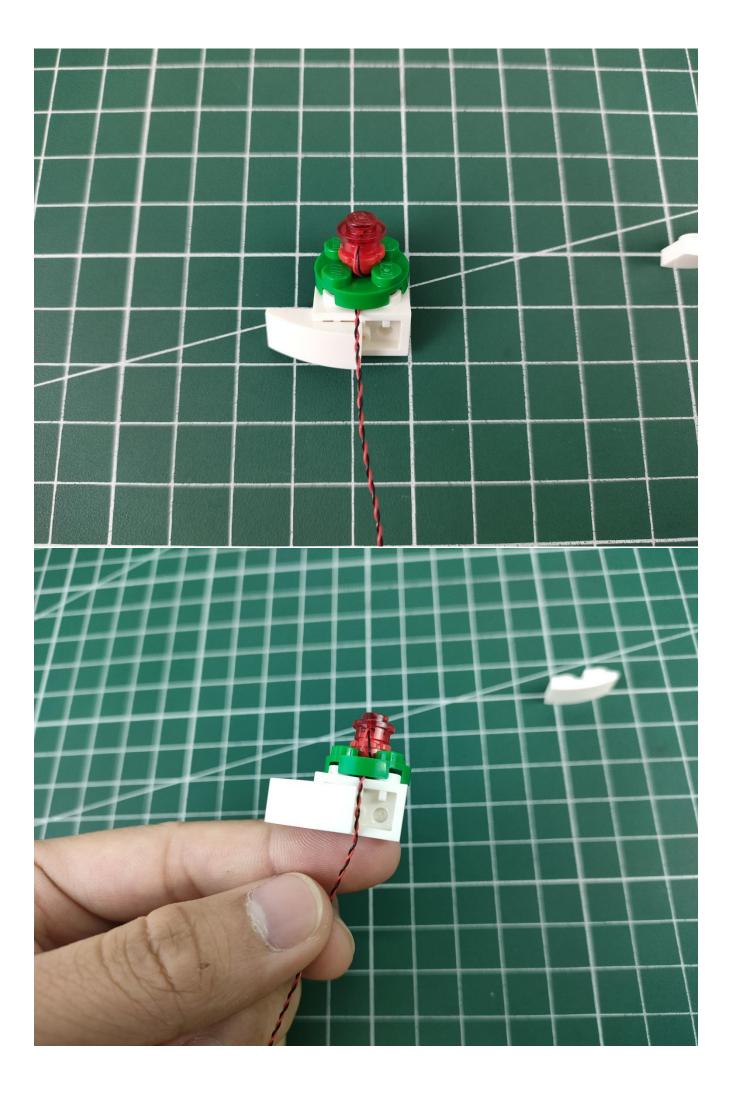


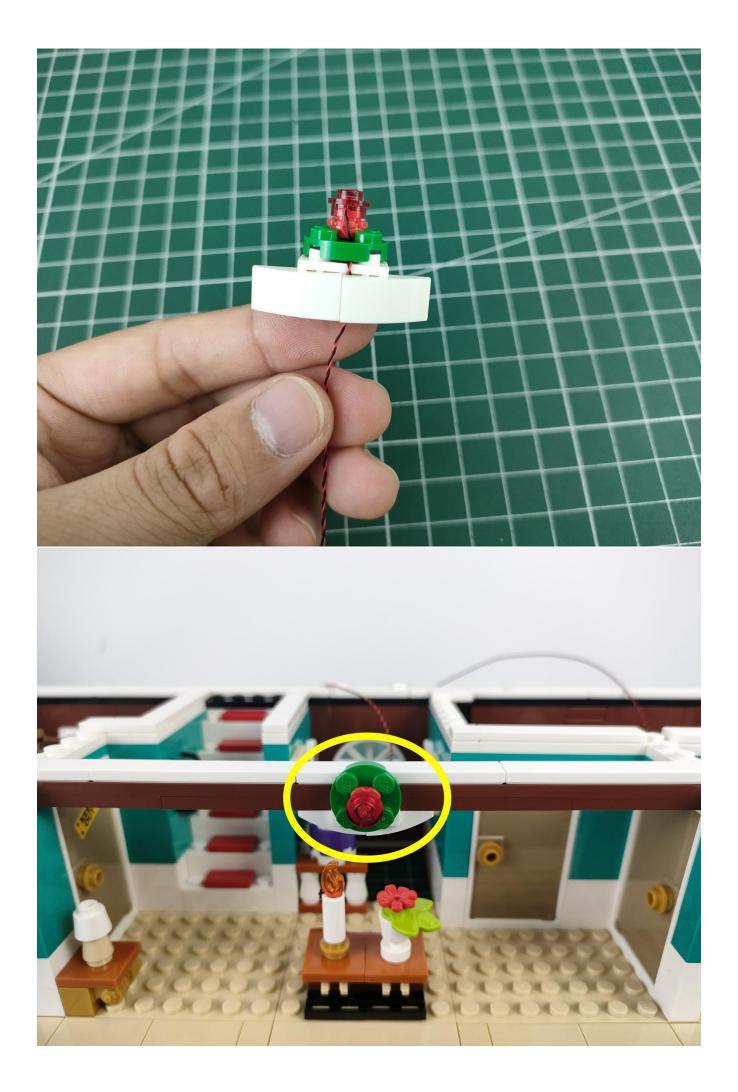


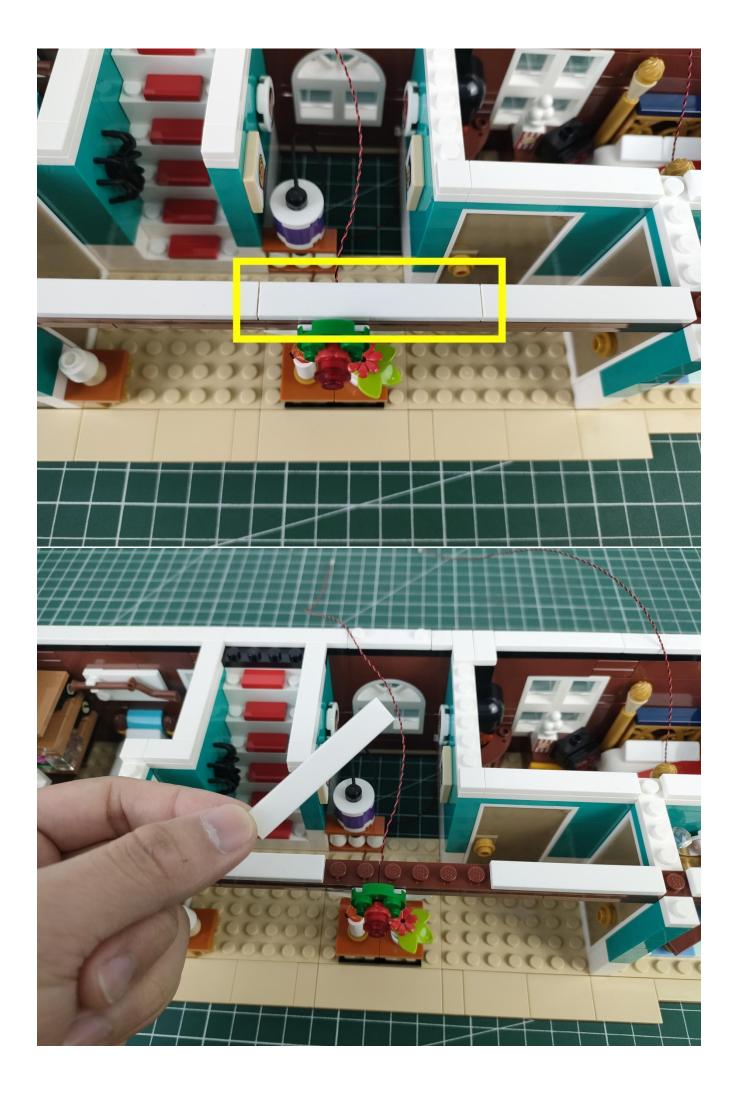


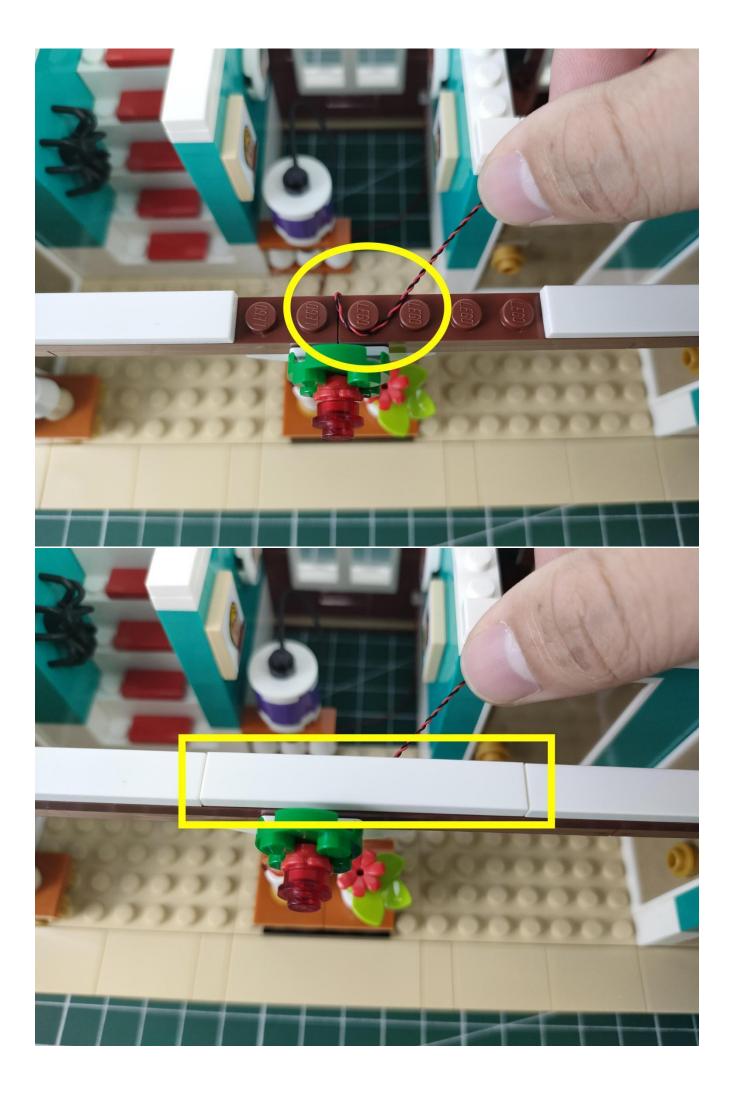

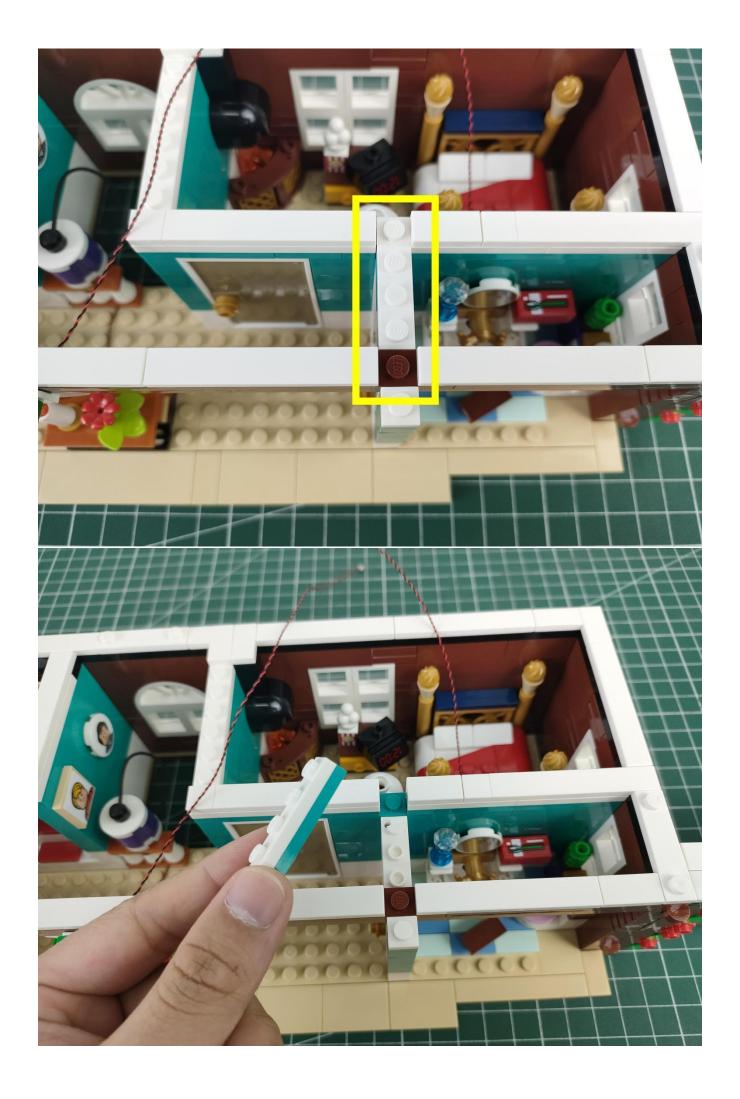


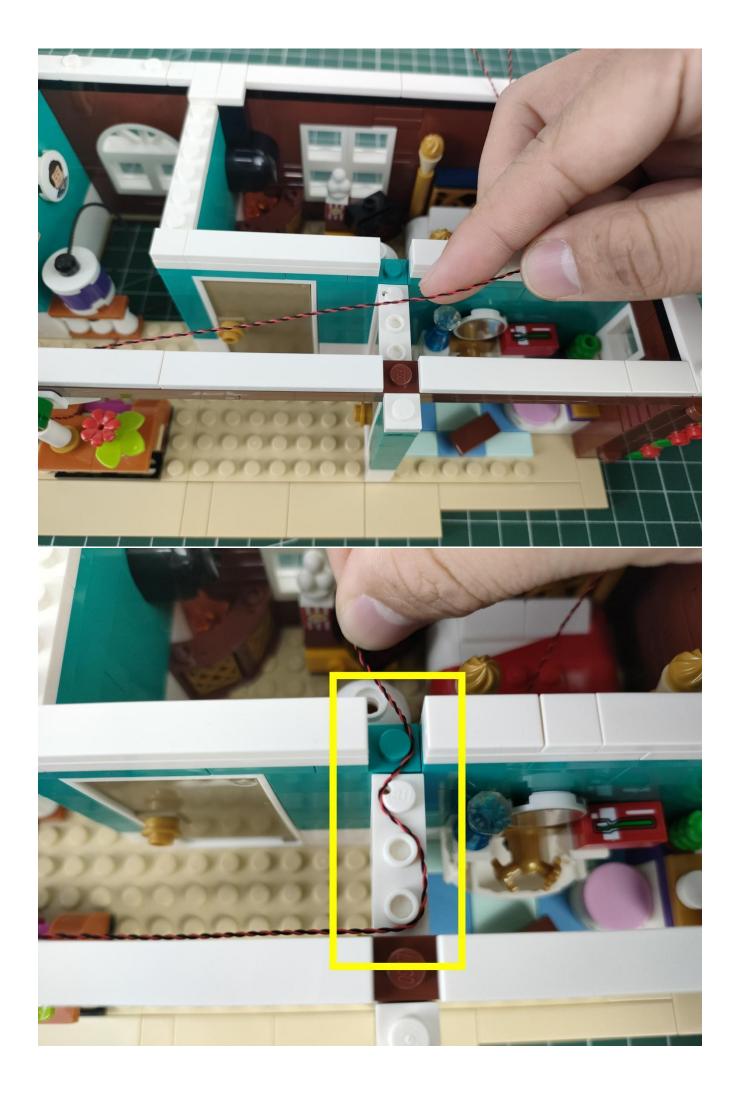


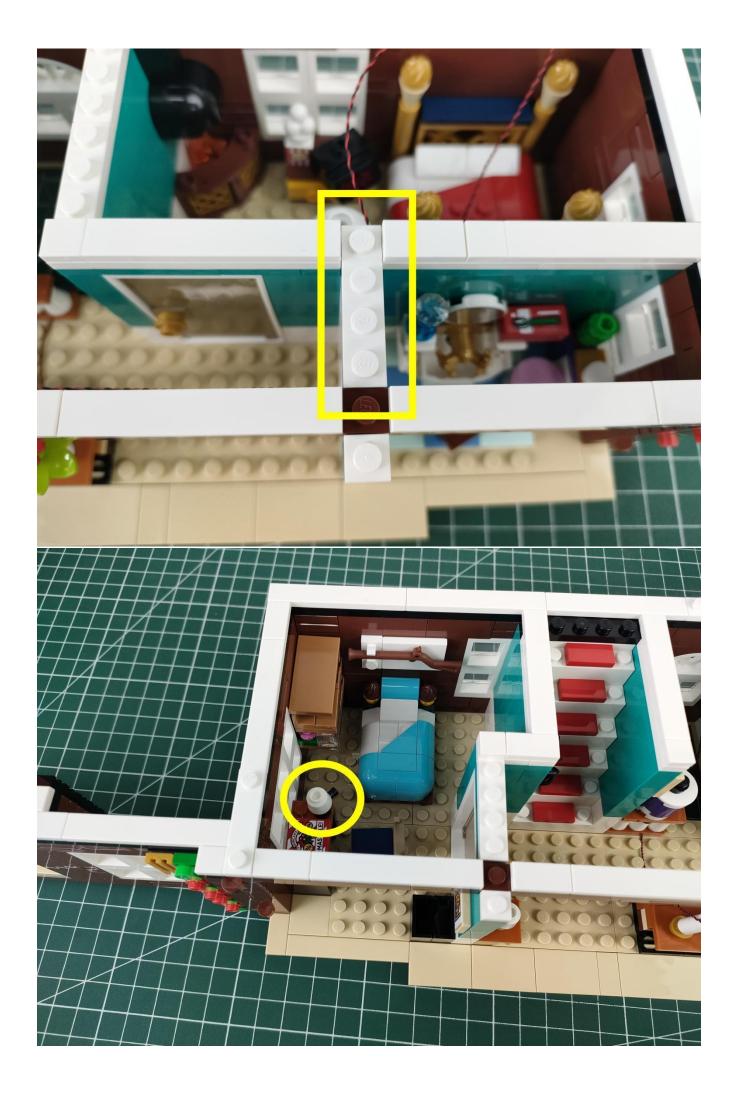


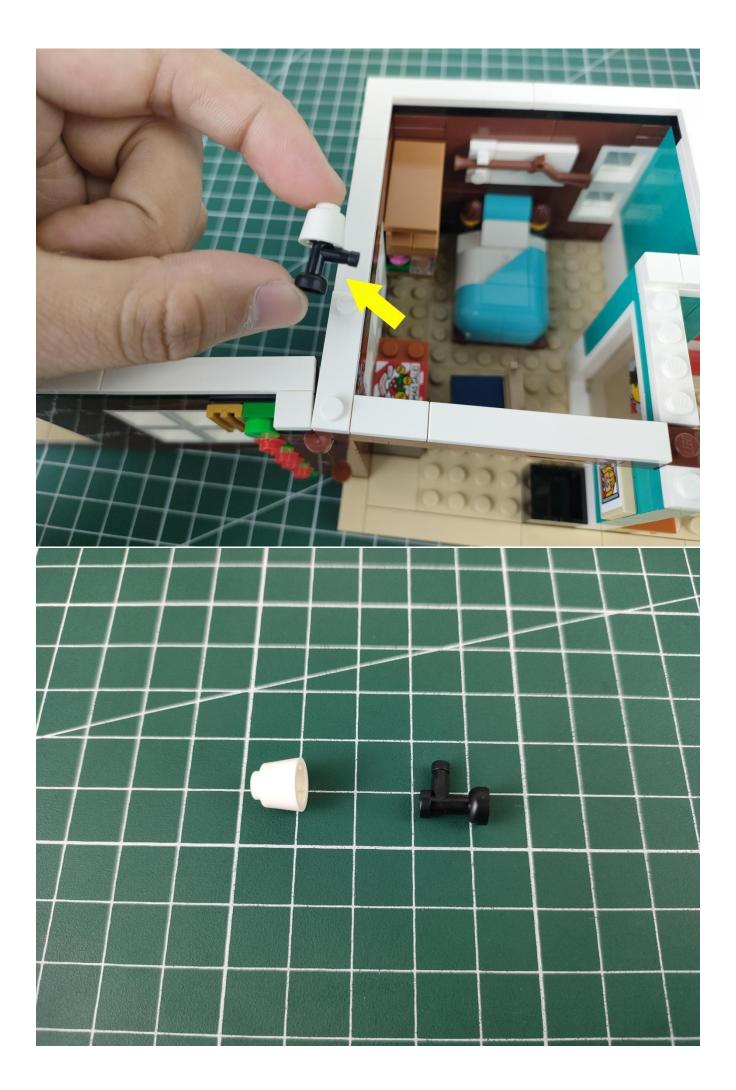




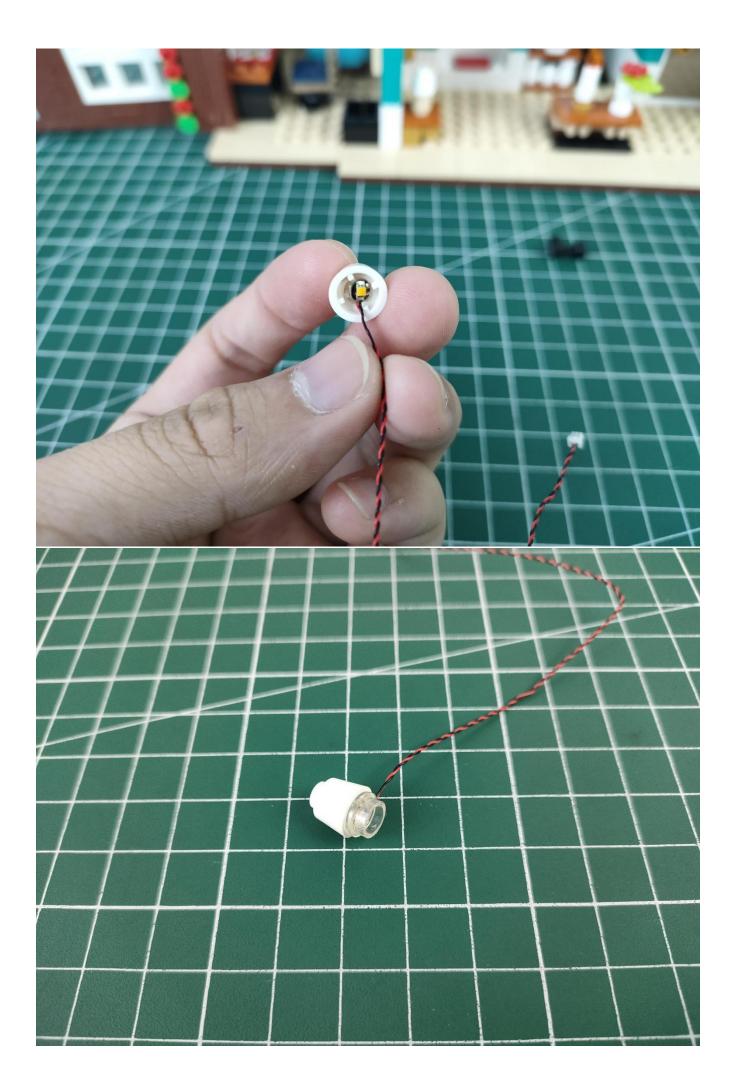


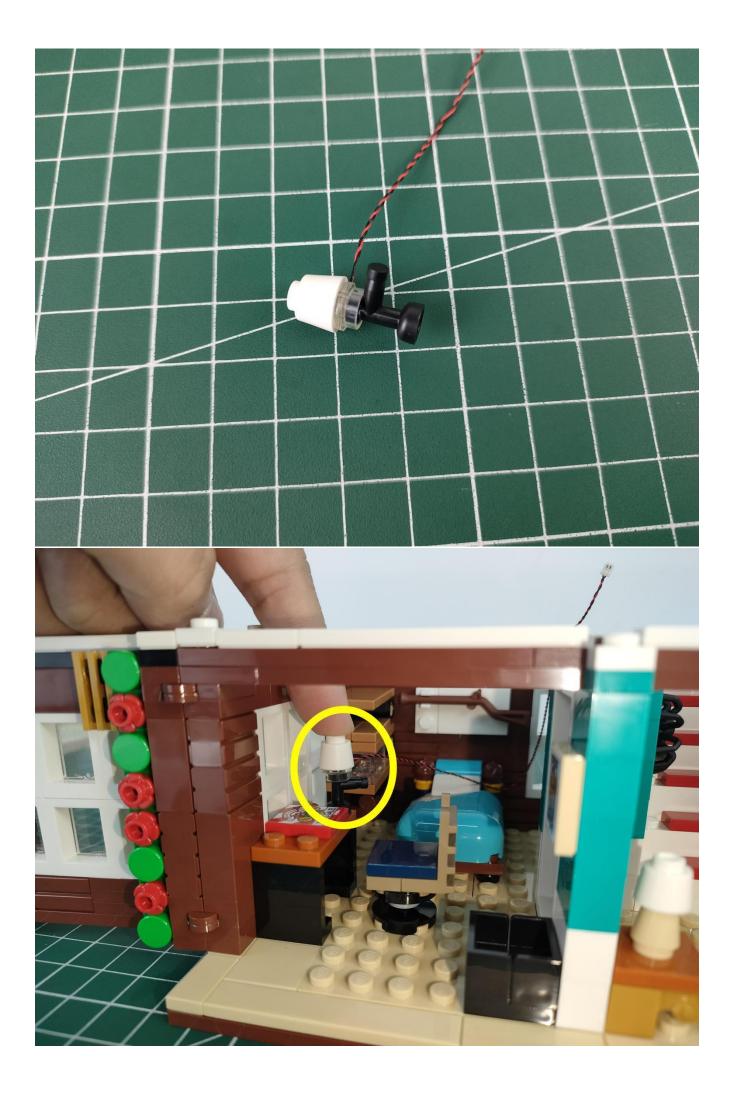


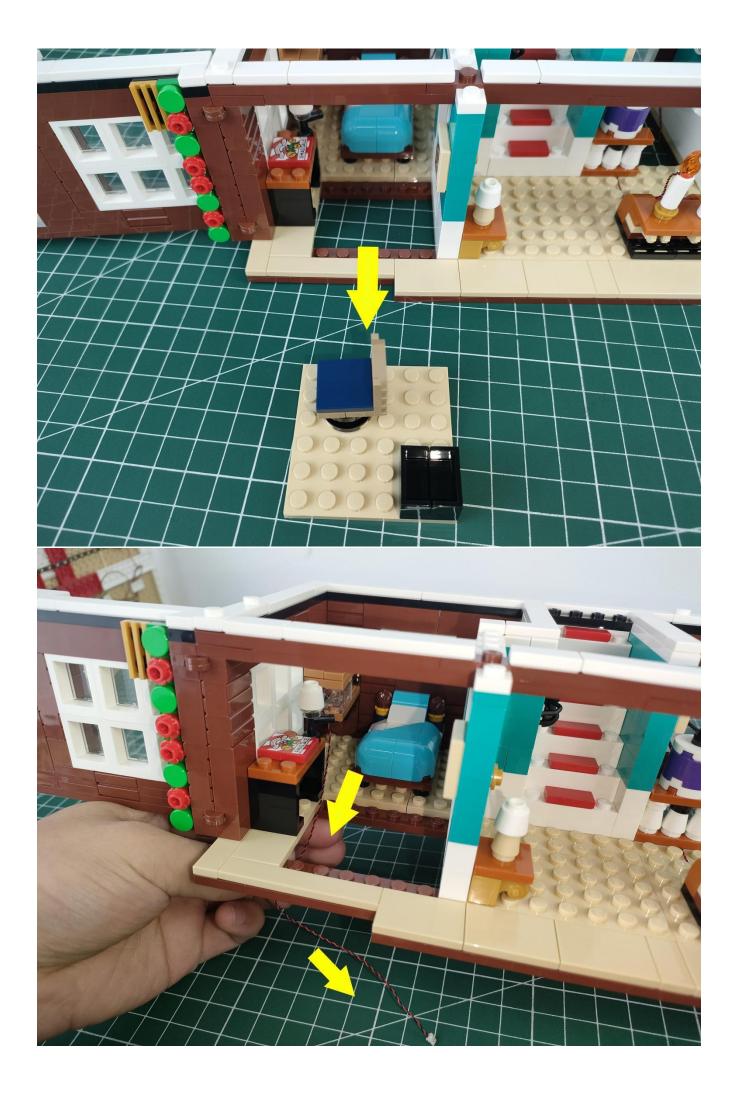


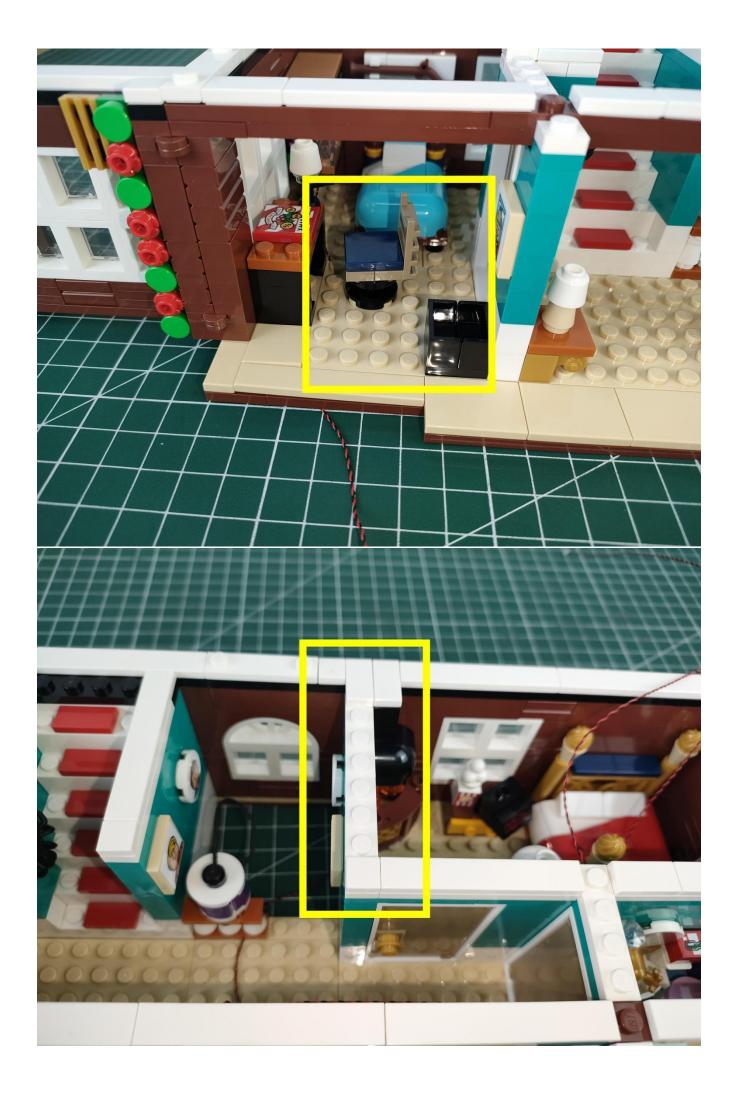




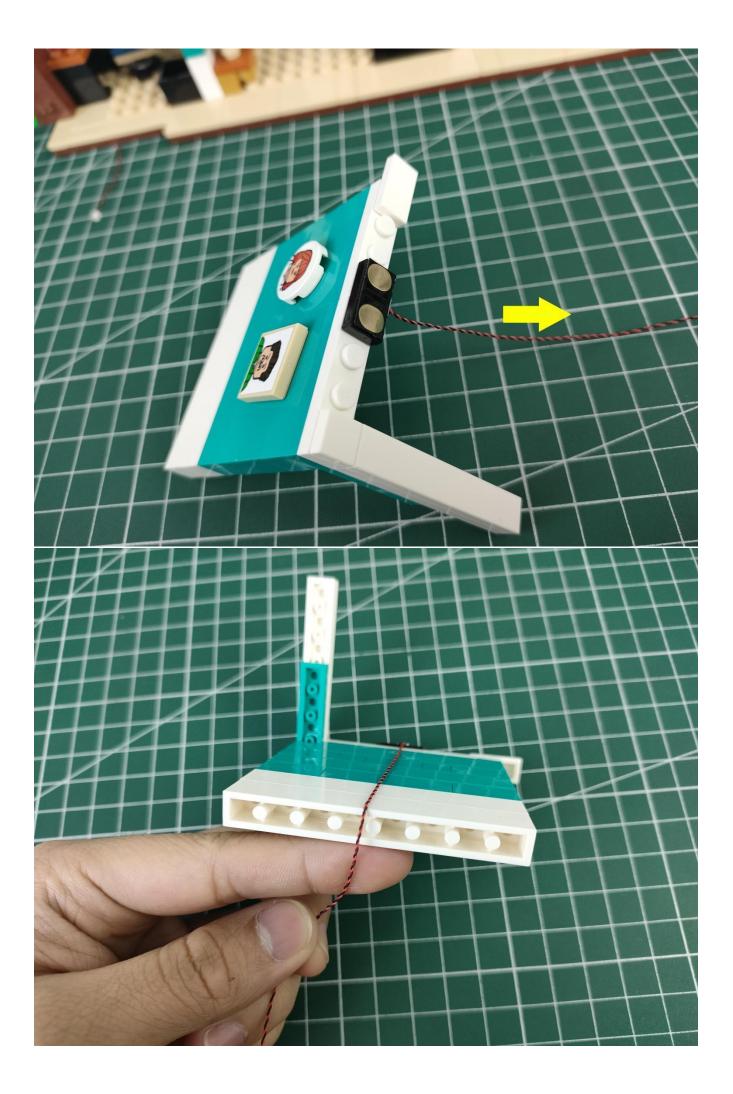

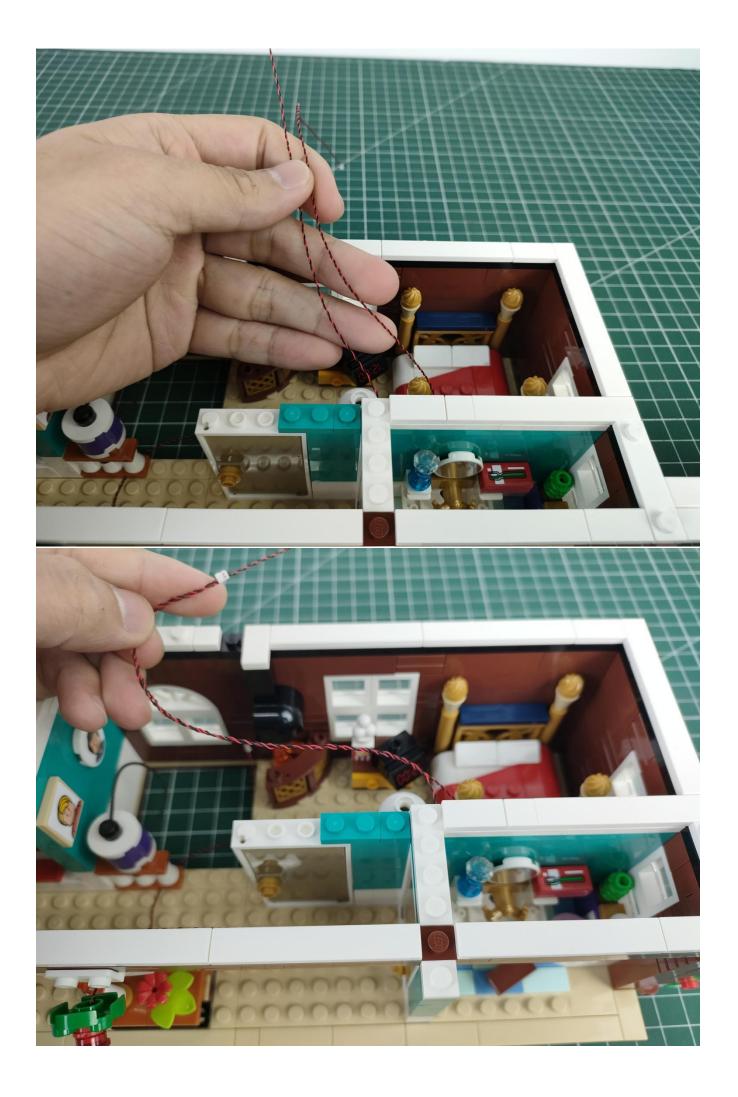


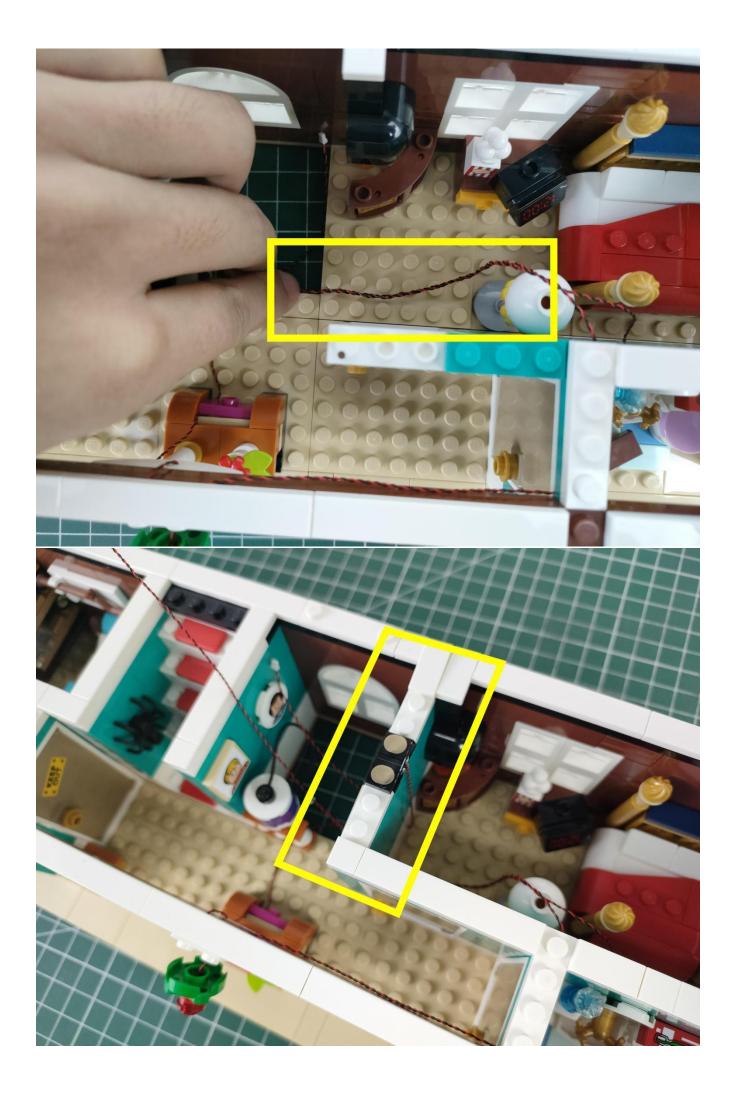


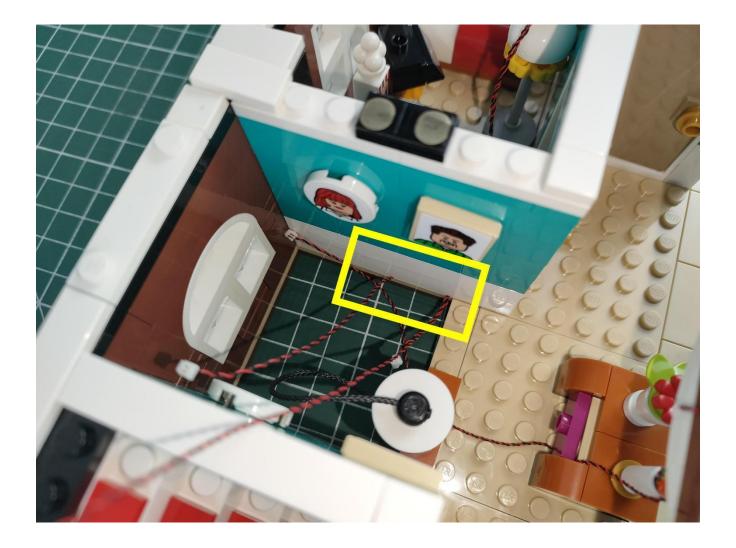


Pull the wires all down.



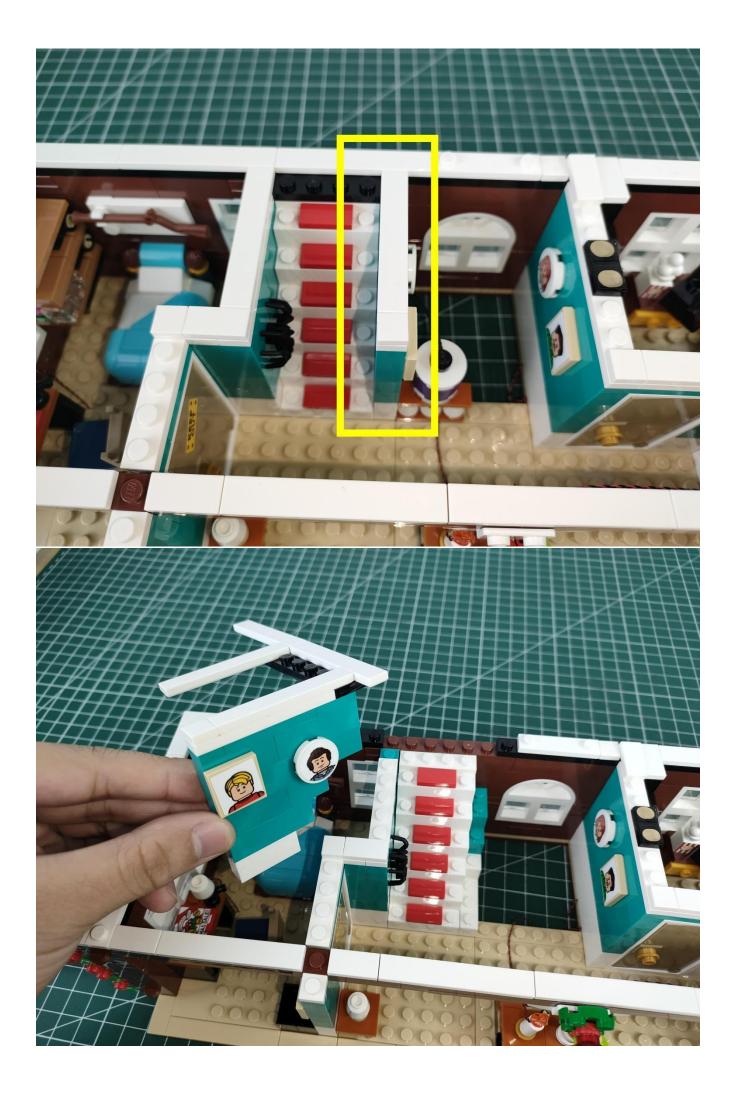


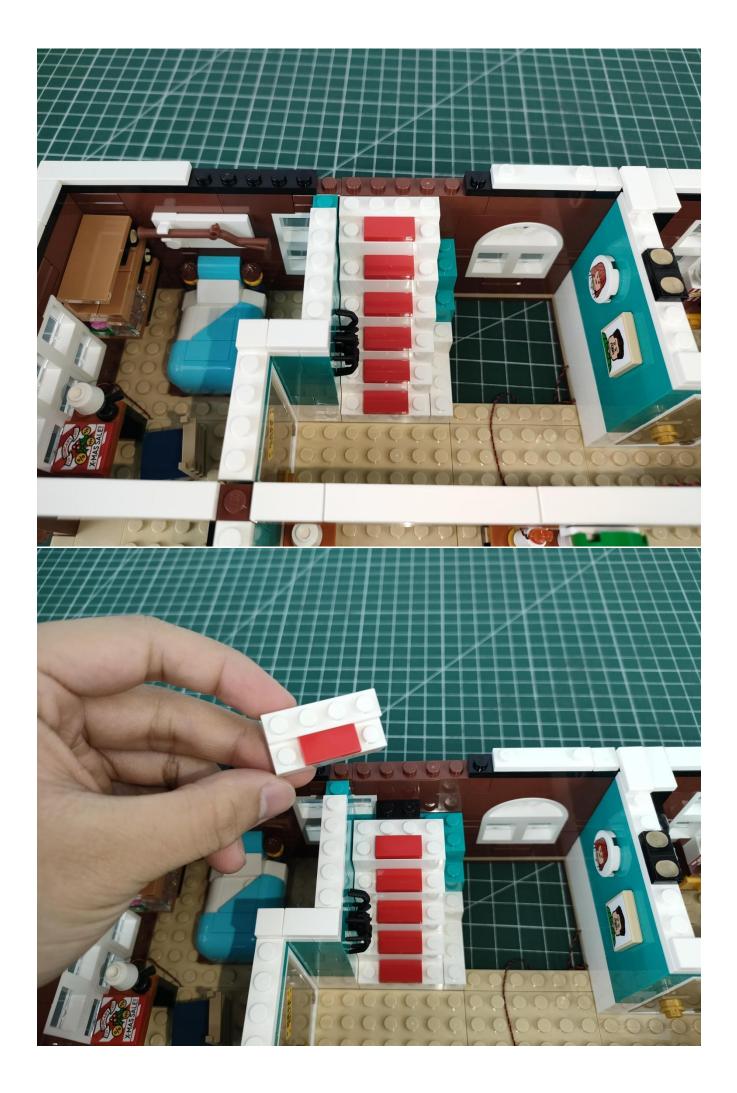


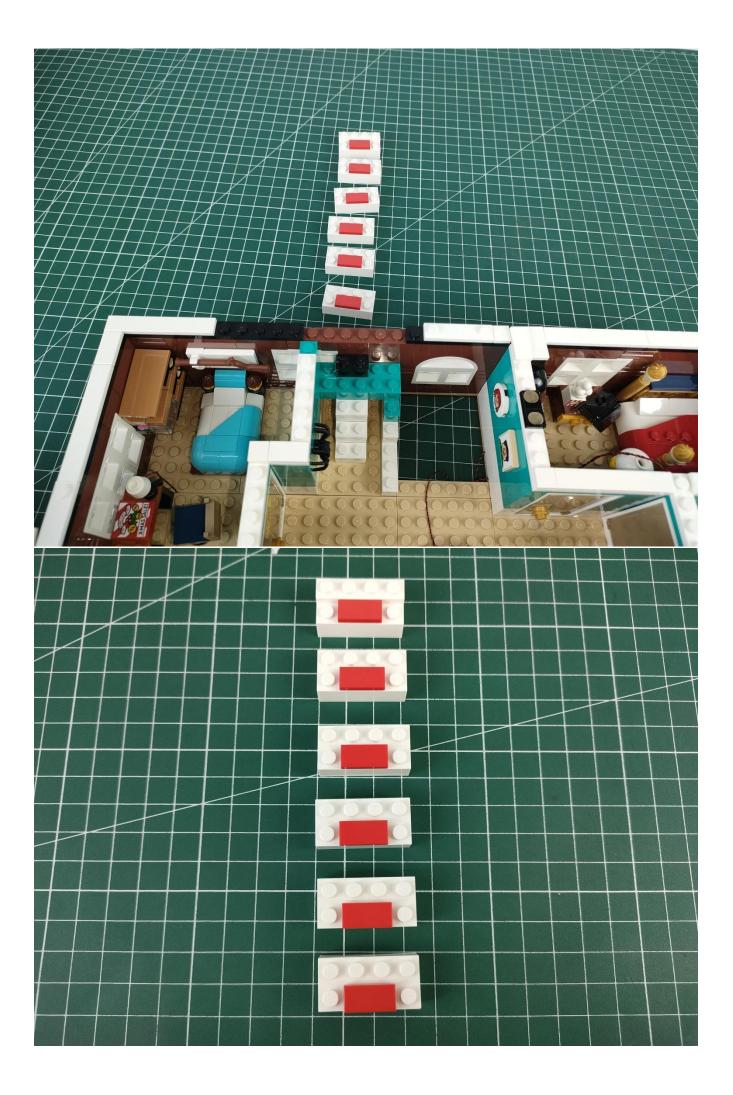








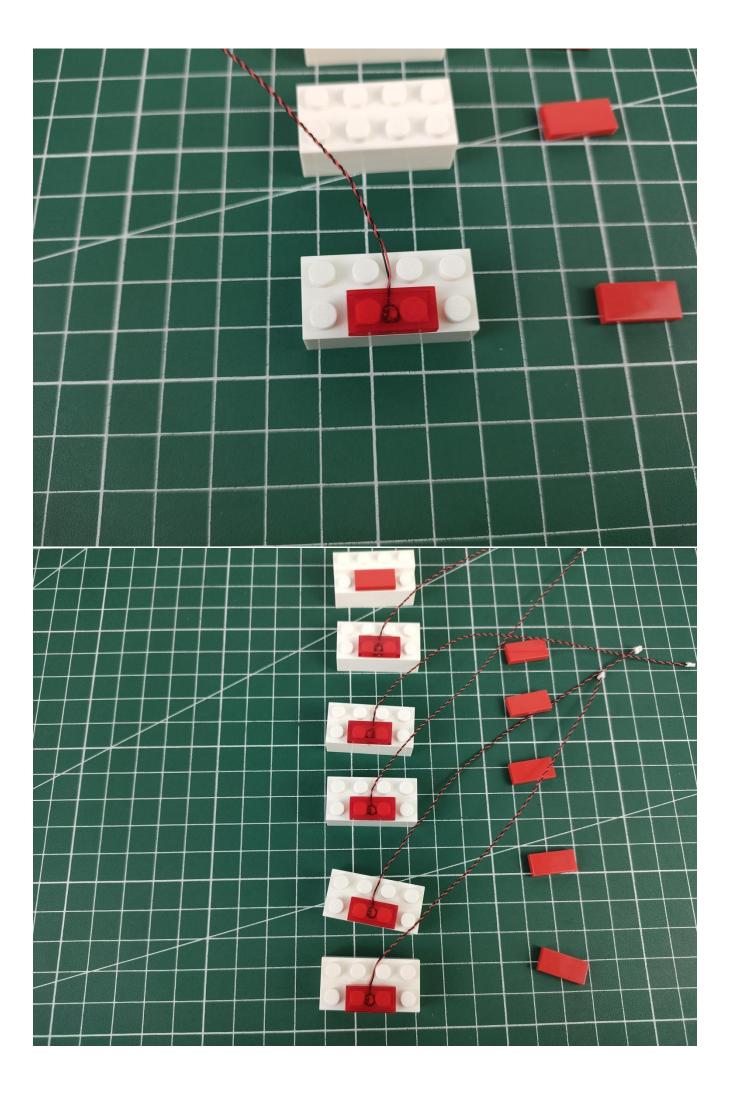

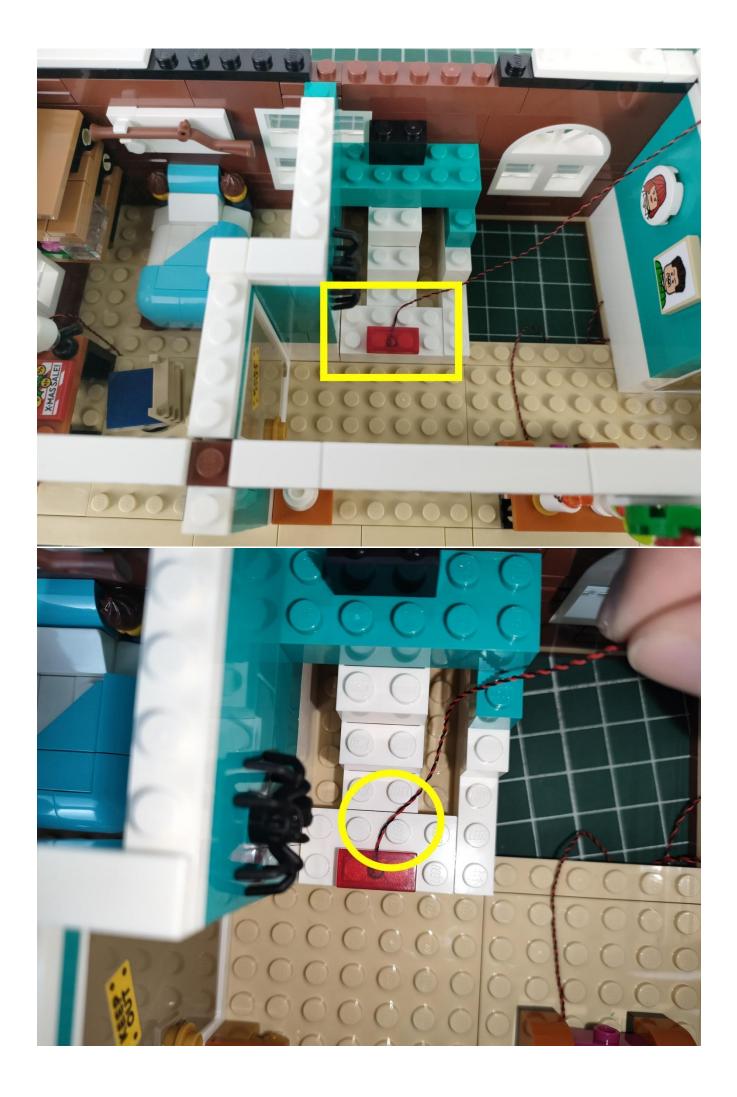

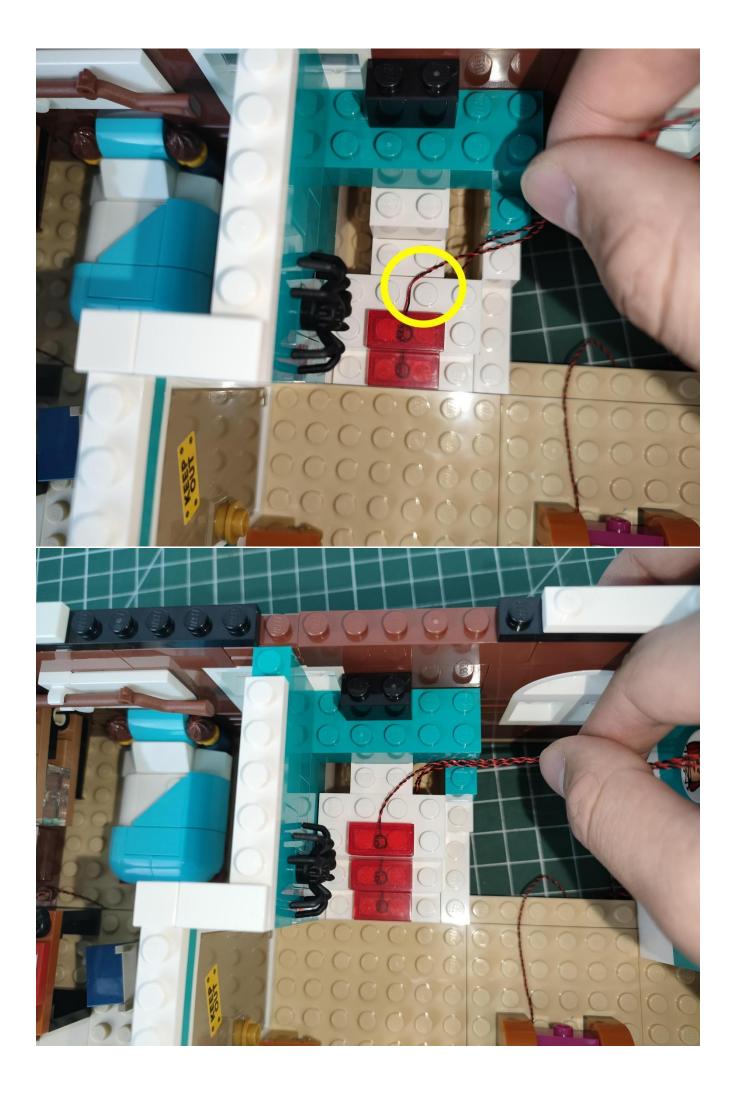


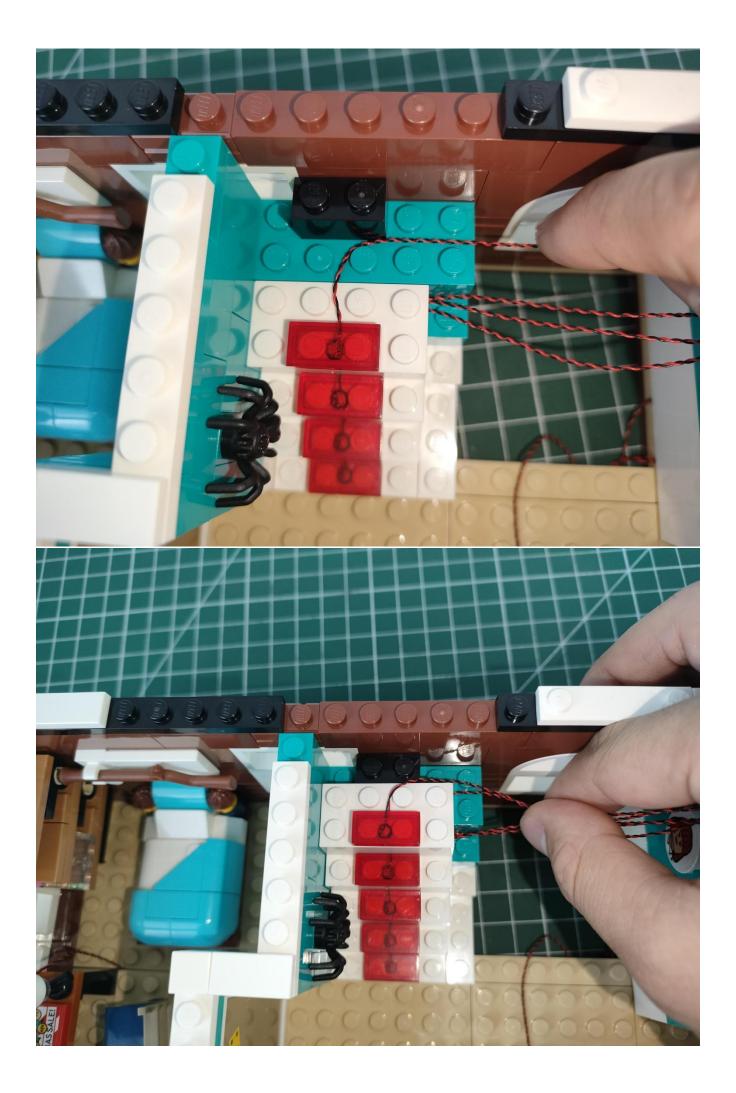

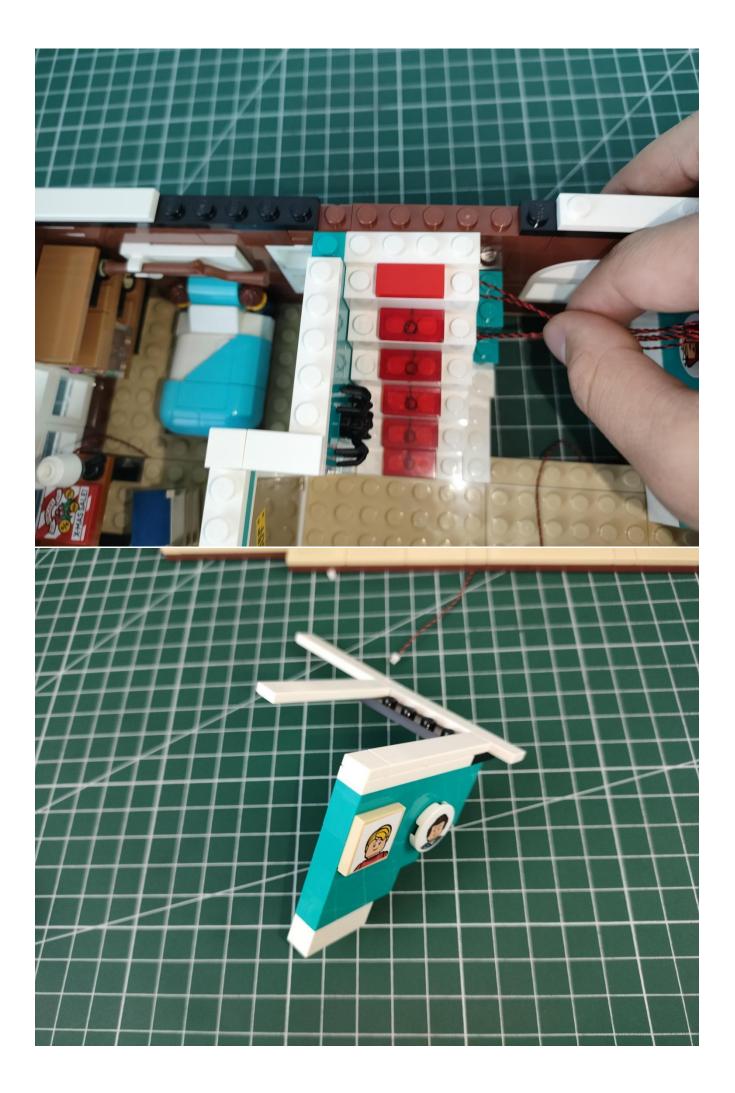





Pull the wires all down.

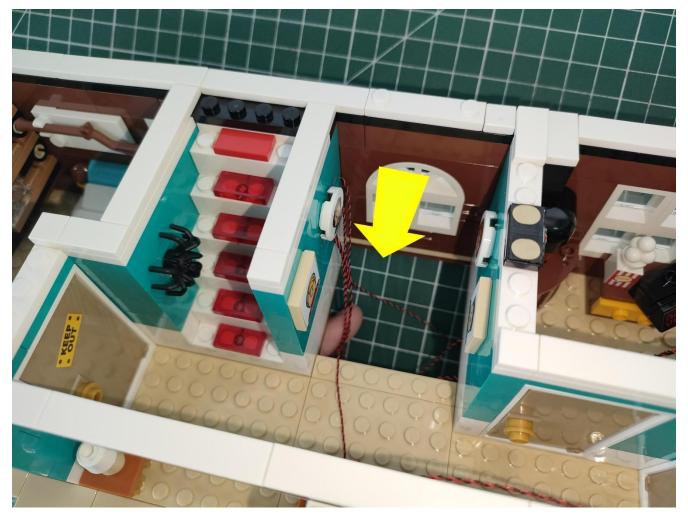




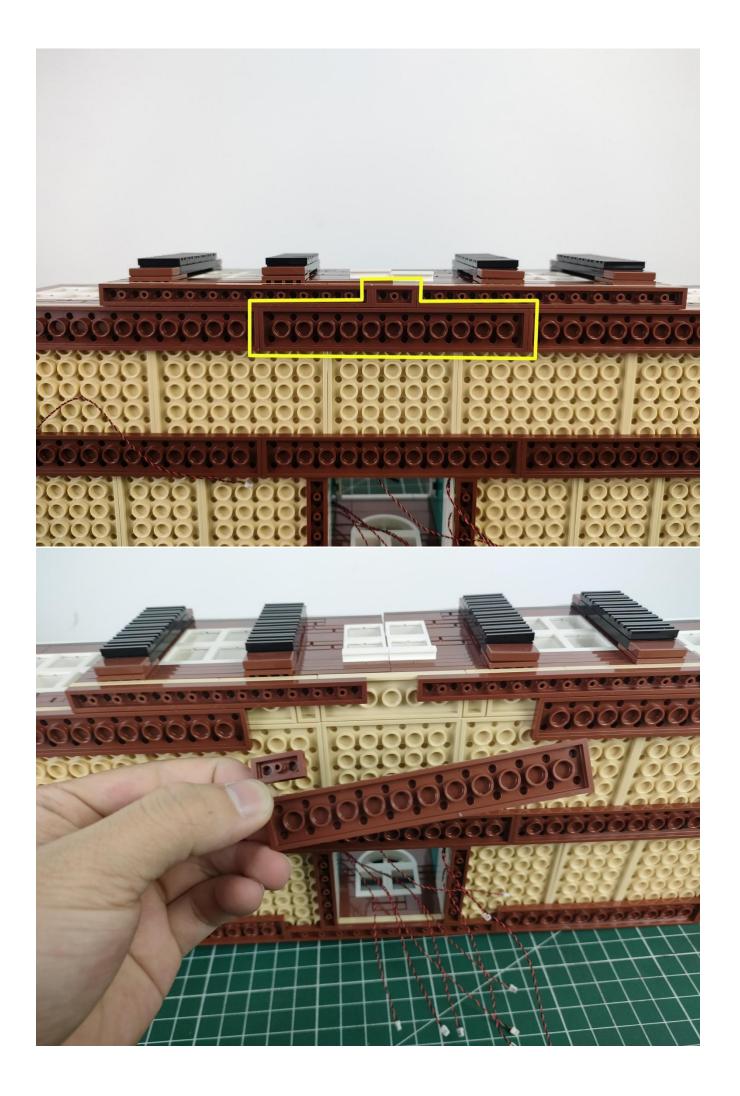




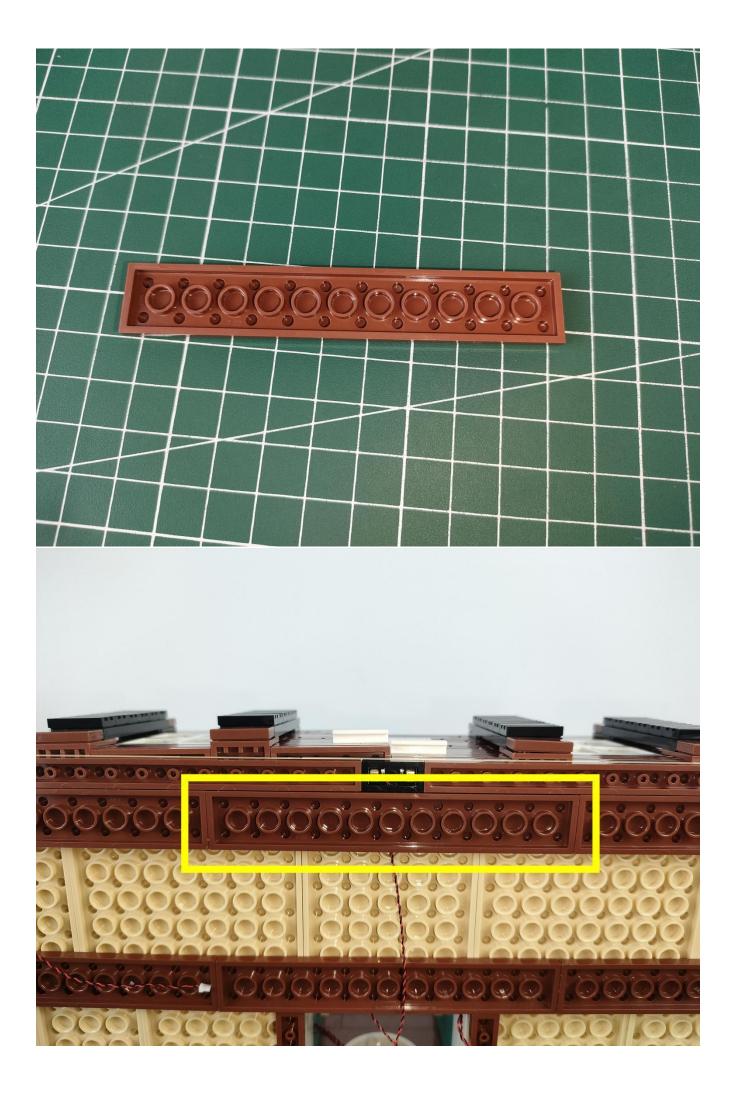





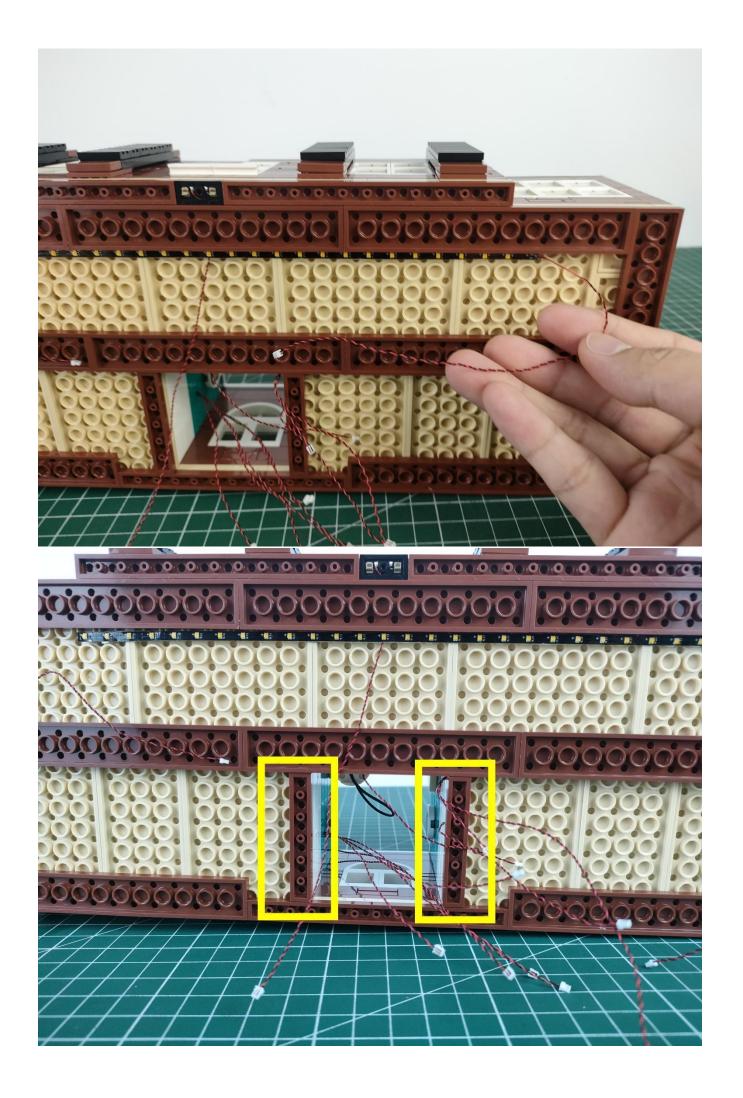




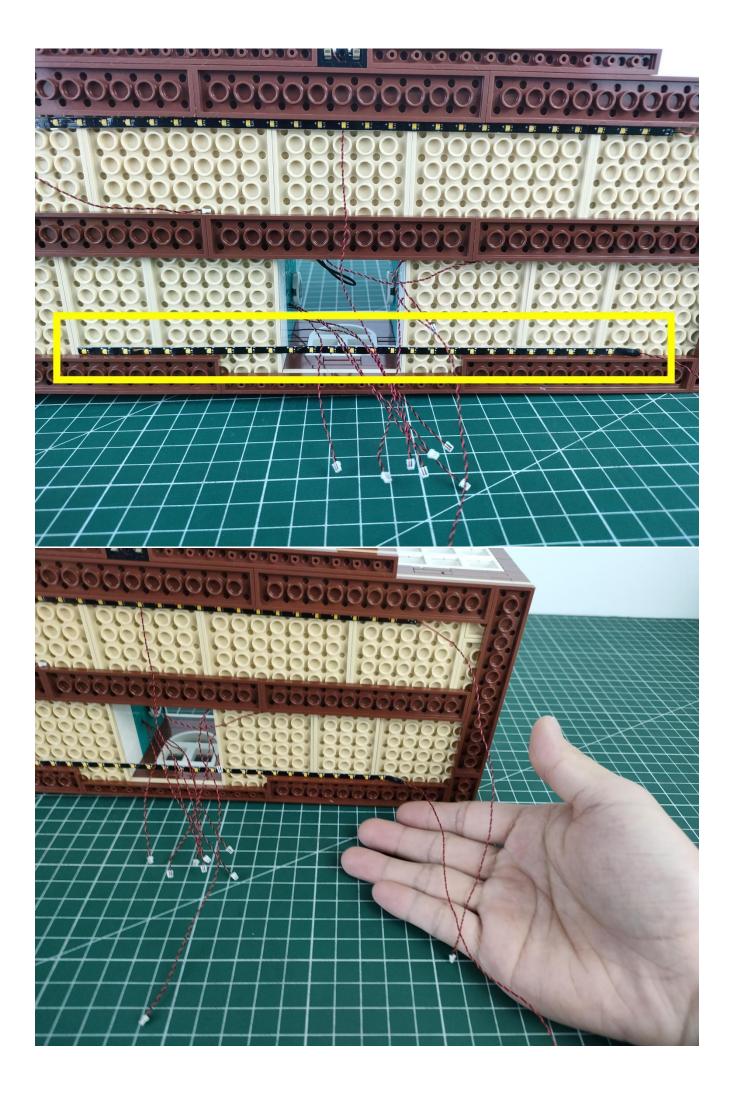


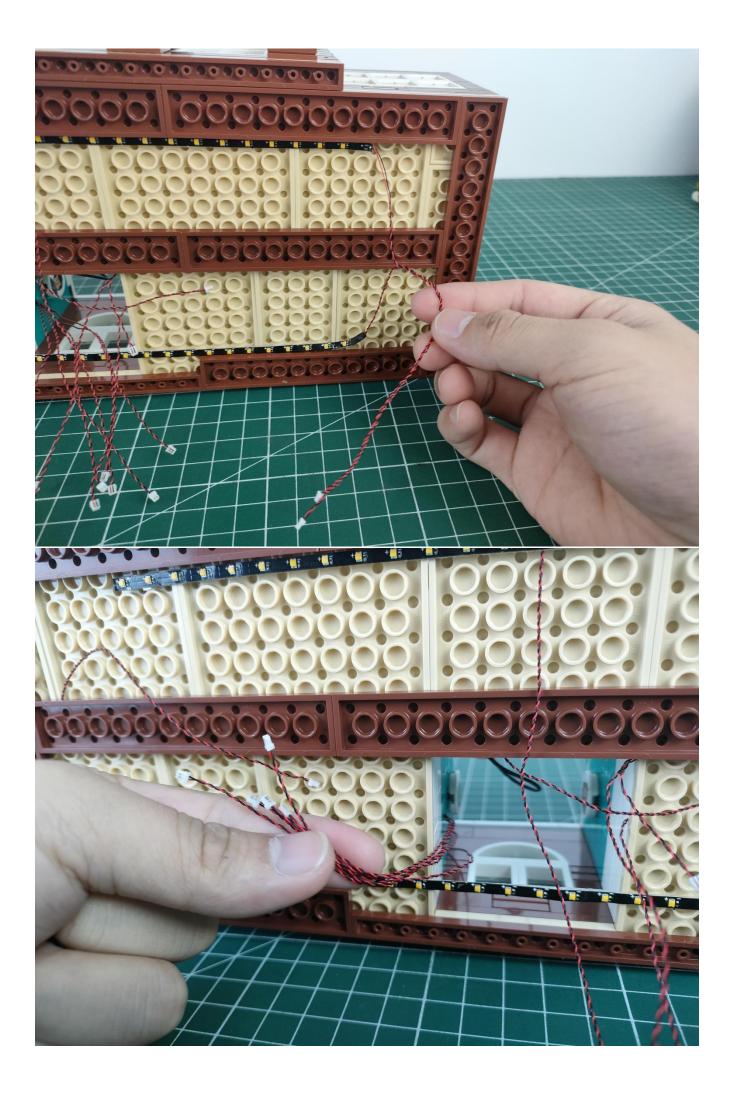

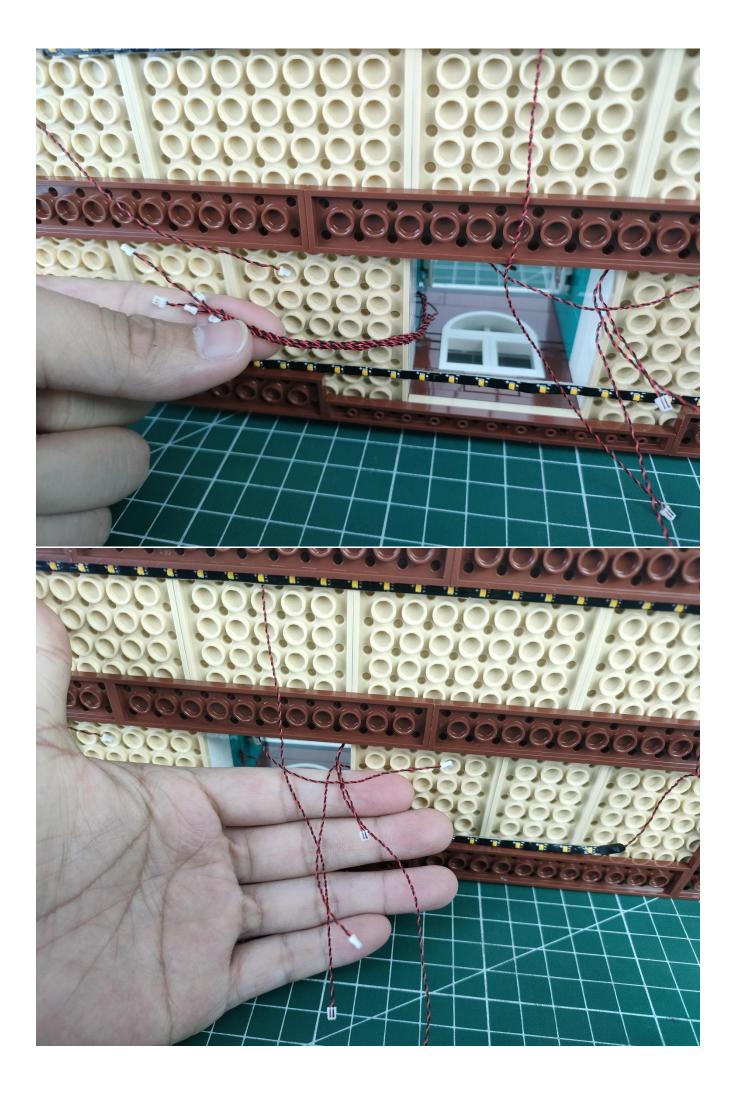




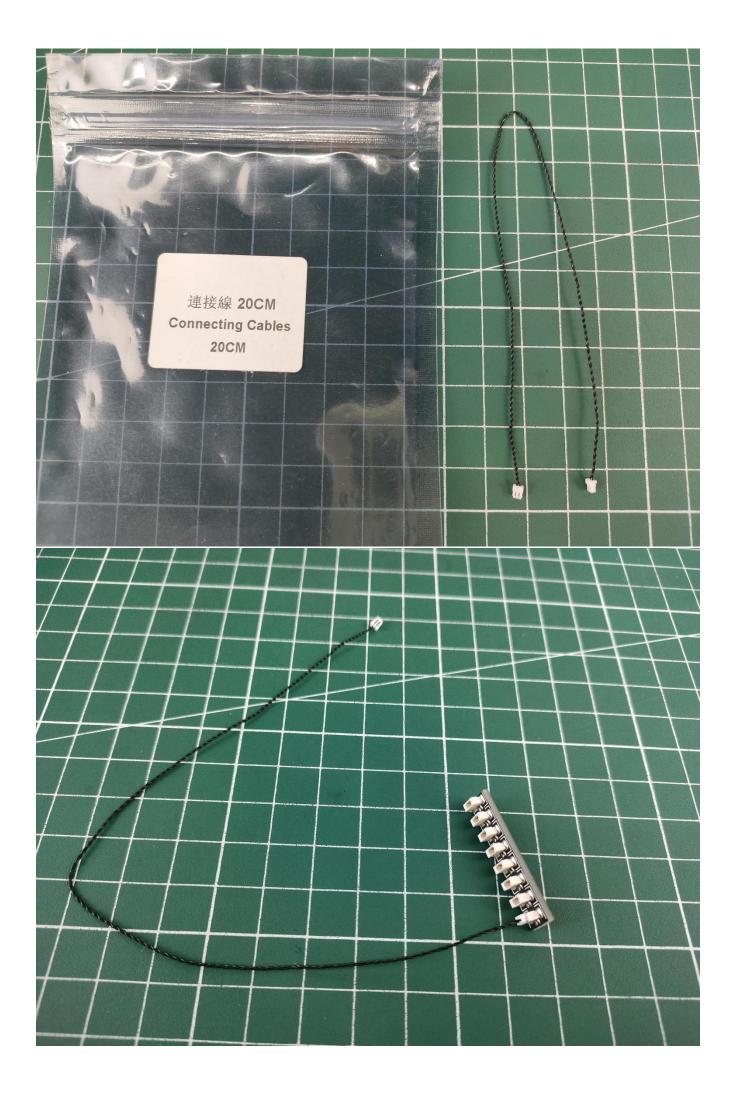

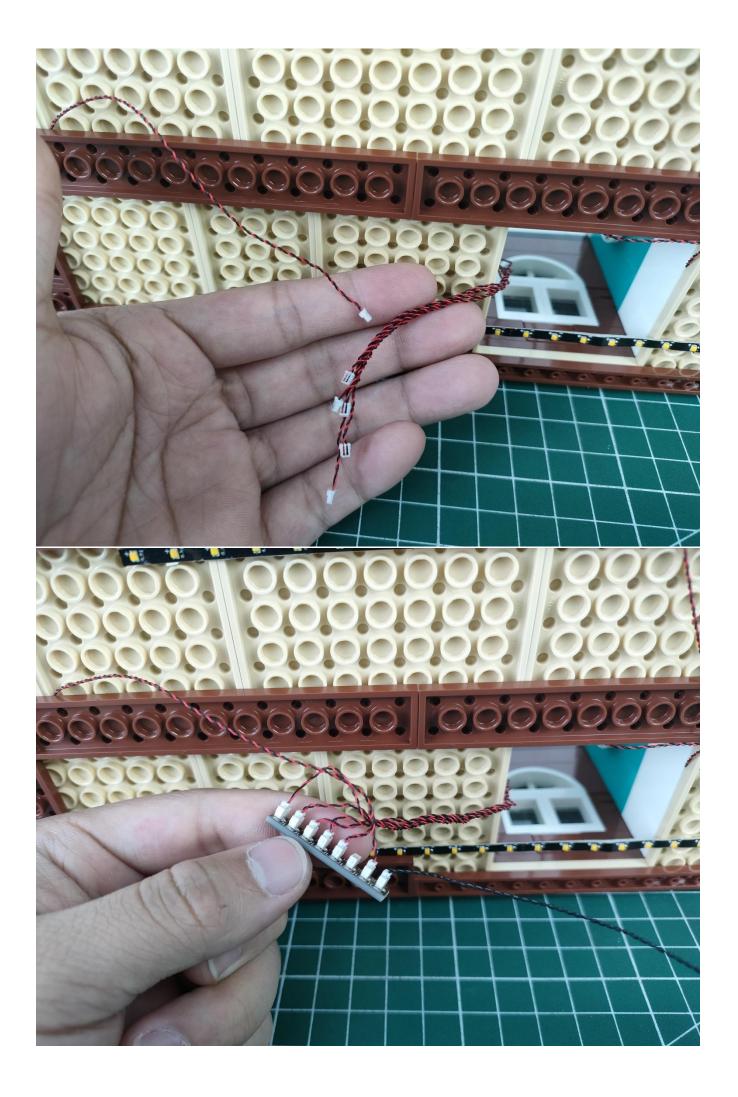







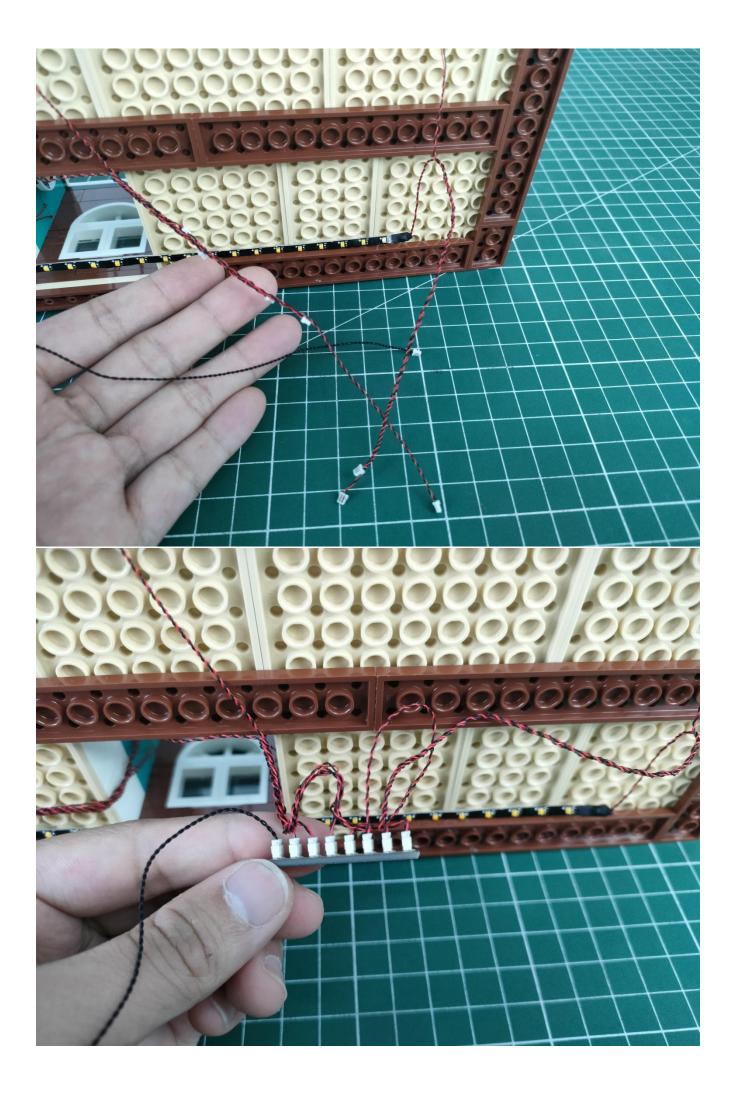



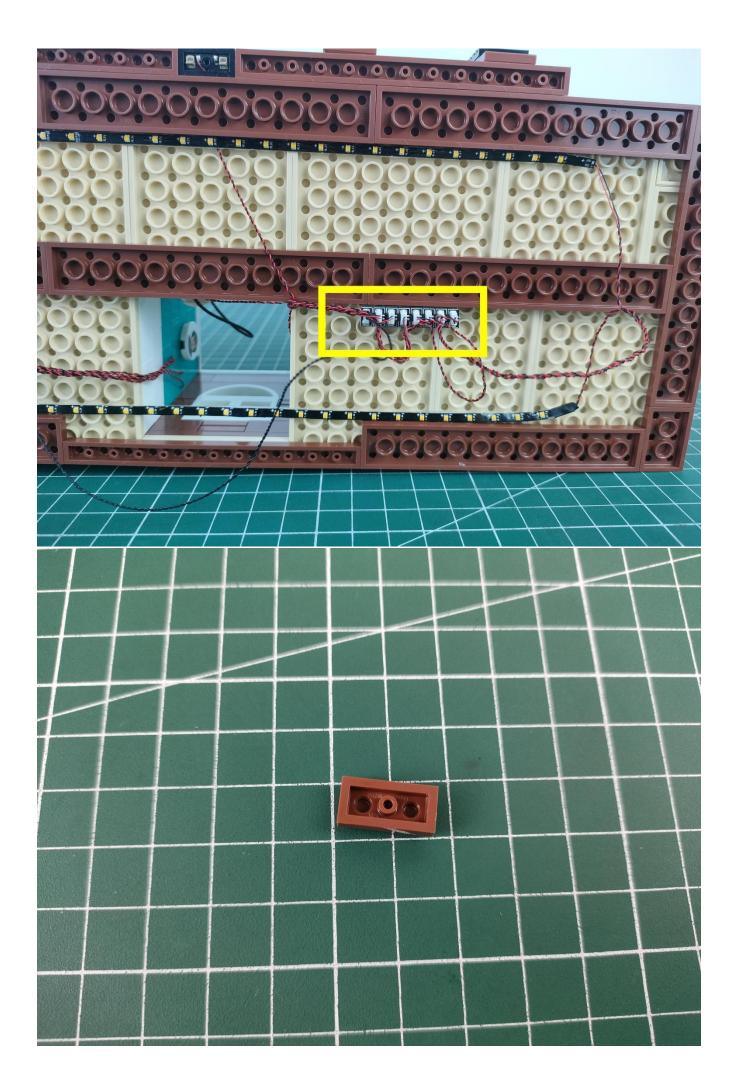


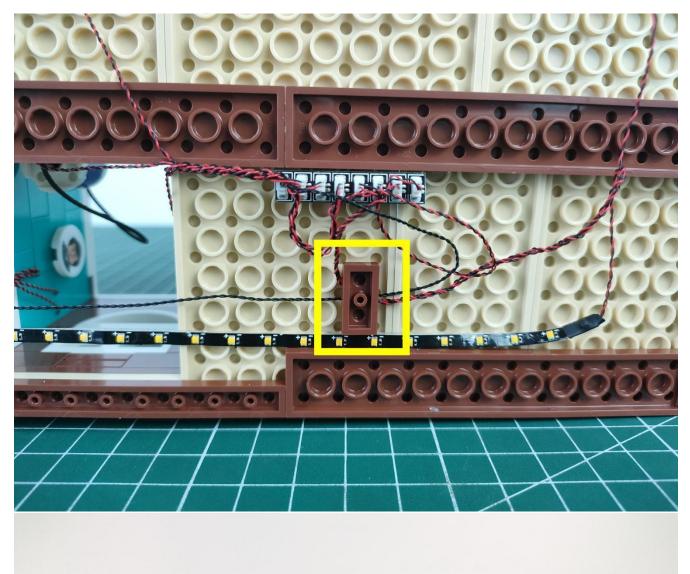











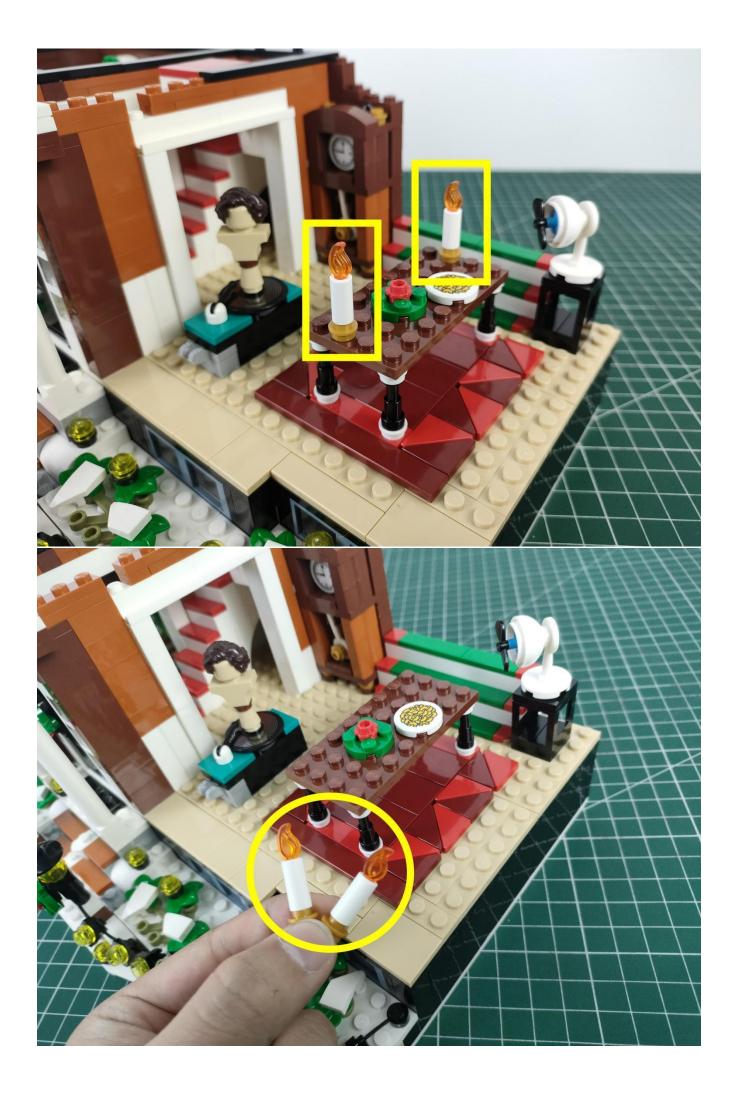

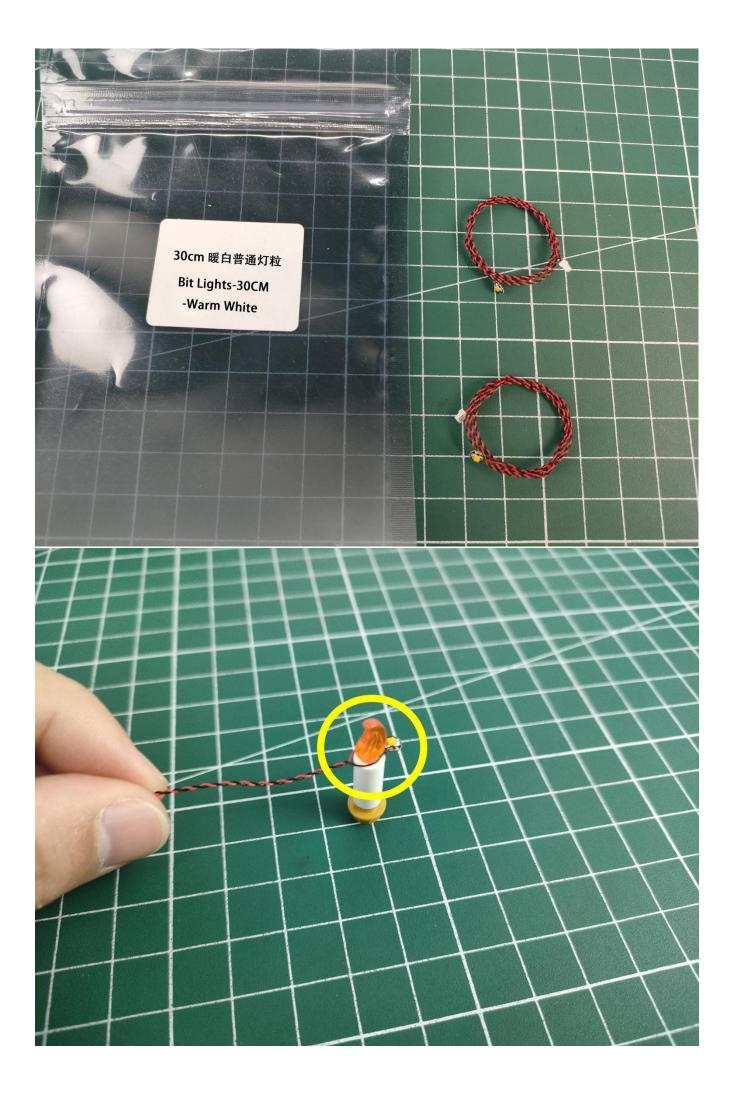

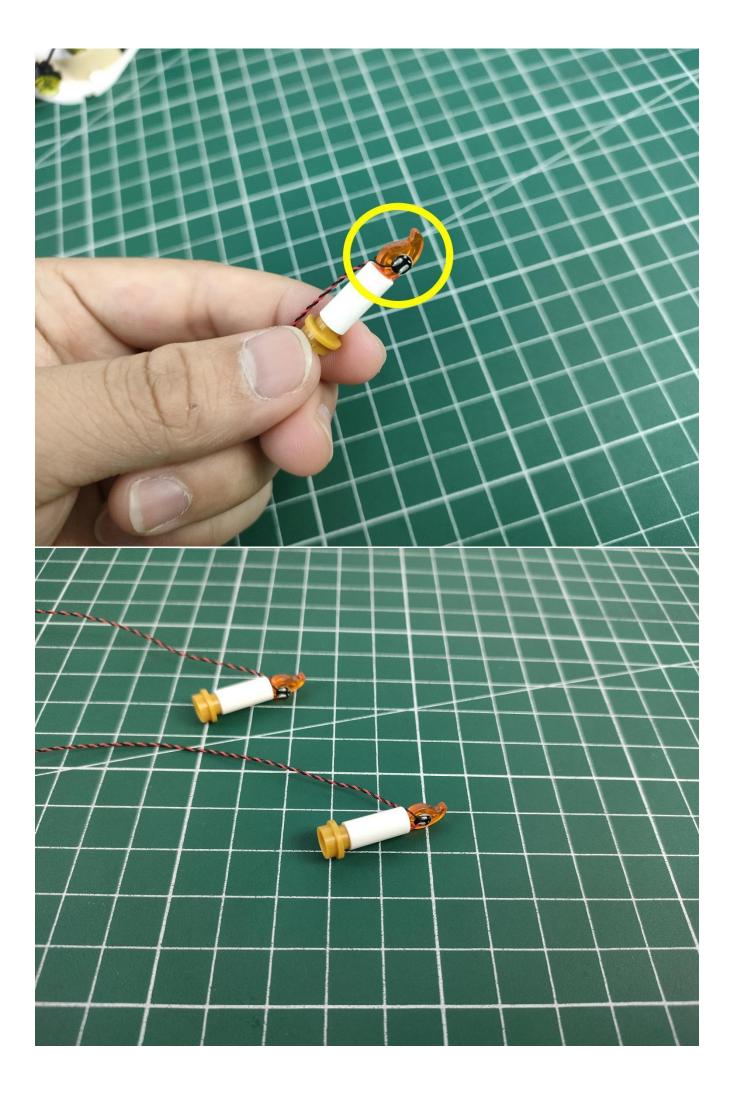

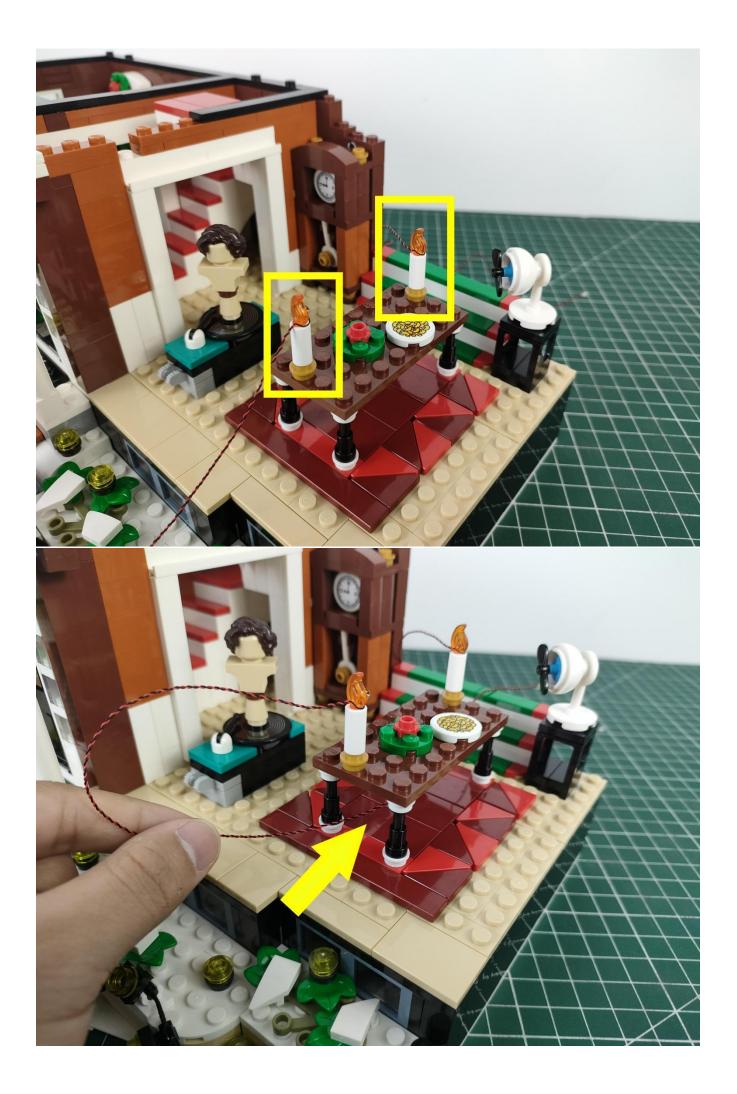


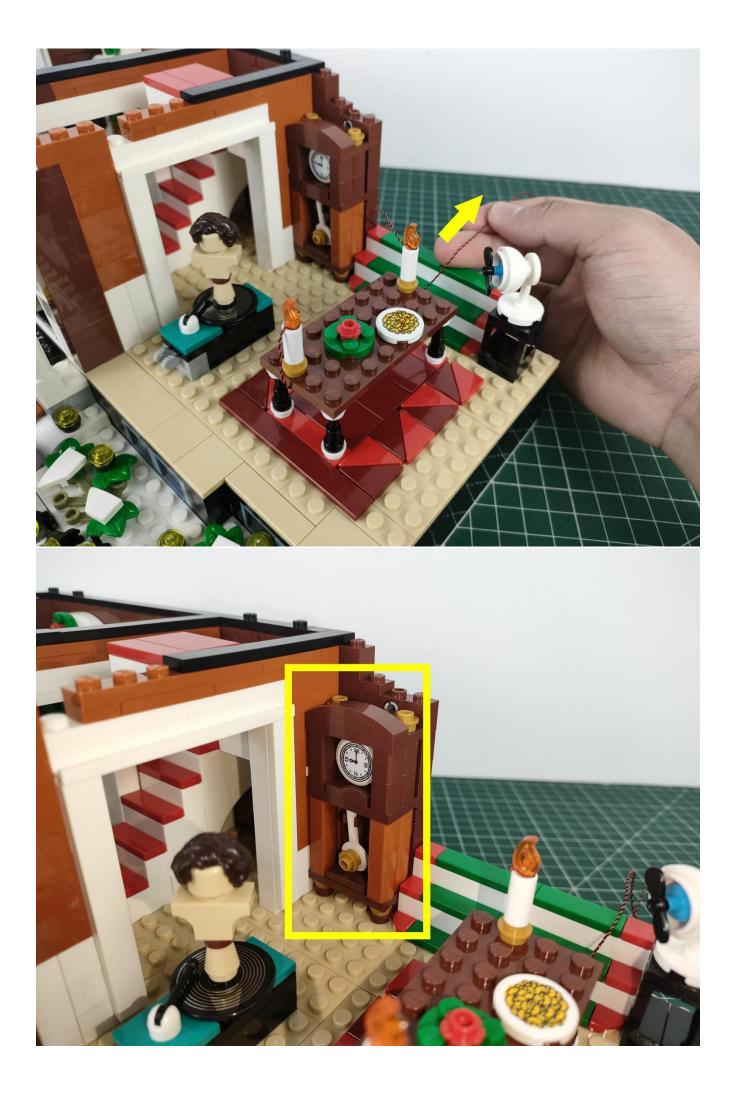











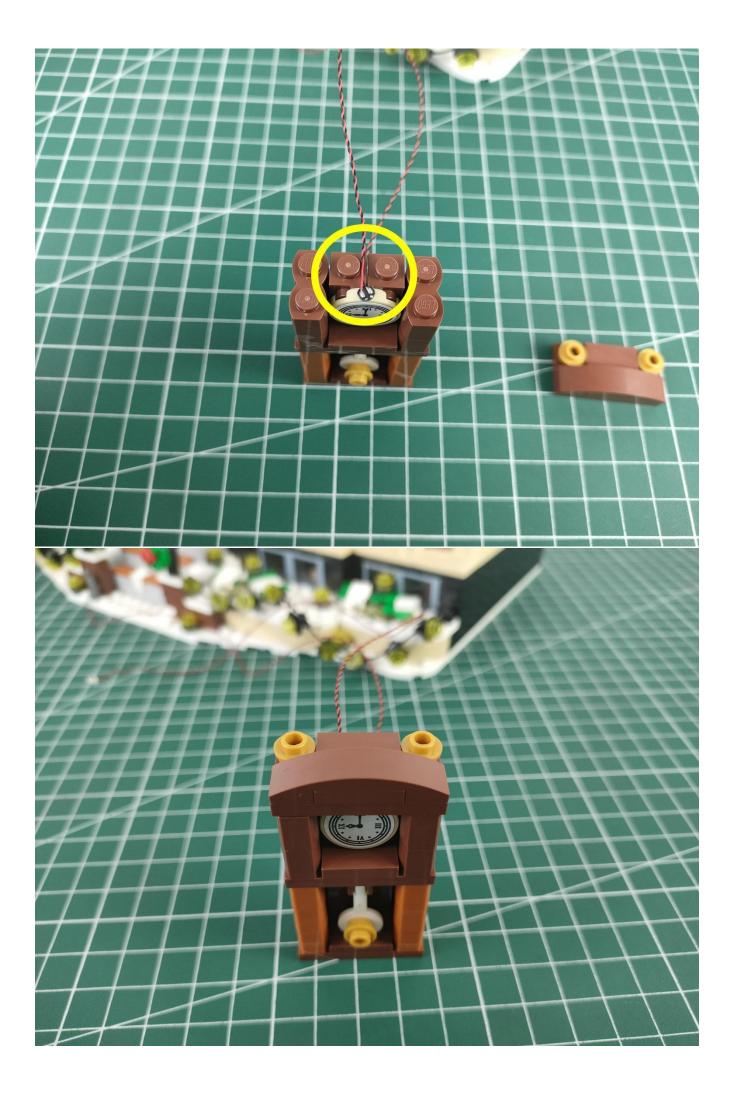

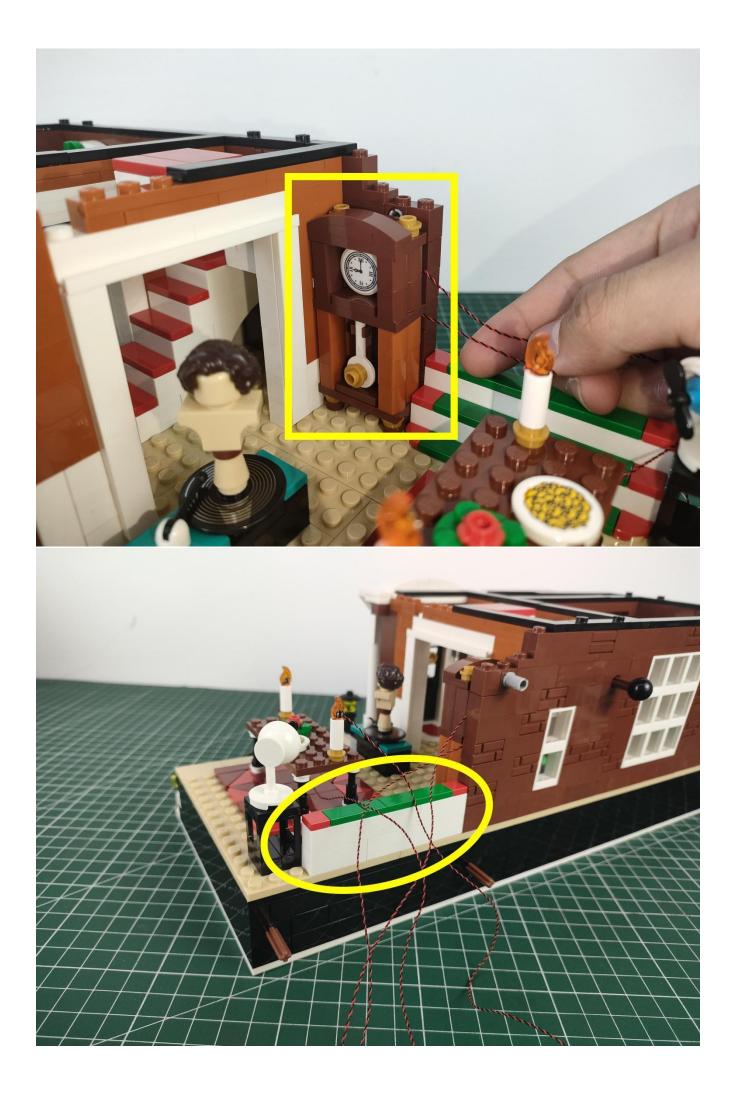


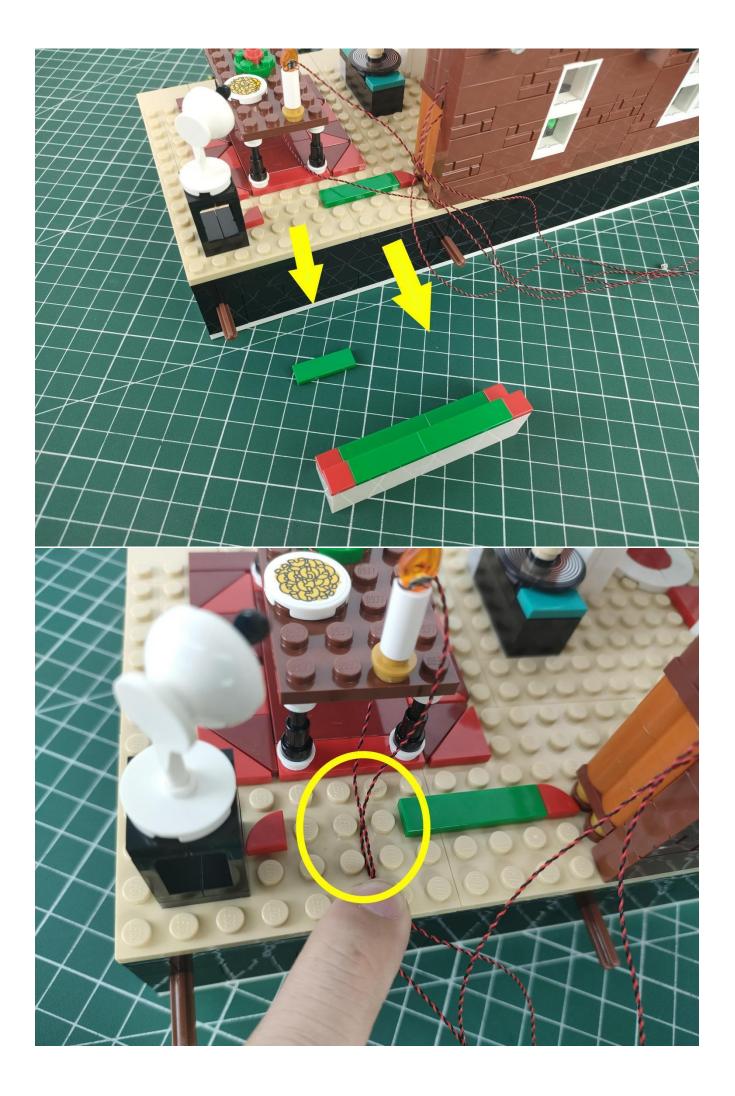

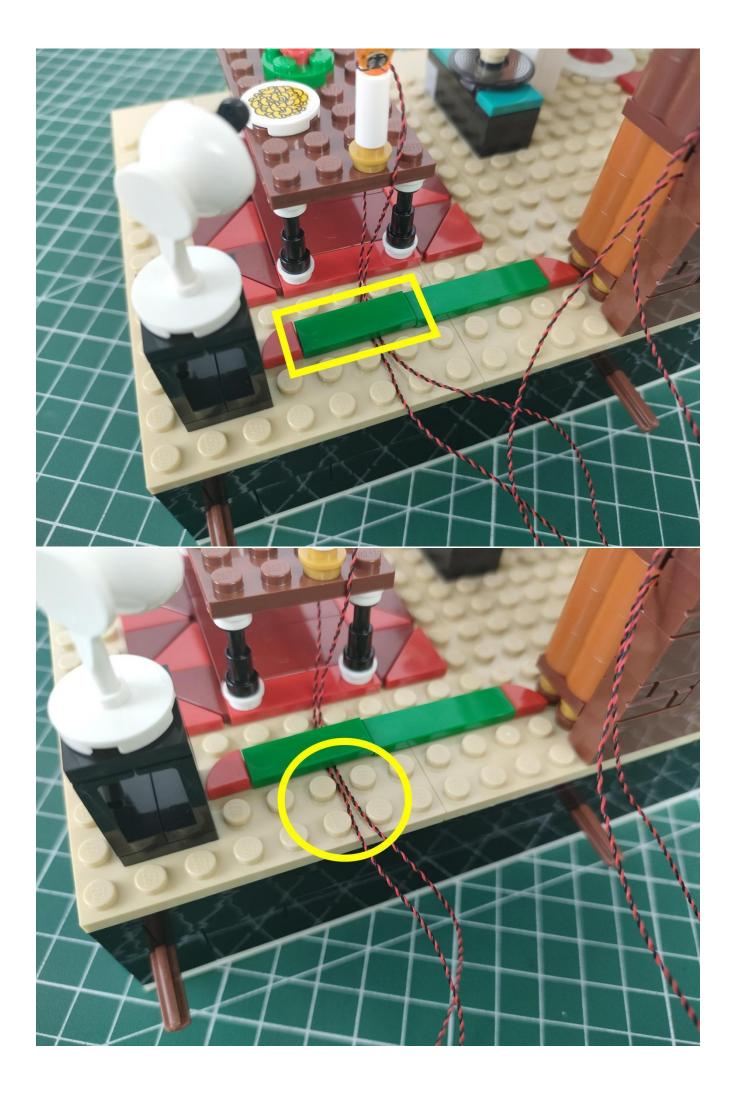


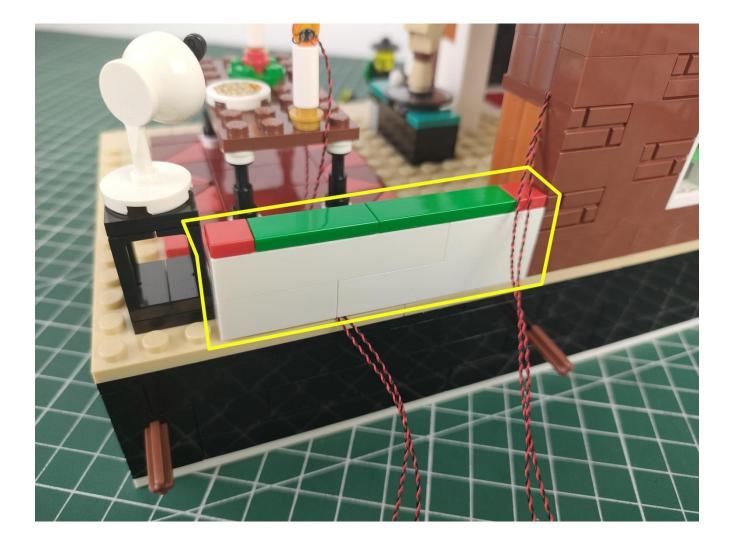


Use the tools provided by Lego to pry off the floor of the model.

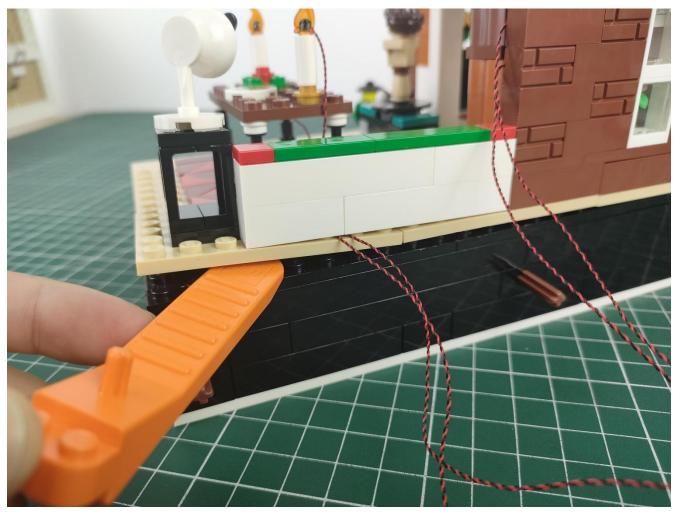

The lighting line goes under the base through the gap of the model.

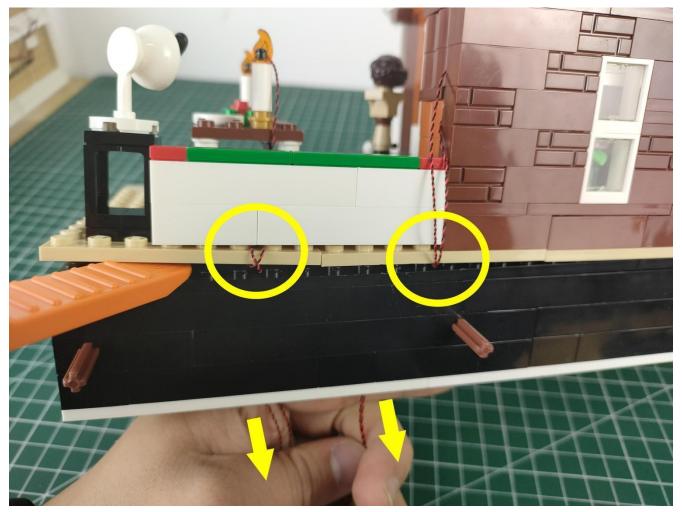

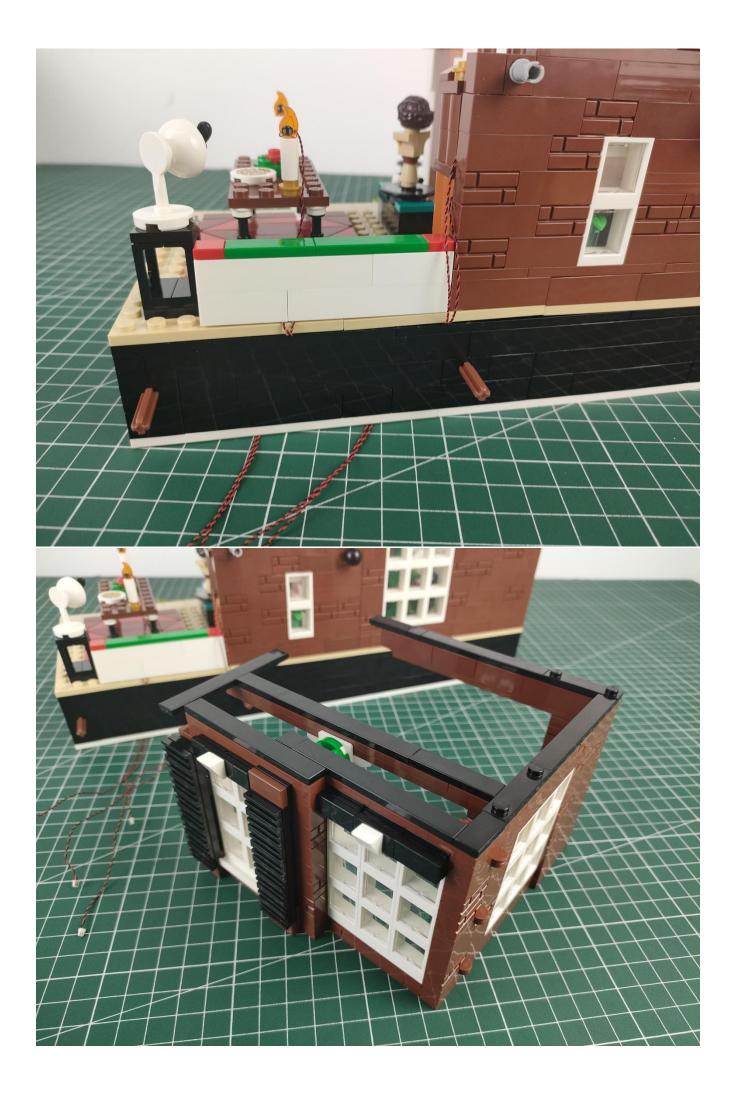















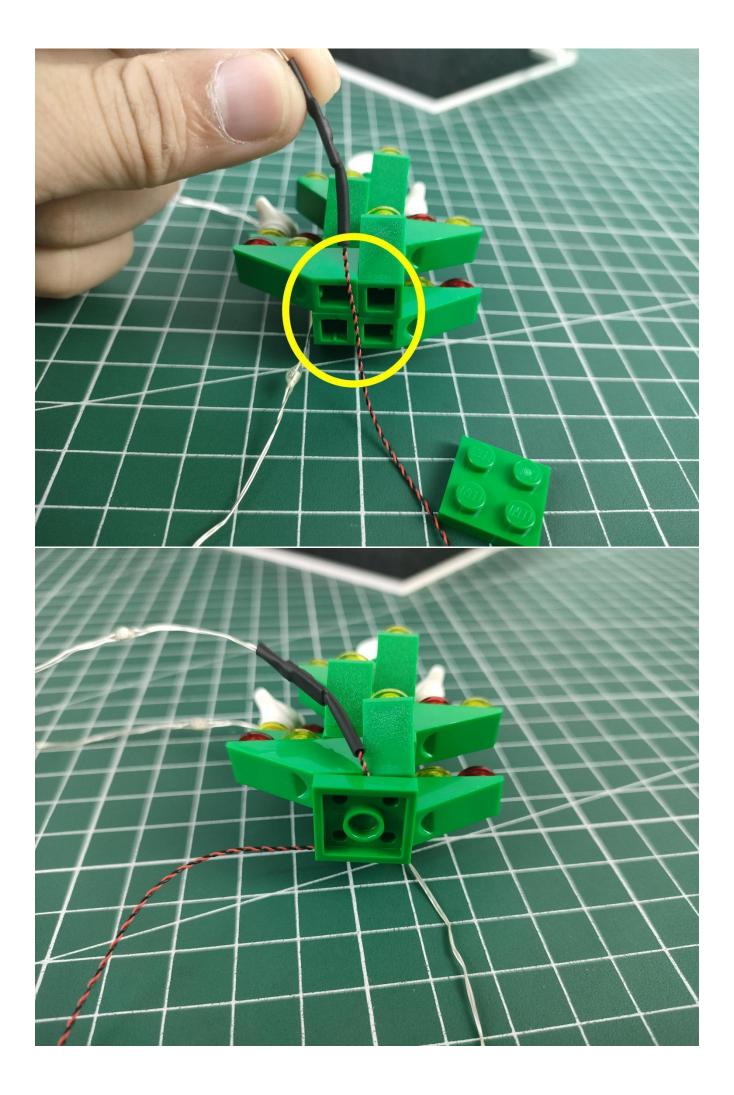


Wrap the rest around the Christmas tree.

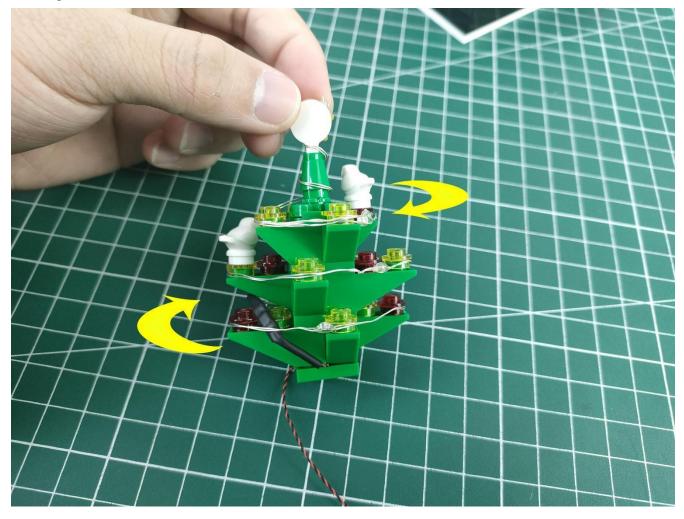

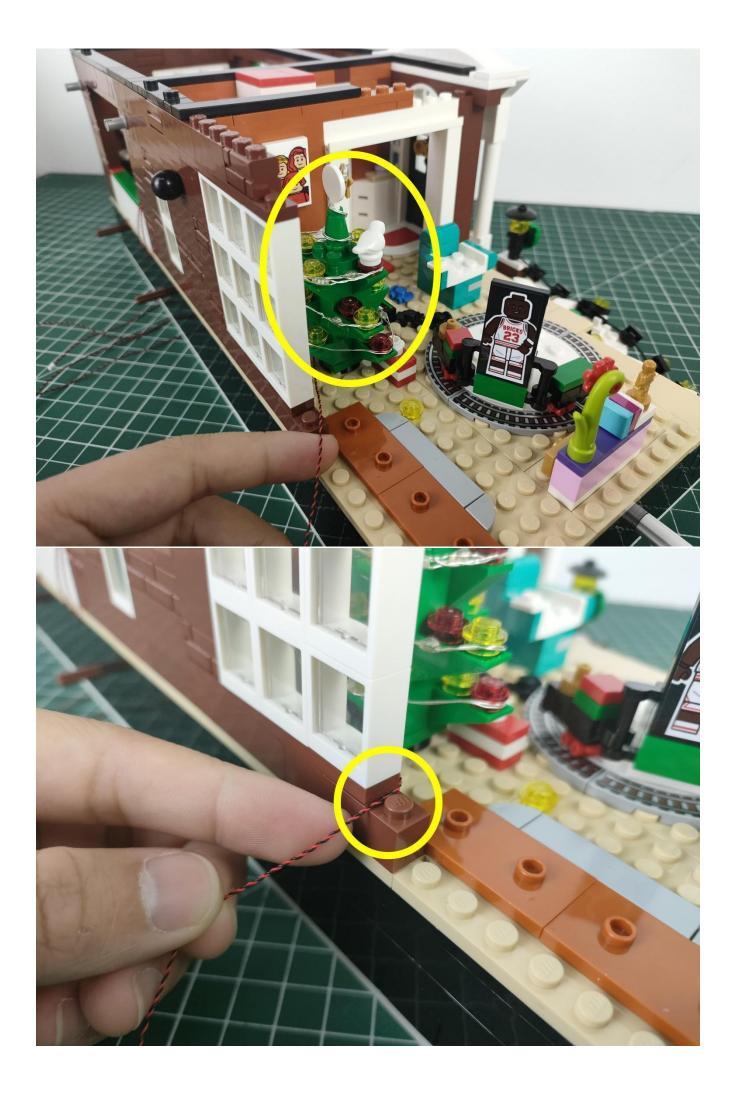


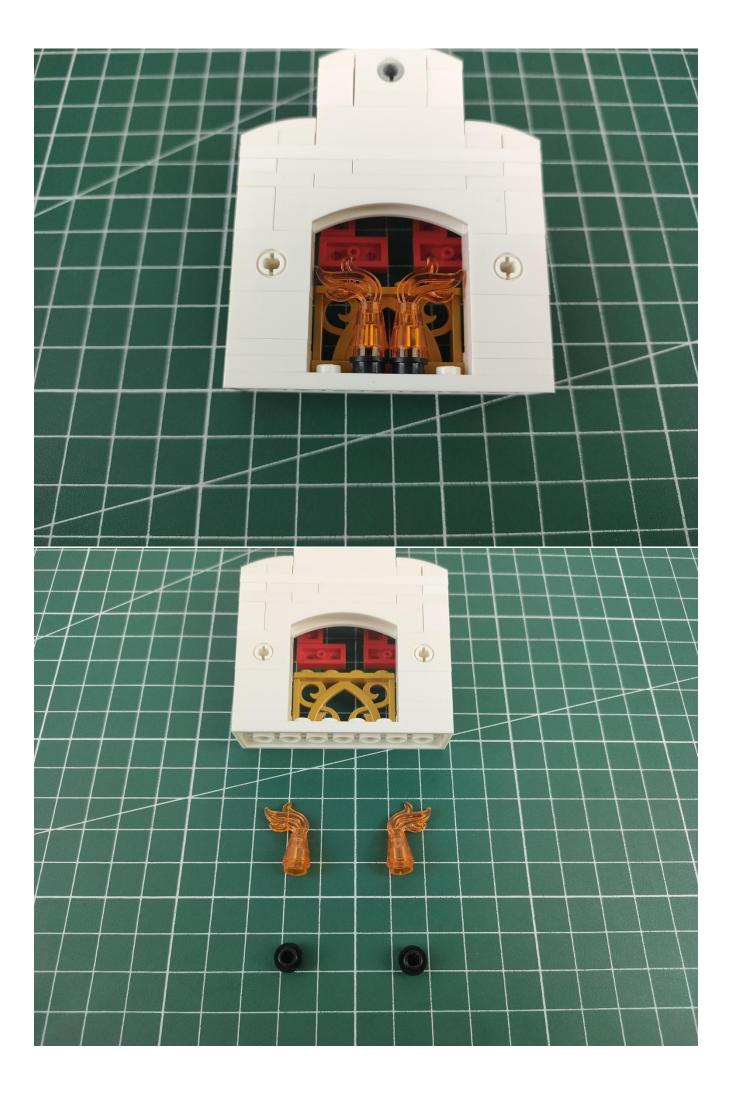



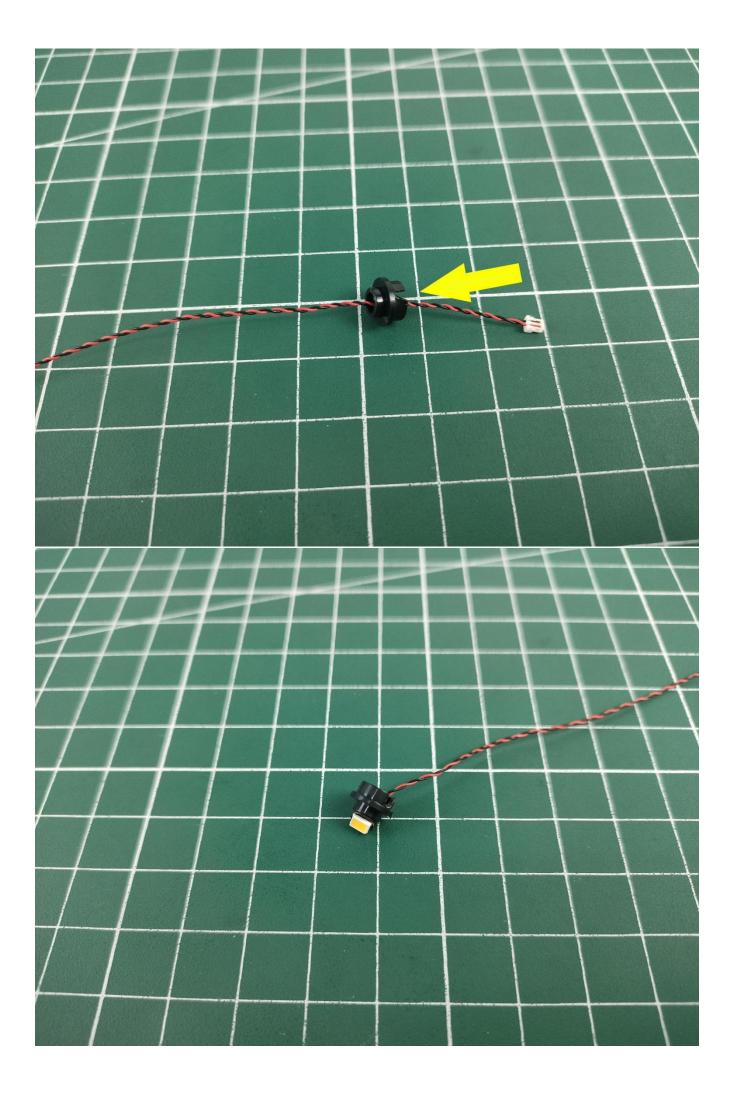


The lamp thread is stuck in the cut of the small circular plate.

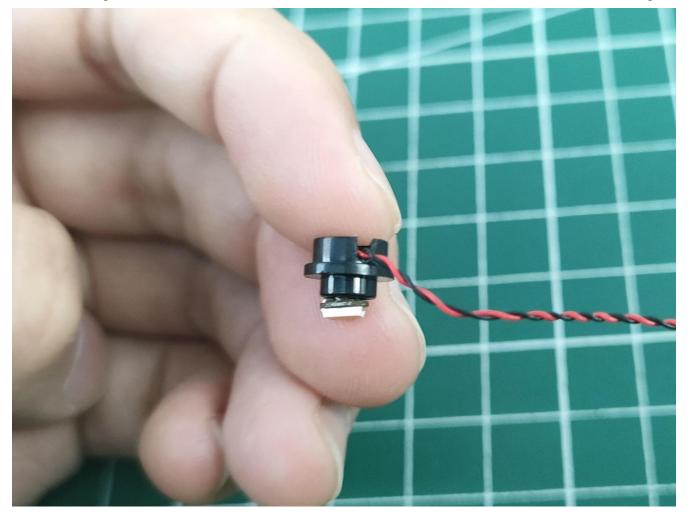




The plate without slit:

The plate without slit: The squeeze causes the protective layer of the wire to be torn apart, the positive and negative wires touch together, and the set is short-circuited and the hot or wire is crushed, the wire to be disconnected and don't work. The plate with slit:

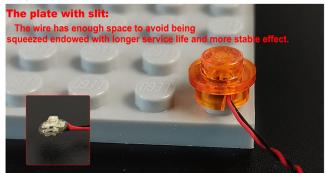


The slit on the plate round 1X1 are hand-made to avoid squeeze the wire and cause short circuit and abnormalheat during installation.




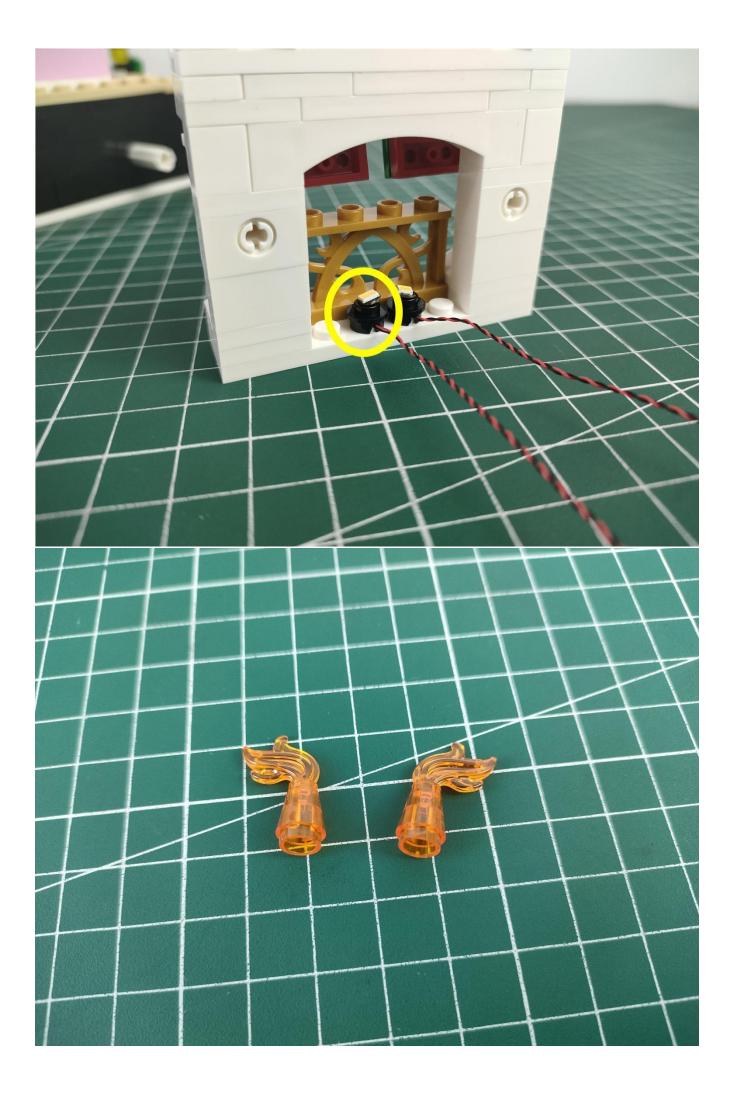






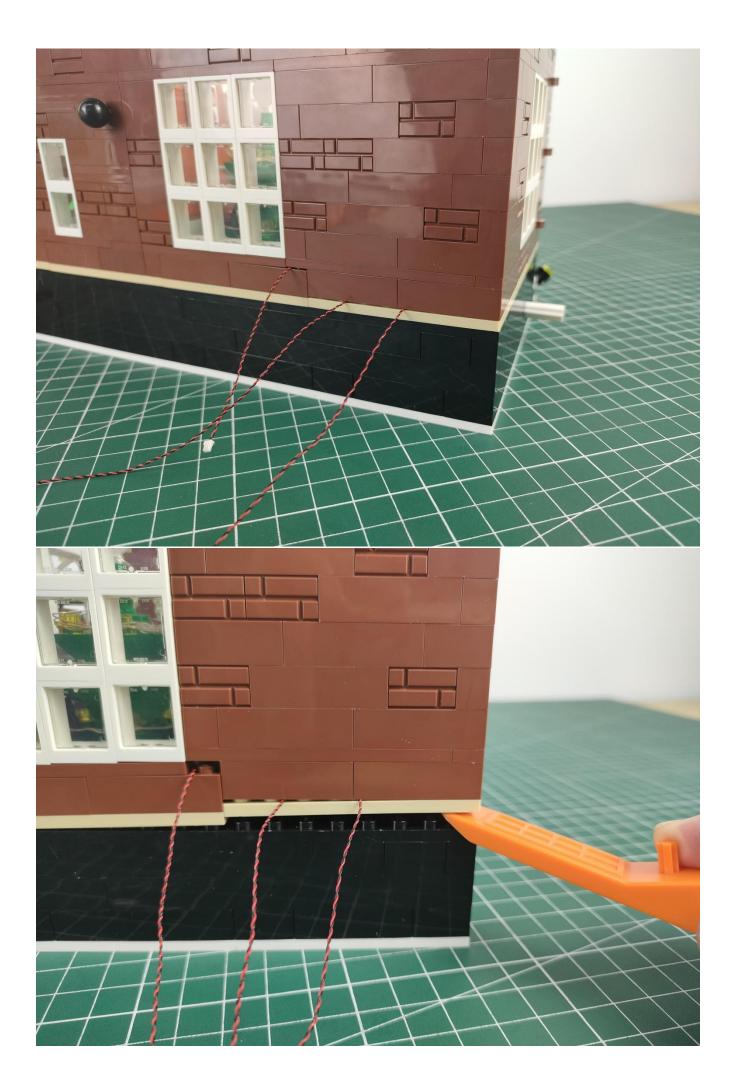

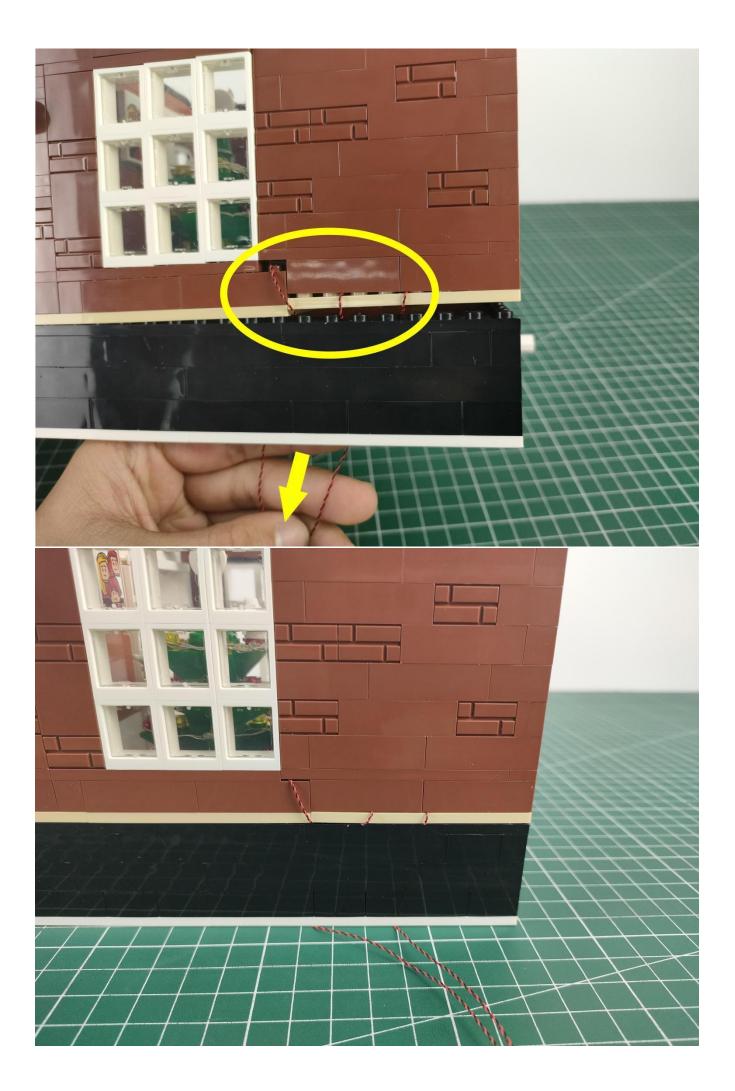







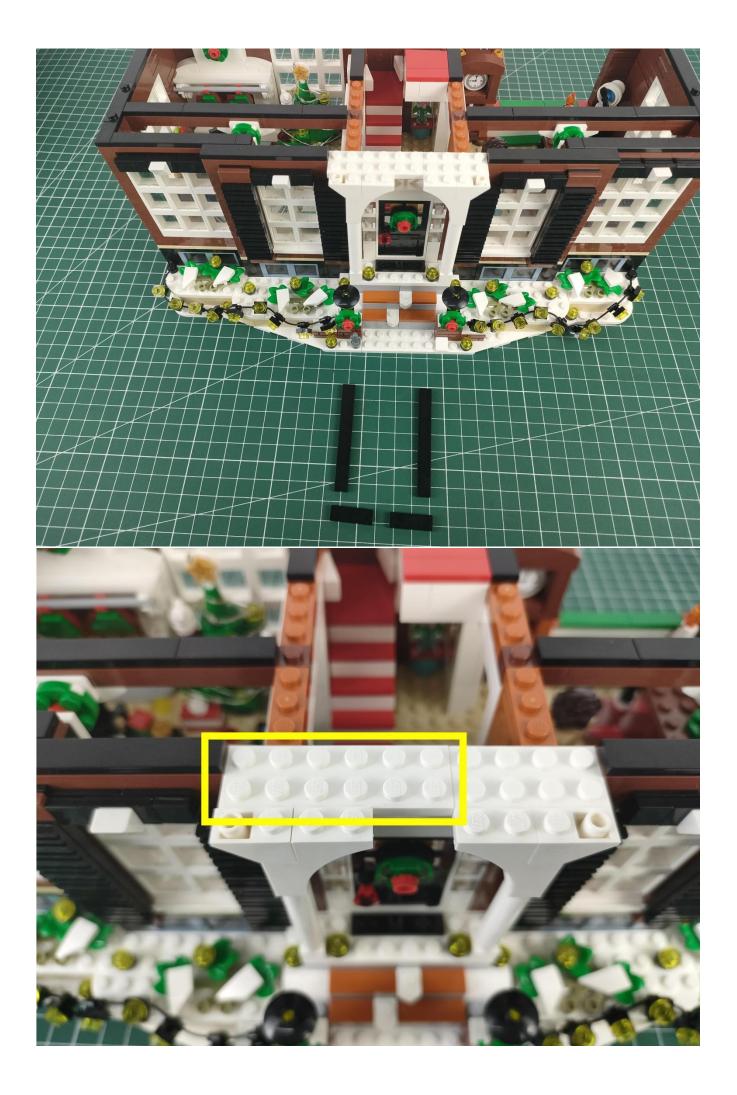








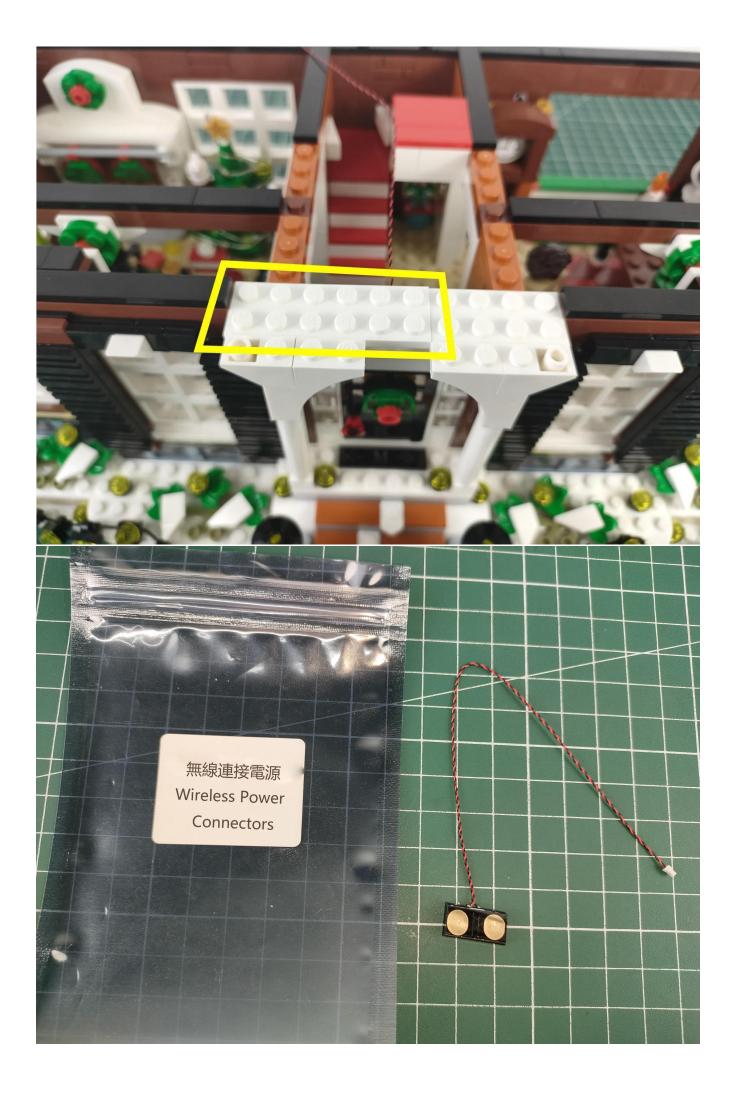

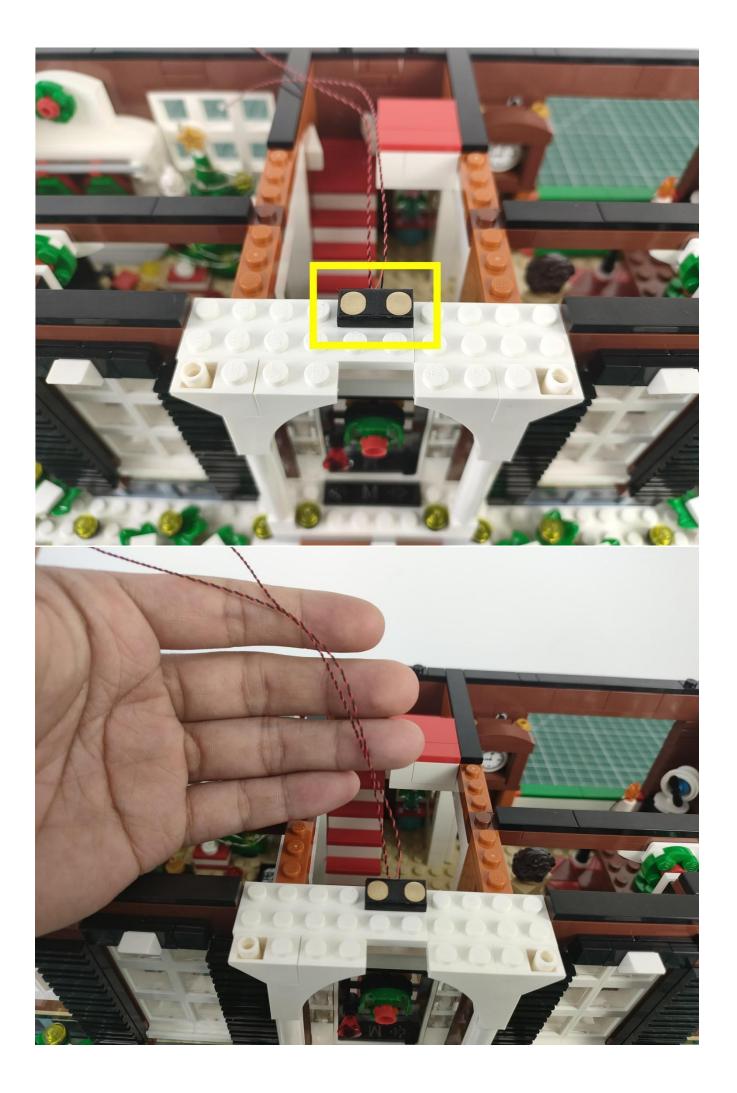


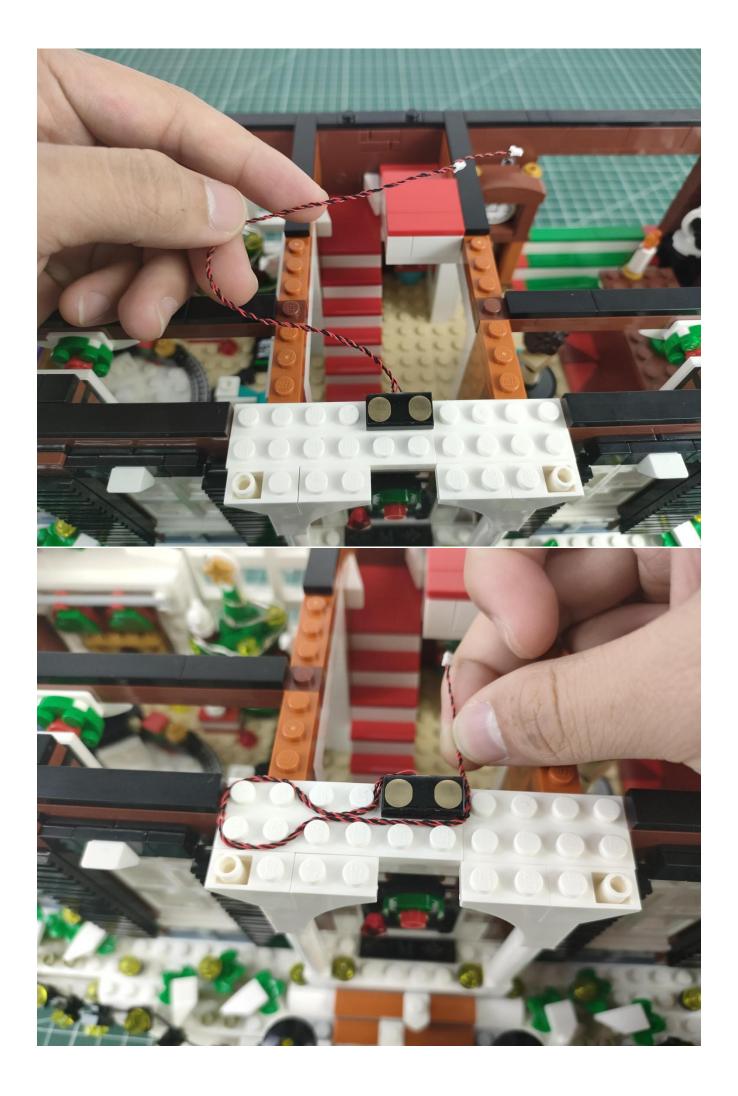

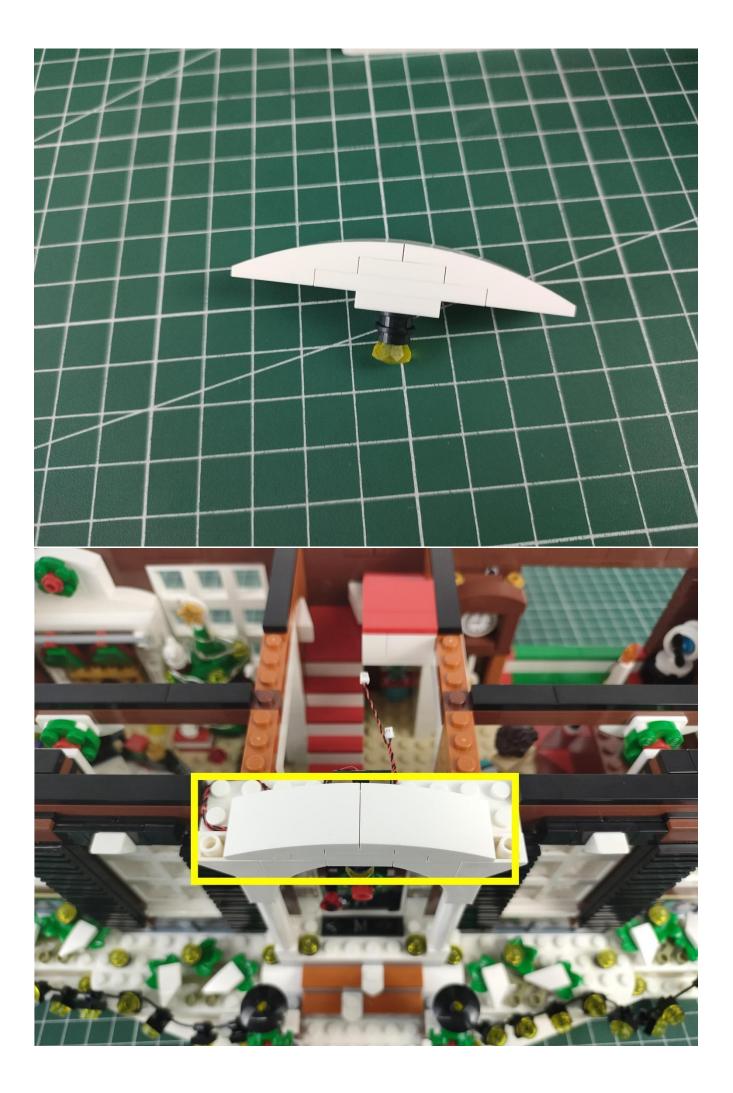


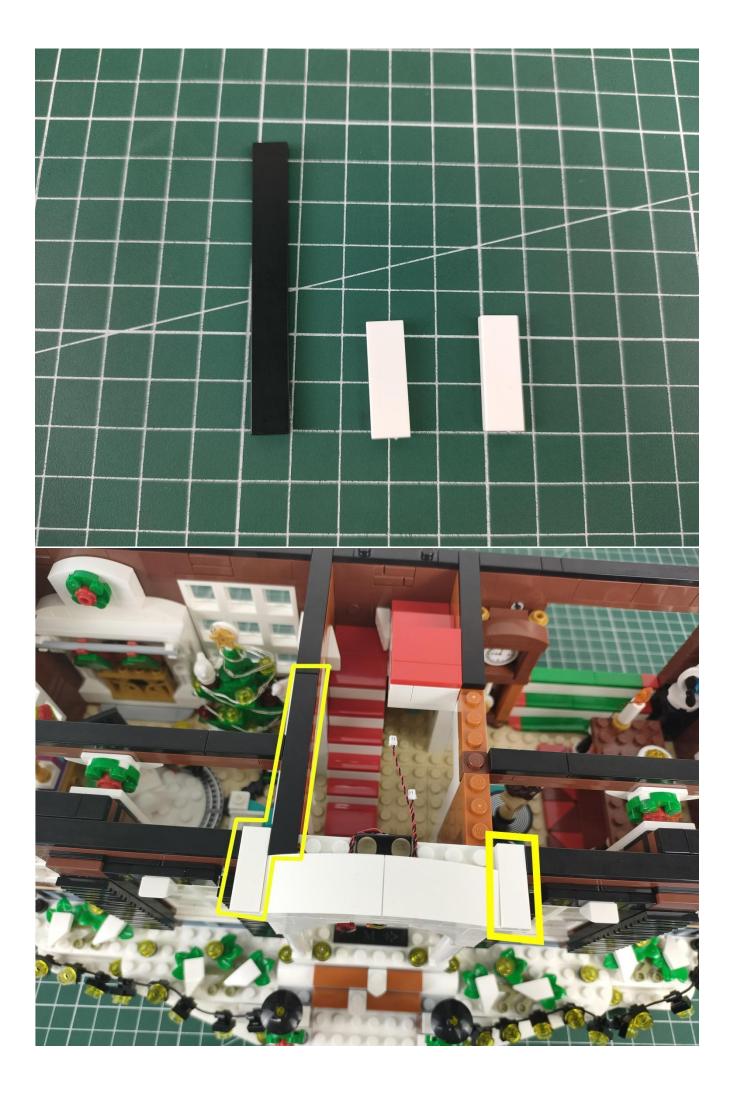





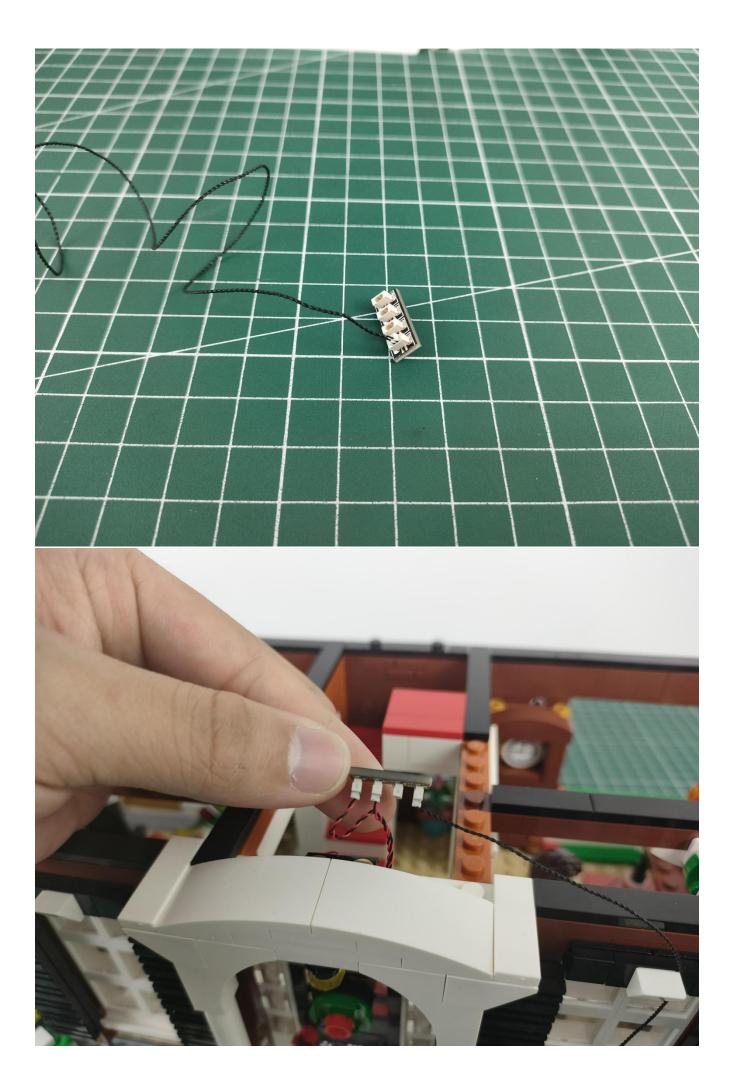





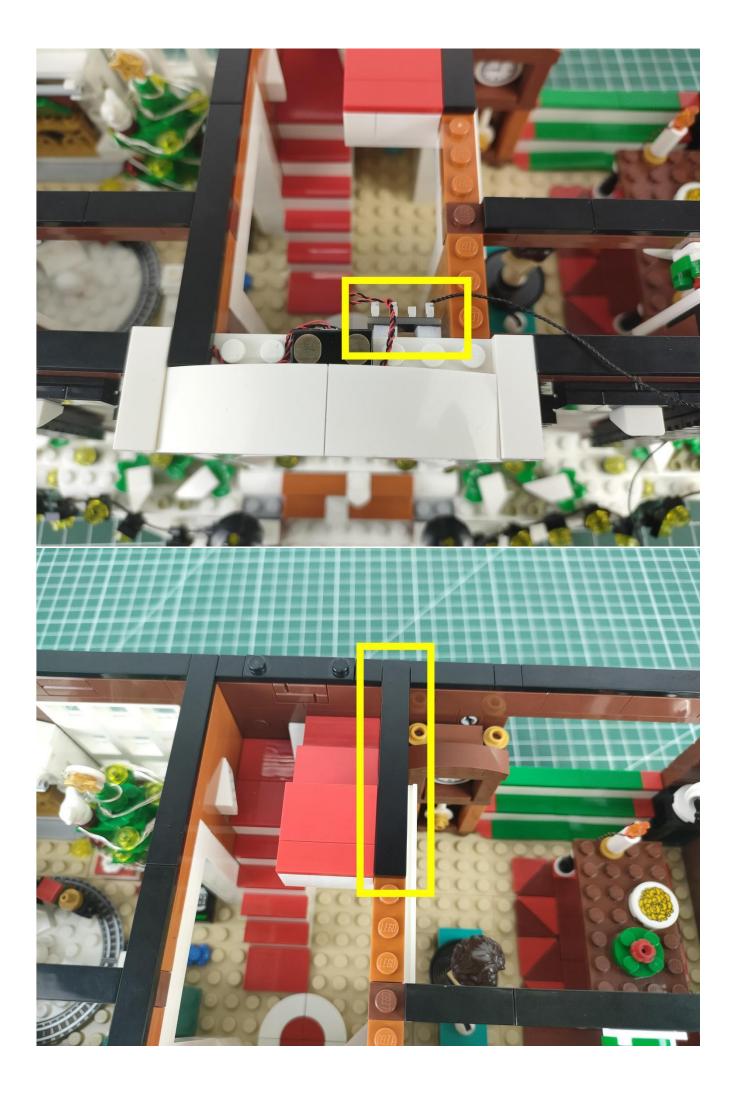

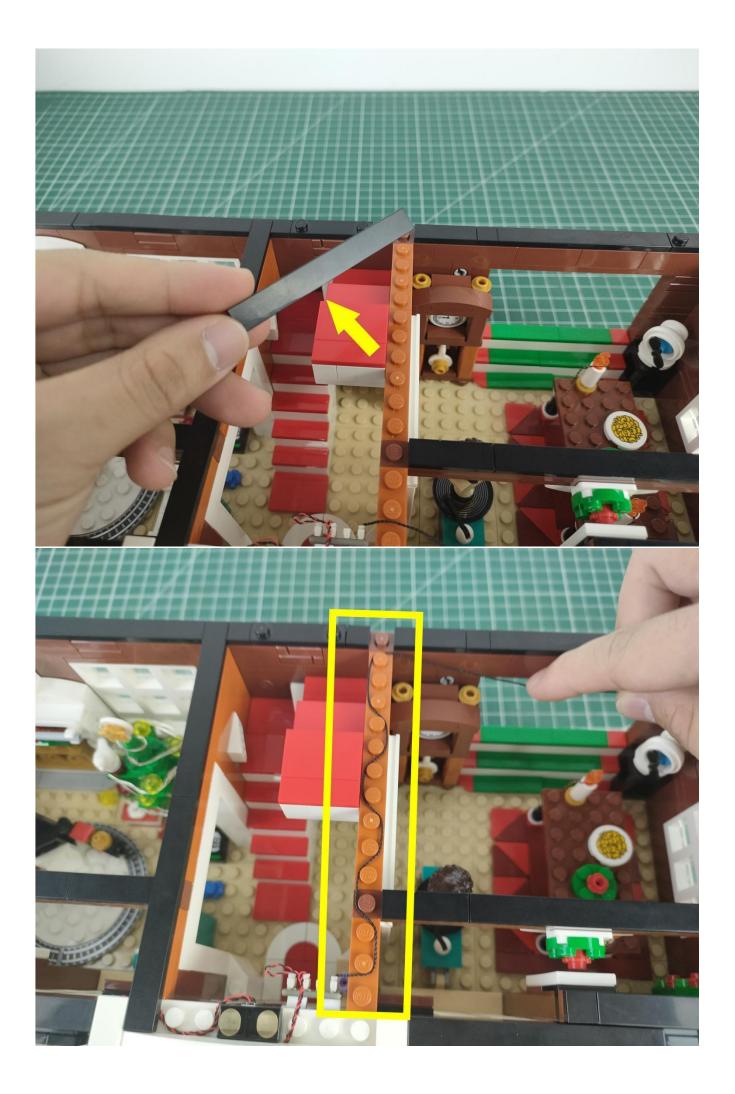

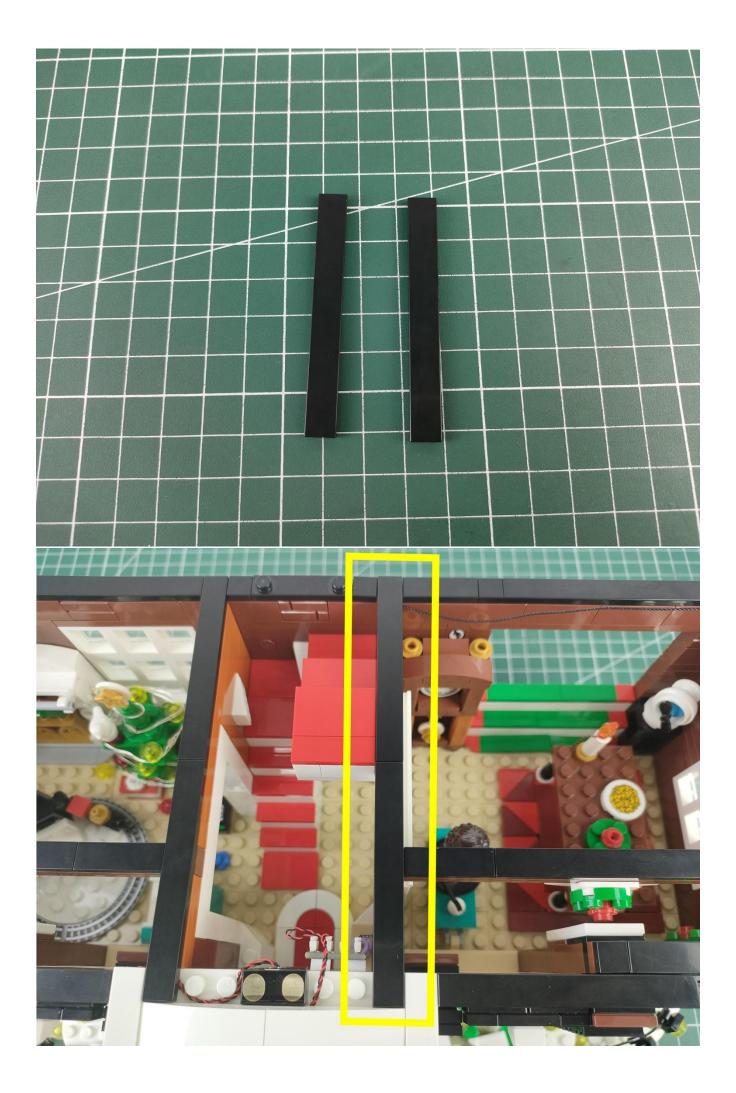


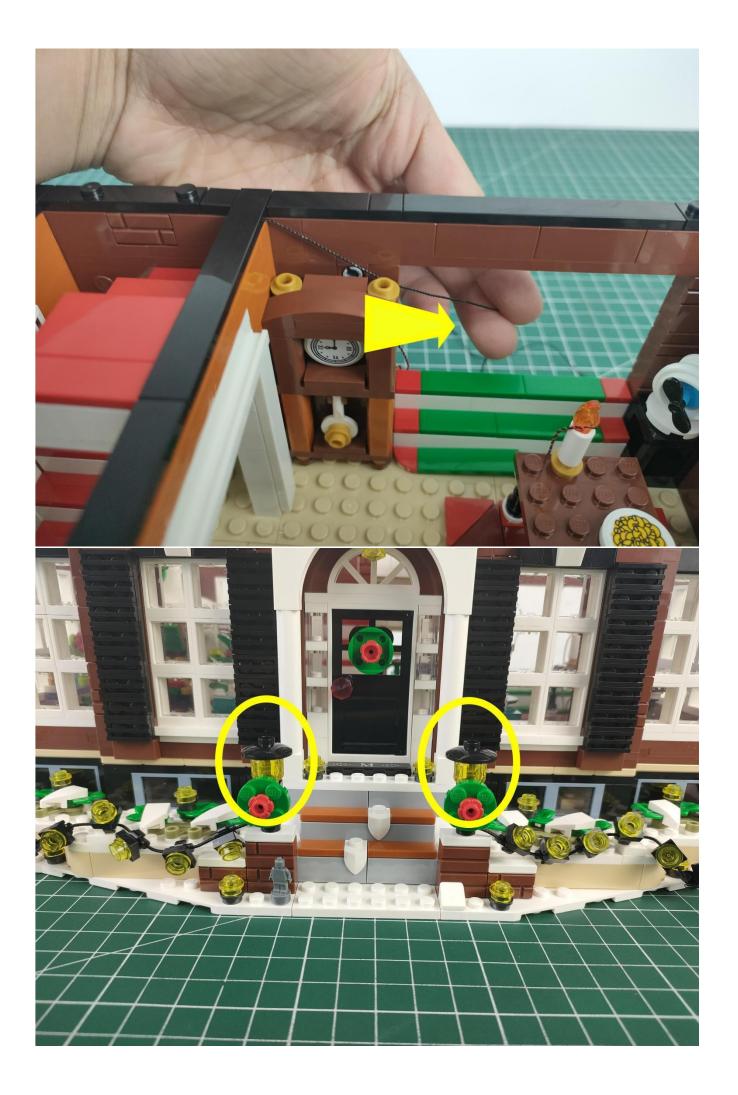


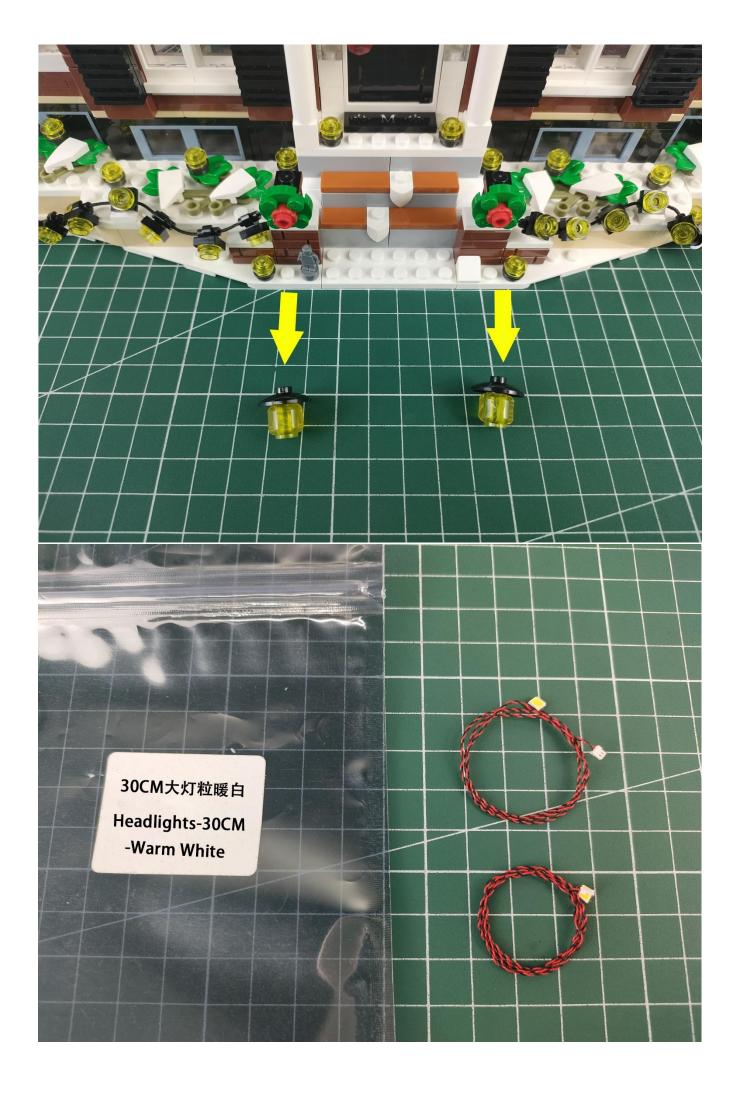

The two orange parts are cut.




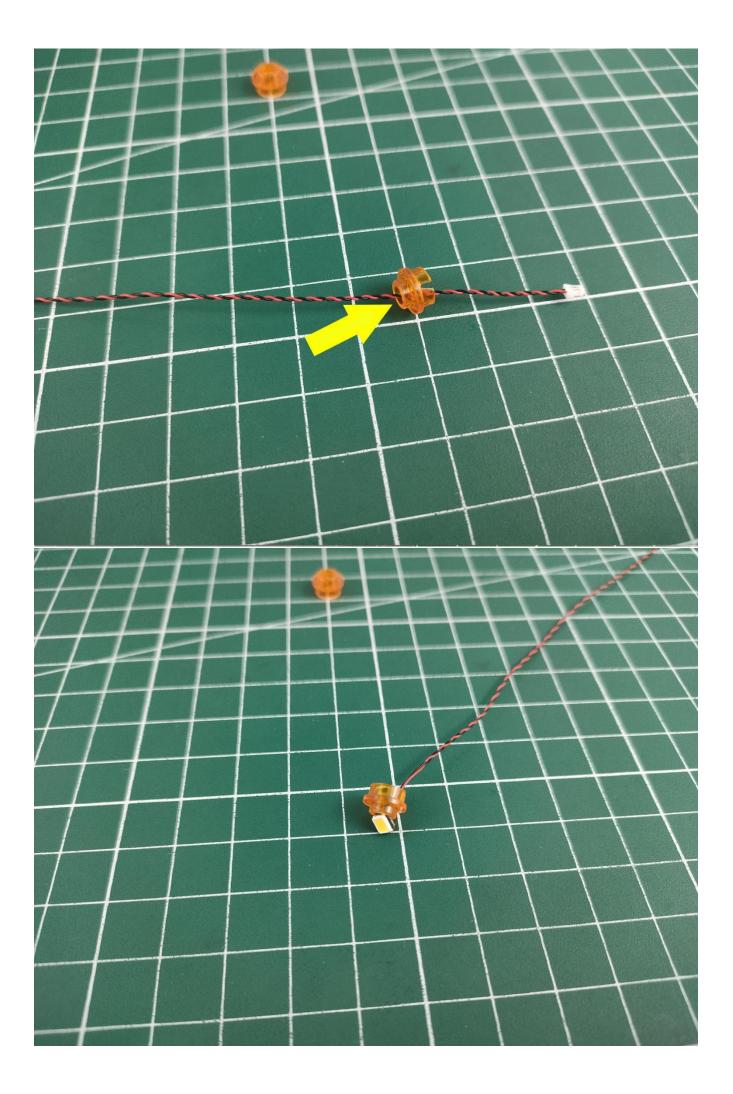

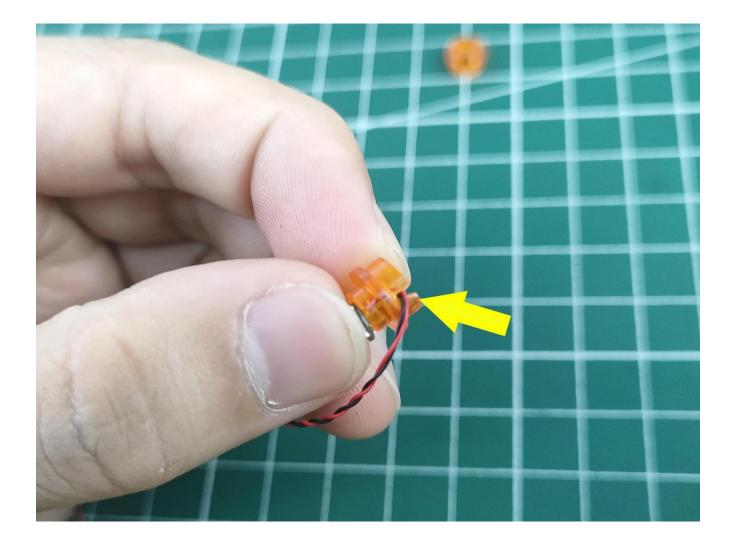

Tips


The plate without slit:

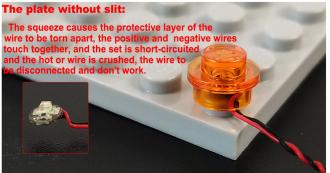



The plate with slit:




The slit on the plate round 1X1 are hand-made to avoid squeeze the wire and cause short circuit and abnormalheat during installation.

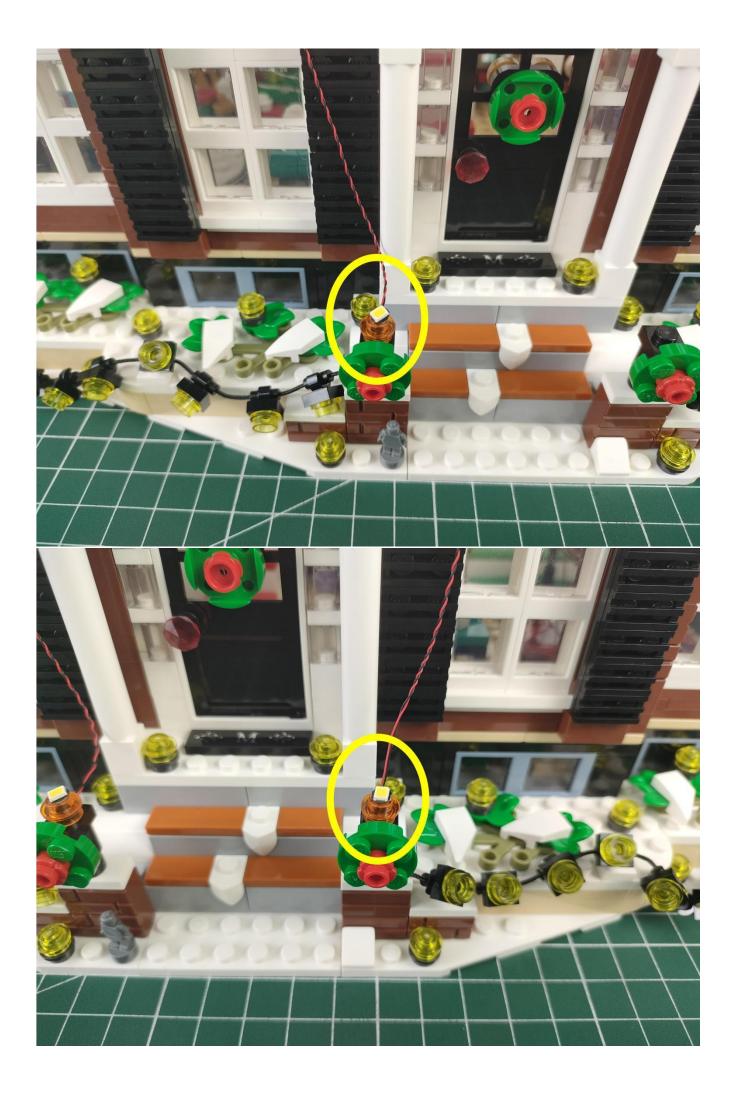

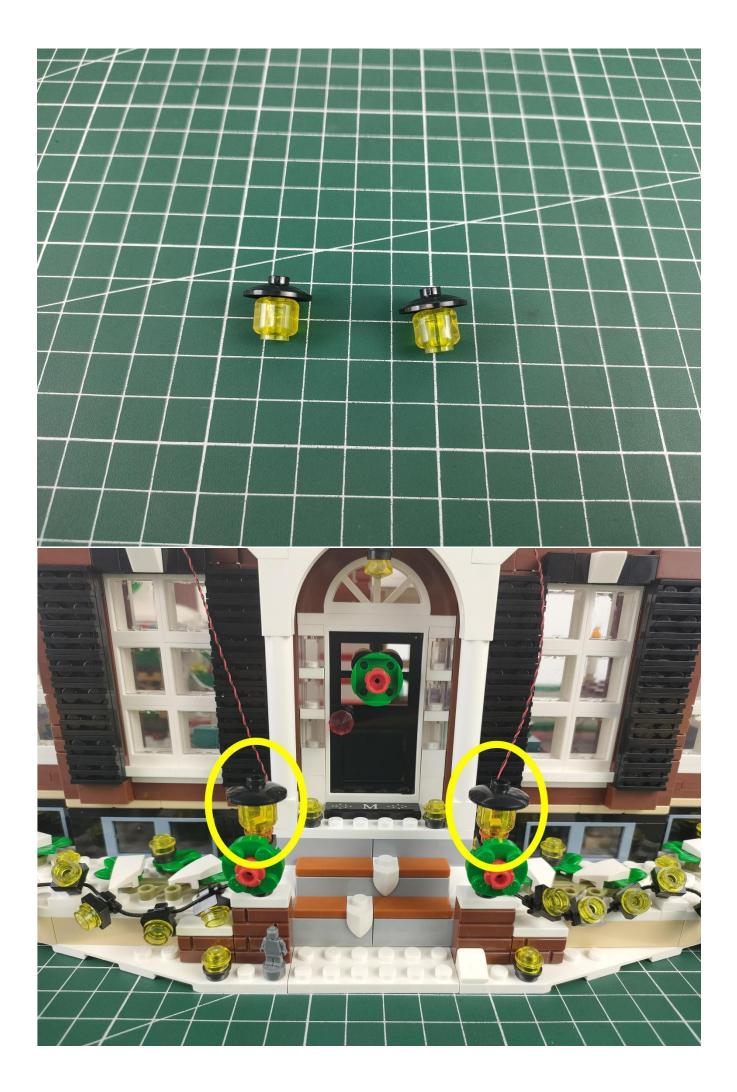

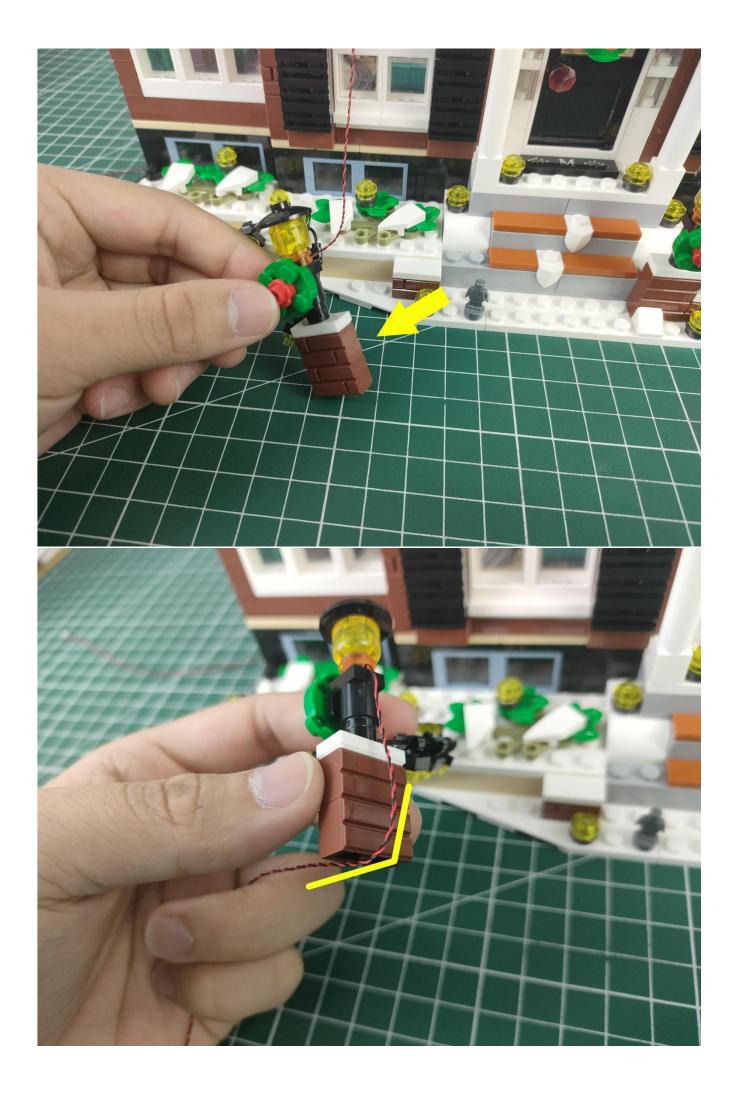

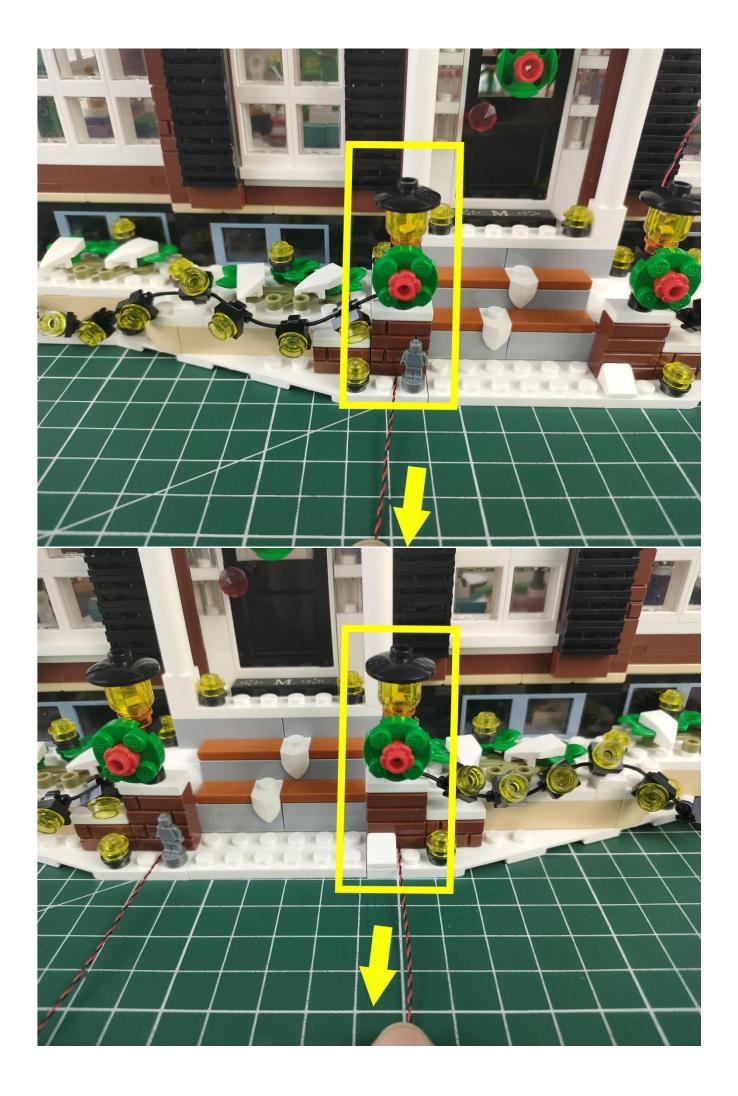














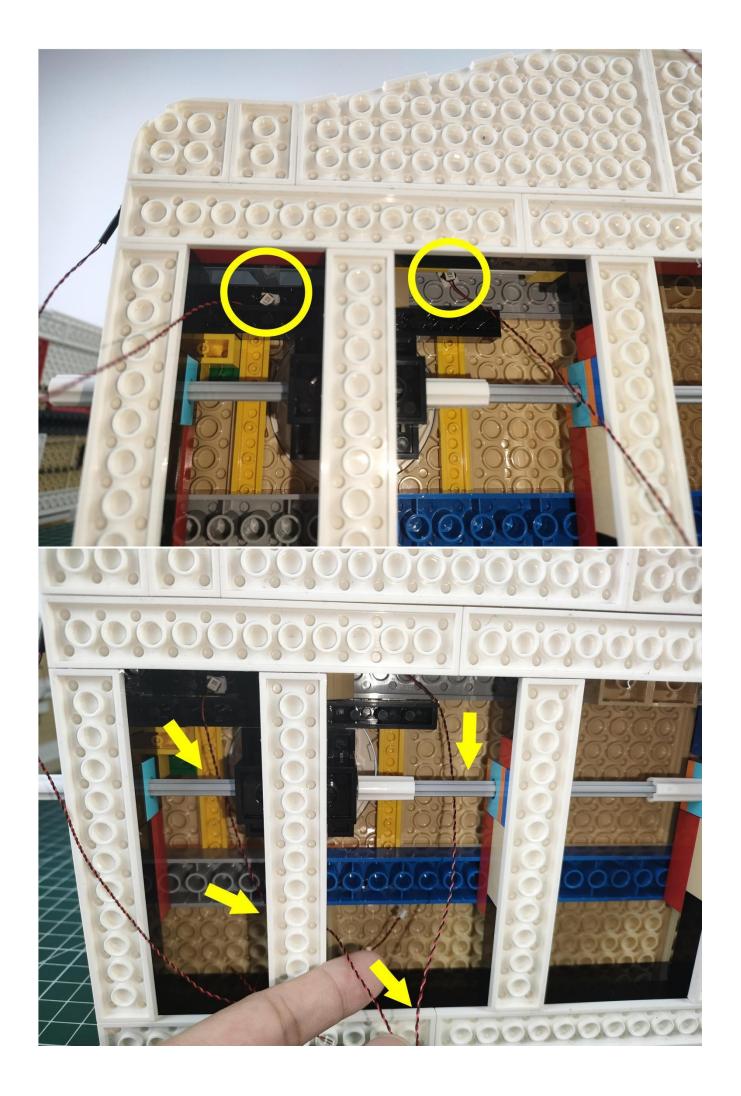


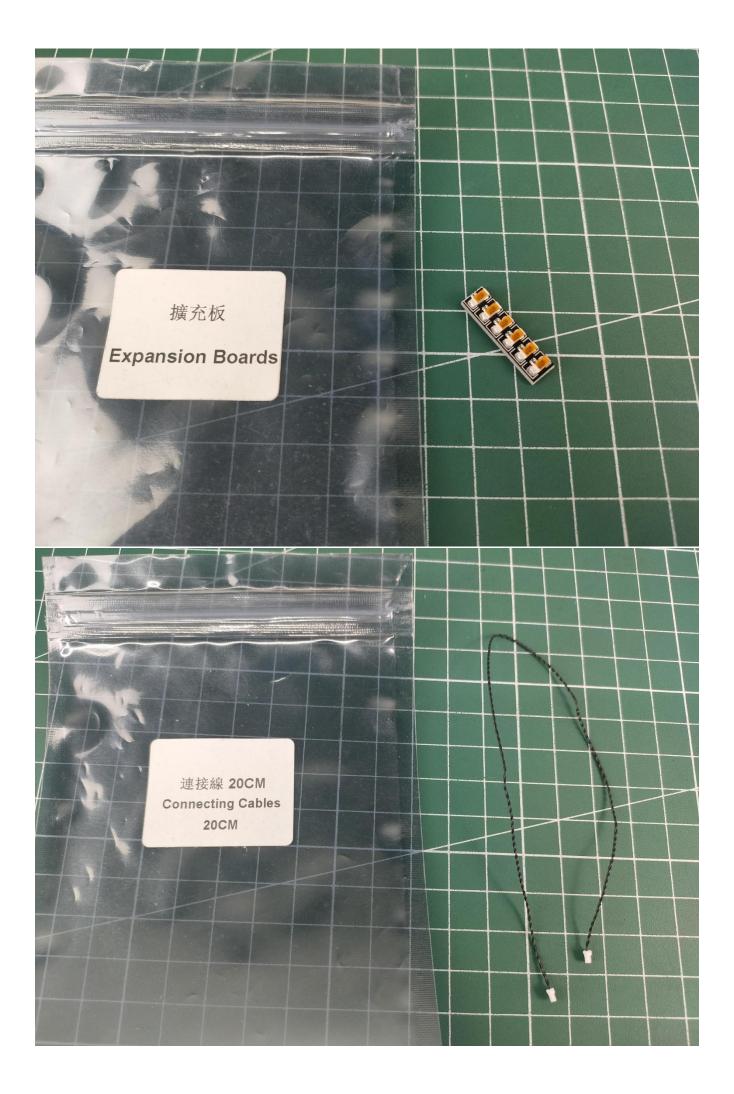

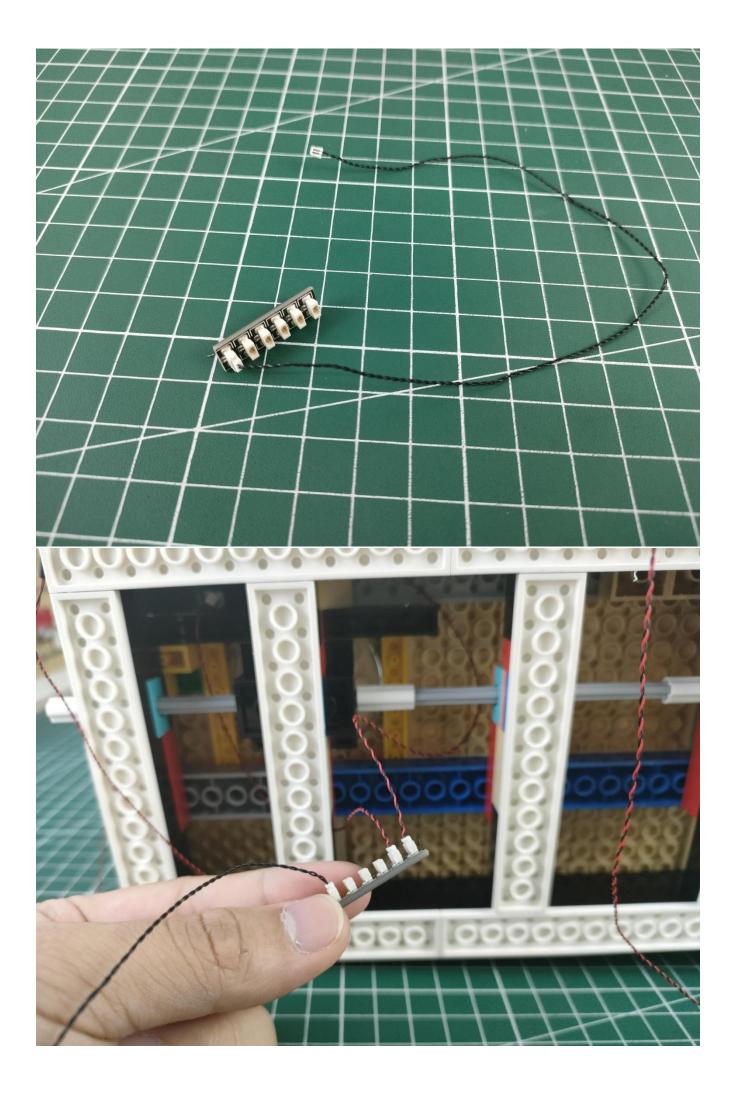


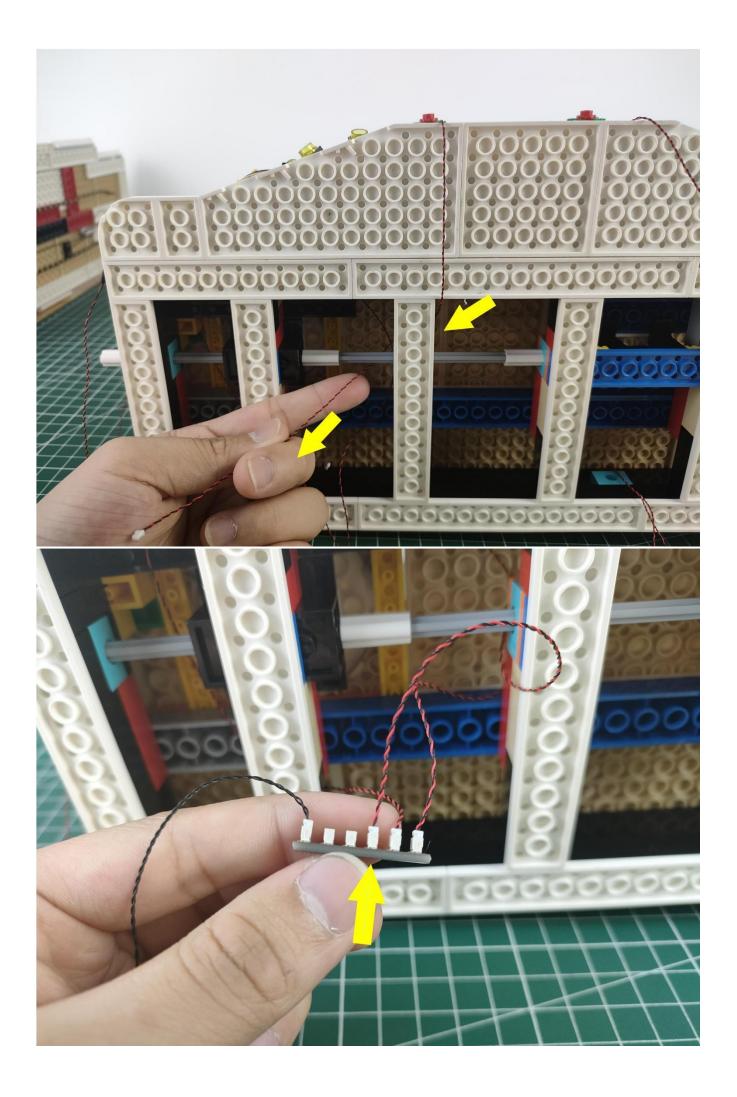

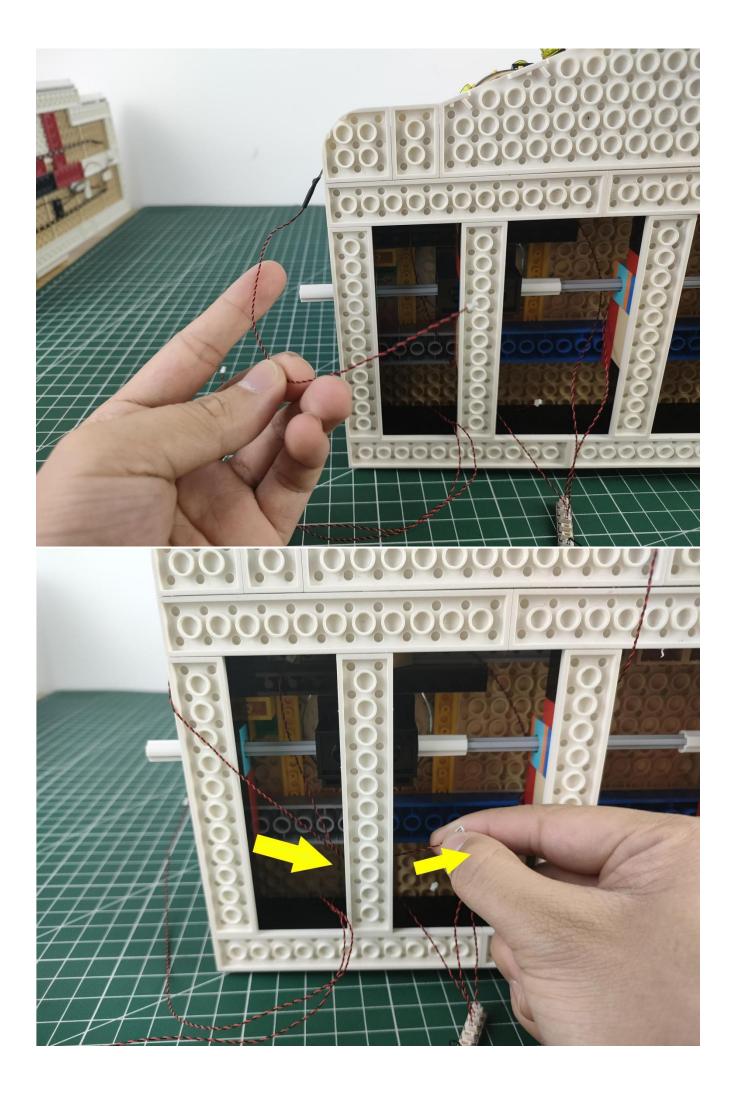

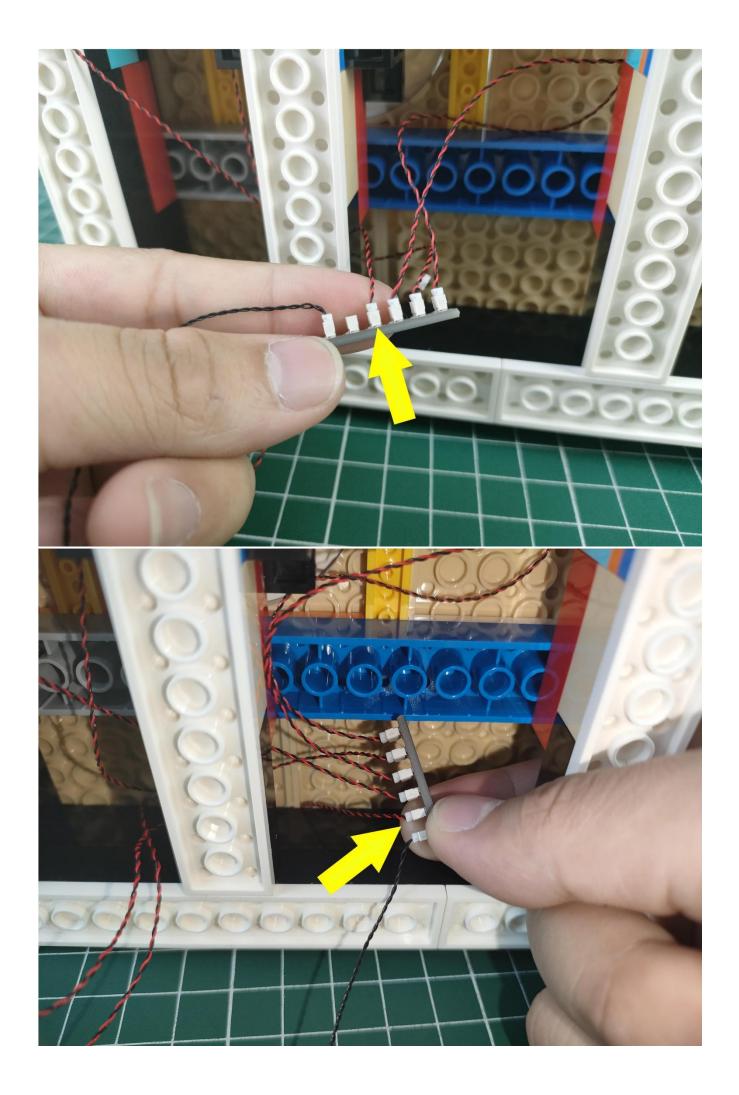




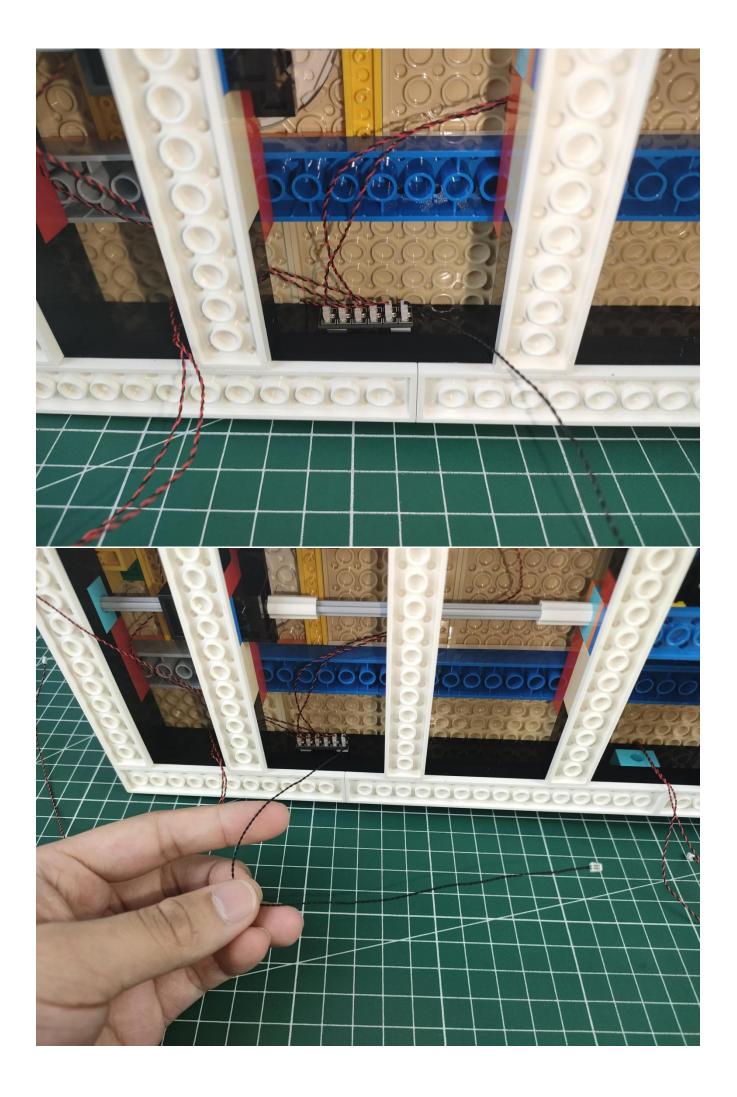








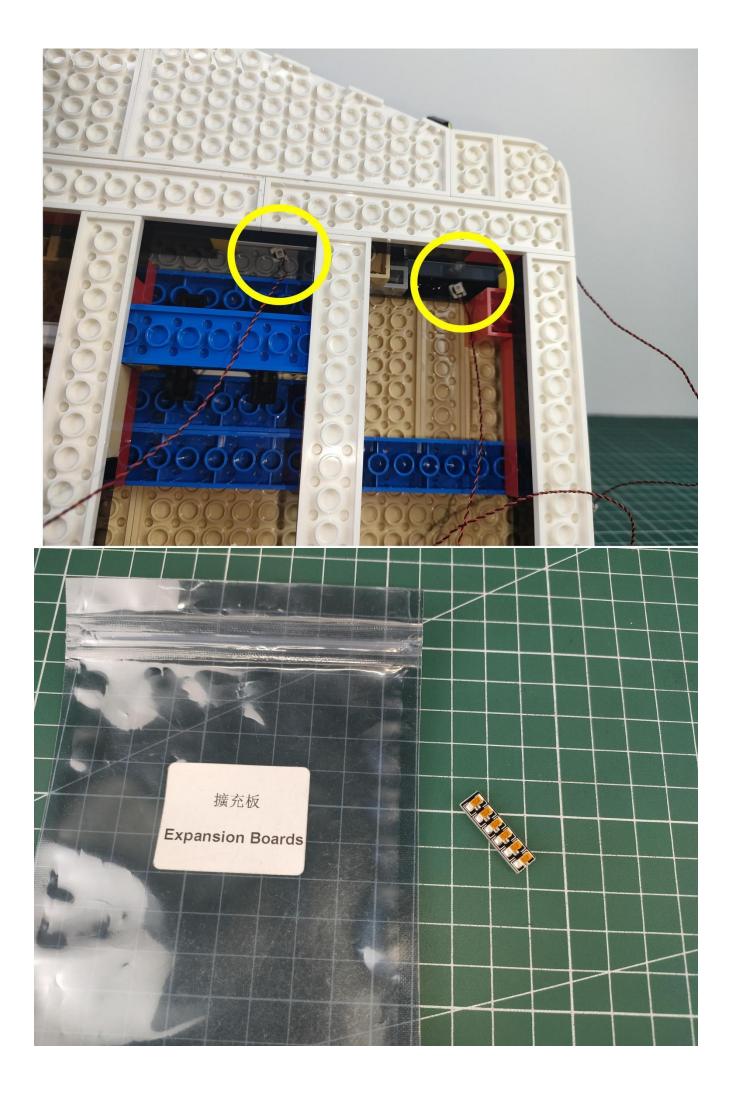





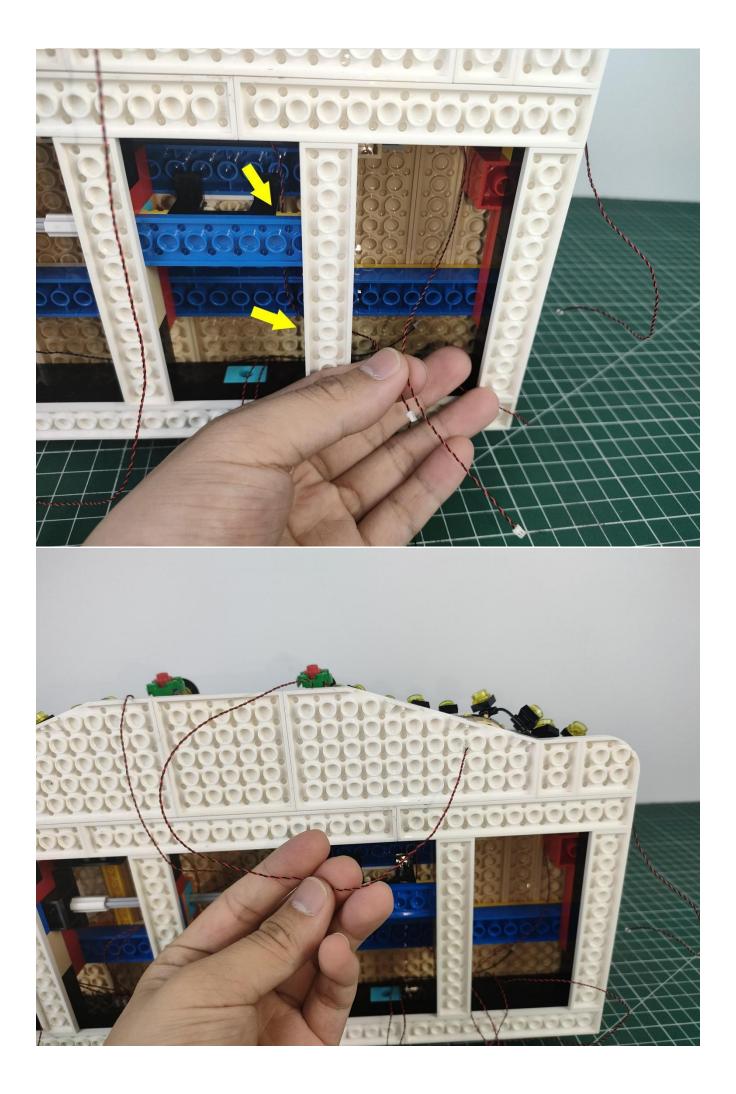


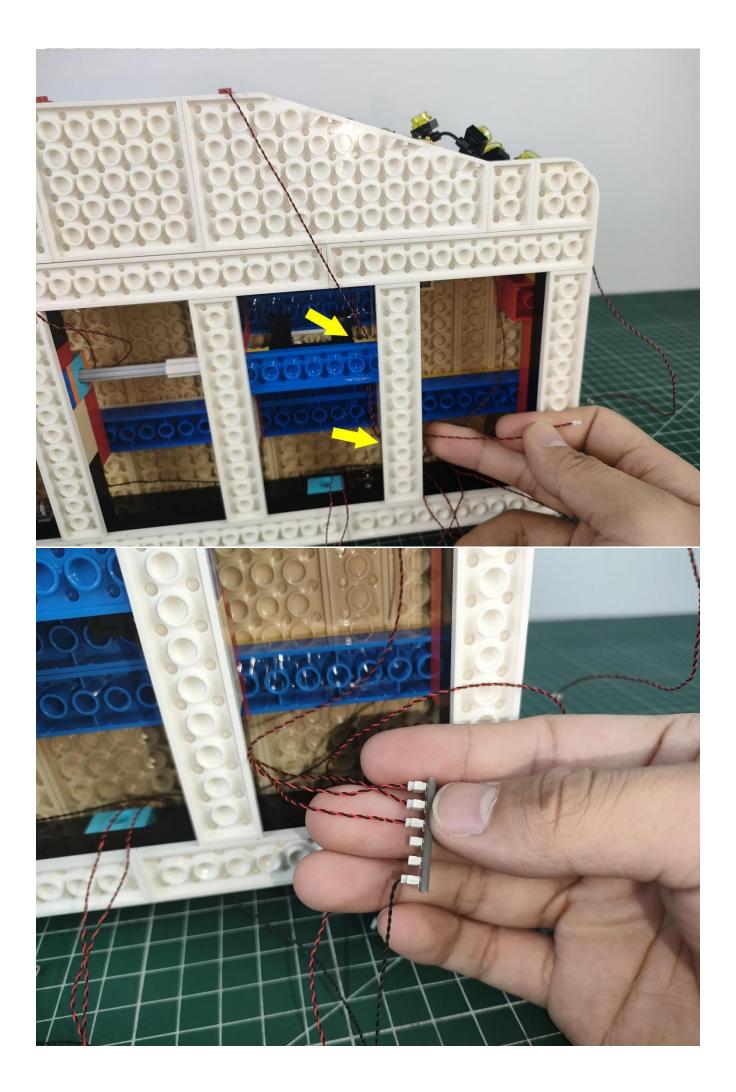


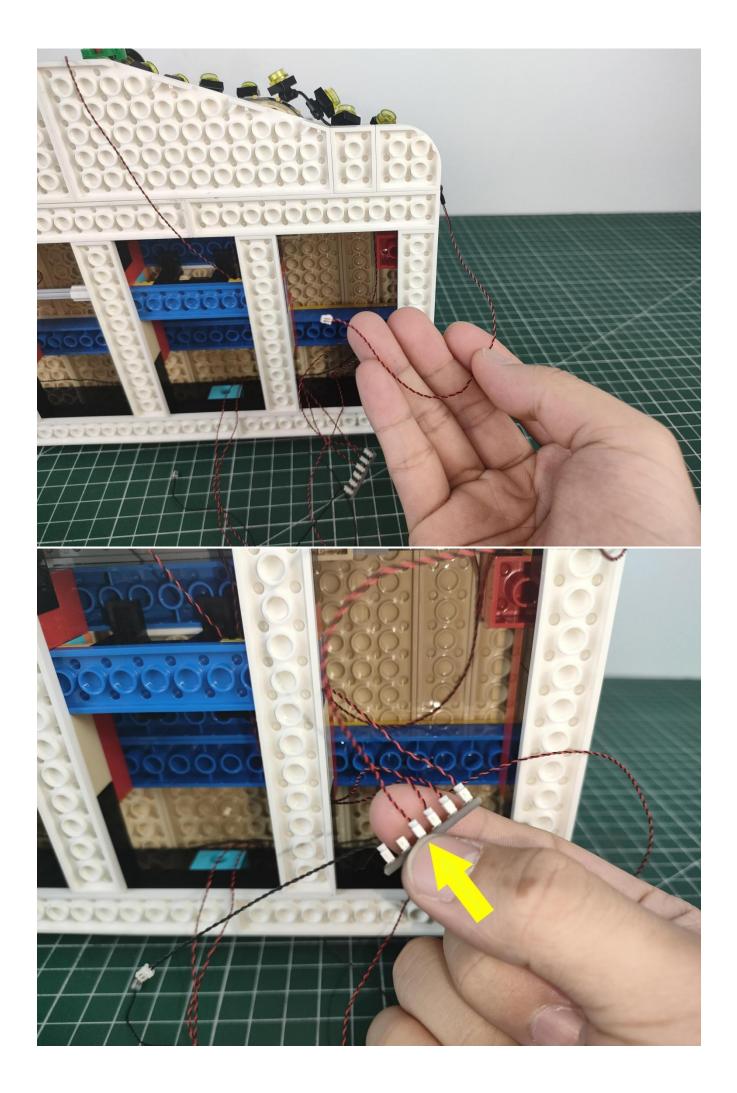

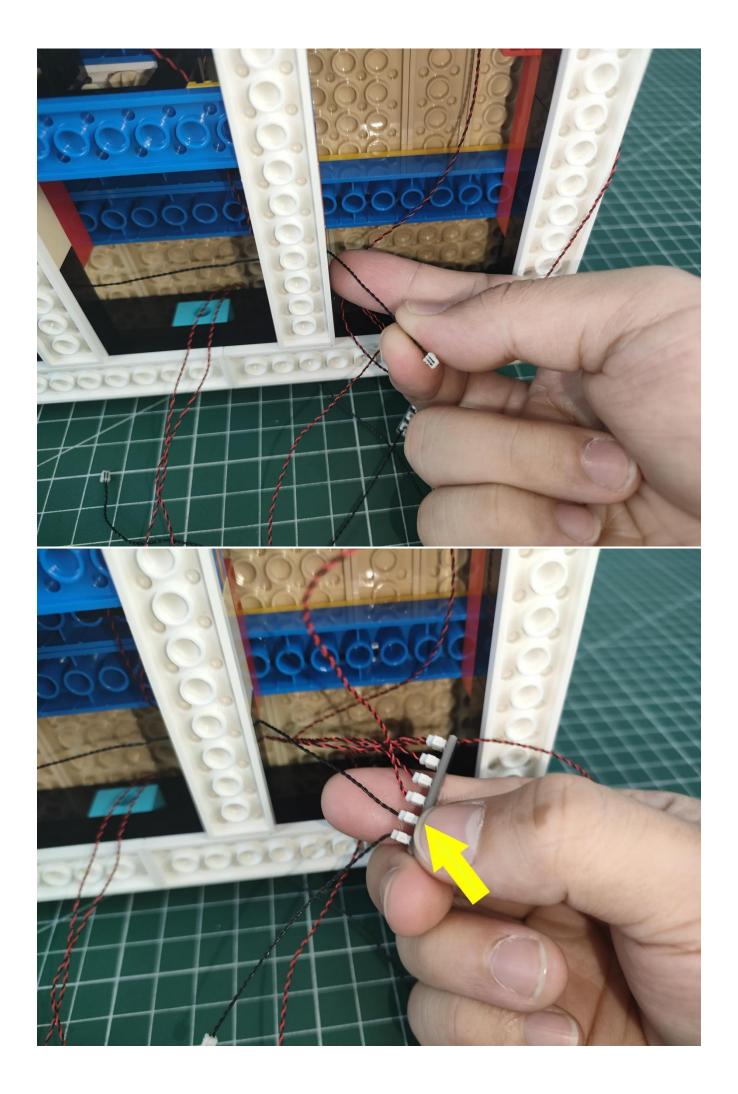


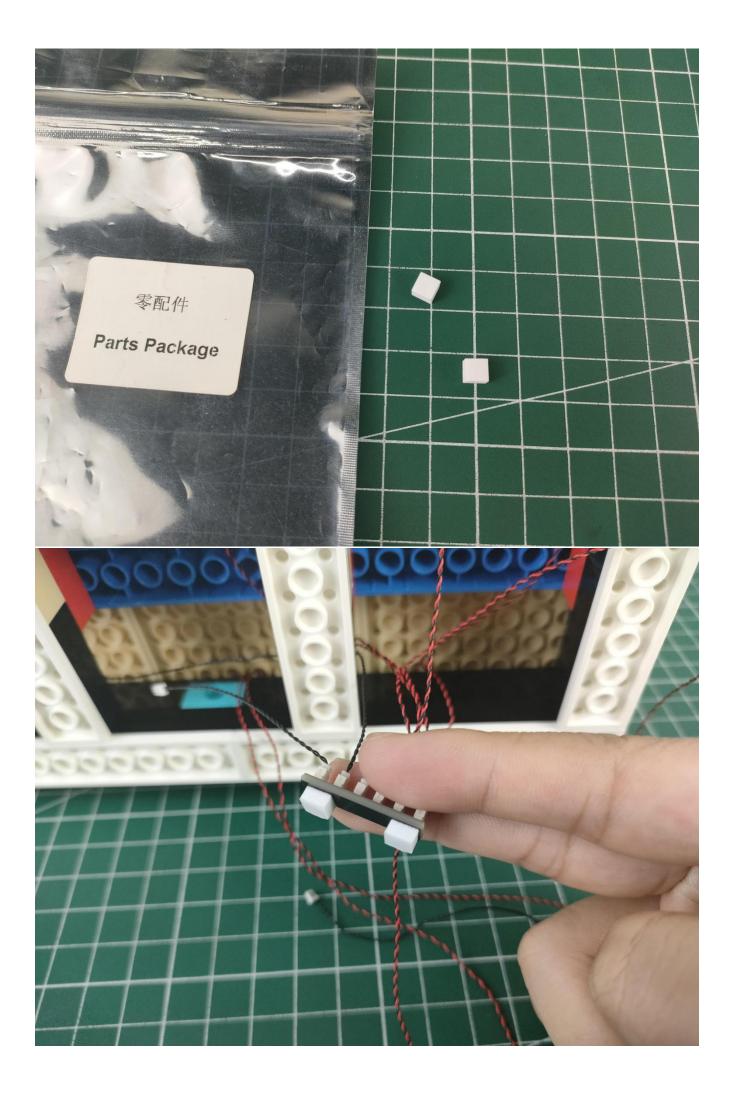

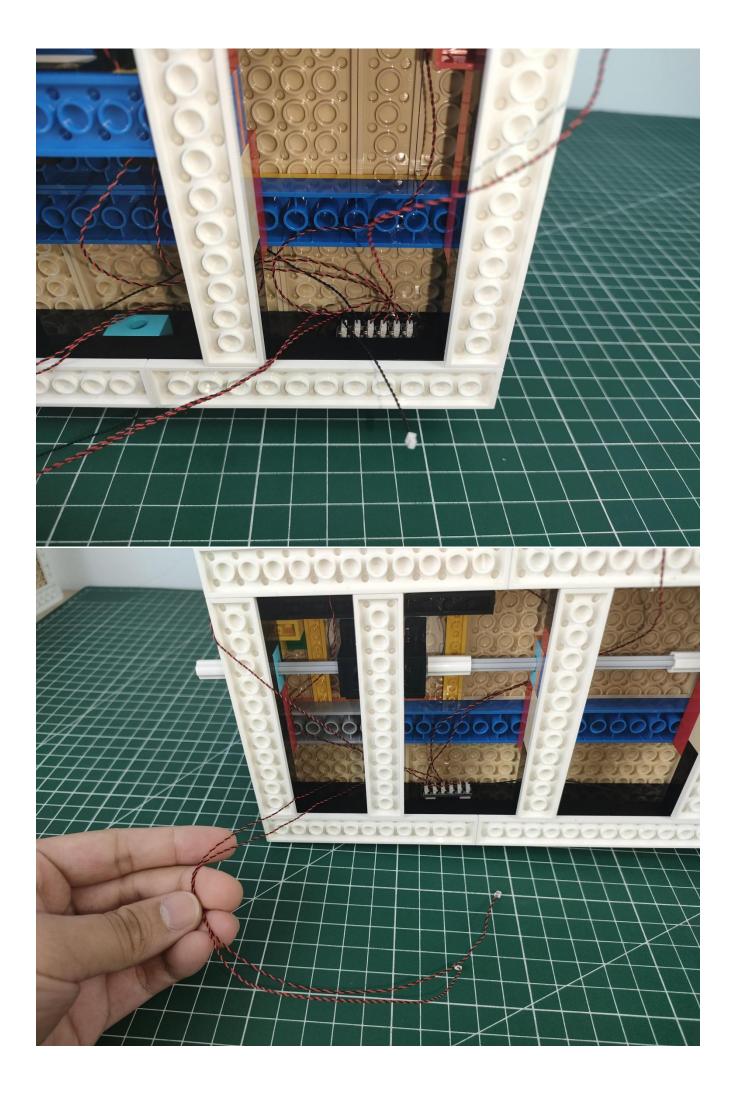


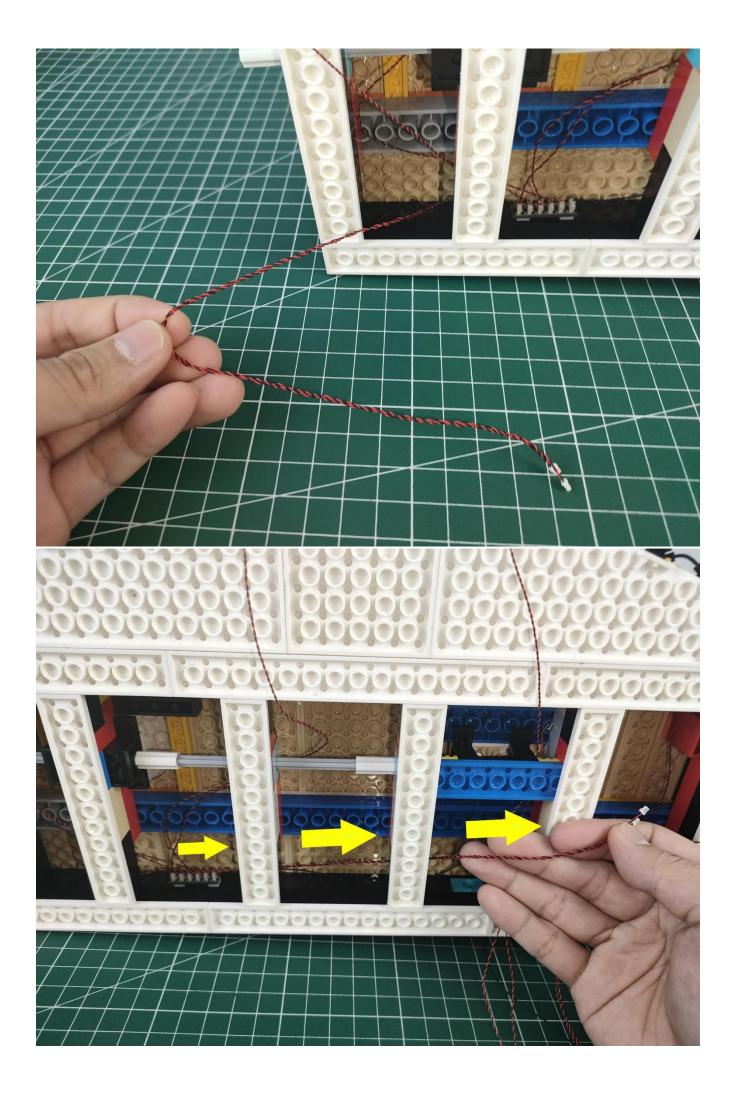



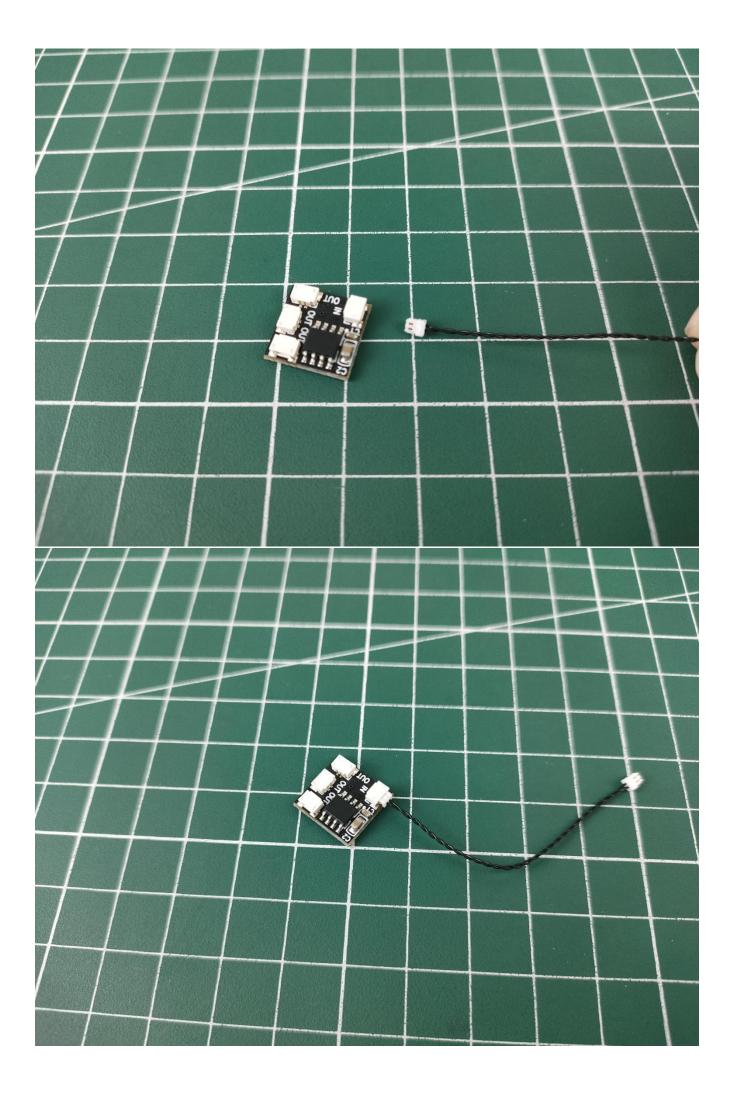



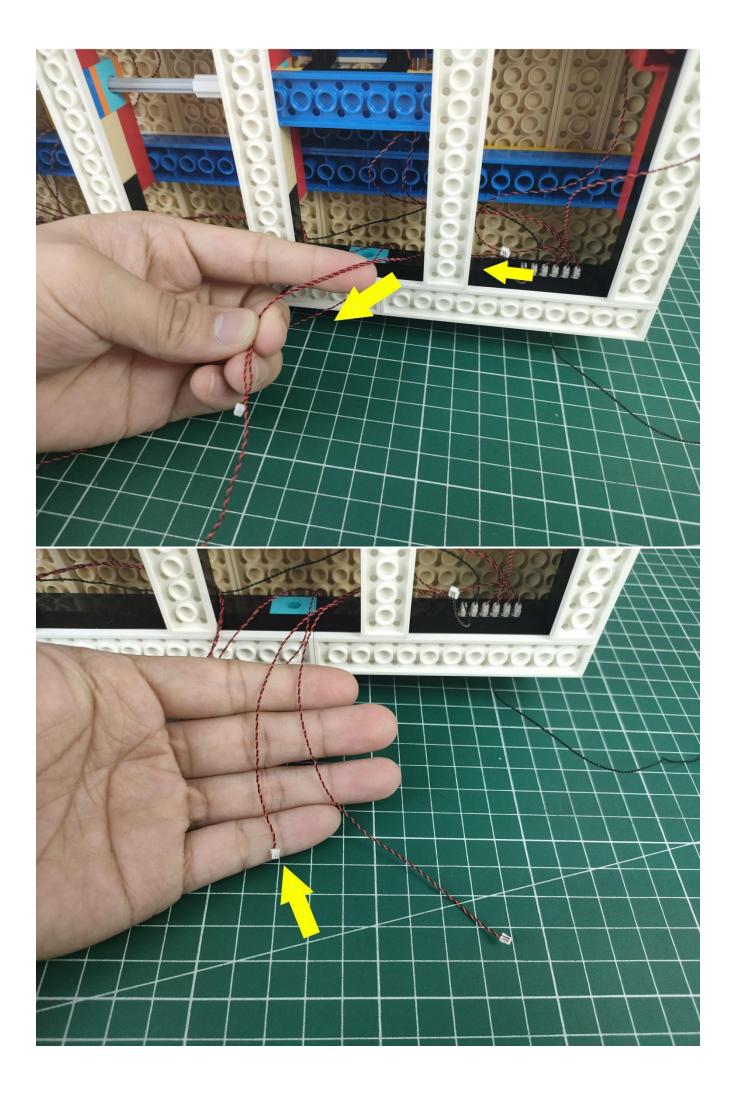















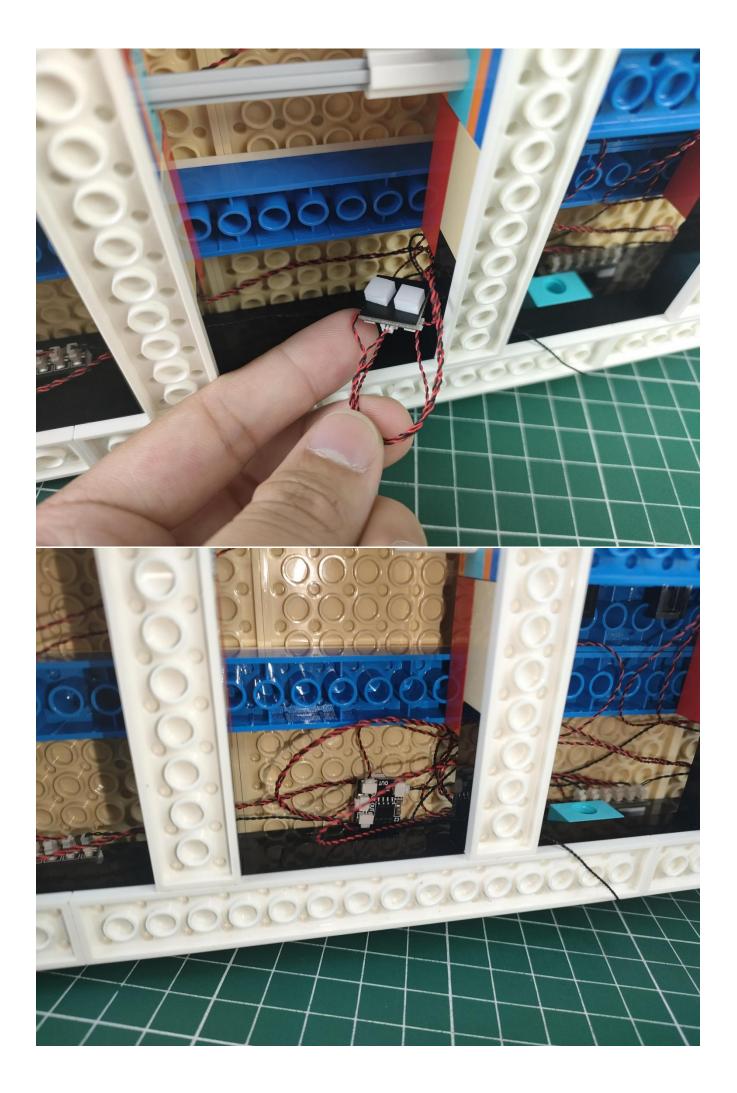











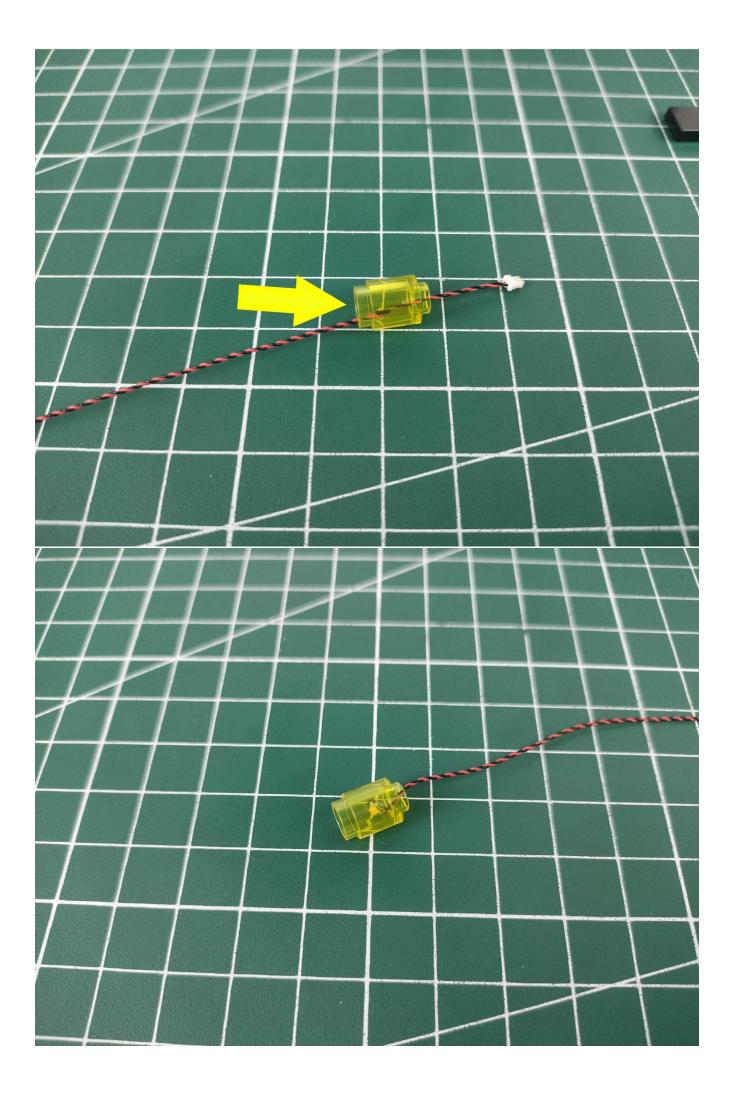

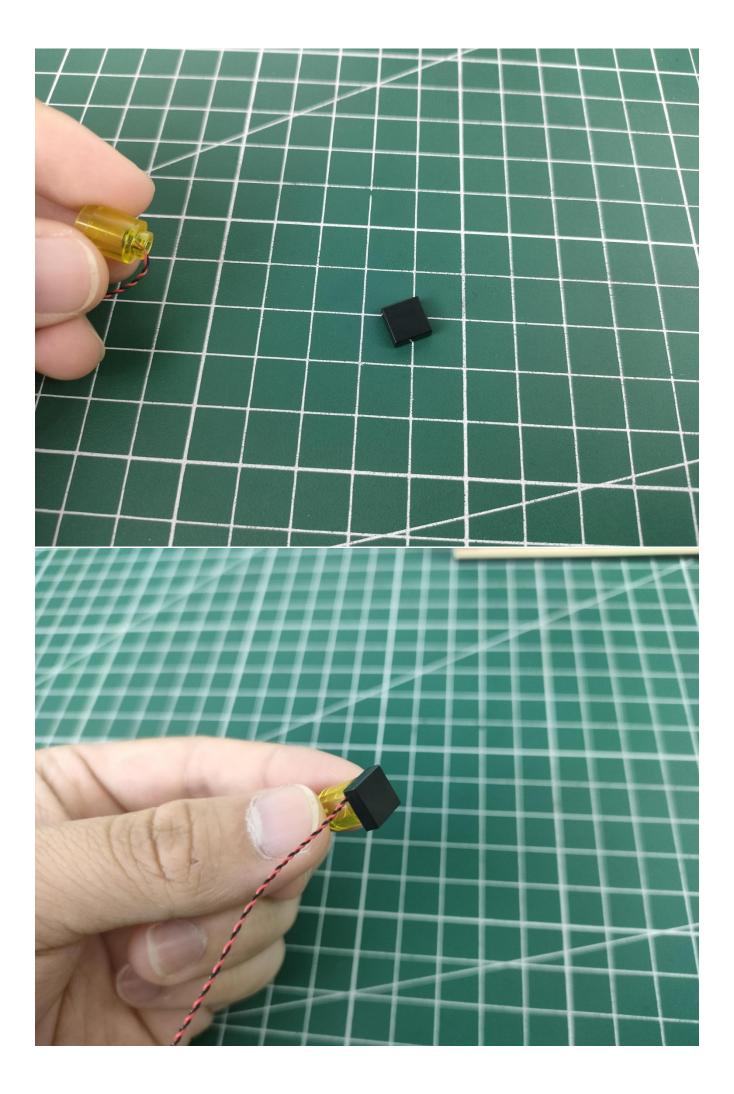


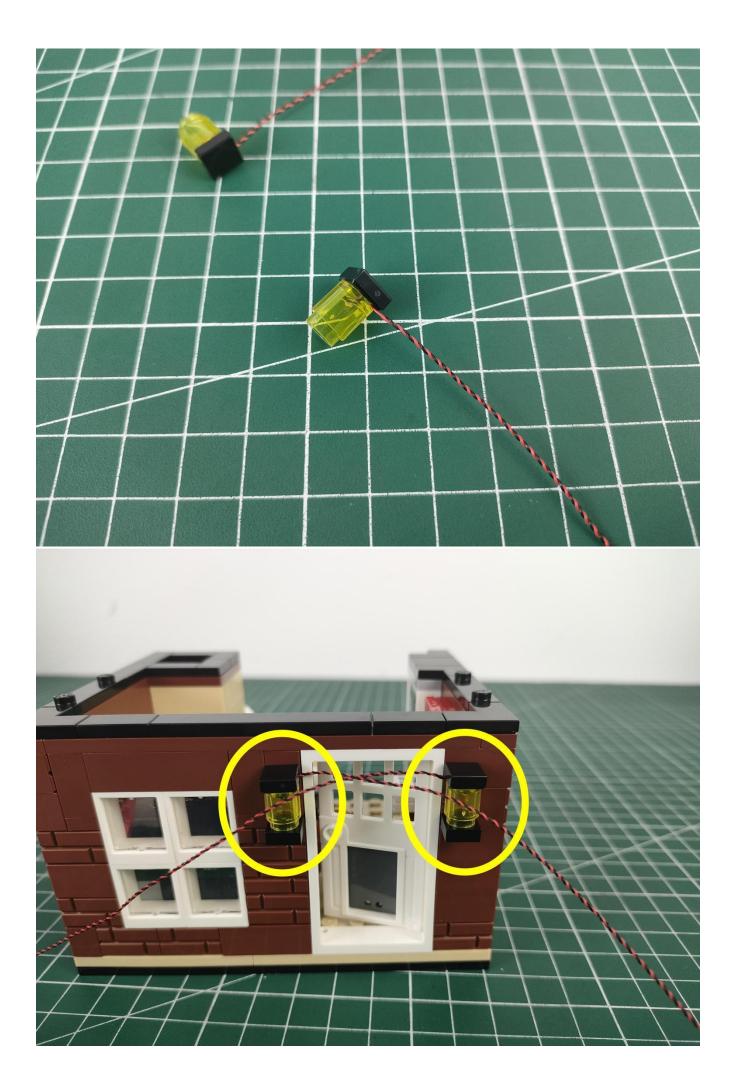

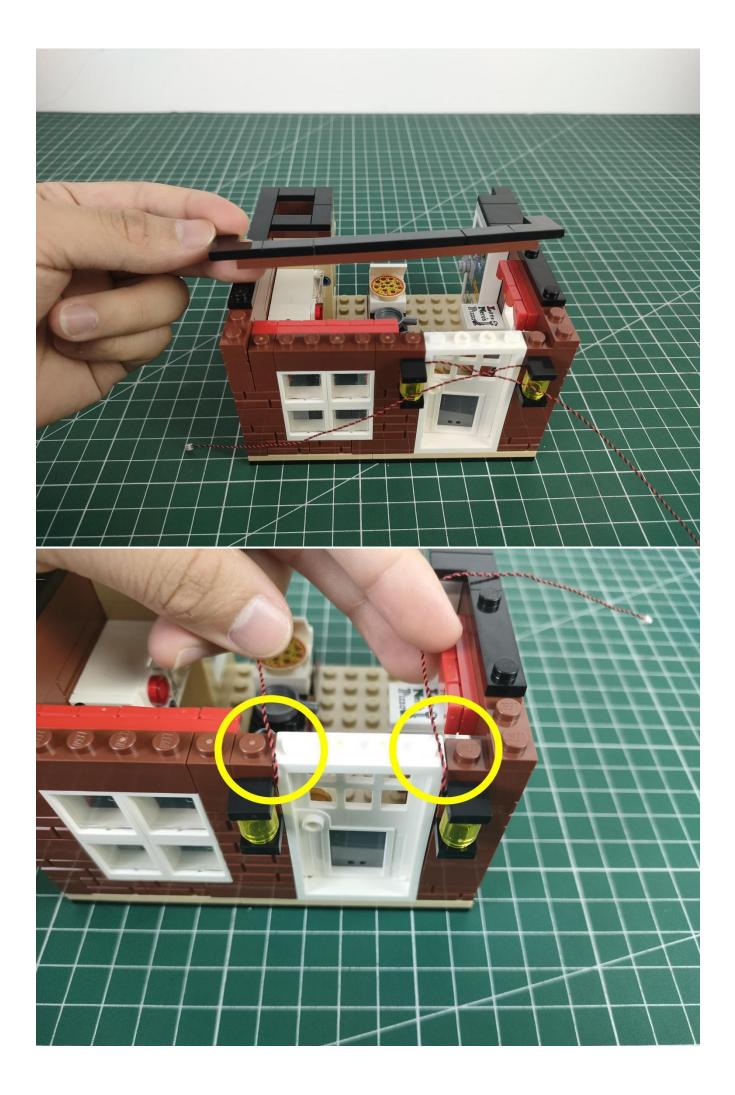

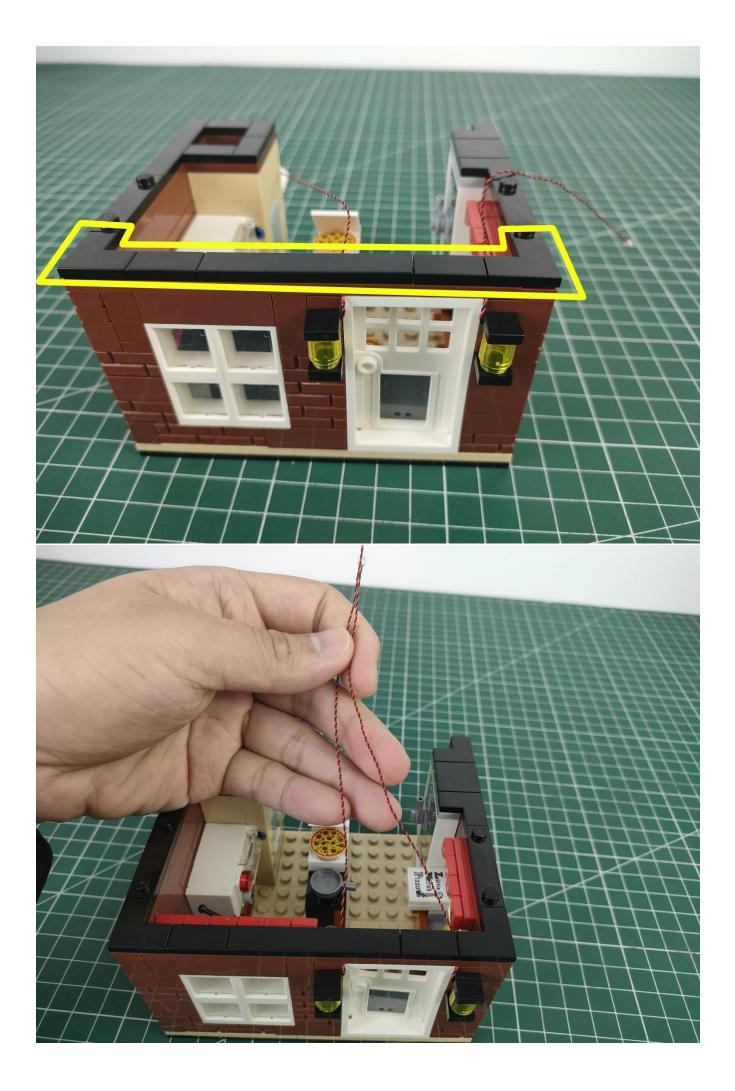




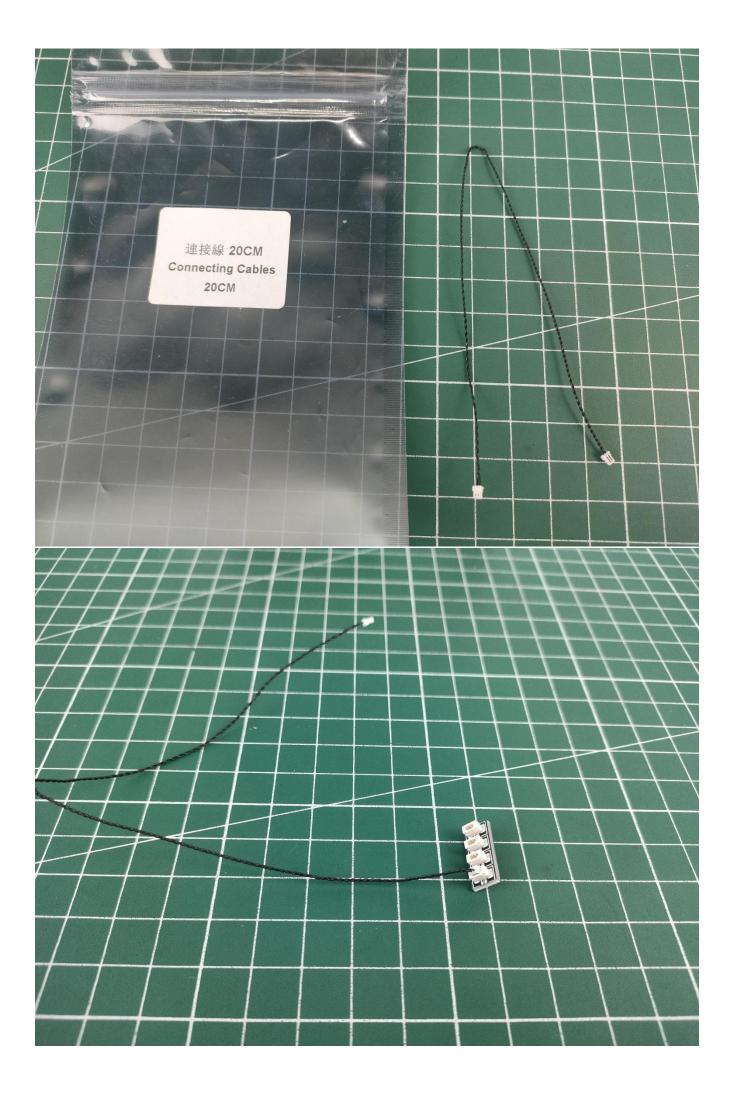








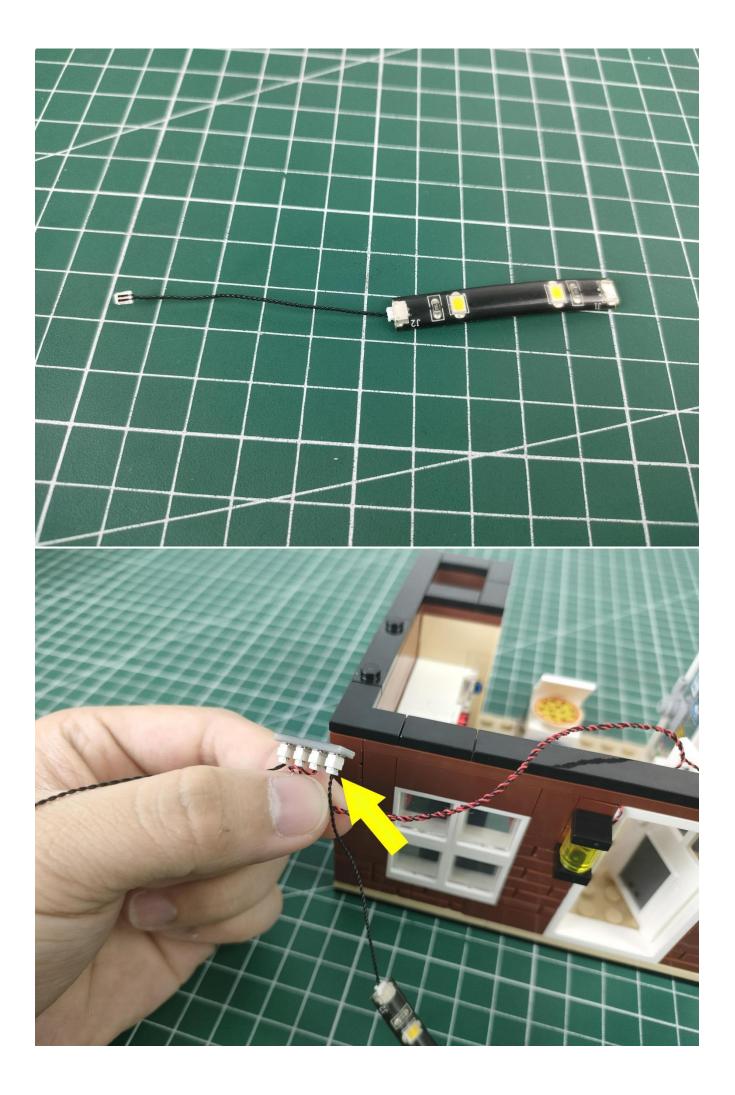



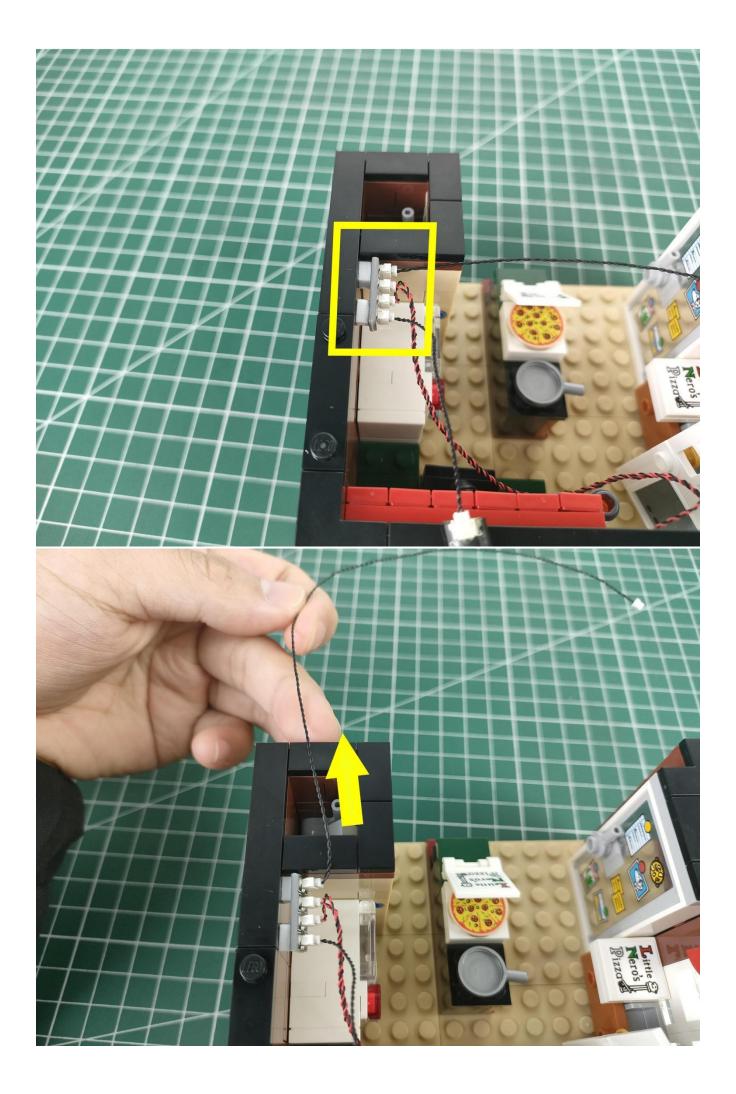


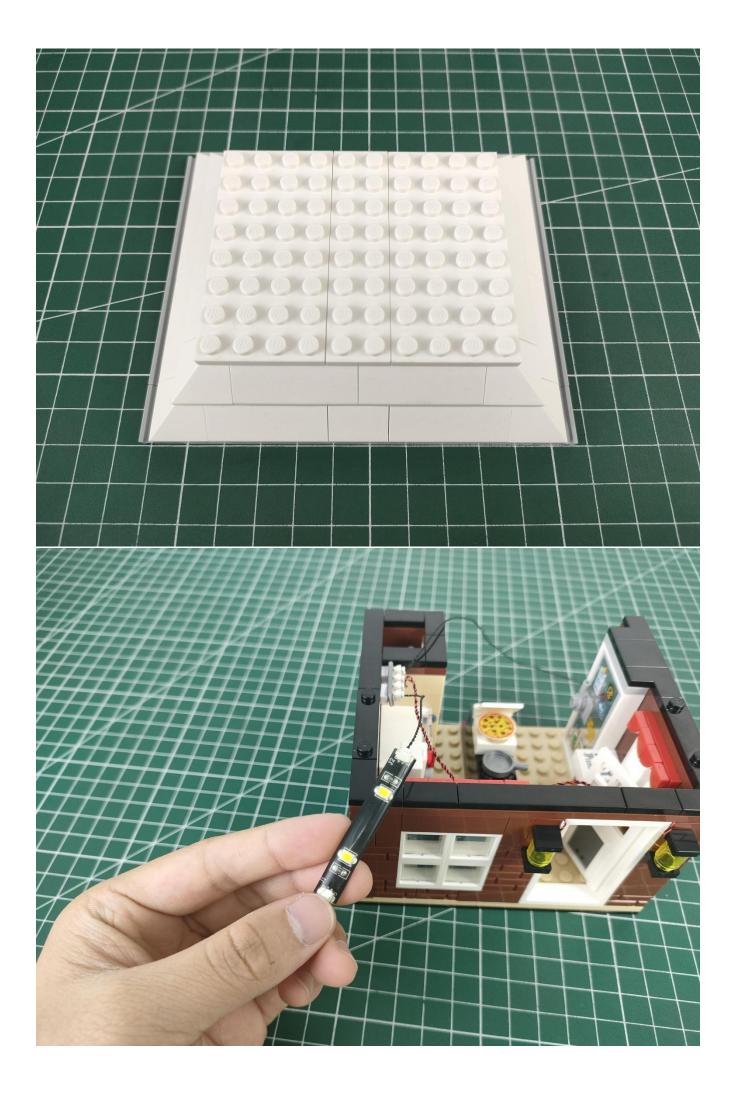


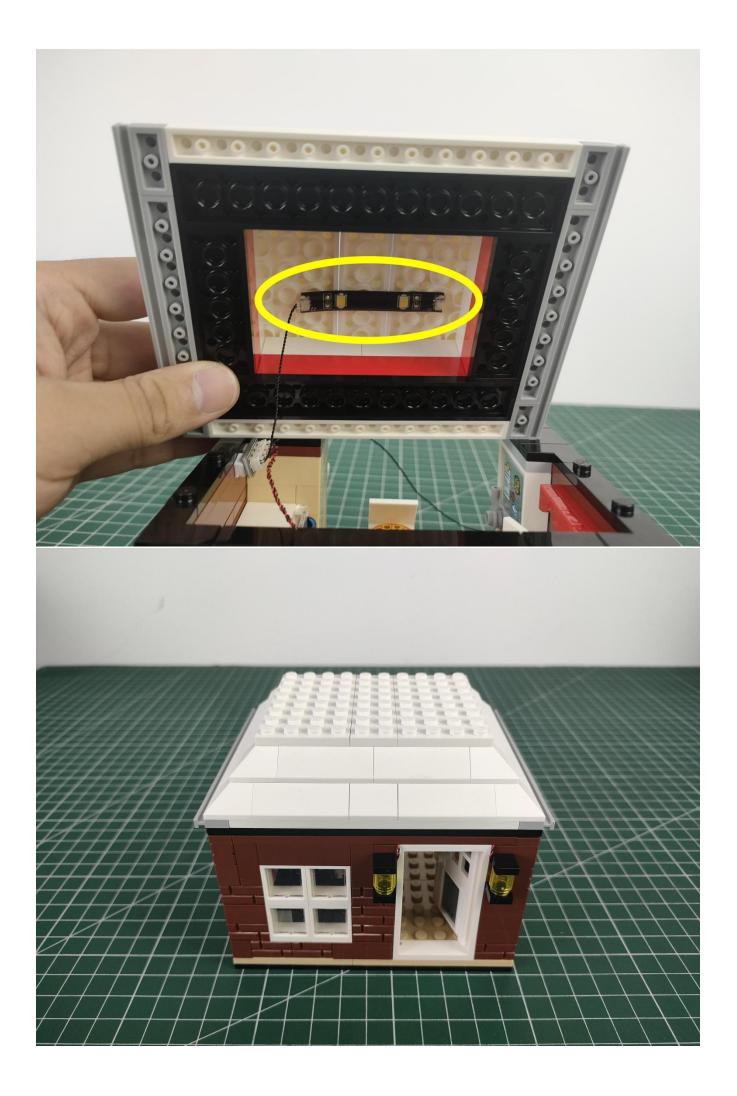





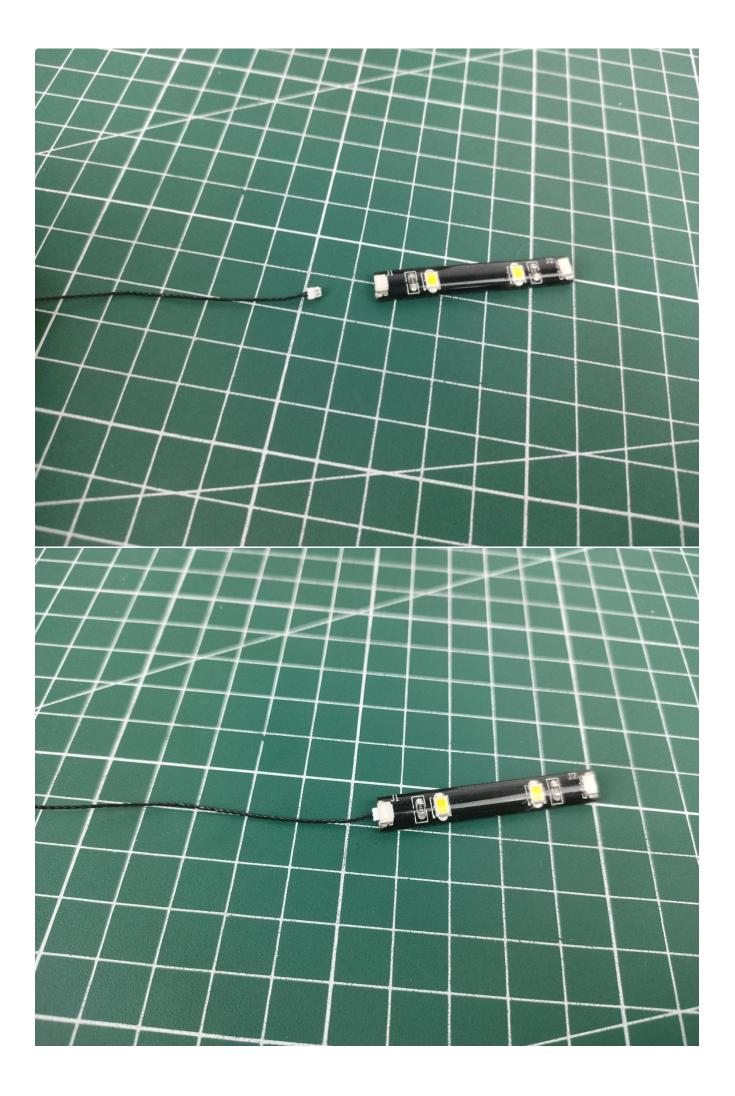

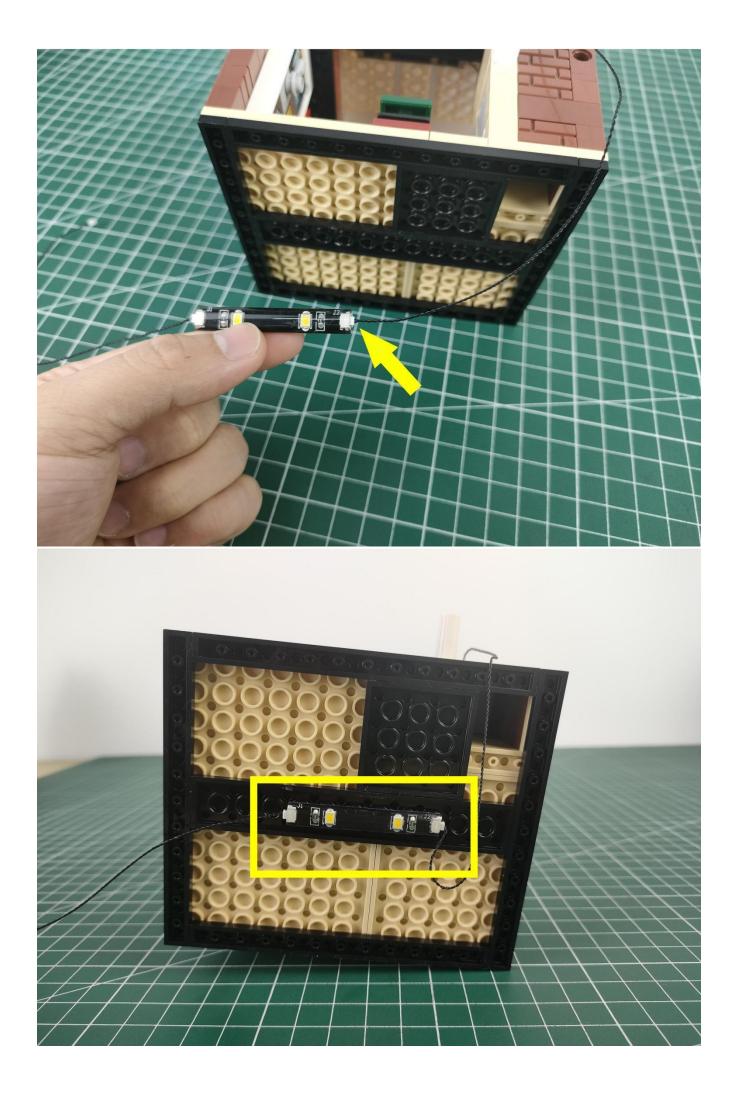







Remote control function description



ON: All branches are opened OFF: all branches are closed


- A: open/close A road
- B: open/close B road
- C: open/close C road
- D: open/close D road


FS: Turn on blinking for the last open channel


BLN:Start breathing for the last opened path


- \uparrow : Increase blinking/breathing rate
- \downarrow : Increase blinking/breathing rate


Brightness+: VIncrease brightness Brightness -: Reduce brightness

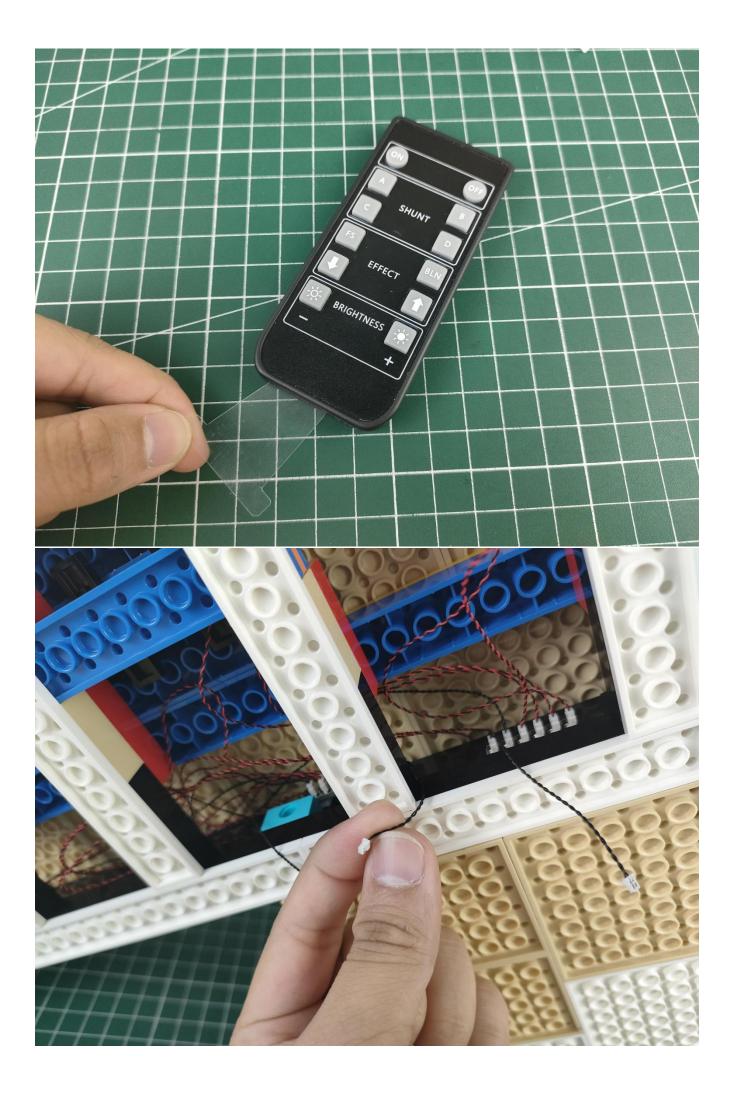

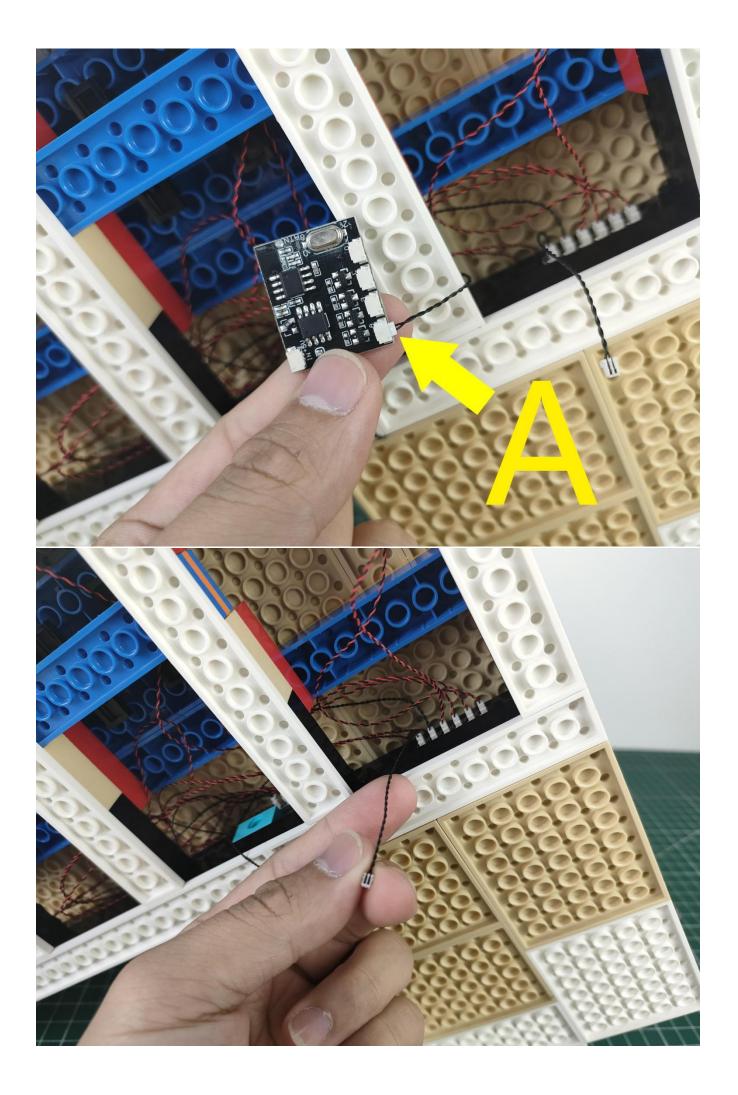


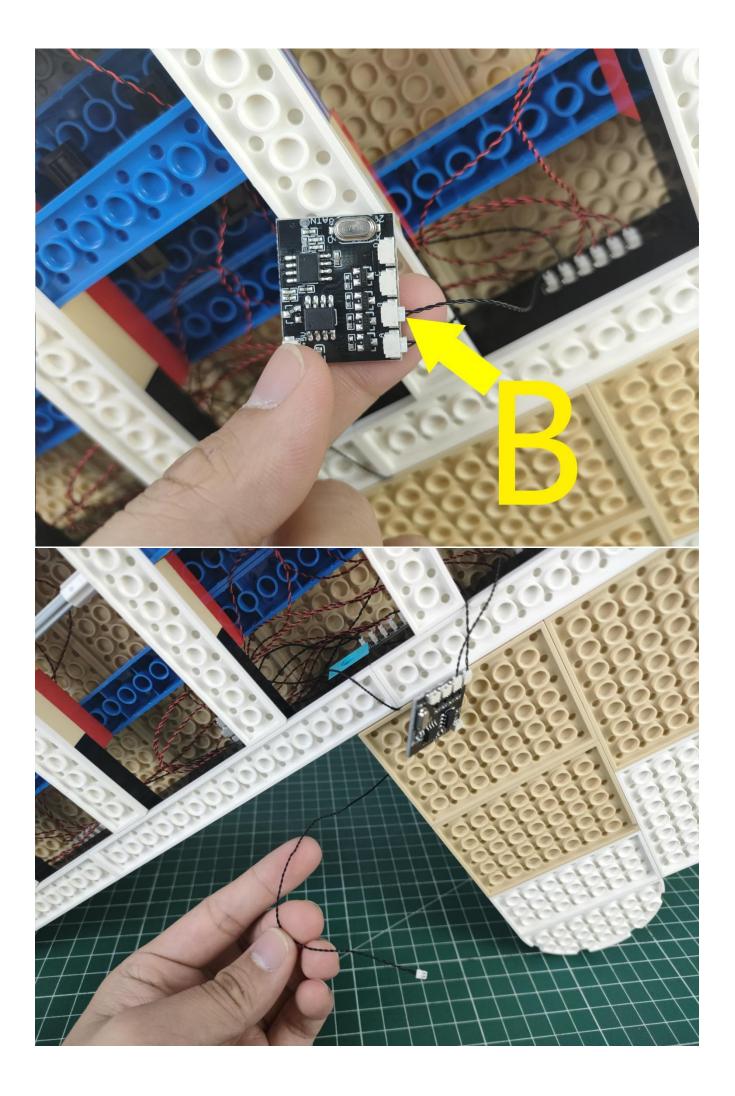


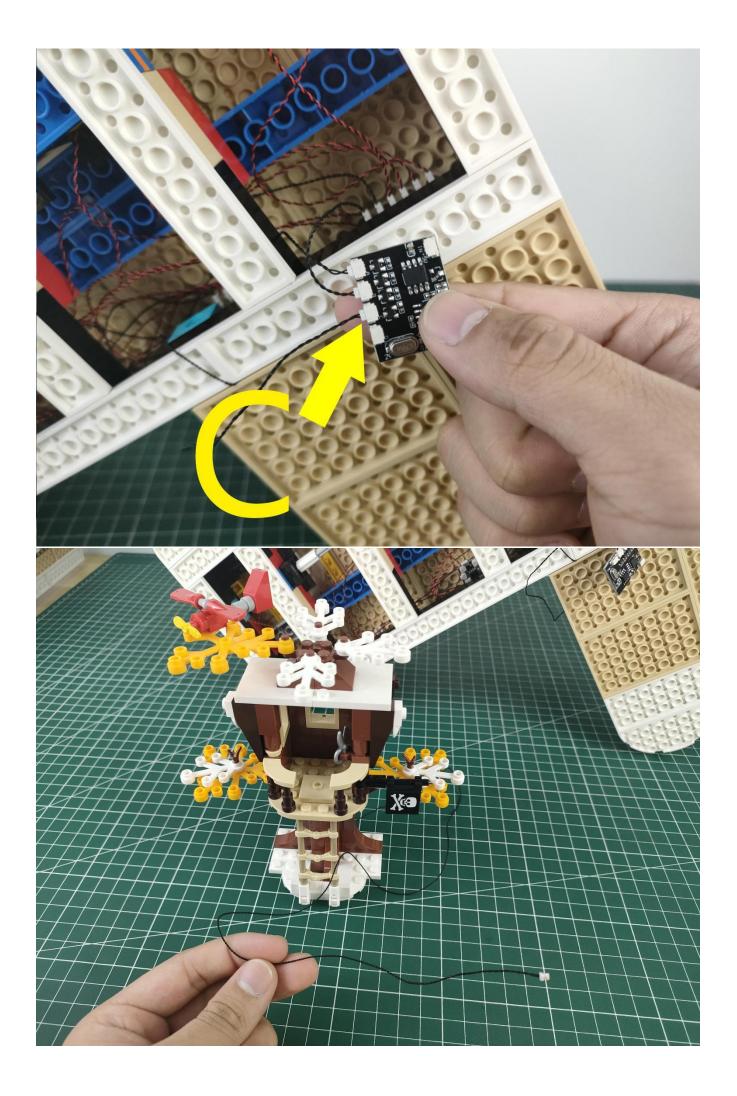

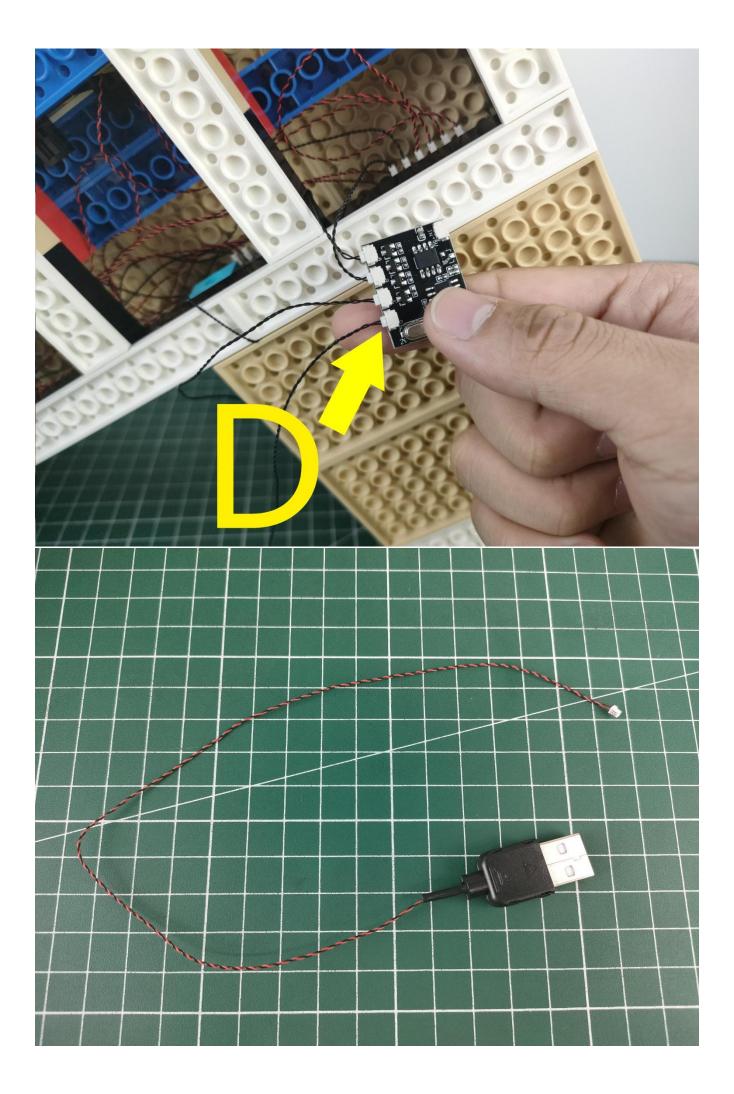



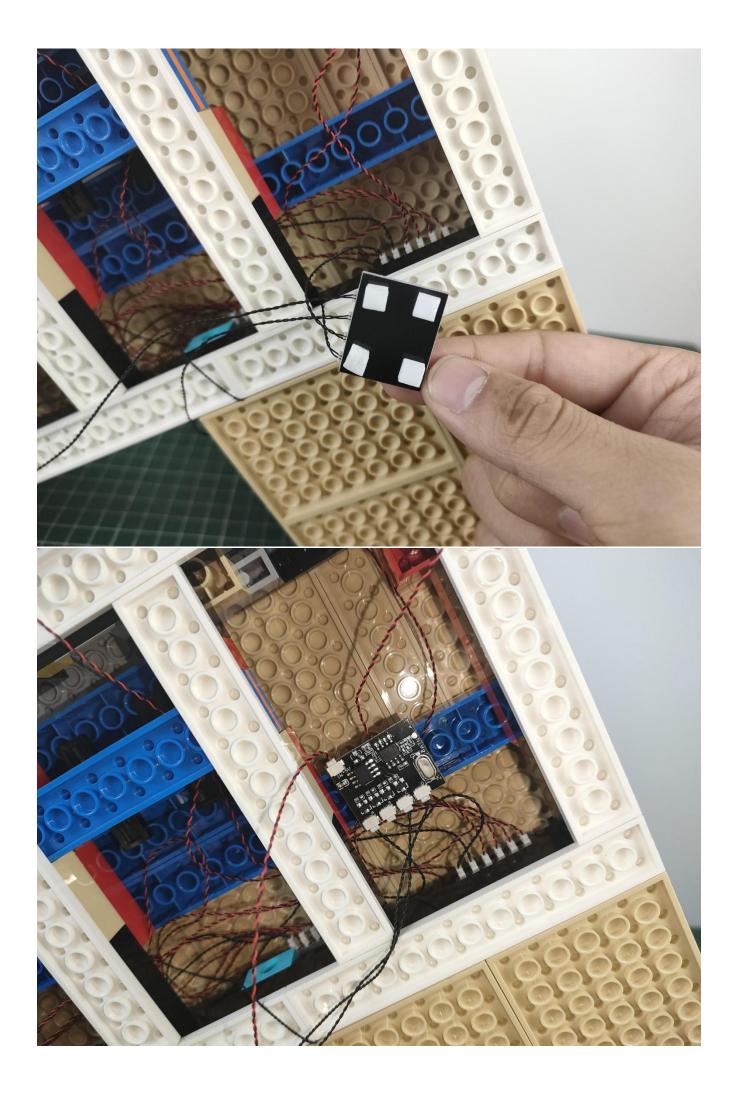

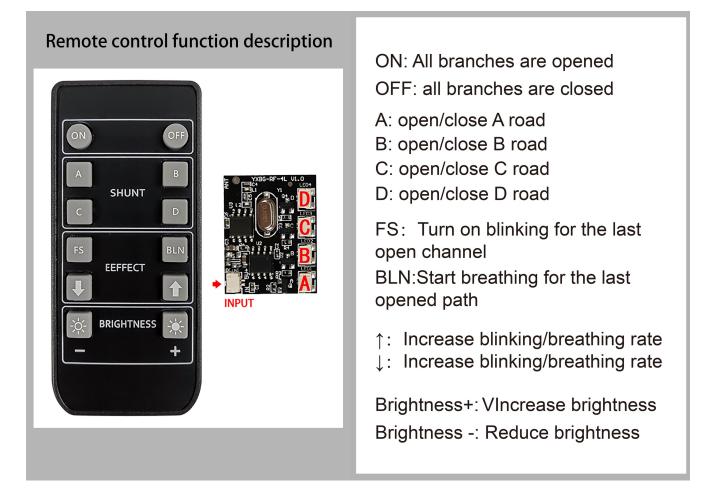

The installation is complete.



The above are ideas and instructions provided by our designers. Please move on:

1: Do you have any suggestions about the material and quality of our products?

2: Do you have any suggestions on the installation instructions and the degree of difficulty of the installation?

3: If you have better installation method and ideas, please contact us in time.