

42154 2022 Ford GT P45602

- **P45602 is the unique code of lighting set, we use this to accurately identify the product you purchased and the corresponding manuals and services you need to obtain. Please make sure your product code is the same as the label on the back of the box shown “42154 P45602”.**
- **Installation requires a lot of patience and great observation that your LEGO bricks will come alive when you get this finished. The bricks with lighting as below, so make sure you're ready and let's get started.**



Strategies for the Installation

This instruction divides three sections to complete the installation of the lighting set.

Section A: Check the type and quantity of components.

The quantity and type of components of each products are different and it needs to be carefully checked to make sure there do have enough material. The type of components is indicated by the label on the bag.

Section B: Test that each components is working properly.

Each components is made individually so it is necessary to test that each components is working properly to avoid the situation that the lighting does not work .

Section C: laying out components following the instruction.

Our material is very small but not fragile, just be reminded that don't to pull the wires too hard. For different people, there may be some installation steps that you can't understand. Please look at the previous and later installation step.

Section A: Check the type and quantity of components.

There are 16 bags in this set. The name and quantities of specific components are as shown , please check carefully.

Label	Content	Quantity
A01001 Light-15CM Warm White	Light-15CM Warm White	2
A01003 Light-15CM Red	Light-15CM Red	2
A01101 LED Strip Red	LED Strip Red	1
A01103 LED Strip Blue	LED Strip Blue	1
A01105 LED Strip Warm White	LED Strip Warm White	1
A01107 LED Strip Slow Flash Multi-Colour	LED Strip Slow Flash Multi-Colour	6
A012 Expansion Board	6 Socket Expansion Board	1
	4 Socket Expansion Board	1
A01305 Power Supply	Power Supply	1
A01501 Connecting Cable 5CM	Connecting Cable 5CM	4
A01502 Connecting Cable 15CM	Connecting Cable 15CM	1
A01505 Connecting Cable 10CM	Connecting Cable 10CM	5
A01506 Connecting Cable 20CM	Connecting Cable 20CM	1
A02538 Light Strip-Cyan	Light Strip-Cyan	1
A03701 Remote Control	Remote Control	1
A1029 High-Brightness Light 15CM-White	High-Brightness Light 15CM-White	2
Components		

Please contact us immediately if there have any missing components.




Section B: Test that each components is working properly.

We need a structure to test all lights, so take out the bag with label “USB Power Cord” and “Expansion Boards” as follows.




It is worth reminding that our products are all customized. They have a unique way of connecting. The white plug on wire and the socket of the expansion board need to be connected together to transmit power.

Note that on one side of the white plug you can see two very small golden wires that should be connected to the two golden needles in socket of the expansion board. shown as blow.

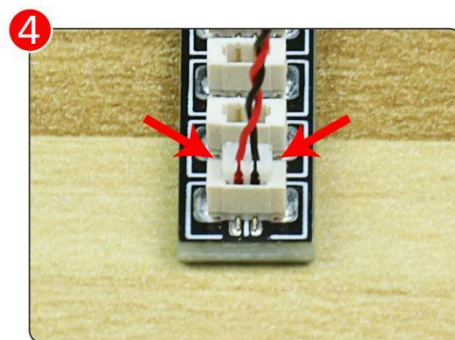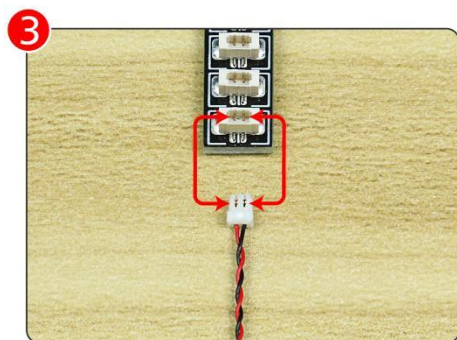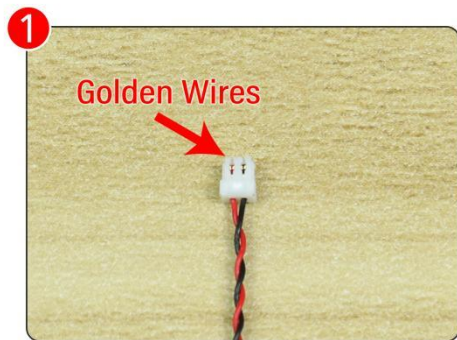


The remote control does not contain batteries, please buy a CR2025 or CR2032 button battery in the nearest store and install it in the remote control.

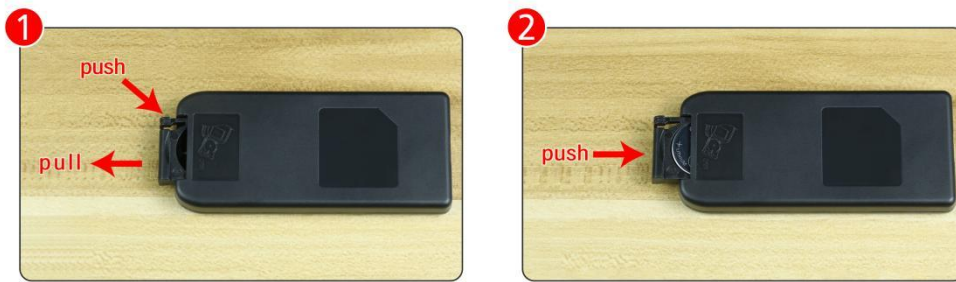


All our connections between plug and socket are all the same as shown above. So for any such structure with plug and socket, please pay attention to the golden wire of the plug and the golden needle of the socket, they must be touched together.

The connection method between the USB Power Cord and Expansion Boards is as follows:

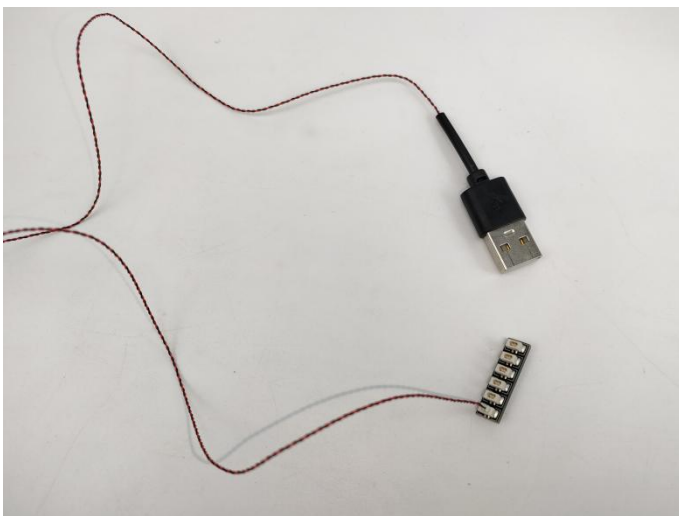

The USB Power Cord can be powered by phone chargers, power banks, etc.

USB connectors to connect devices

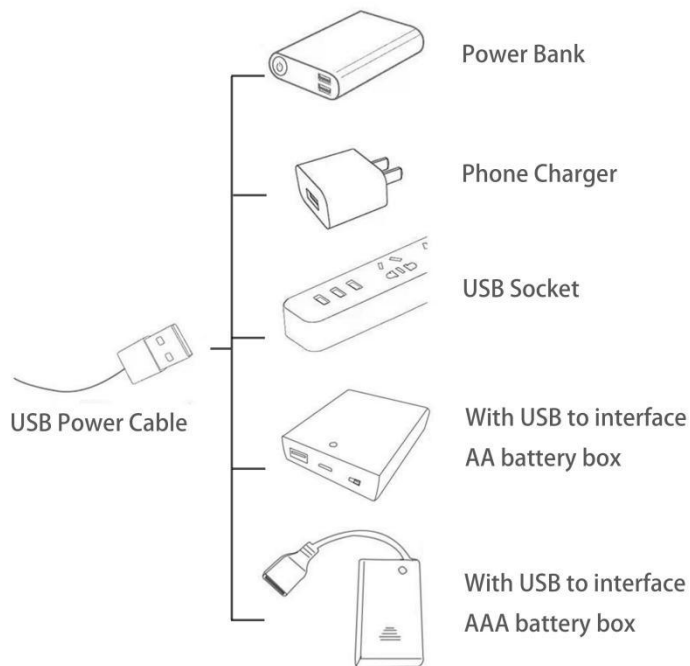

This instruction will use the power bank as power supply . The test structure is shown as follow. All lamp in this set will be tested by this structure.




When we test "A1029 High-Brightness Light 15CM-White" particles,Take out the bag labelled "A1029 High-Brightness Light 15CM-White".Take out one of the light and connect it to the socket. Turn on the power bank, the light will turn on normally as shown below.



LED strip test:

Take out the bag labeled "A01105 LED Strip Warm White". Take out the LED light bar, connect the USB power cable, turn on the mobile power supply, the light will be on normally, as shown in the figure below.

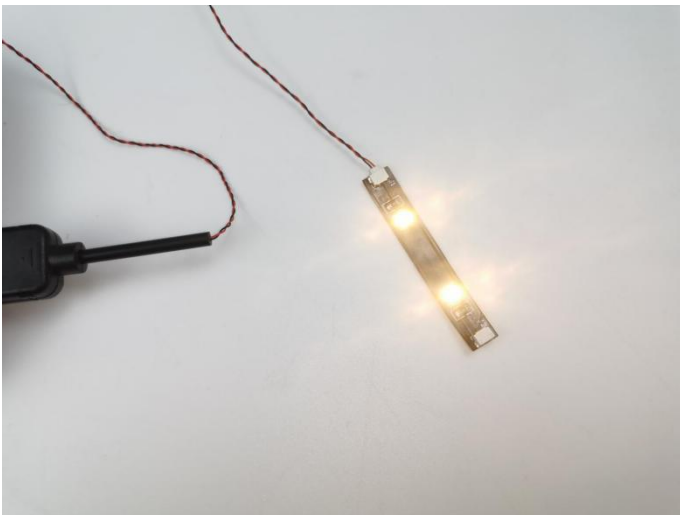

Test each lamp according to this method. It should be noted that after the test, the lamp must be returned to the corresponding bag to avoid confusion of types.




The components needs to be tested in this set is 2* Light-15CM Warm White,2* Light-15CM Red,1* LED Strip Red,1* LED Strip Blue,6* LED Strip Slow Flash Multi-Colour,1* Light Strip-Cyan.

Please contact us immediately if any components don't work.

Section C: laying out components following the instruction.


1

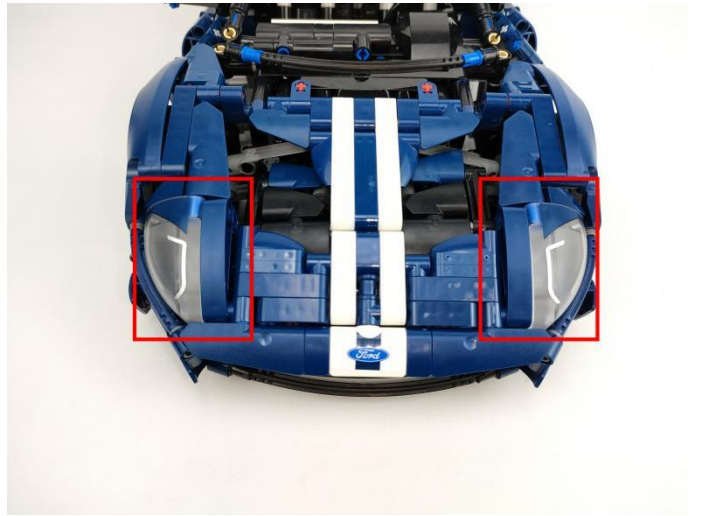



2





3

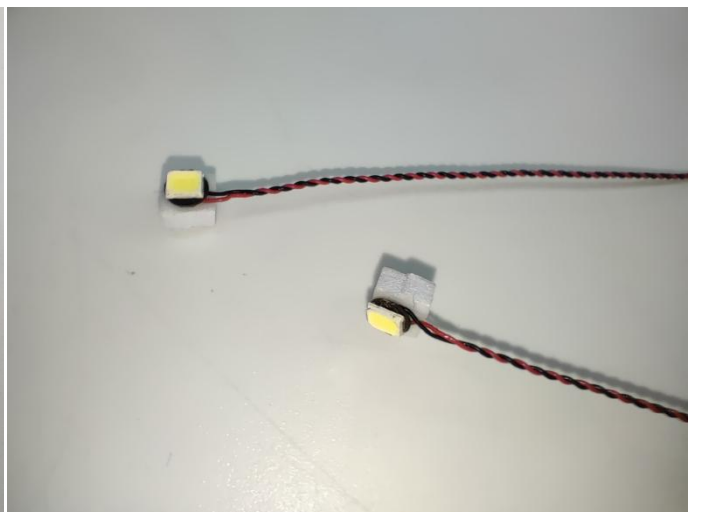


4

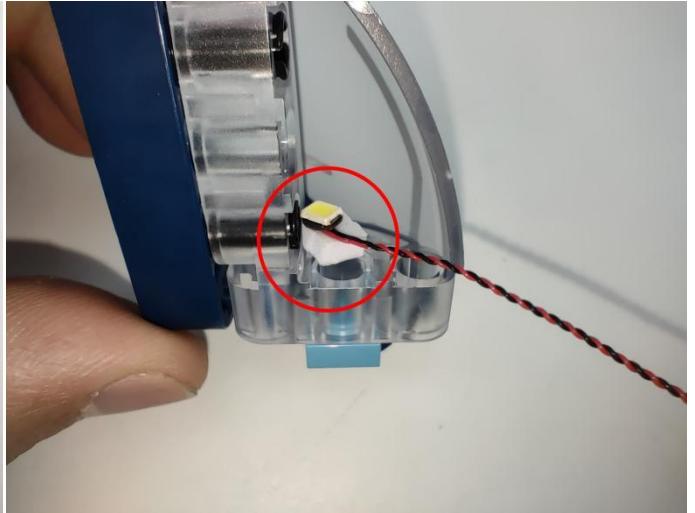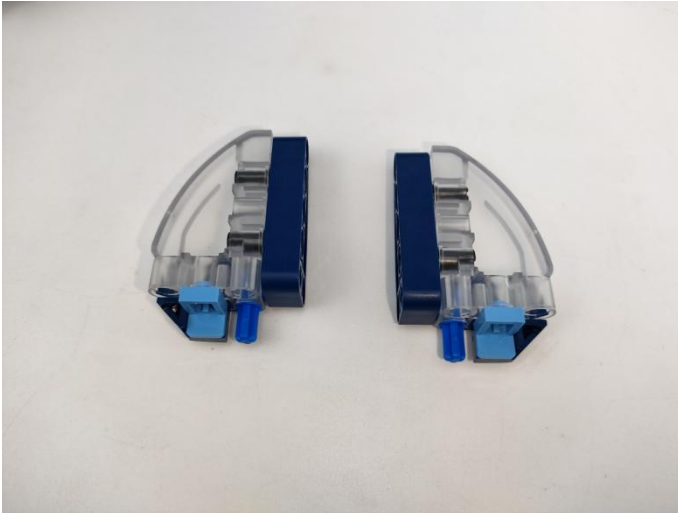

5

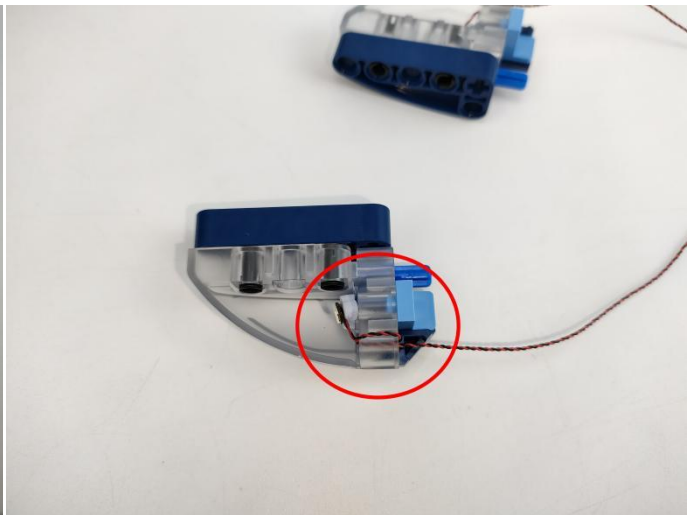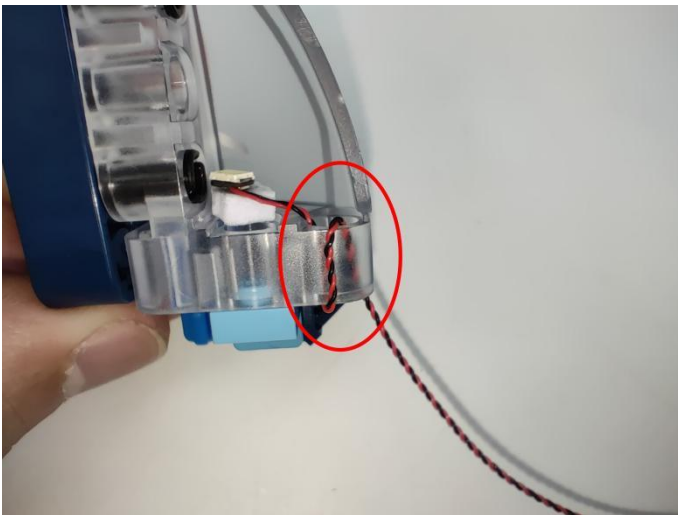



6. Push the gray brick pieces out of the way.

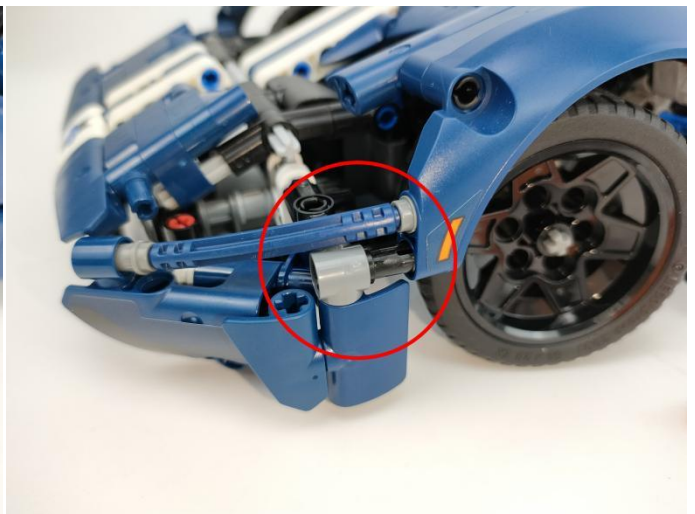

7




8

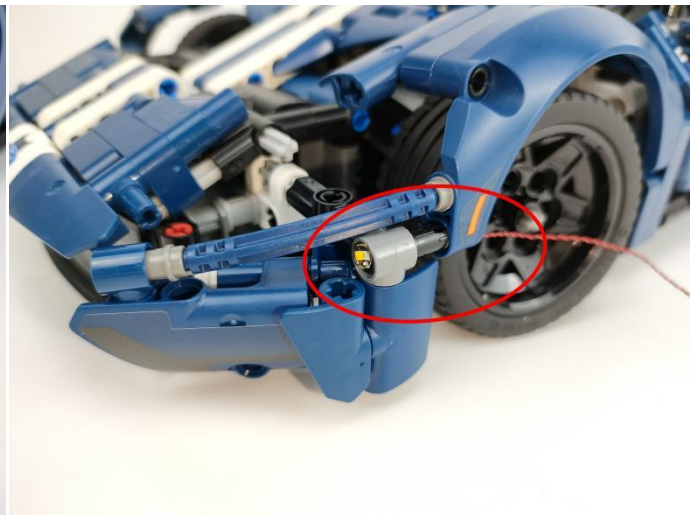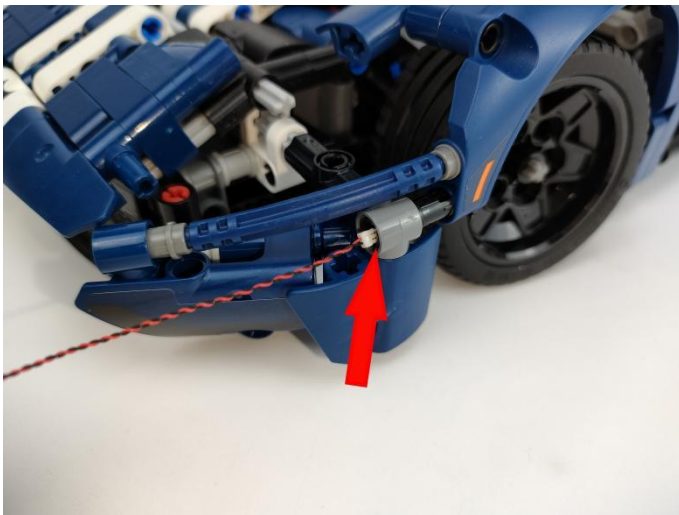


9. Restore the gray brick parts.




10. Push the gray brick pieces out of the way.

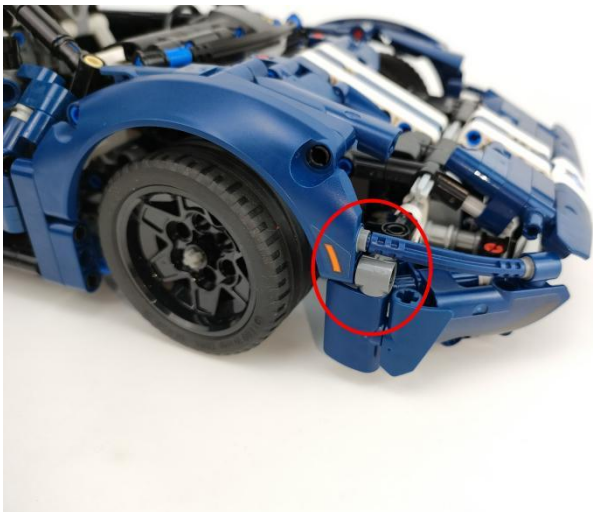



11. Same method as above.

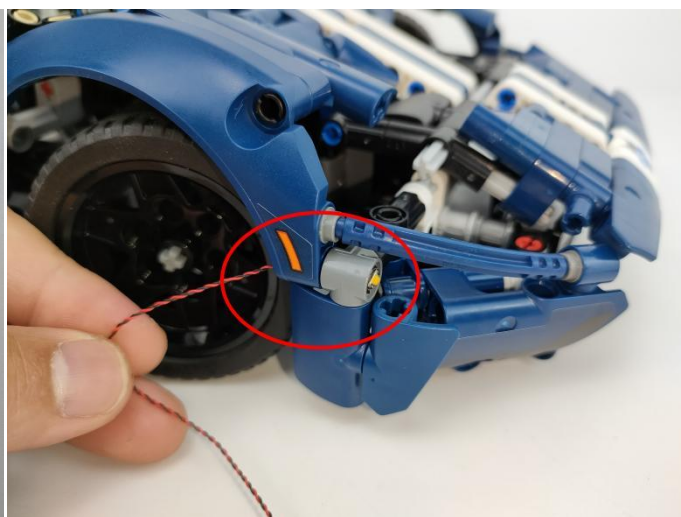


12

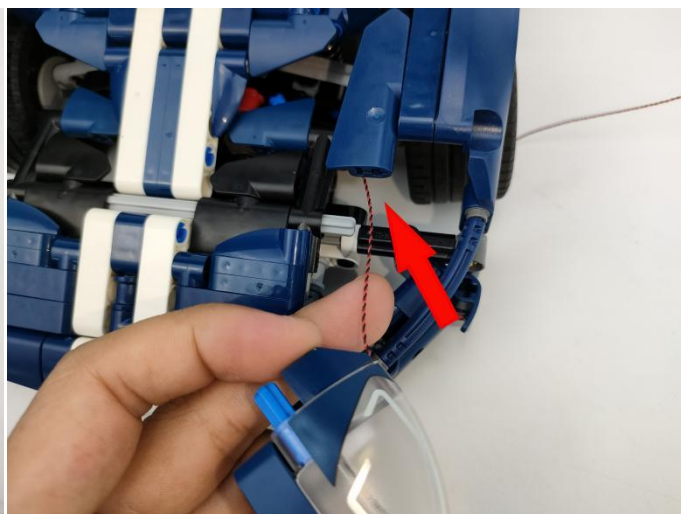


13

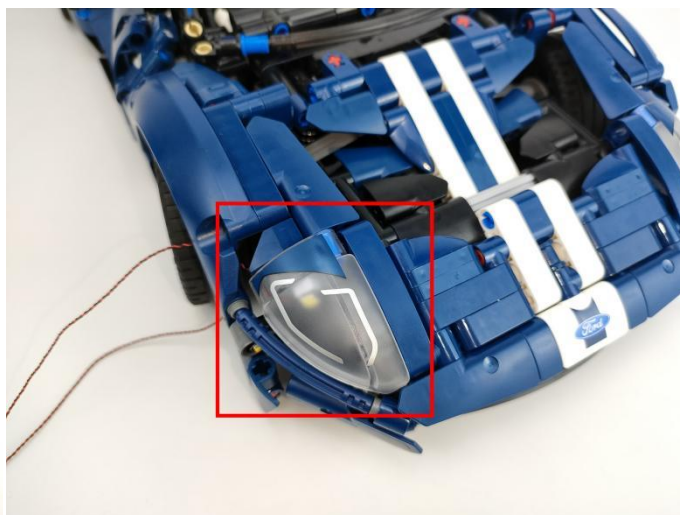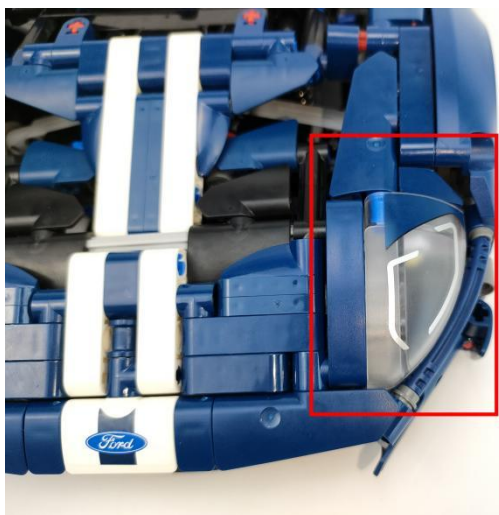


14

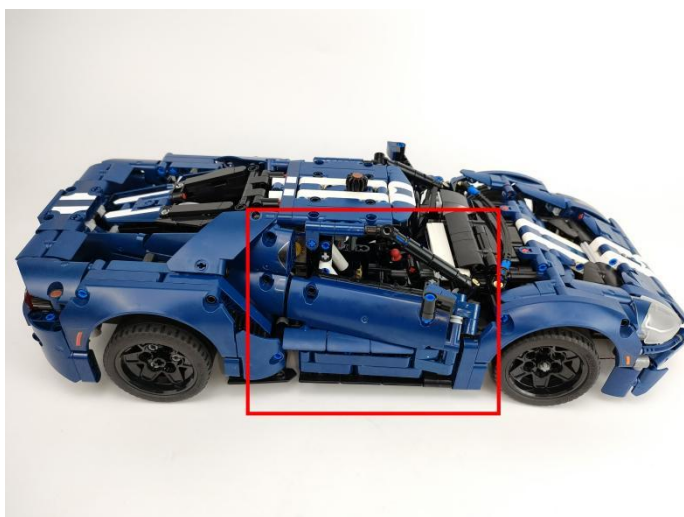

15

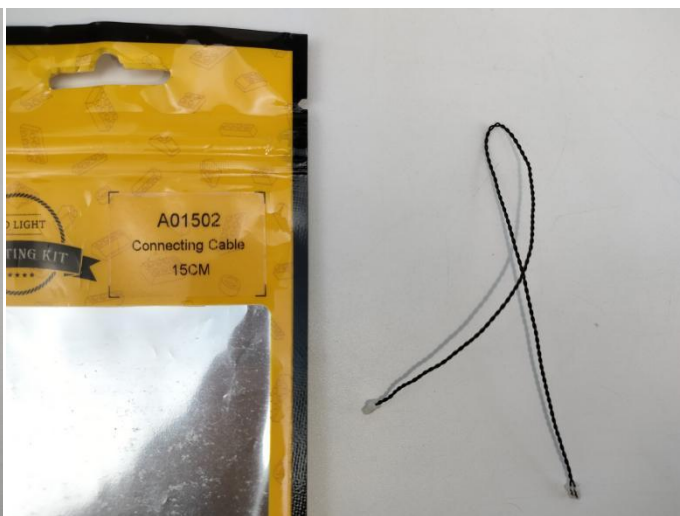



16

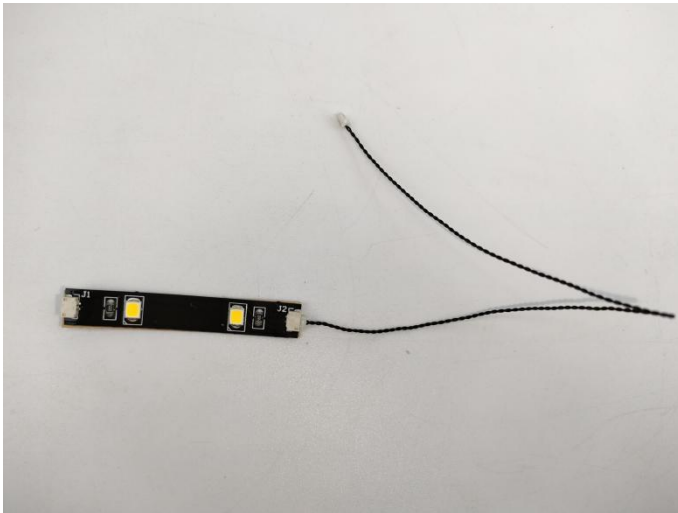



17





18

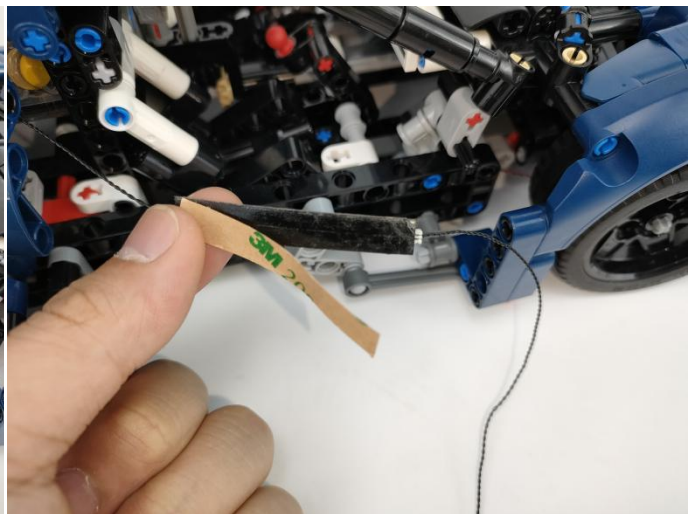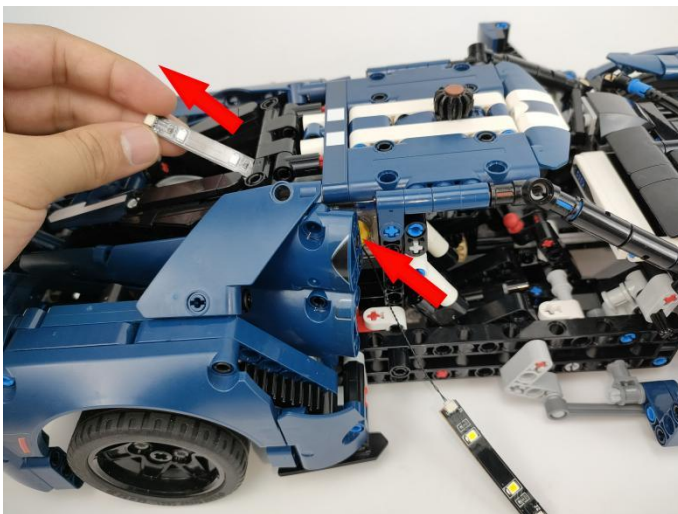



19

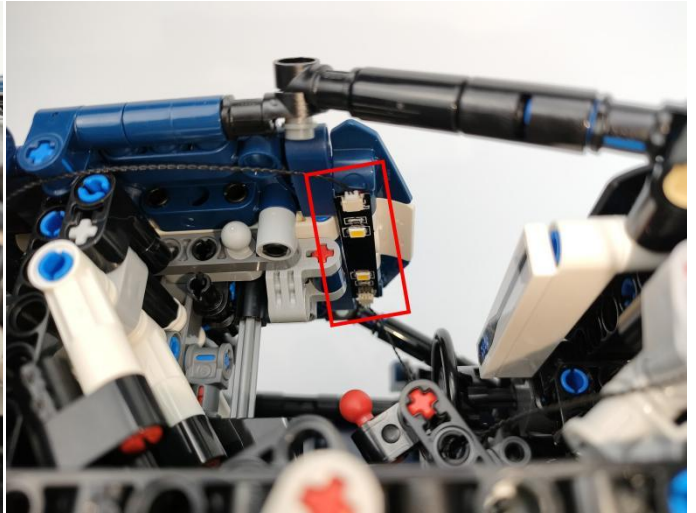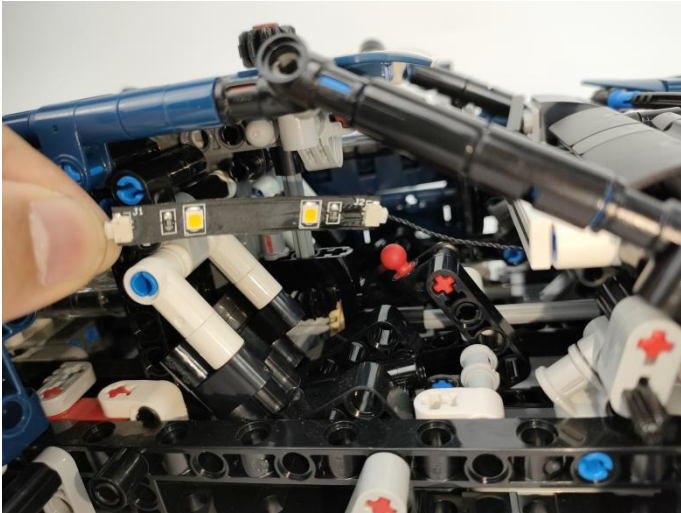



20

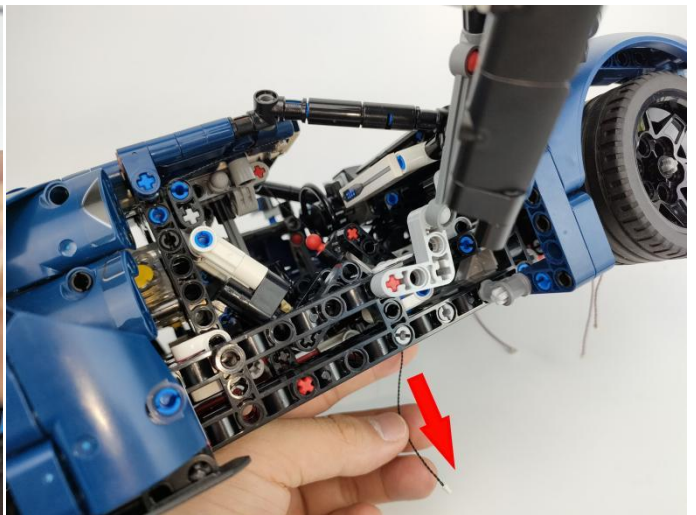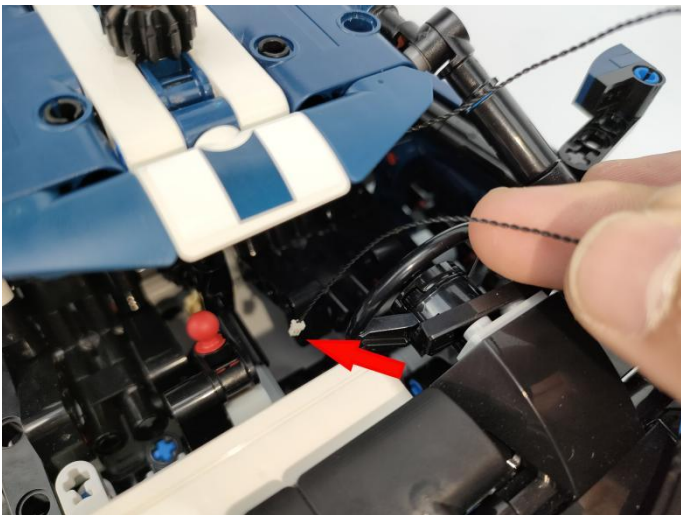



21

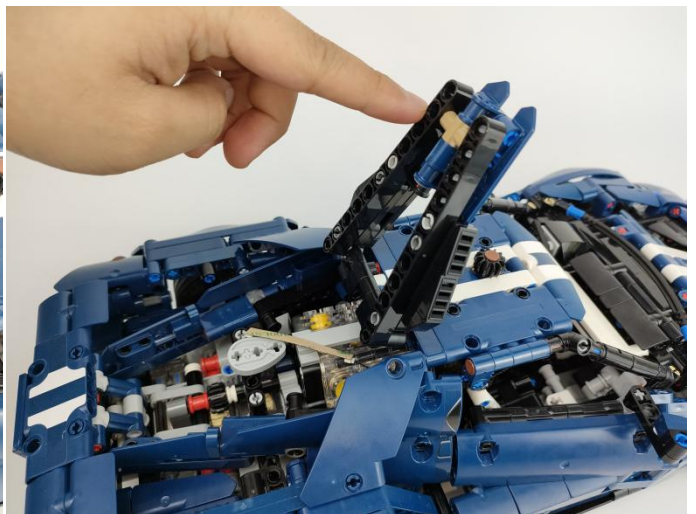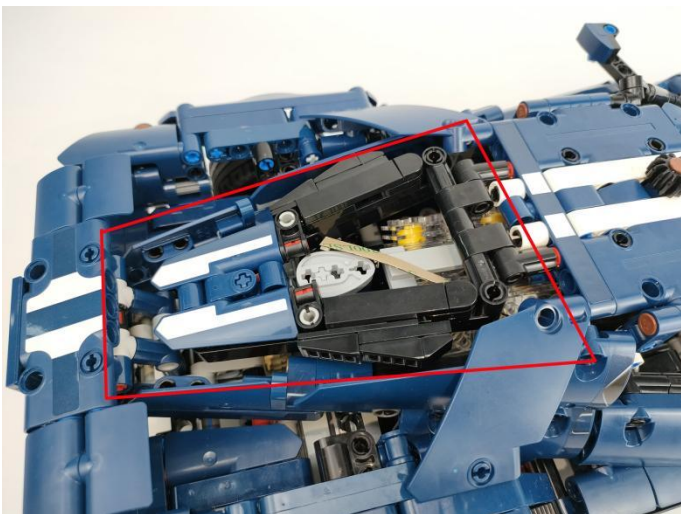


22

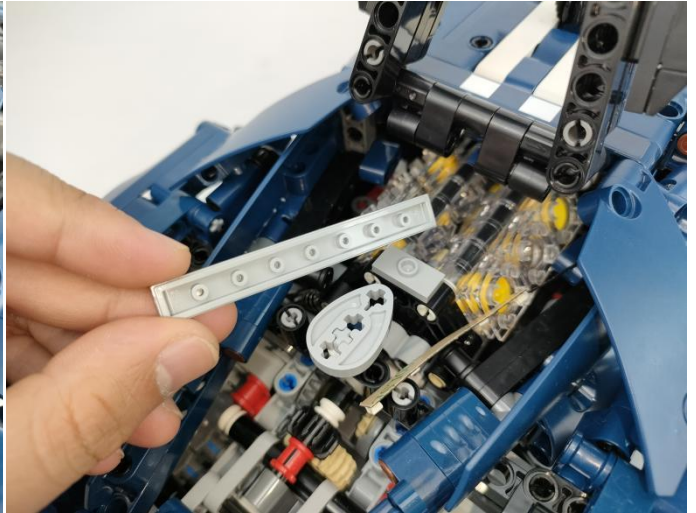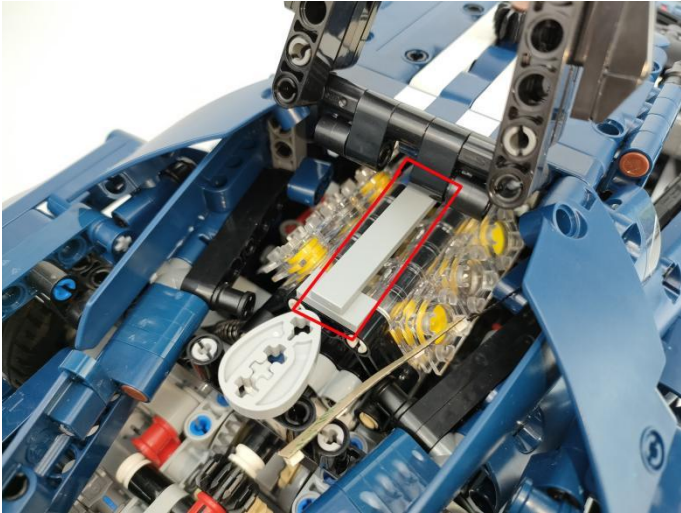


23

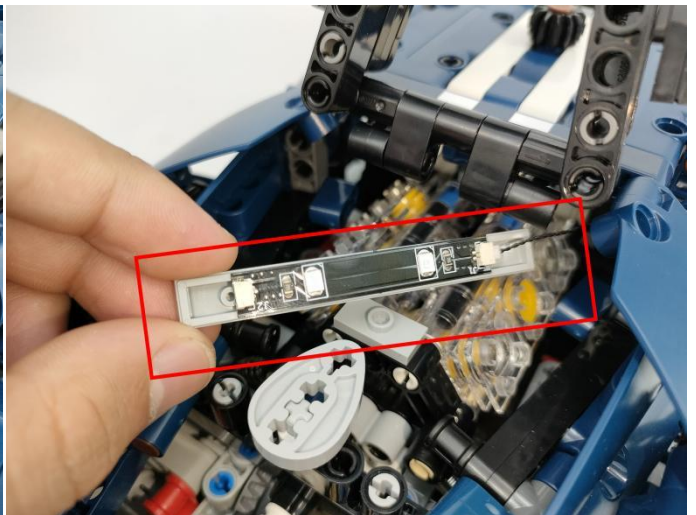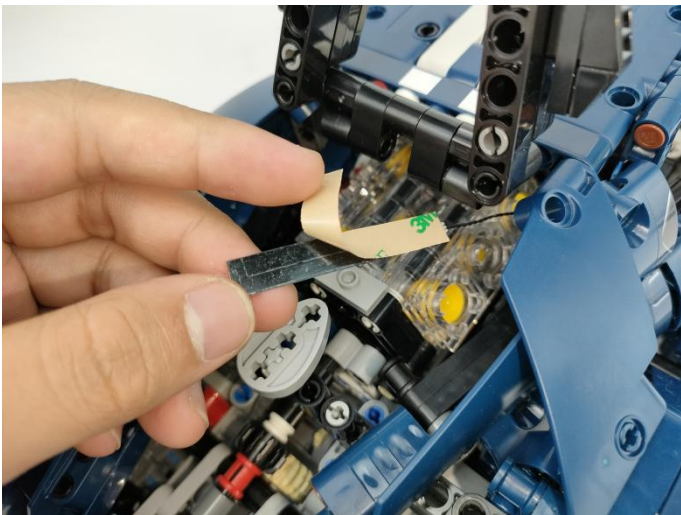

24

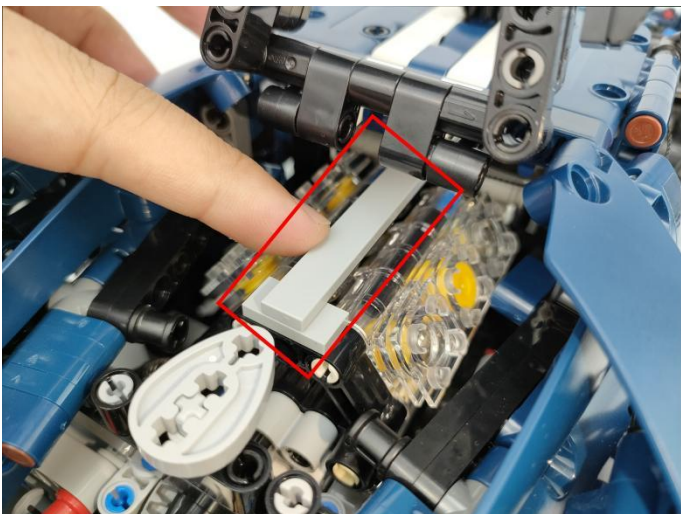

25

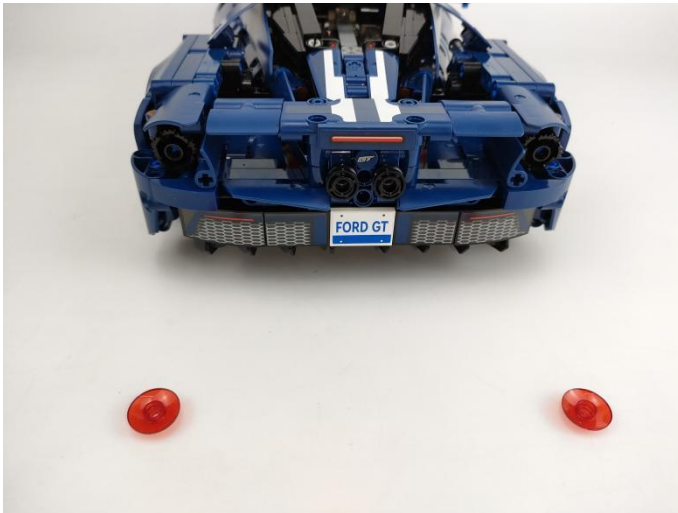

26



Tips

The plate without slit:

The plate without slit:

The squeeze causes the protective layer of the wire to be torn apart, the positive and negative wires touch together, and the set is short-circuited and the hot or wire is crushed, the wire to be disconnected and don't work.



The plate with slit:

The plate with slit:

The wire has enough space to avoid being squeezed endowed with longer service life and more stable effect.





The slit on the the plate round 1X1 are hand-made to avoid squeeze the wire and cause short circuit and abnormal heat during installation.



27




28

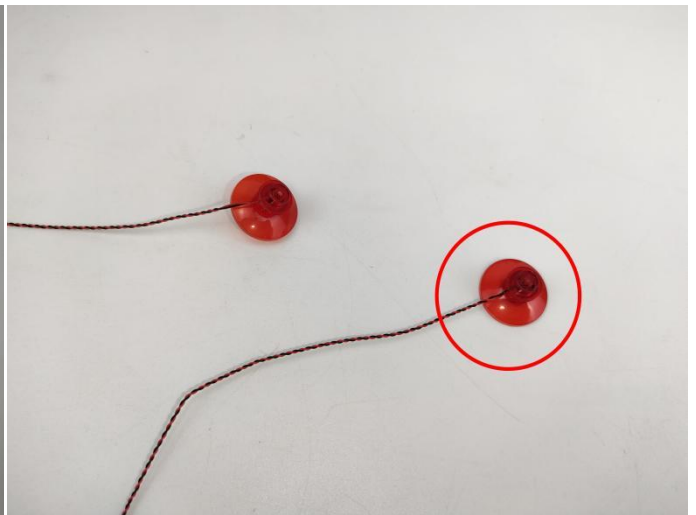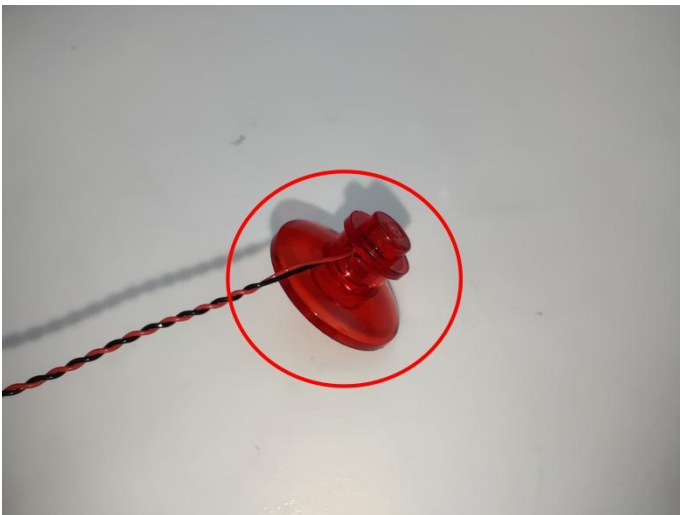

29

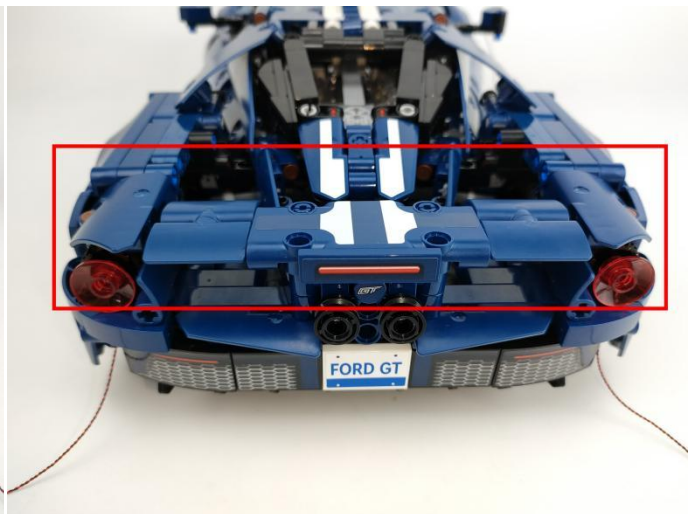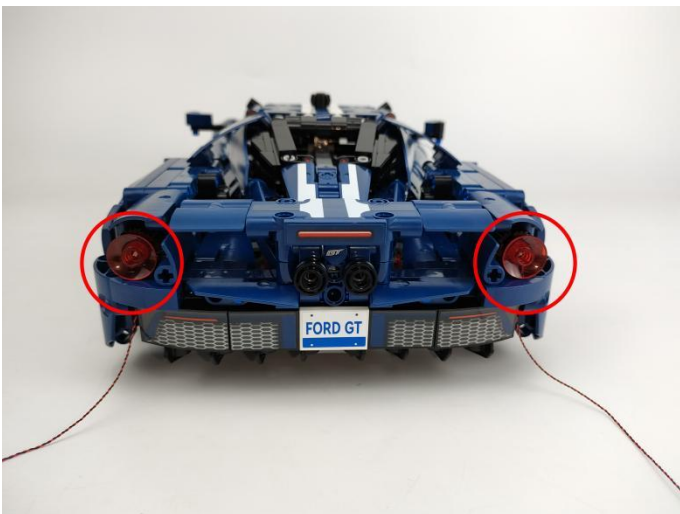



30

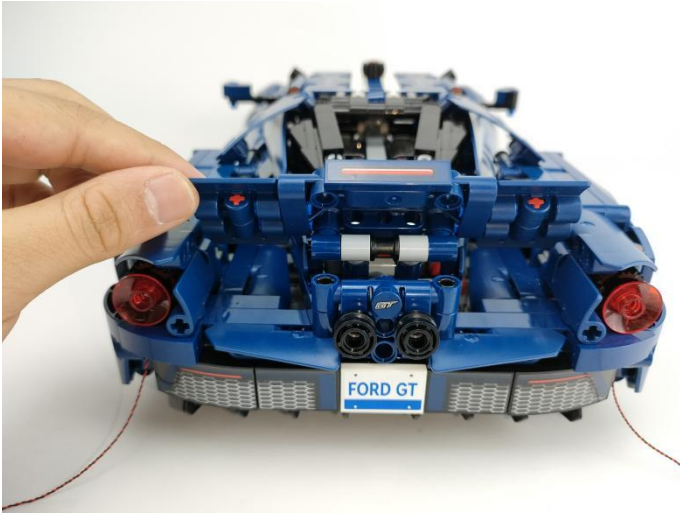



31





32

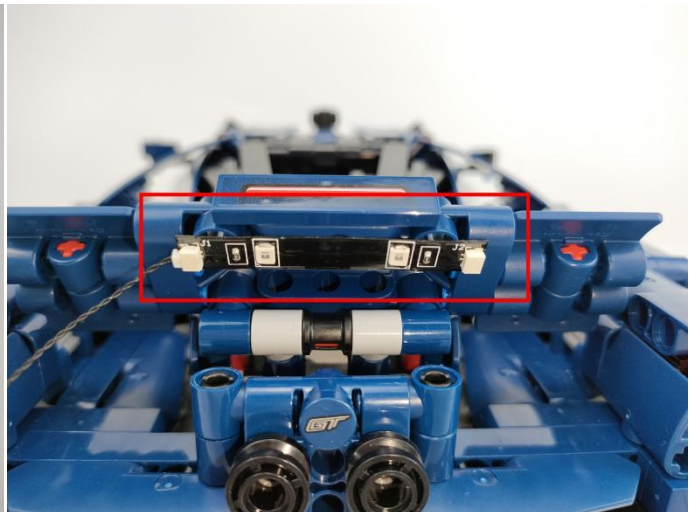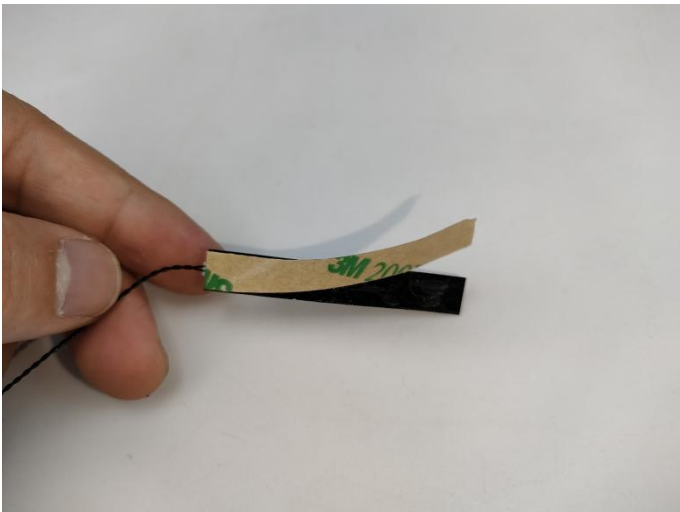


33

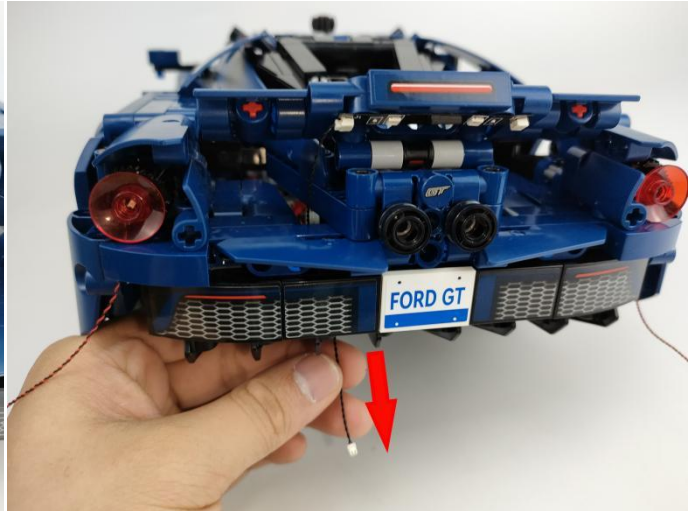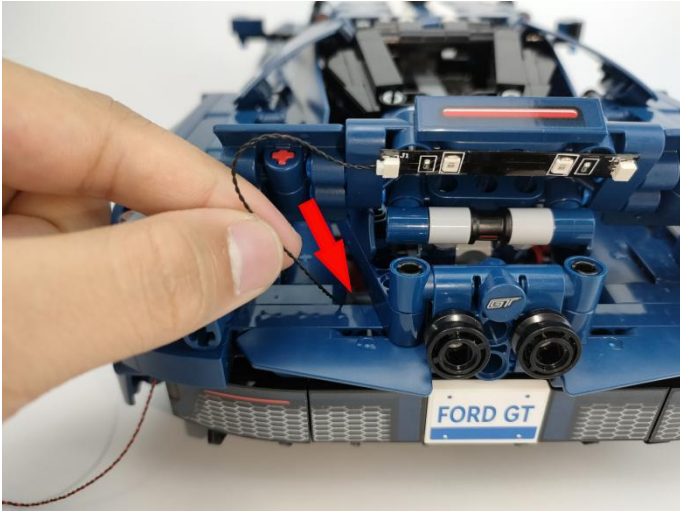



34

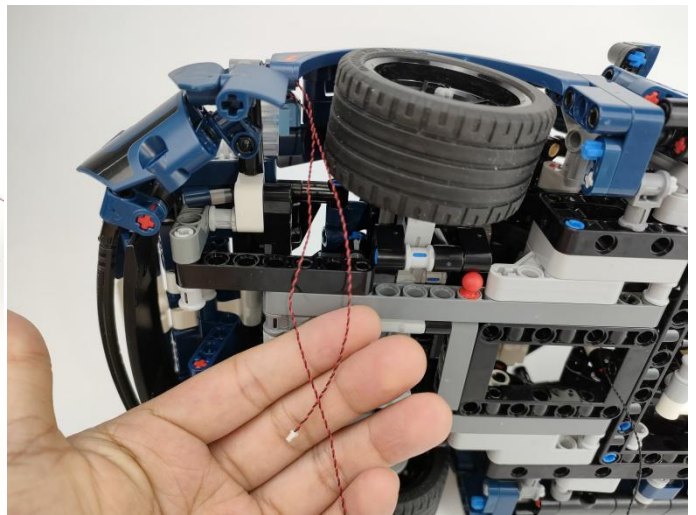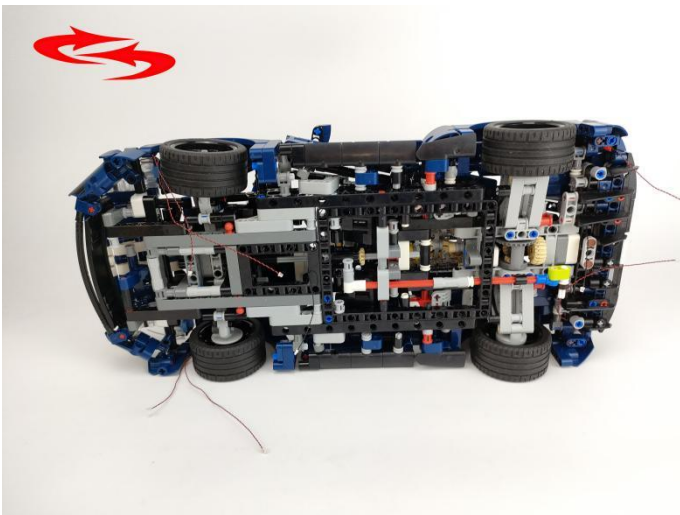

35

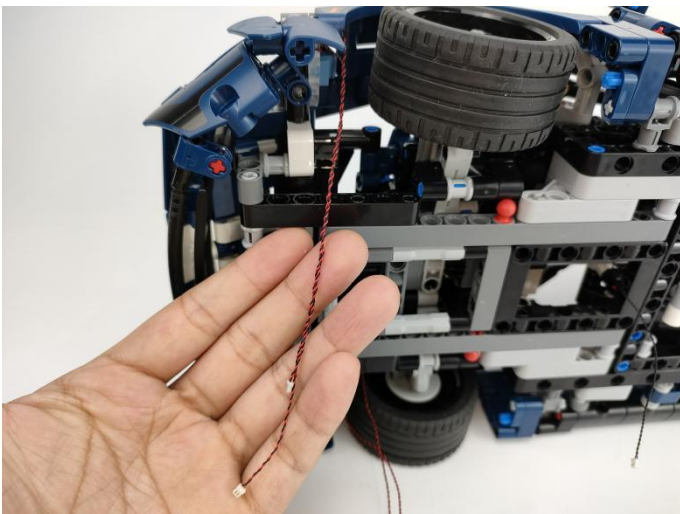



36

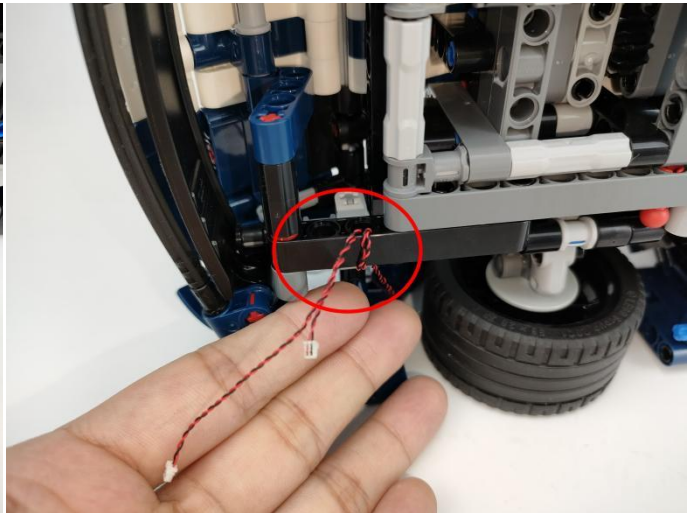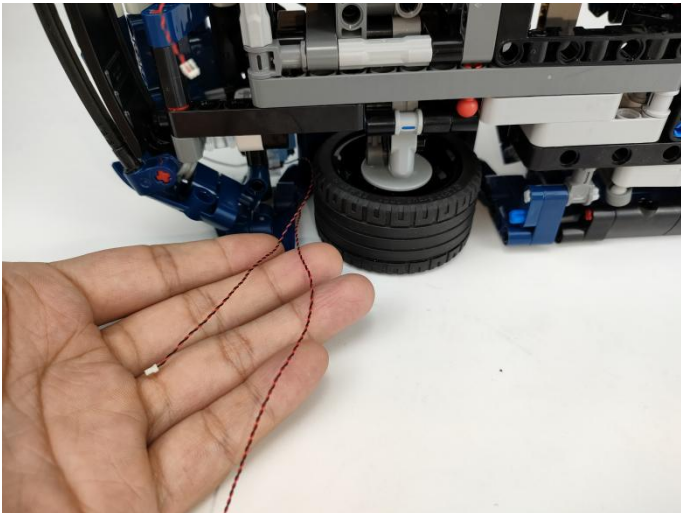


37




38

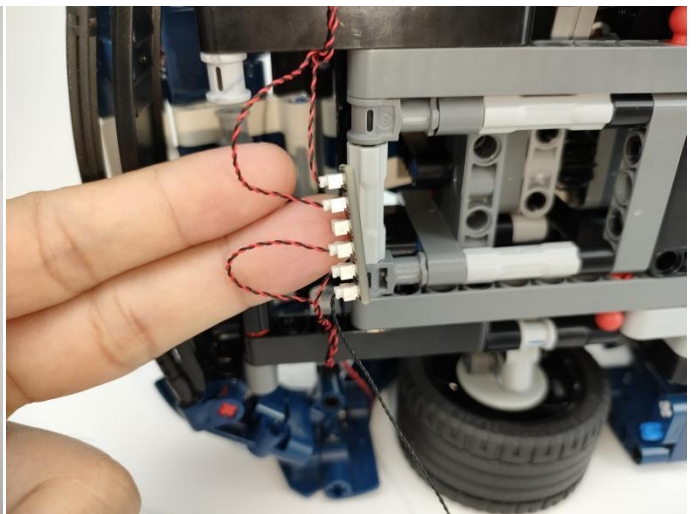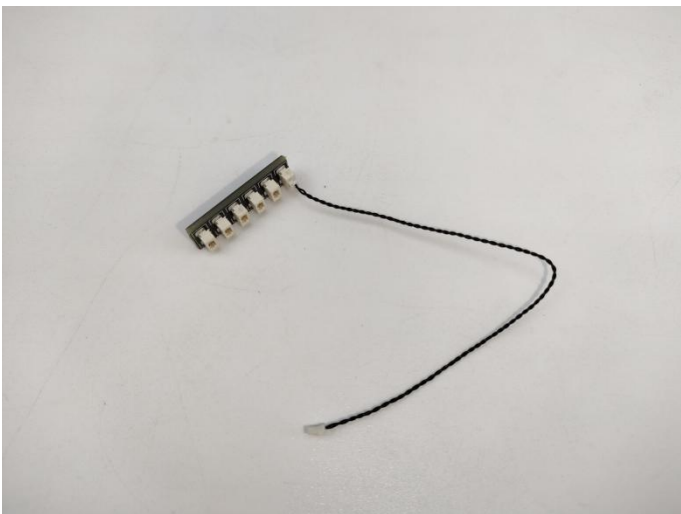



39

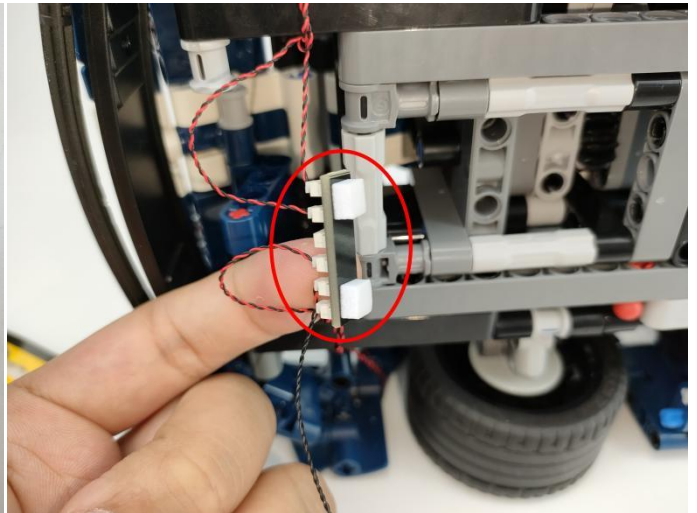

40

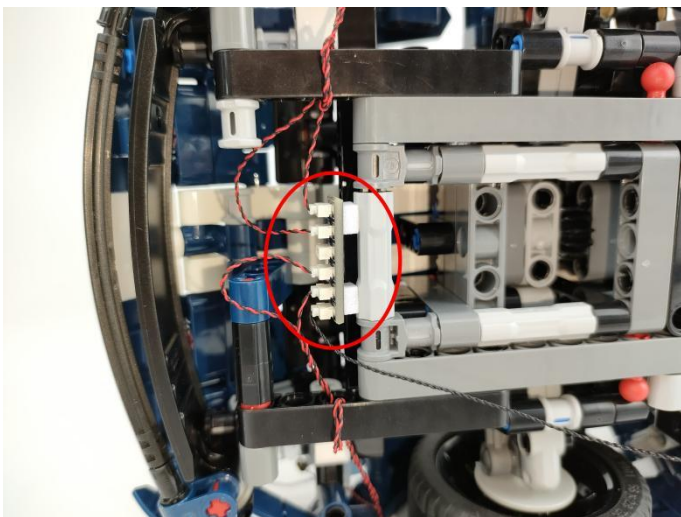


41

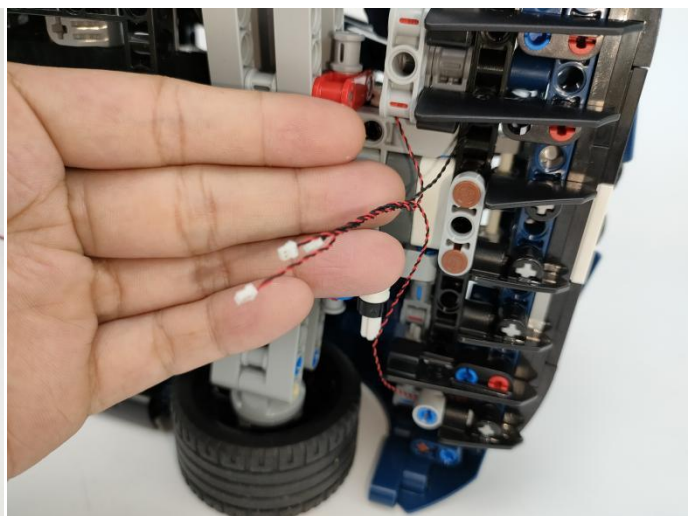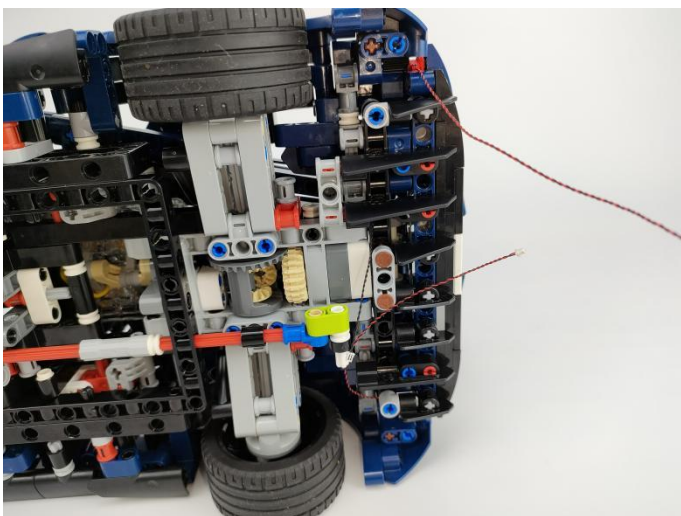


42





43

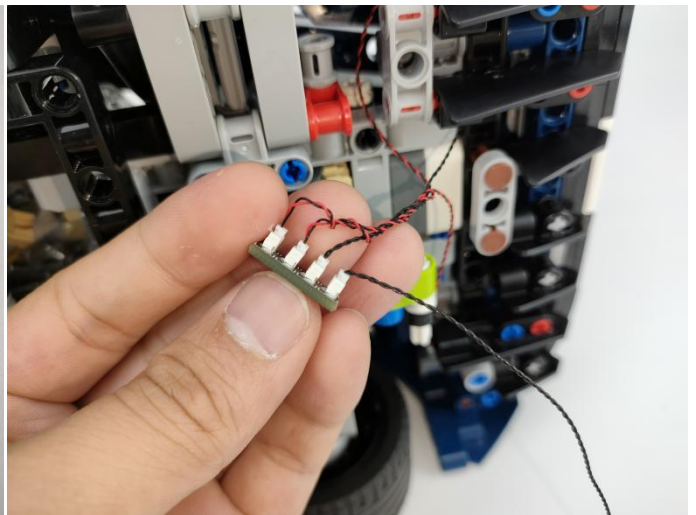



44

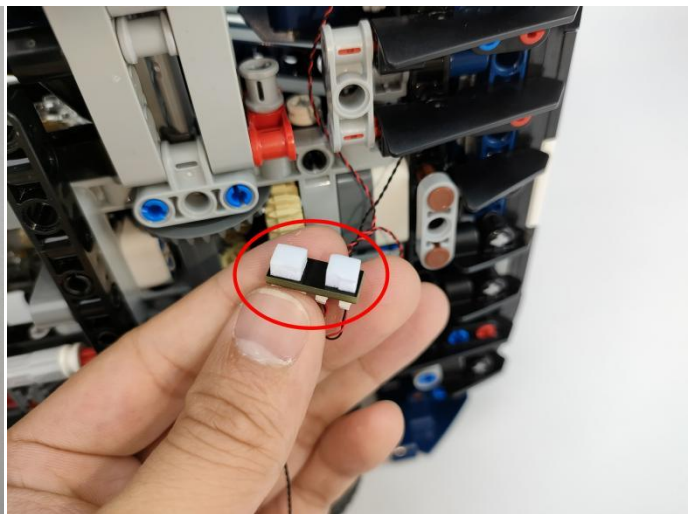

45

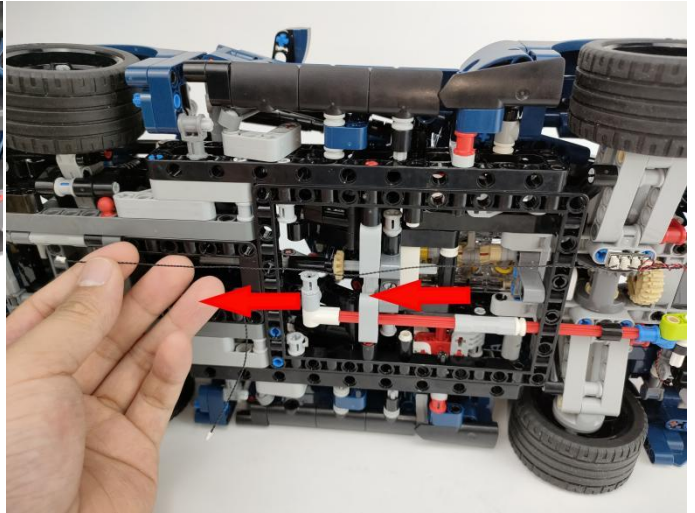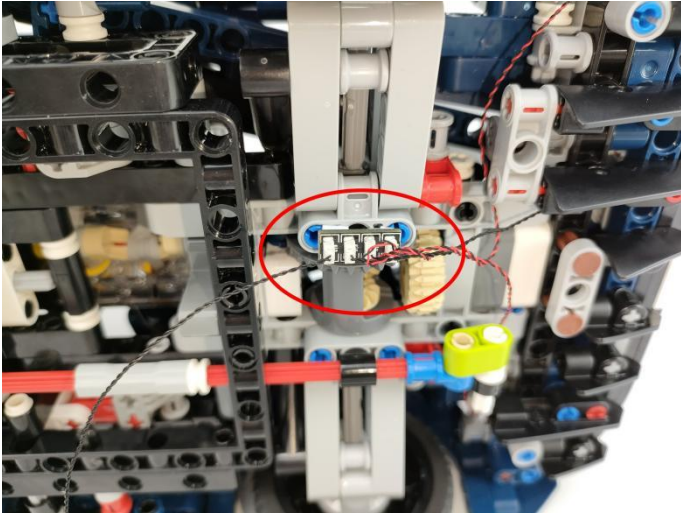



46

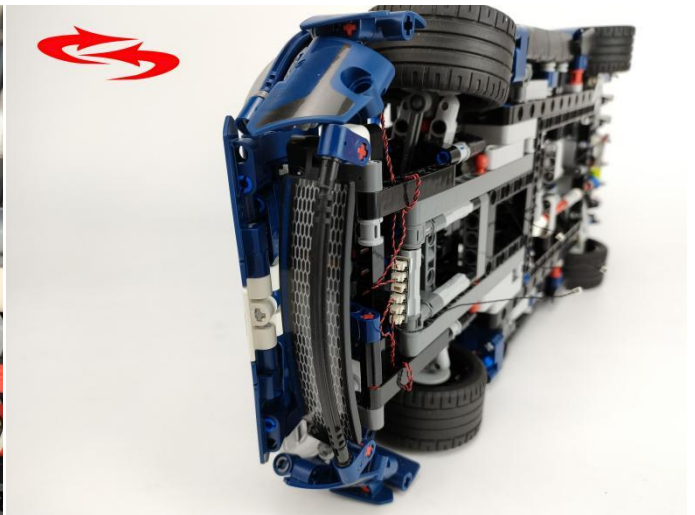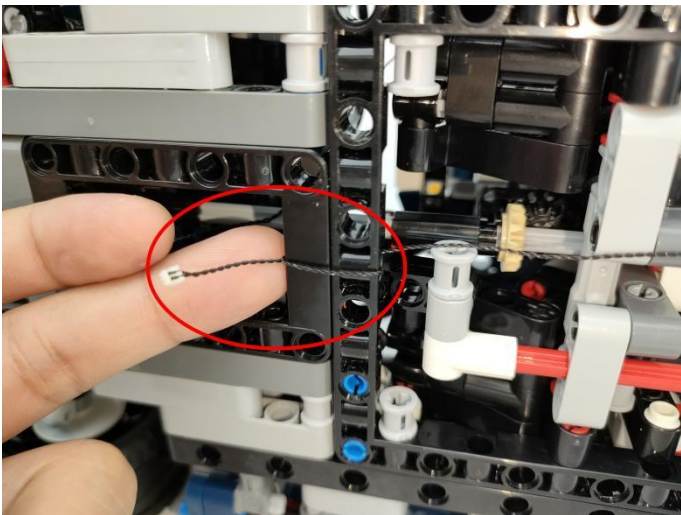



47



48

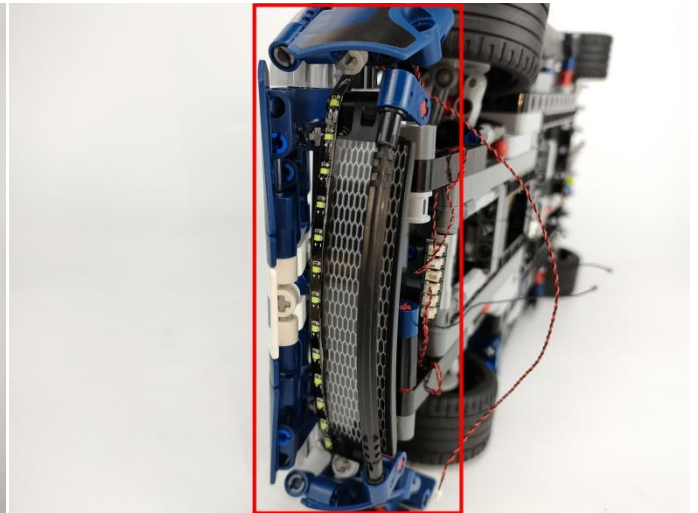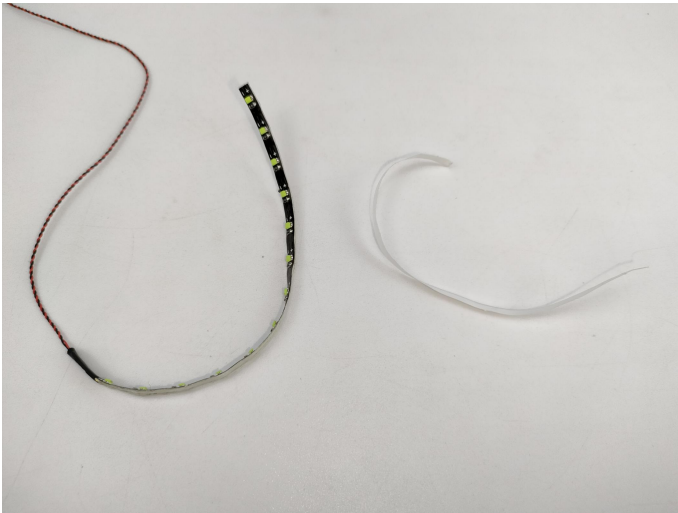


49

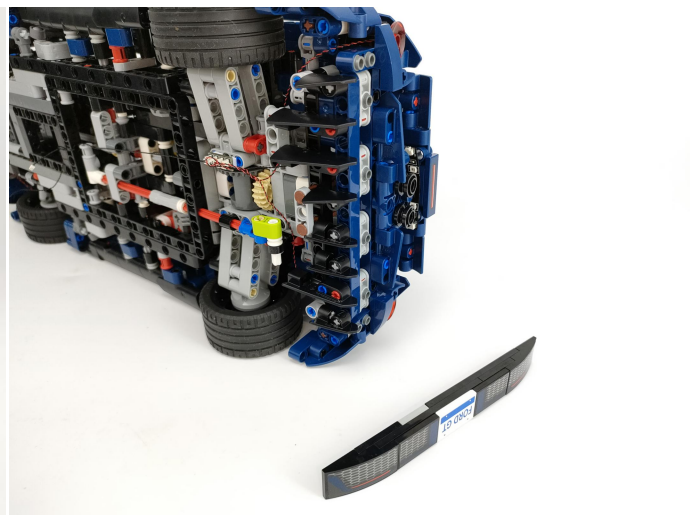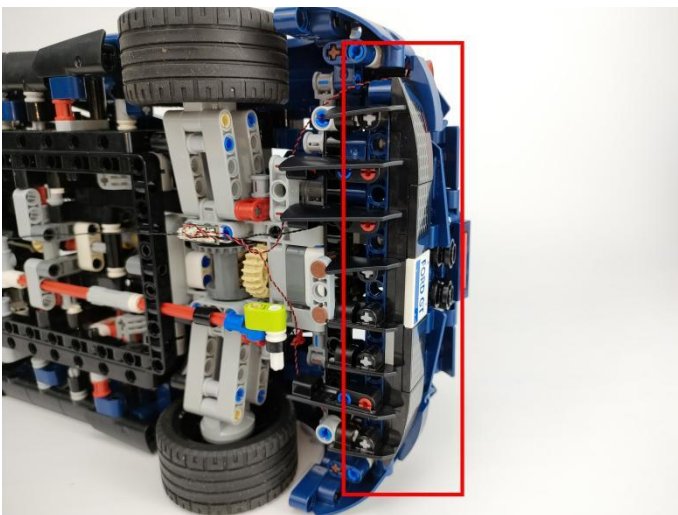



50





51

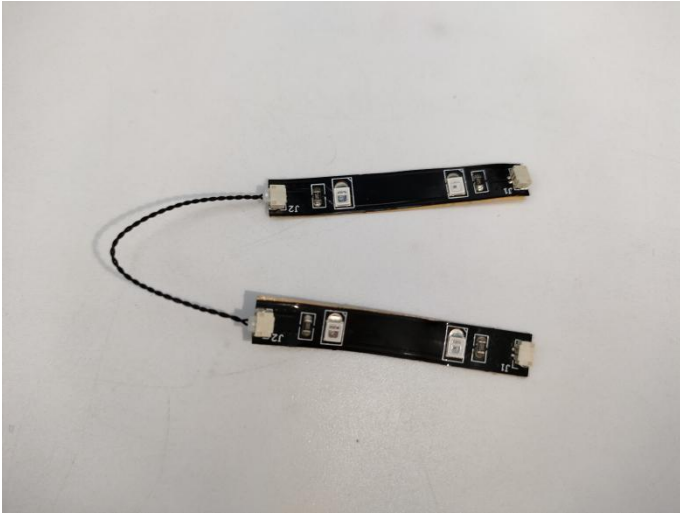


52

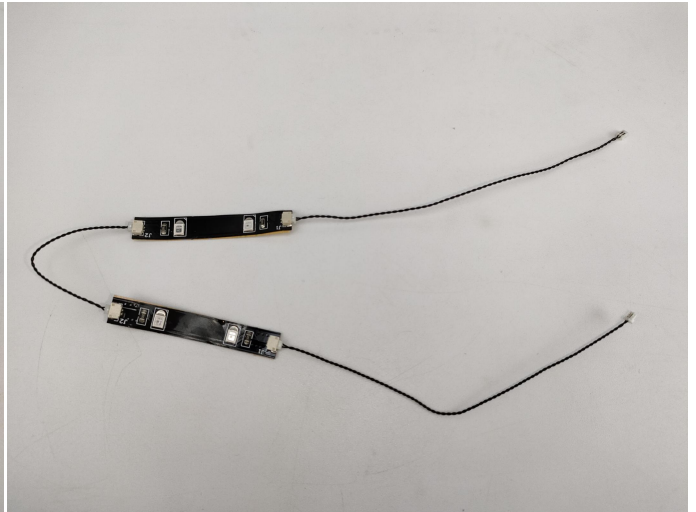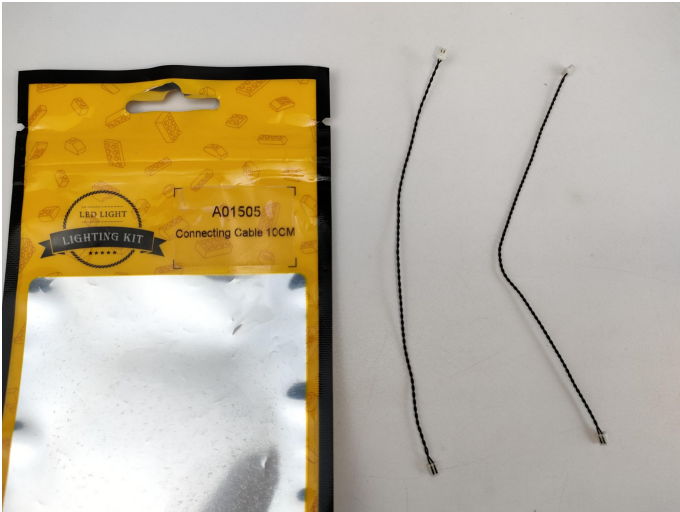

53

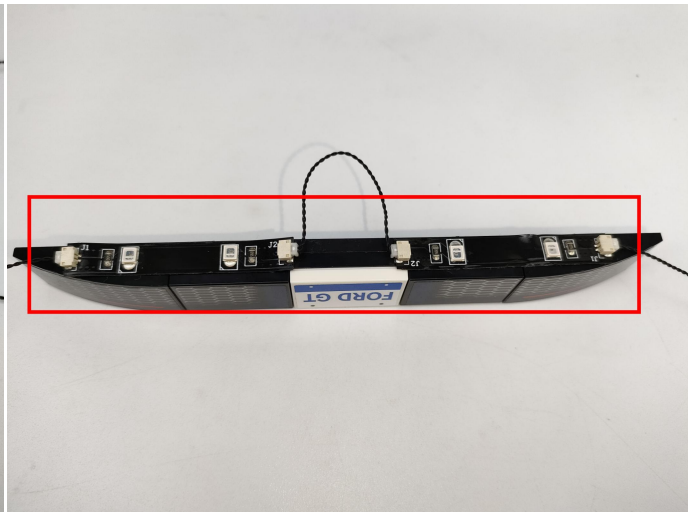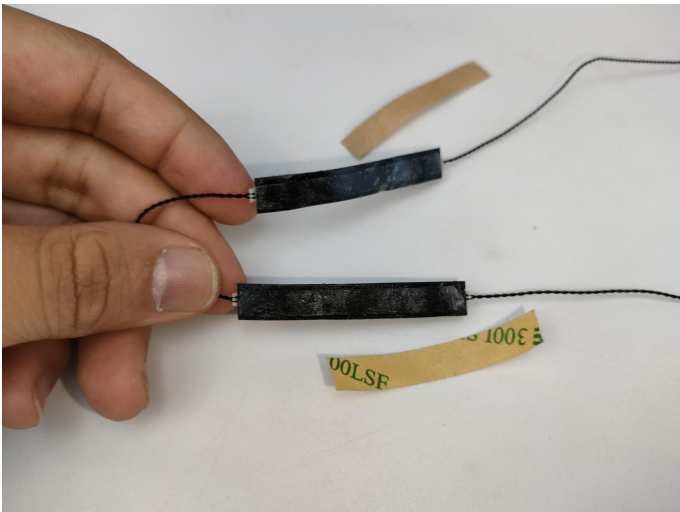



54

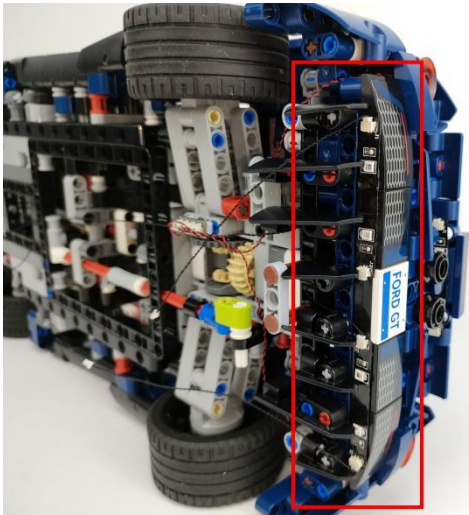



55



56

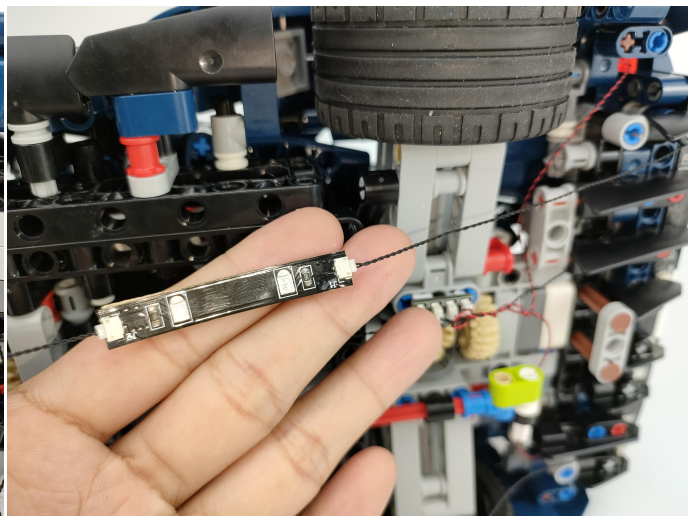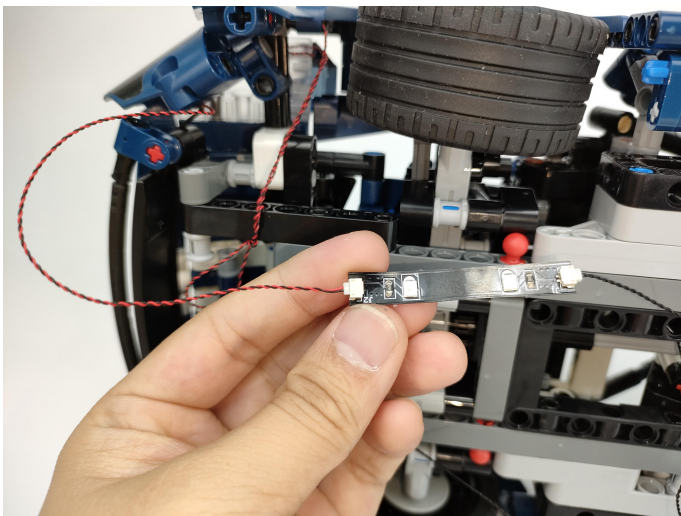



57

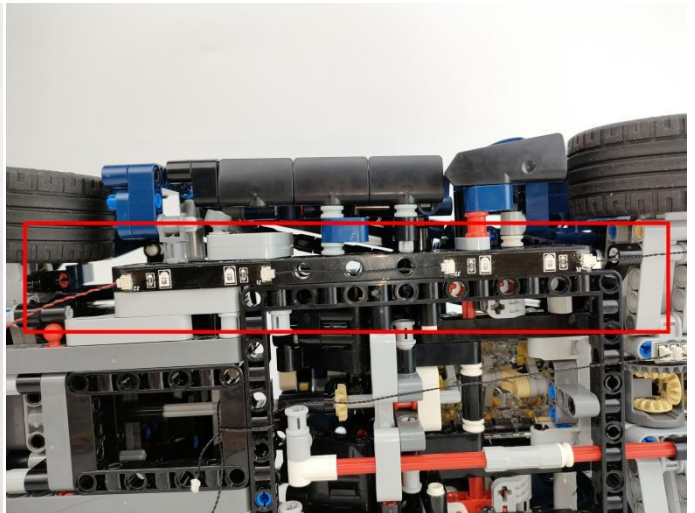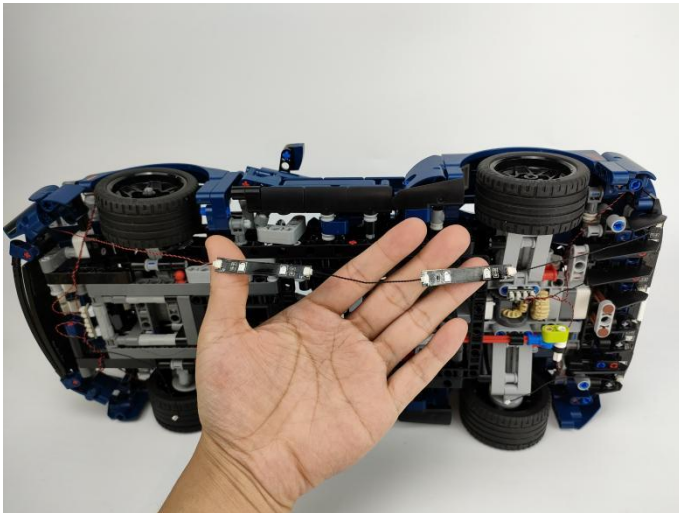



58



59

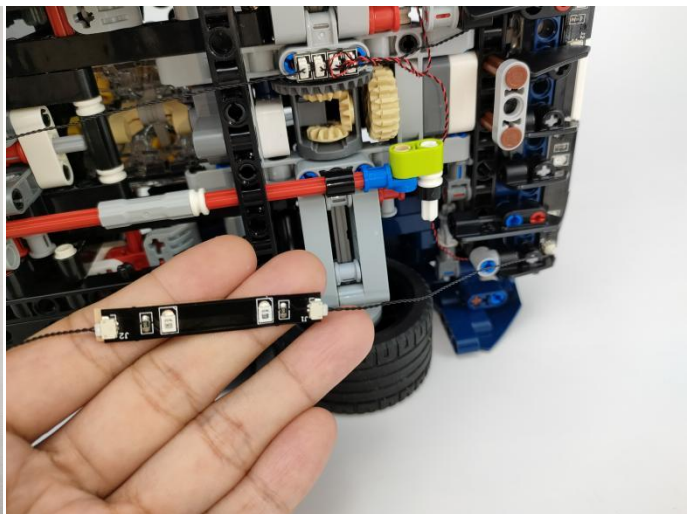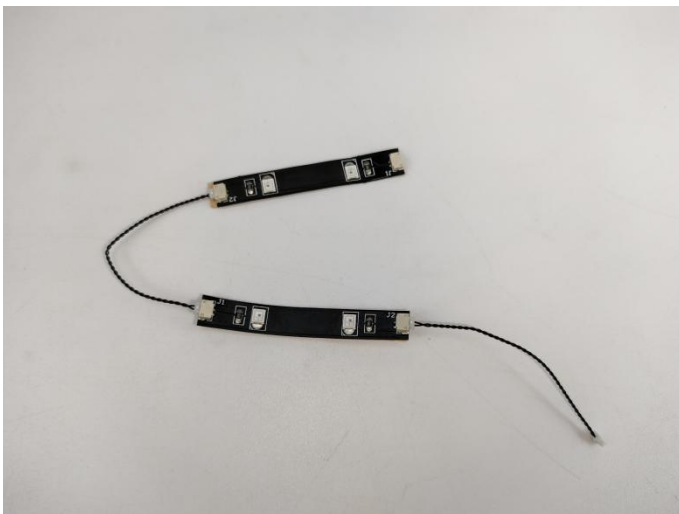

60

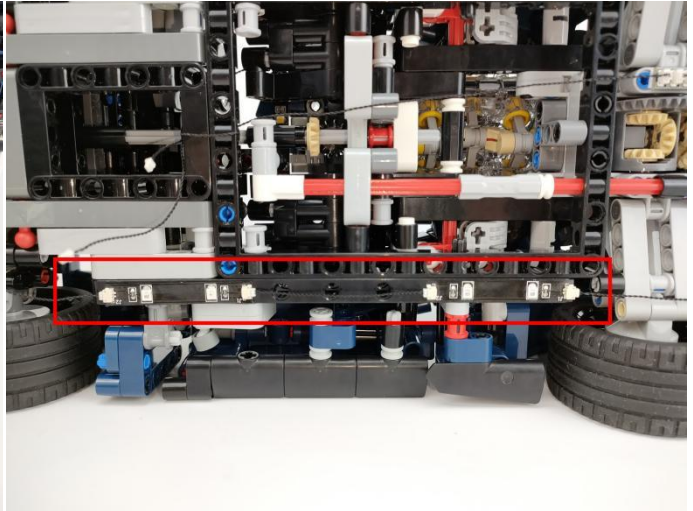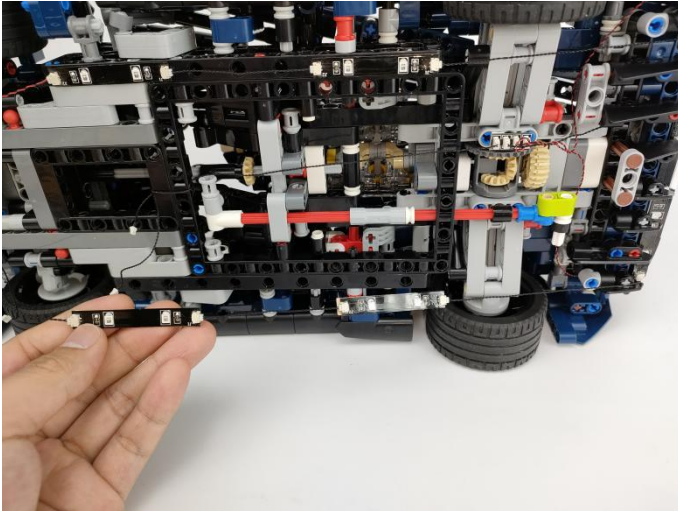

61




Remote control function description

- ON: All branches are opened
- OFF: all branches are closed
- A: open/close A road
- B: open/close B road
- C: open/close C road
- D: open/close D road
- FS: Turn on blinking for the last open channel
- BLN: Start breathing for the last opened path
- ↑: Increase blinking/breathing rate
- ↓: Increase blinking/breathing rate
- Brightness+: Increase brightness
- Brightness -: Reduce brightness



The remote control does not contain batteries, please buy a CR2025 or CR2032 button battery in the nearest store and install it in the remote control.





62

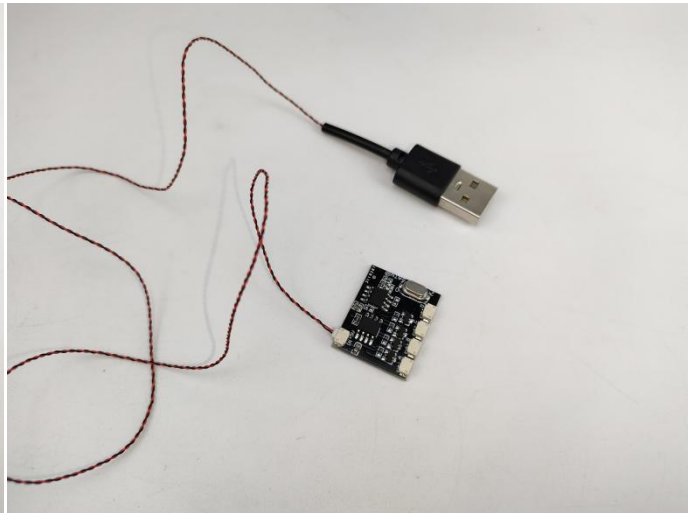


63

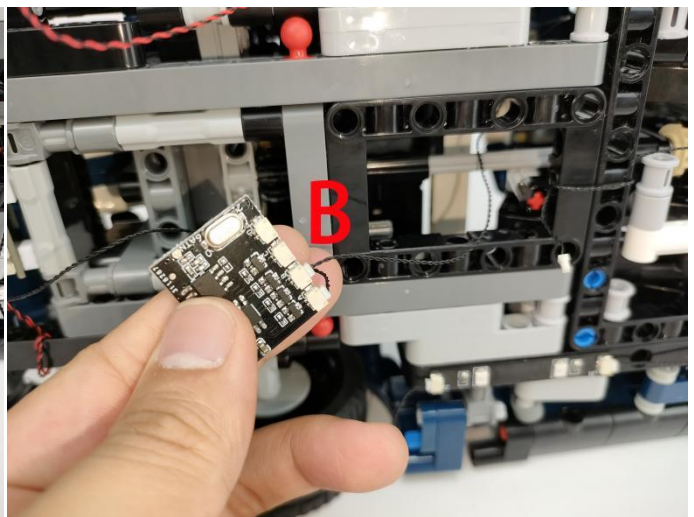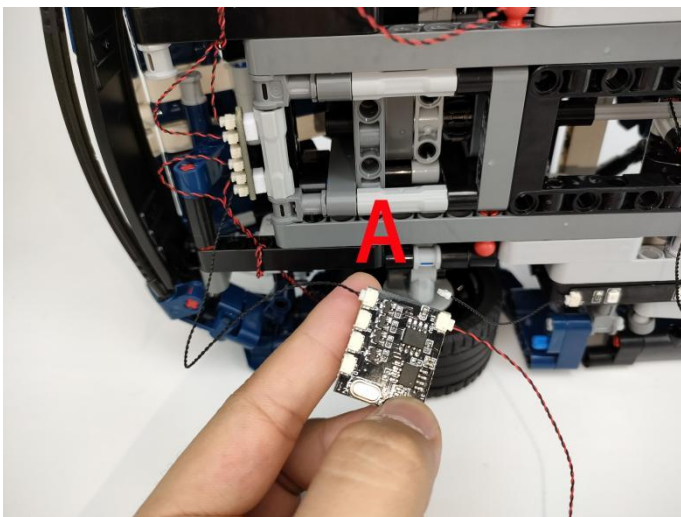


64

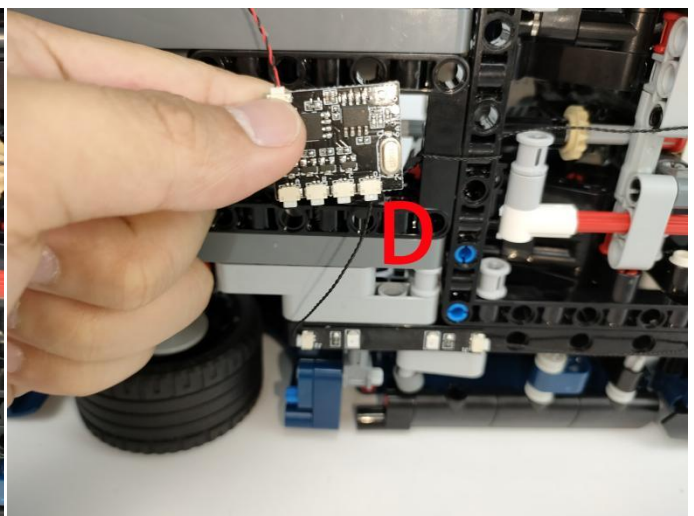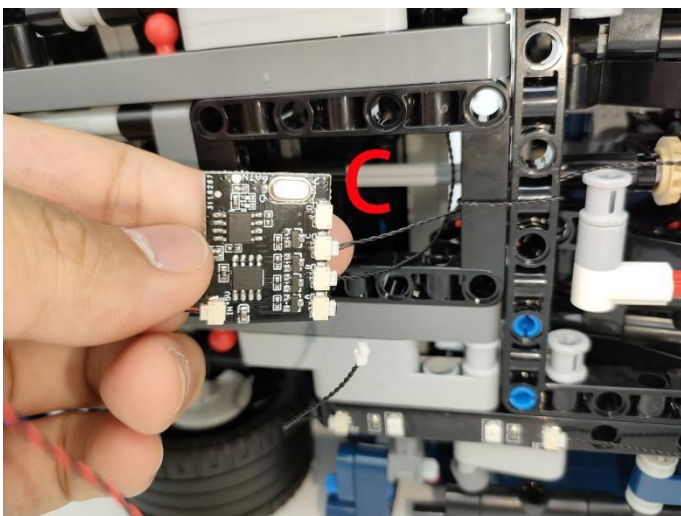

65

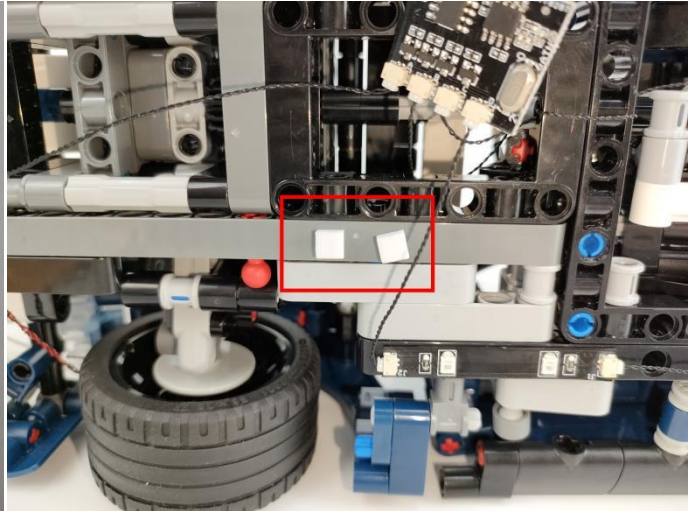

66

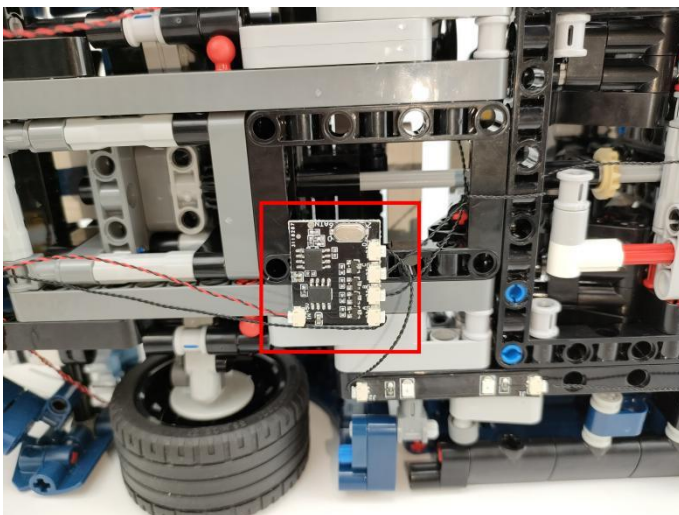

67



Remote control function description

- ON: All branches are opened
- OFF: all branches are closed
- A: open/close A road
- B: open/close B road
- C: open/close C road
- D: open/close D road
- FS: Turn on blinking for the last open channel
- BLN: Start breathing for the last opened path
- ↑: Increase blinking/breathing rate
- ↓: Increase blinking/breathing rate
- Brightness+: Increase brightness
- Brightness -: Reduce brightness

68



Good job, you've done all the installation steps, power it up and enjoy your work.



If it is necessary to change the power supply , prepare three AAA batteries, install them in the battery box, turn on the switch on the battery box, remove the plug of the USB Power Cable from the socket of the expansion board,plug the plug of the battery box to the same socket in the expansion board to power the suit as well.

THANKS