


60433 Modular Space Station

- Installation requires a lot of patience and great observation that your LEGO bricks will come alive when you get this finished. The bricks with lighting as below, so make sure you're ready and let's get started.

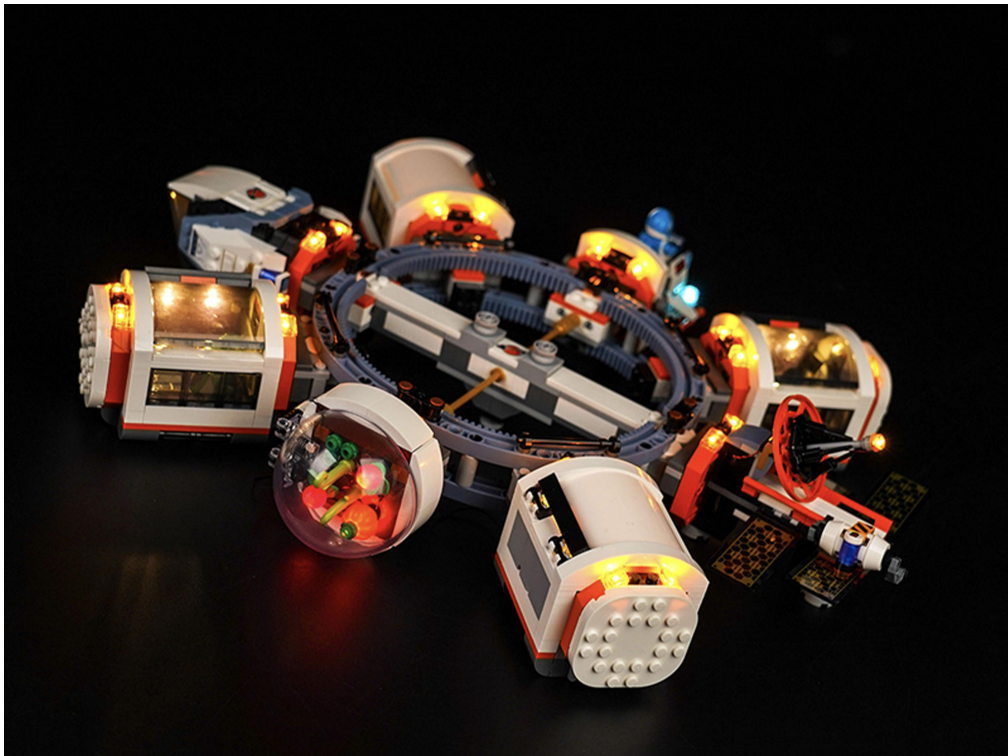

Strategies for the Installation

This instruction divides three sections to complete the installation of the lighting set.

Section A: Check the type and quantity of components.

The quantity and type of components of each products are different and it needs to be carefully checked to make sure there do have enough material. The type of components is indicated by the label on the bag.

Section B: Test that each components is working properly.

Each components is made individually so it is necessary to test that each components is working properly to avoid the situation that the lighting does not work .

Section C: laying out components following the instruction.

Our material is very small but not fragile, just be reminded that don't to pull the wires too hard. For different people, there may be some installation steps that you can't understand. Please look at the previous and later installation step.

Section A: Check the type and quantity of components.

There are 9 bags in this set. The name and quantities of specific components are as shown , please check carefully.

Label	Content	Quantity
A01001 Light-15CM Warm White	Light-15CM Warm White	25
A01024 High-Brightness light 15CM-Warm White	High-Brightness light 15CM-Warm White	4
A01025 Light-15CM Cyan	Light-15CM Cyan	2
A01105 LED Strip Warm White	LED Strip Warm White	4
A012 Expansion Board	6 Socket Expansion Board	4
	8 Socket Expansion Board	4
A01305 Power Supply	Power Supply	1
A01505 Connecting Cable 10CM	Connecting Cable 10CM	12
A041 Action Control Module	Action Control Module	1
Components		

Please contact us immediately if there have any missing components.


Section B: Test that each components is working properly.

We need a structure to test all lights, so take out the bag with label “USB Power Cord”and “Expansion Boards”as follows.




It is worth reminding that our products are all customized. They have a unique way of connecting. The white plug on wire and the socket of the expansion board need to be connected together to transmit power.

Note that on one side of the white plug you can see two very small golden wires that should be connected to the two golden needles in socket of the expansion board.shown as blow.

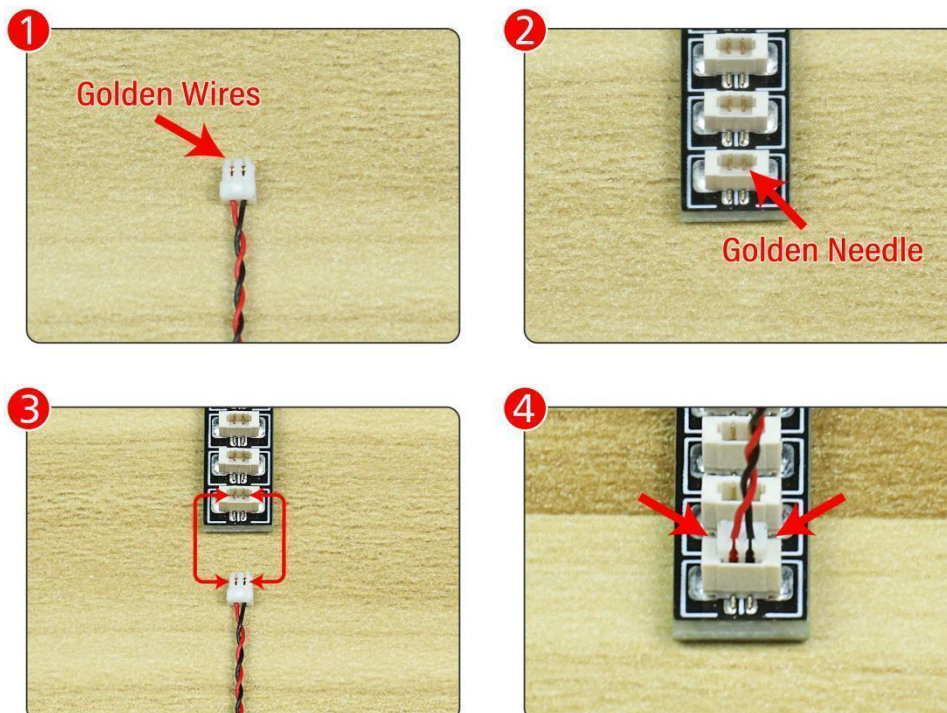


All our connections between plug and socket are all the same as shown above. So for any such structure with plug and socket, please pay attention to the golden wire of the plug and the golden needle of the socket, they must be touched together.

The connection method between the USB Power Cord and Expansion Boards is as follows:

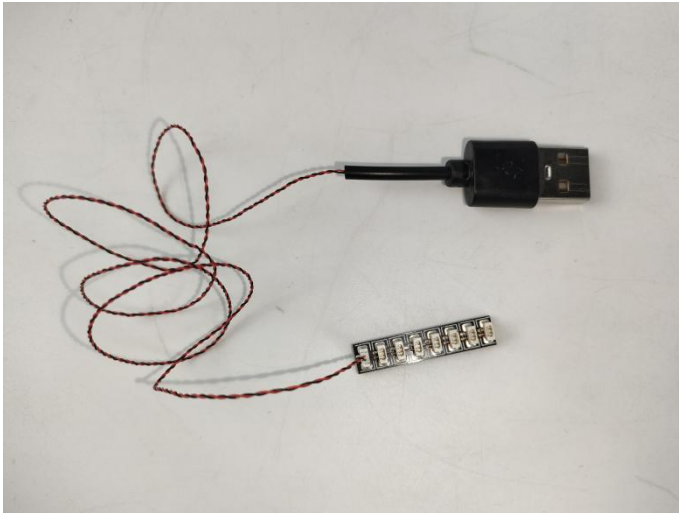

The USB Power Cord can be powered by phone chargers, power banks, etc.

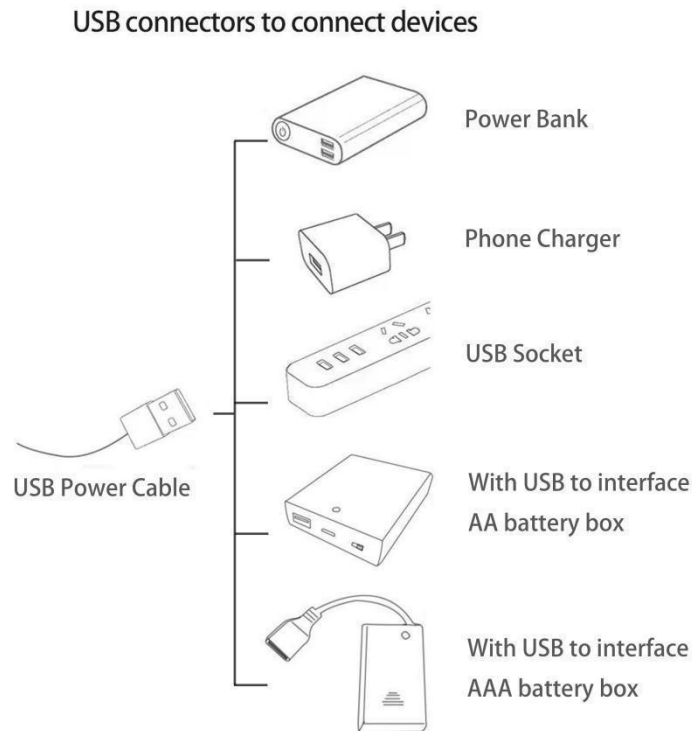

This instruction will use the power bank as power supply . The test structure is shown as follow. All lamp in this set will be tested by this structure.



When we test "A01025 Light-15CM Cyan" particles,Take out the bag labelled "A01025 Light-15CM Cyan".Take out one of the light and connect it to the socket. Turn on the power bank, the light will turn on normally as shown below.




Test each lamp according to this method. It should be noted that after the test, the lamp must be returned to the corresponding bag to avoid confusion of types.



LED strip test:

Take out the bag labeled "A01105 LED Strip Warm White". Take out the LED light bar, connect the USB power cable, turn on the mobile power supply, the light will be on normally, as shown in the figure below.

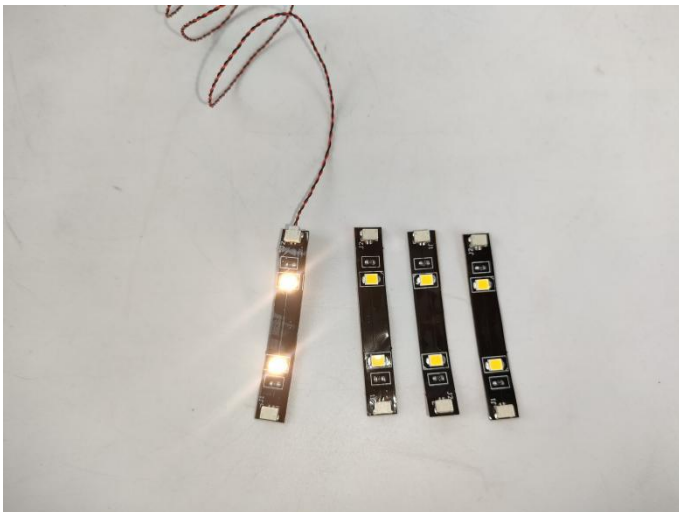


The components needs to be tested in this set is 25*Light-15CM Warm White,4*A01024 High-Brightness light 15CM-Warm White.


Please contact us immediately if any components don't work.

Section C: laying out components following the instruction.



1

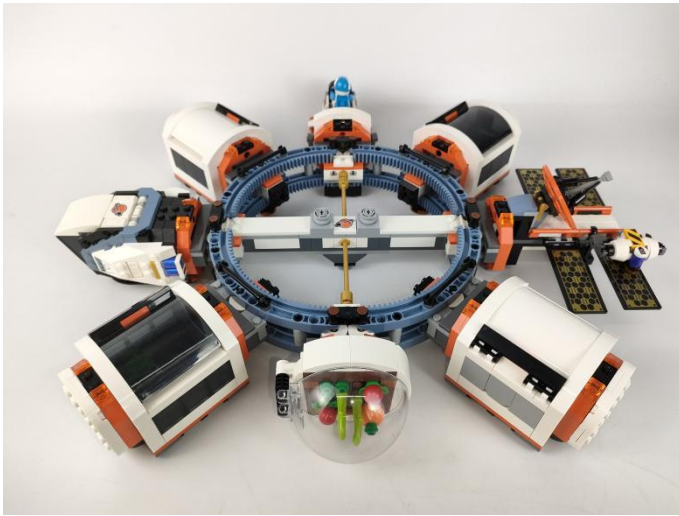


2

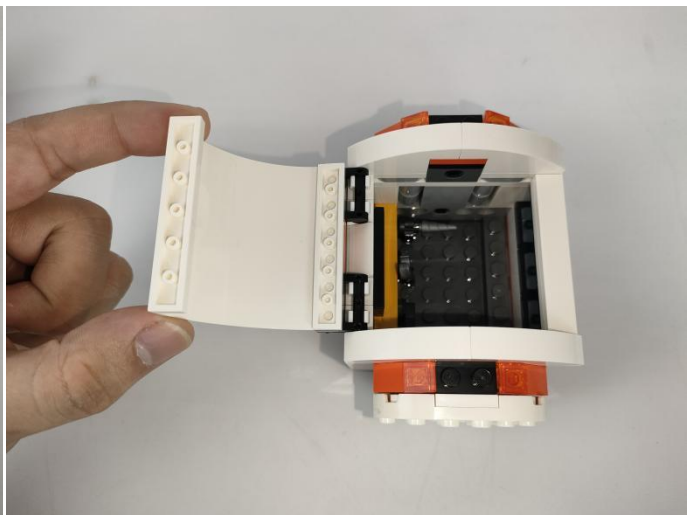



3

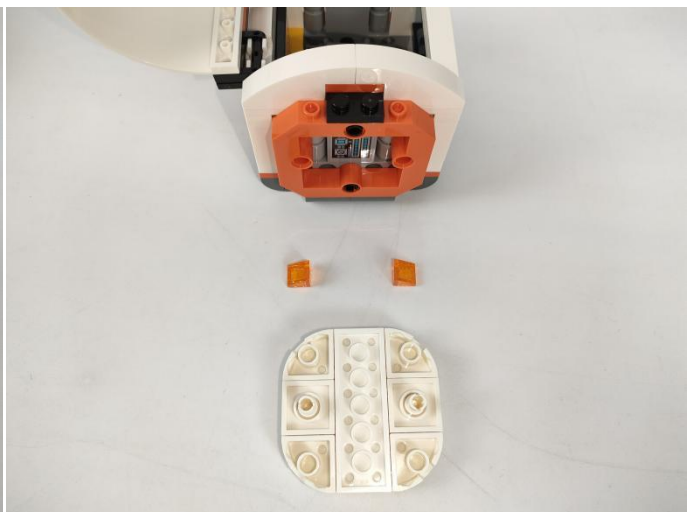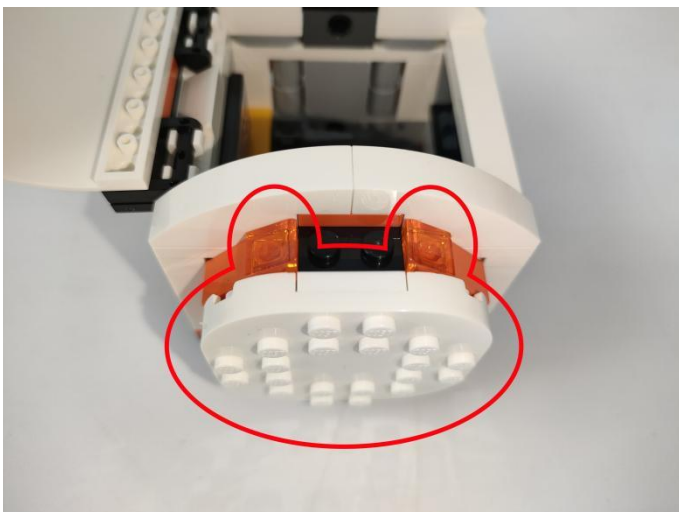



4

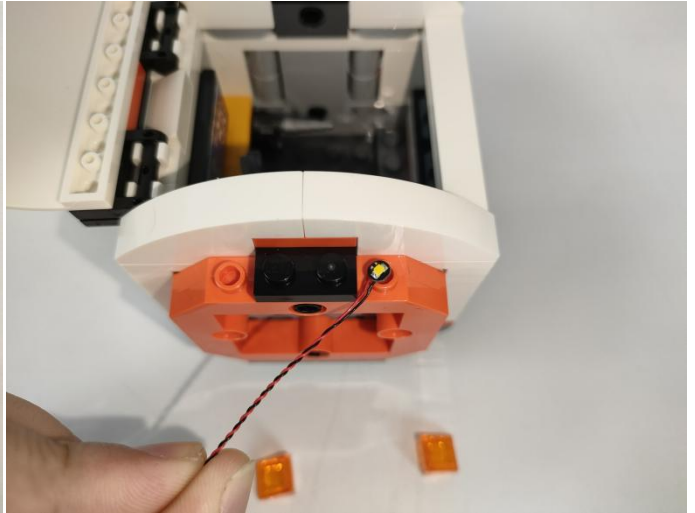



5

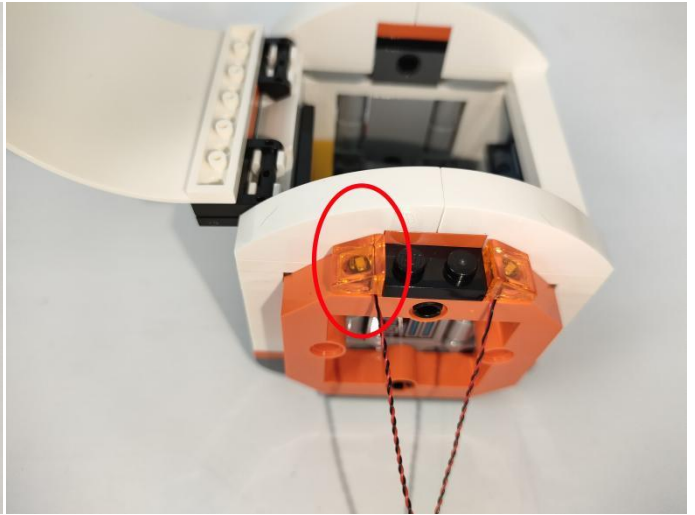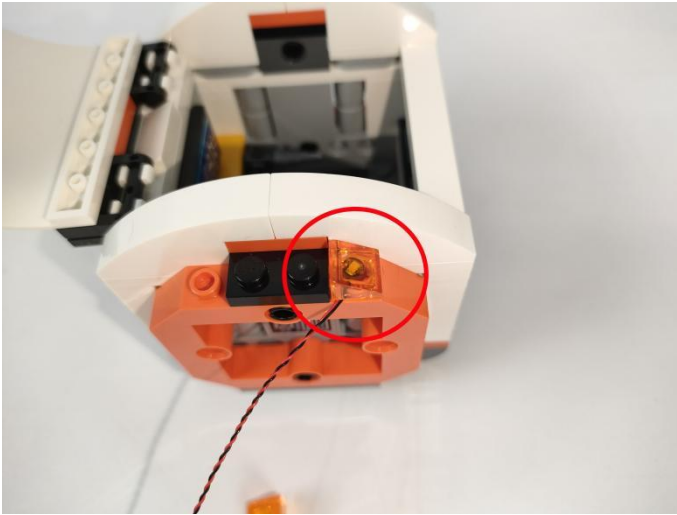



6

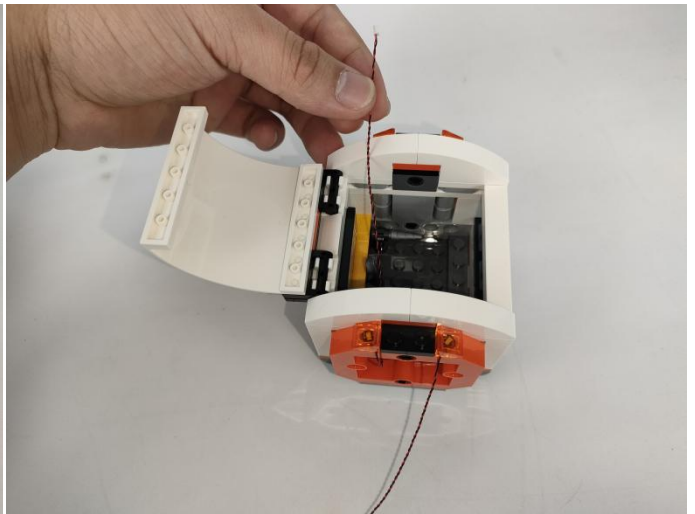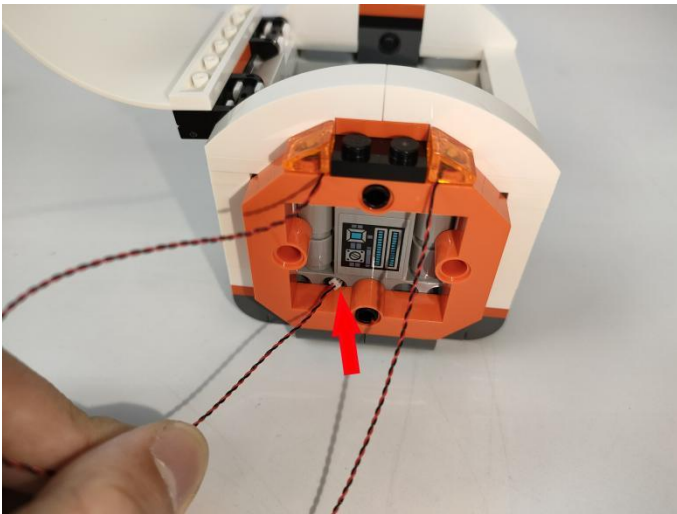


7

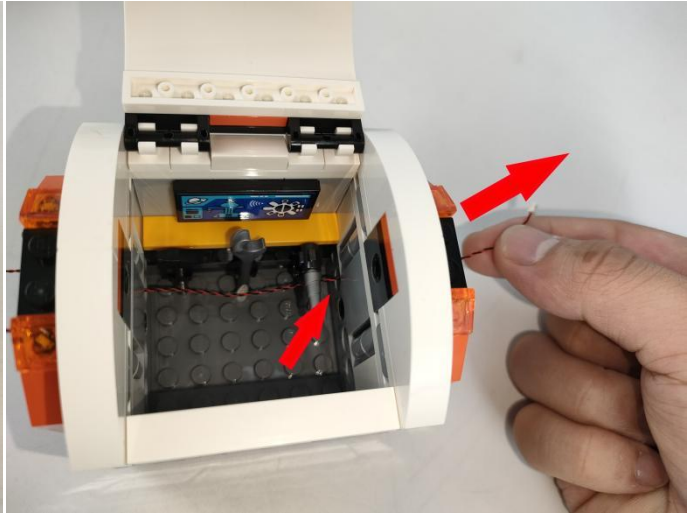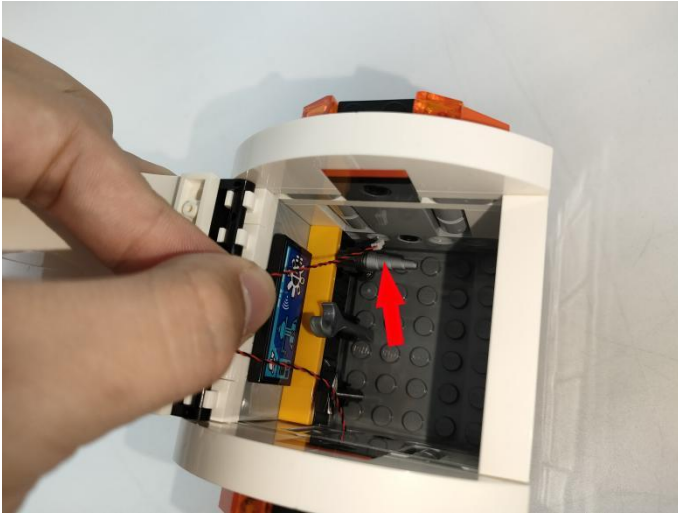

8

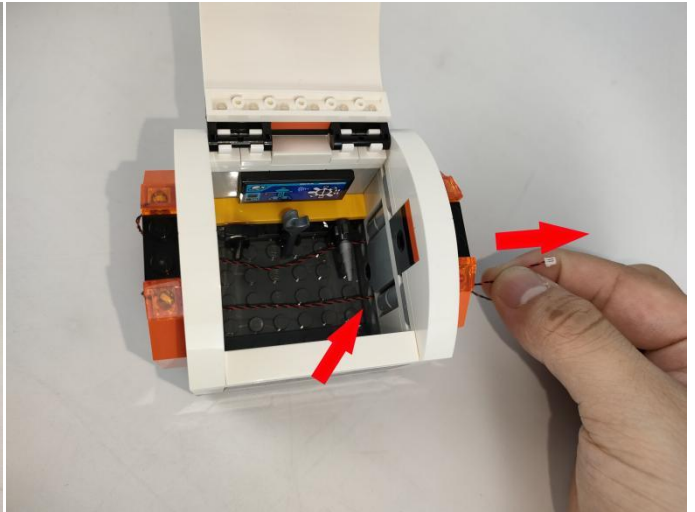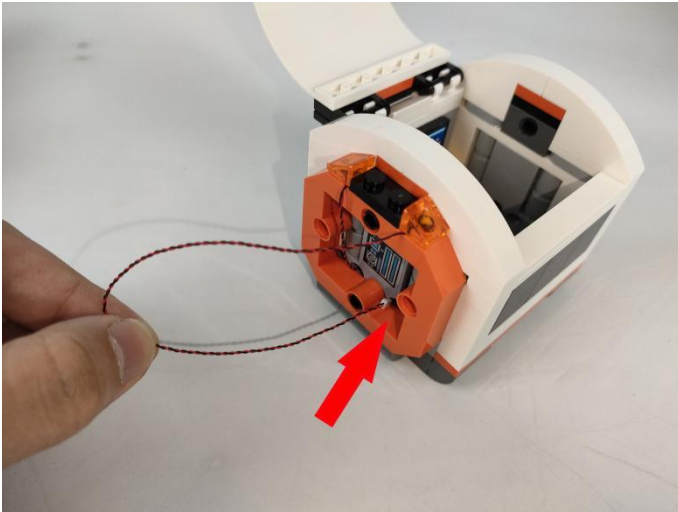


9

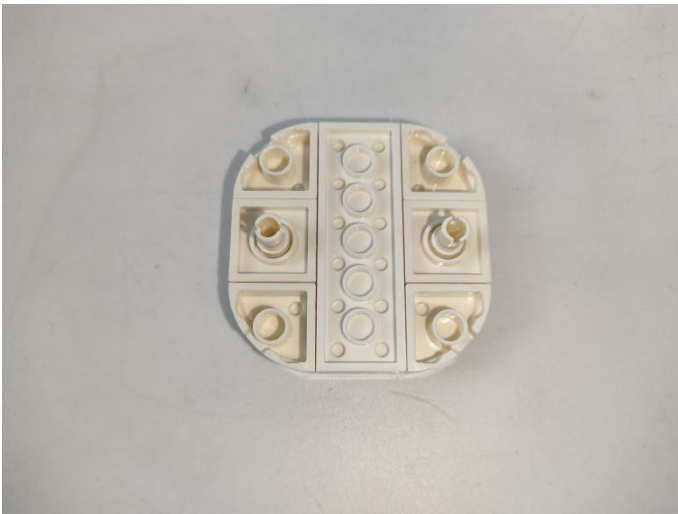


10





11

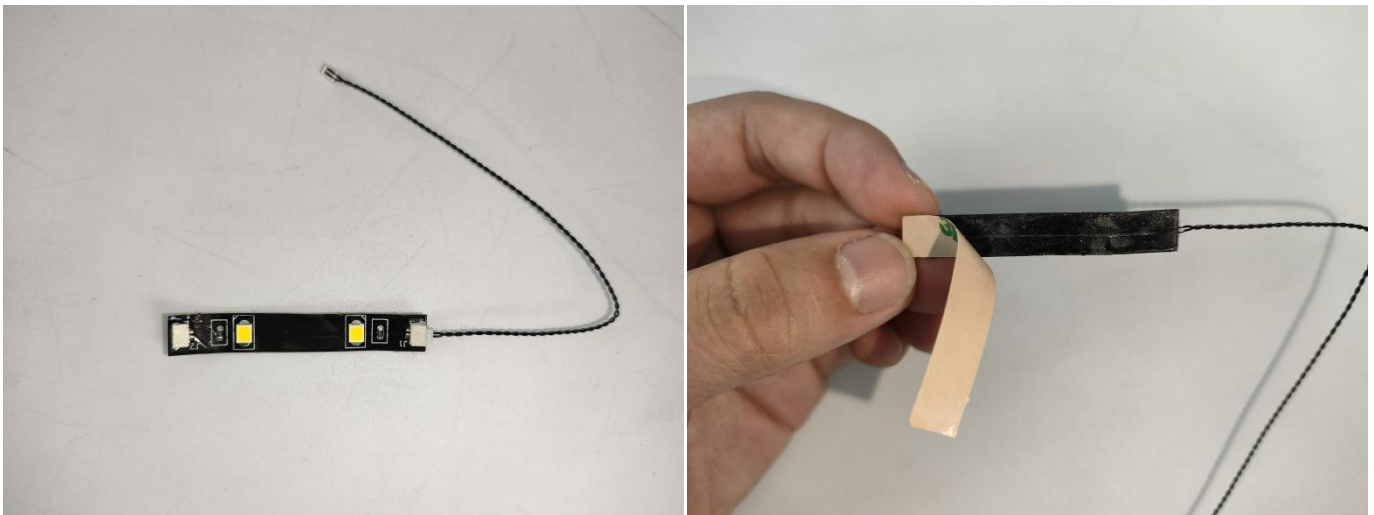



12

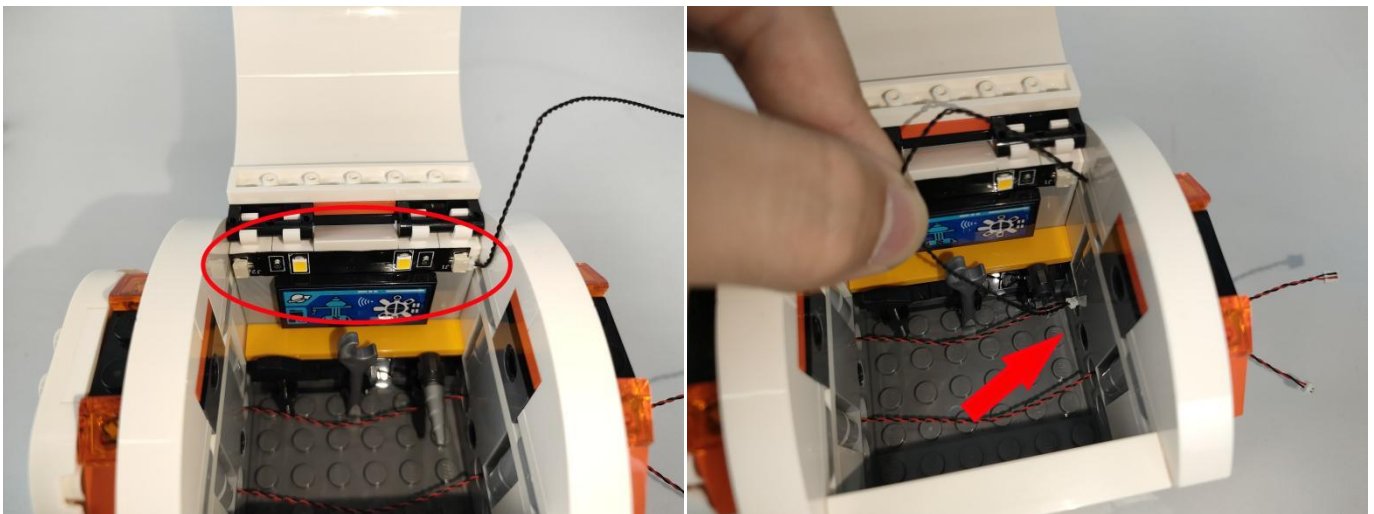


13

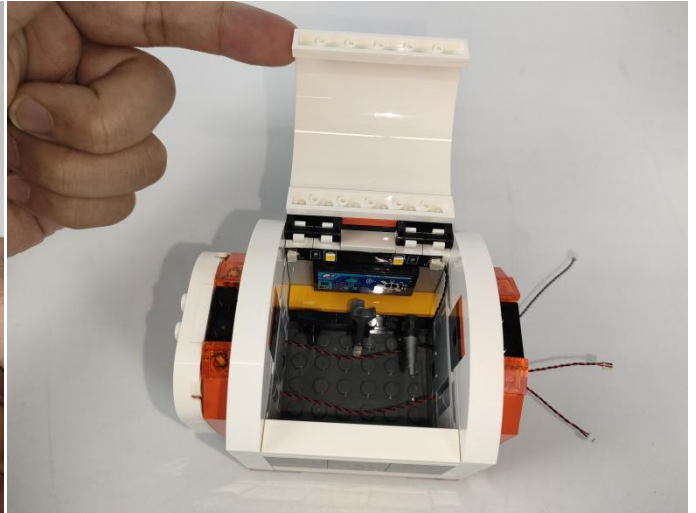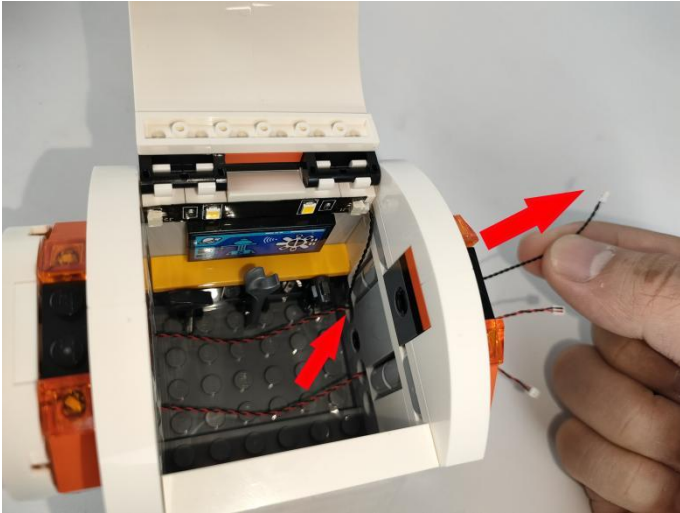


14

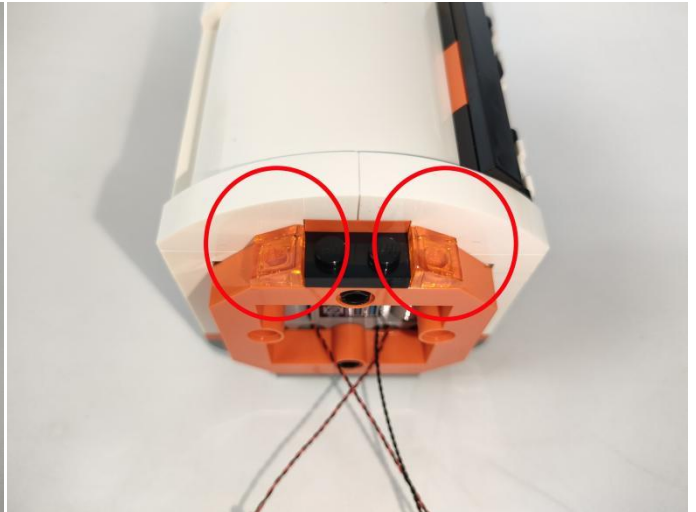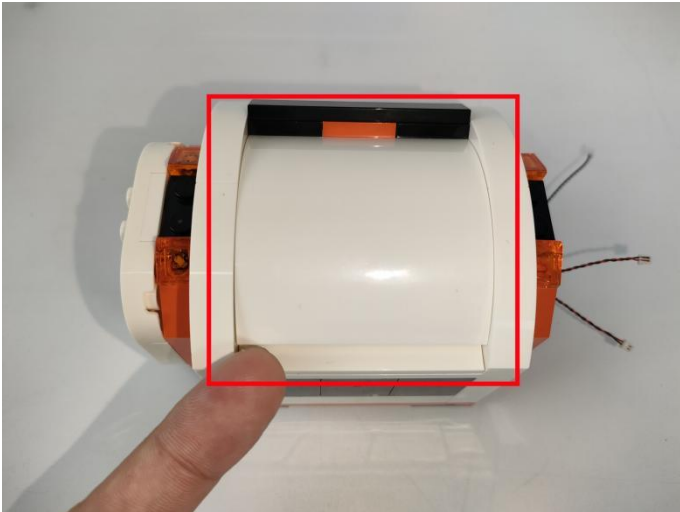



15

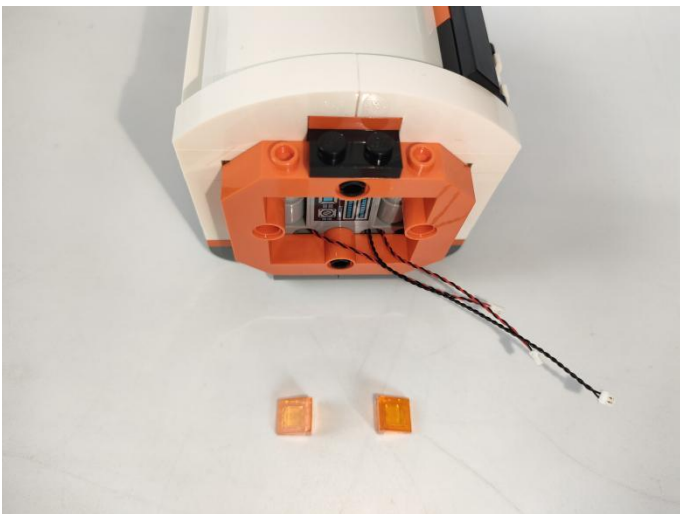


16

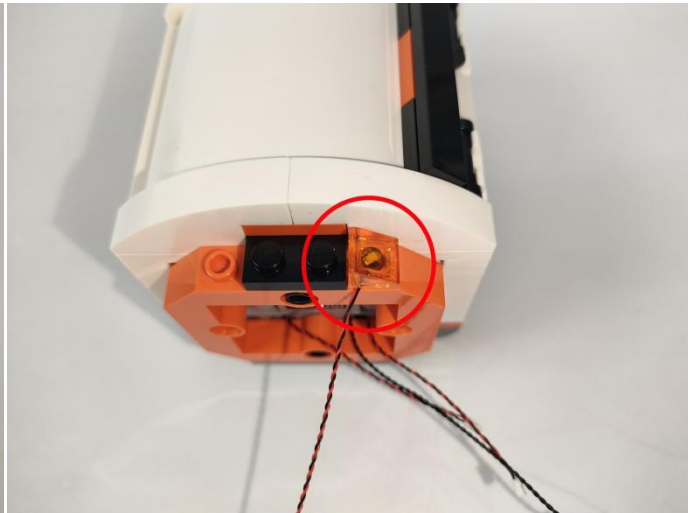

17

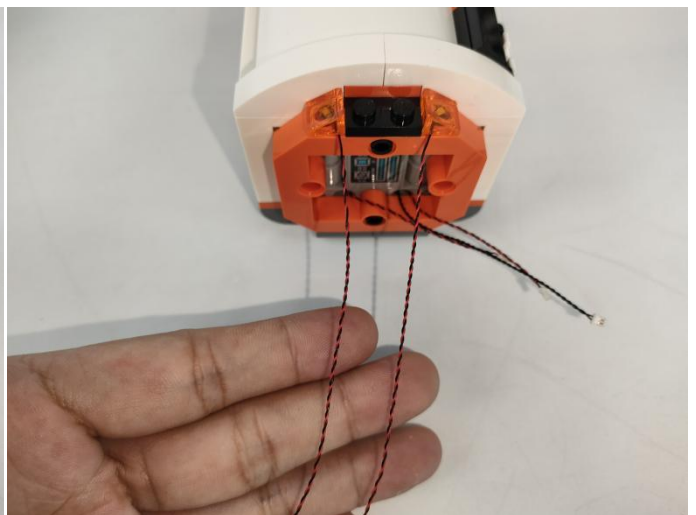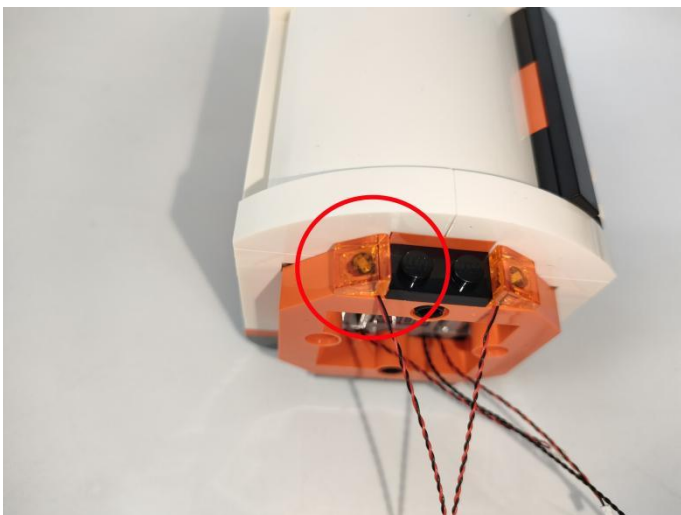



18

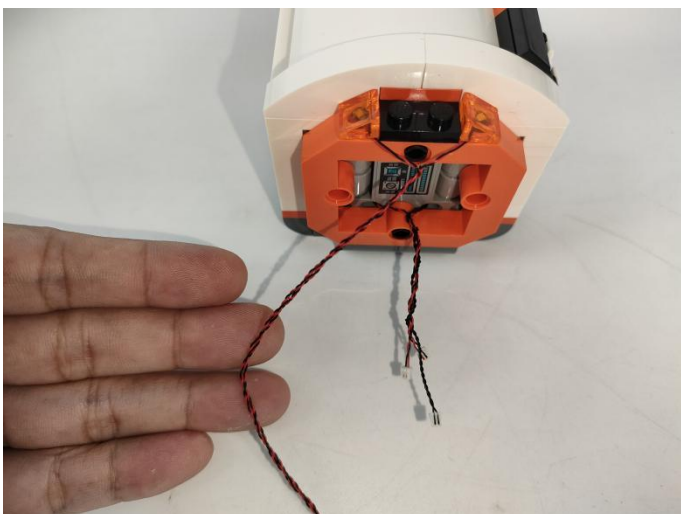



19




20

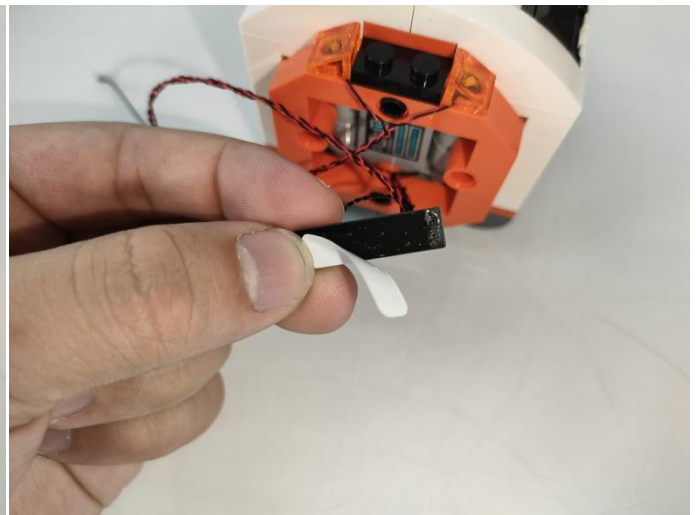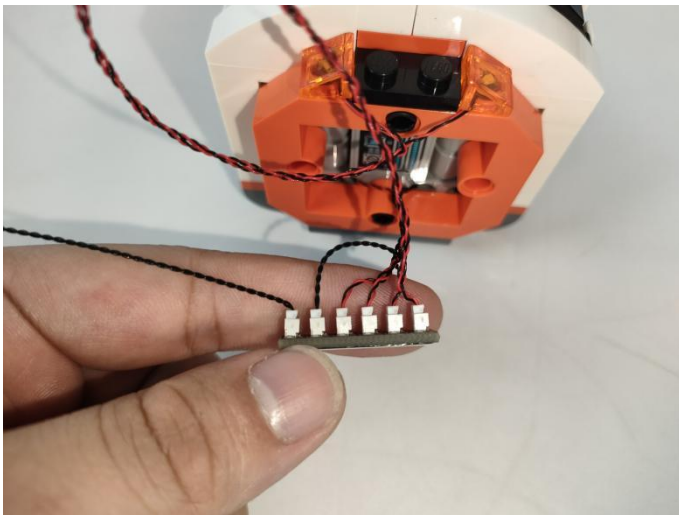

21

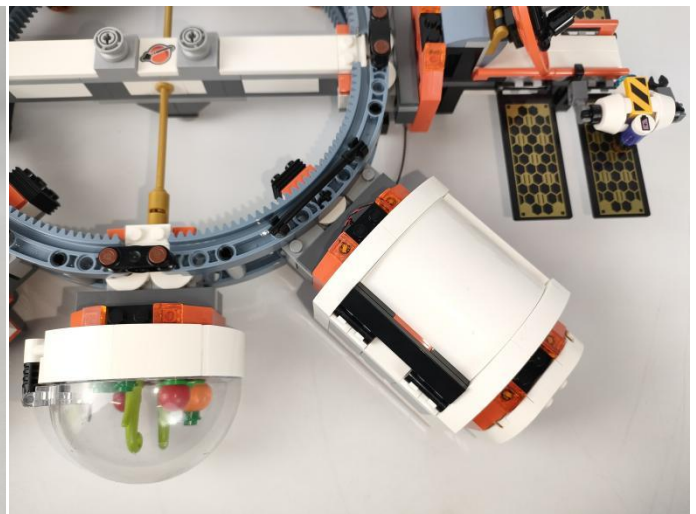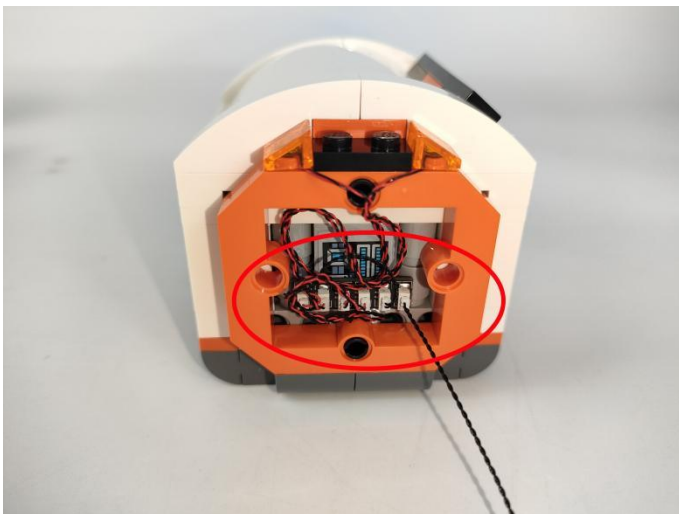

22

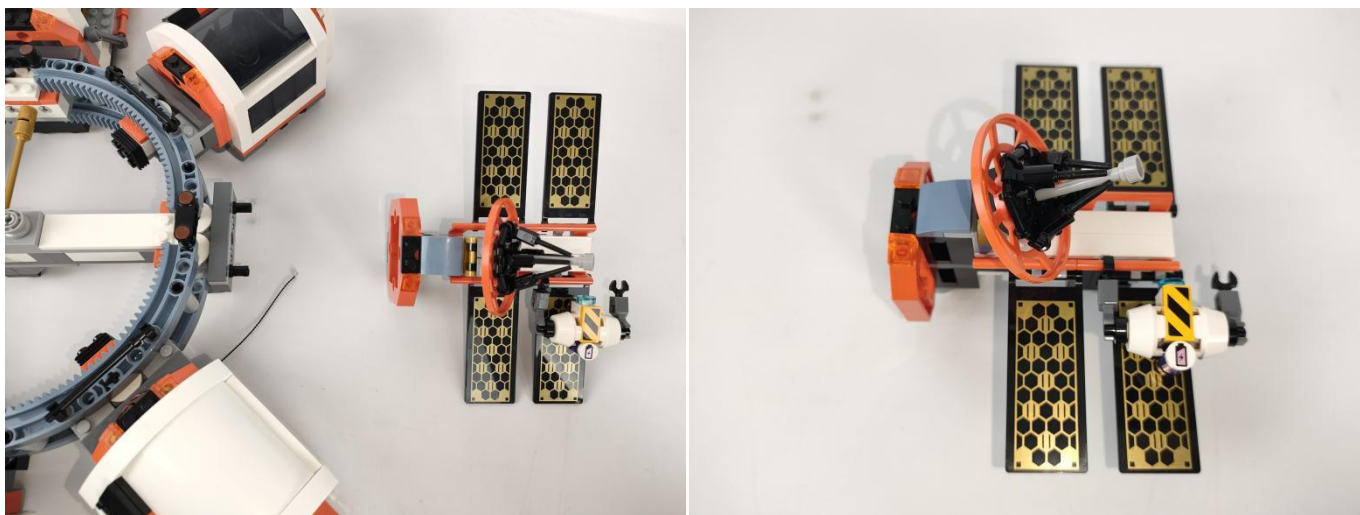

23



Tips

The plate without slit:

The plate without slit:

The squeeze causes the protective layer of the wire to be torn apart, the positive and negative wires touch together, and the set is short-circuited and the hot or wire is crushed, the wire to be disconnected and don't work.



The plate with slit:


The plate with slit:

The wire has enough space to avoid being squeezed and has longer service life and more stable effect.



The slit on the the plate round 1X1 are hand-made to avoid squeeze the wire and cause short circuit and abnormal heat during installation.



24

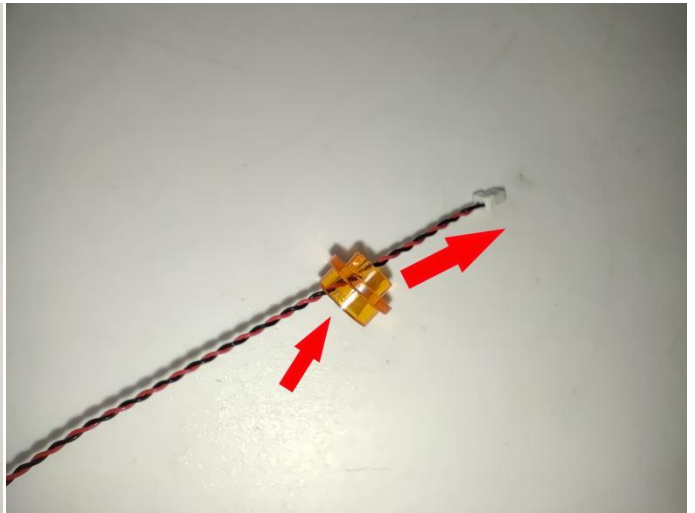



25





26

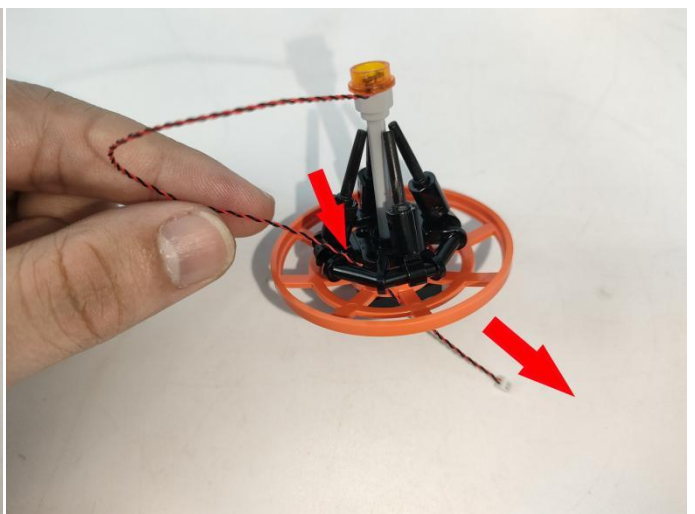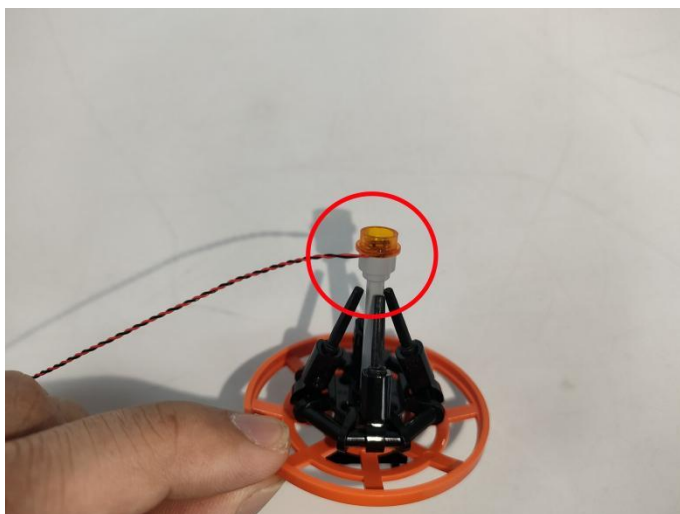


27

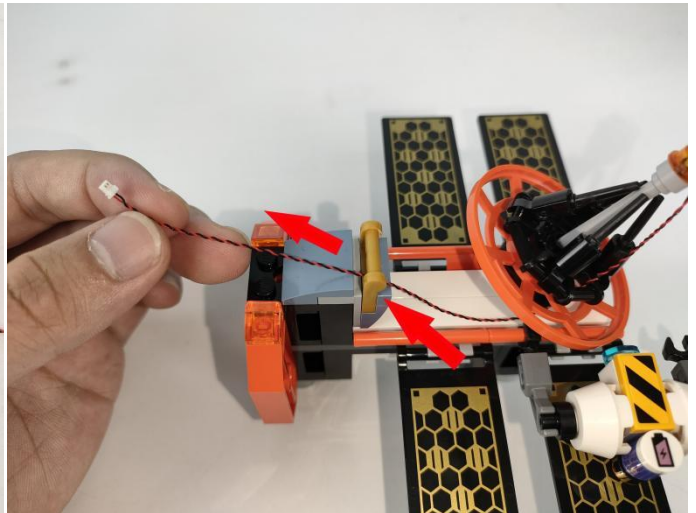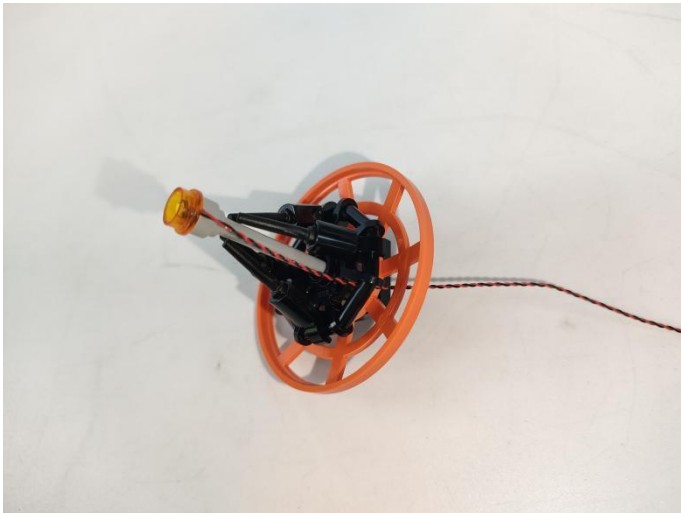



28

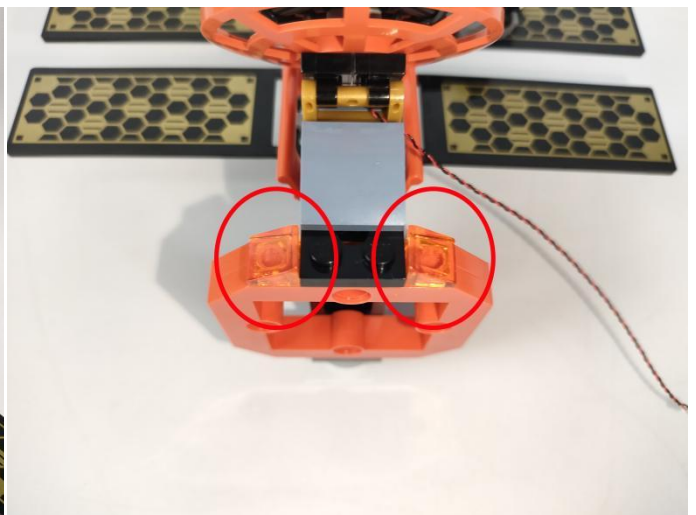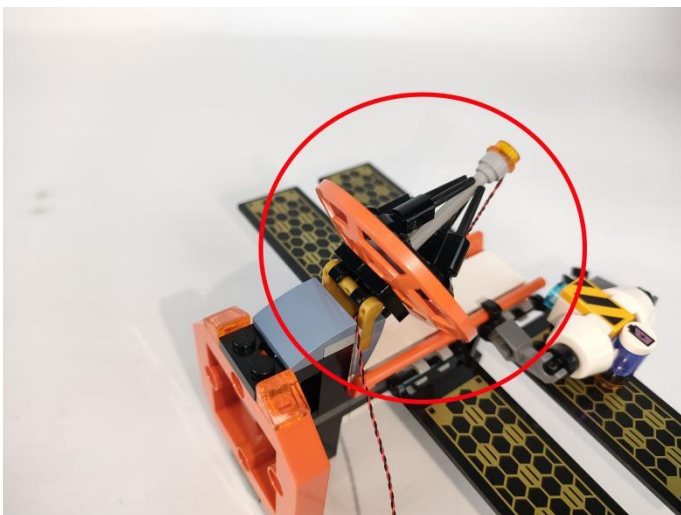


29

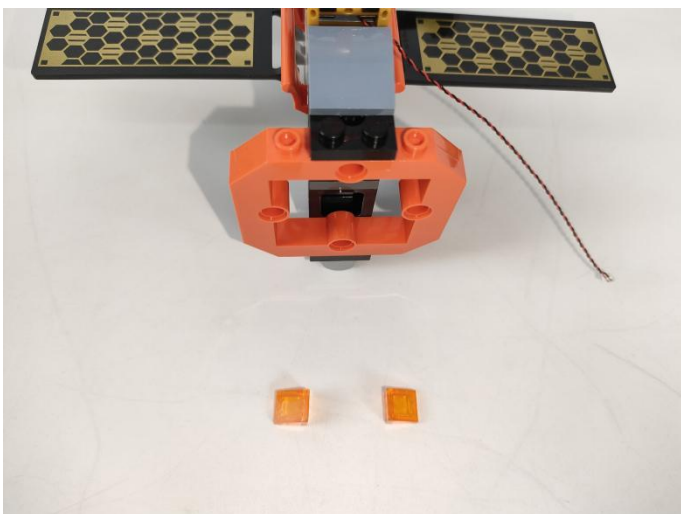

30

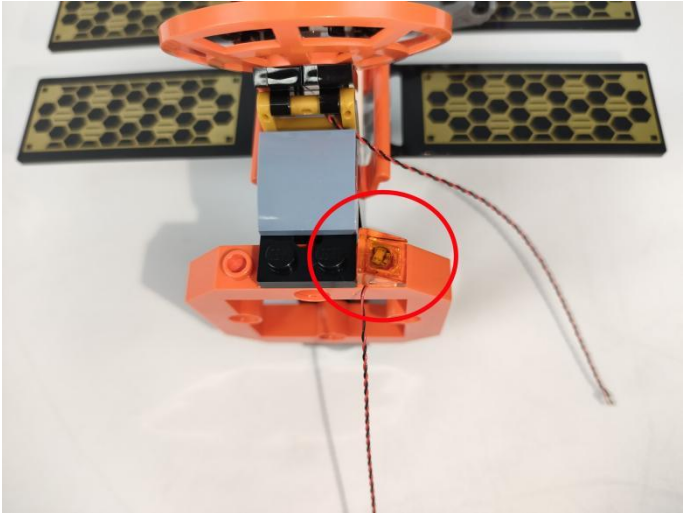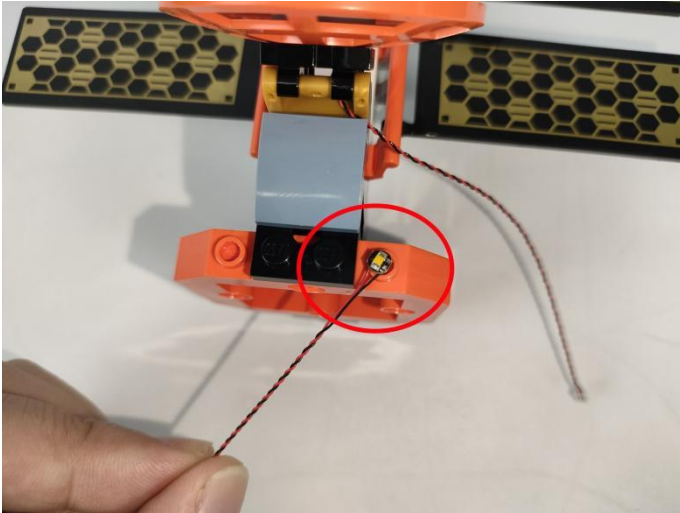

31

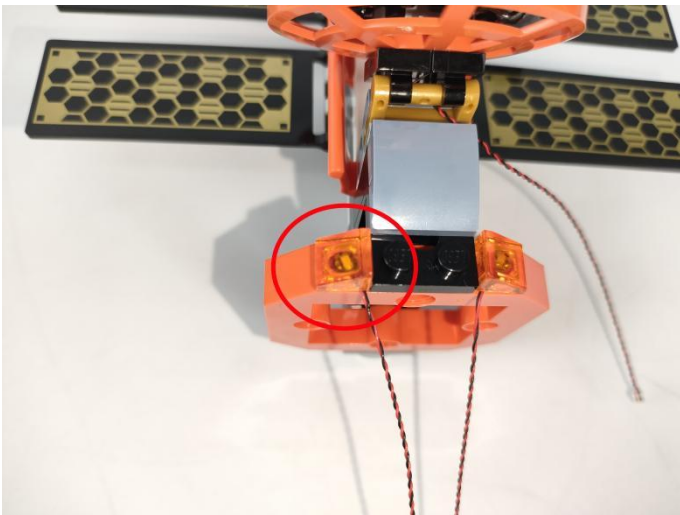



32





33




34

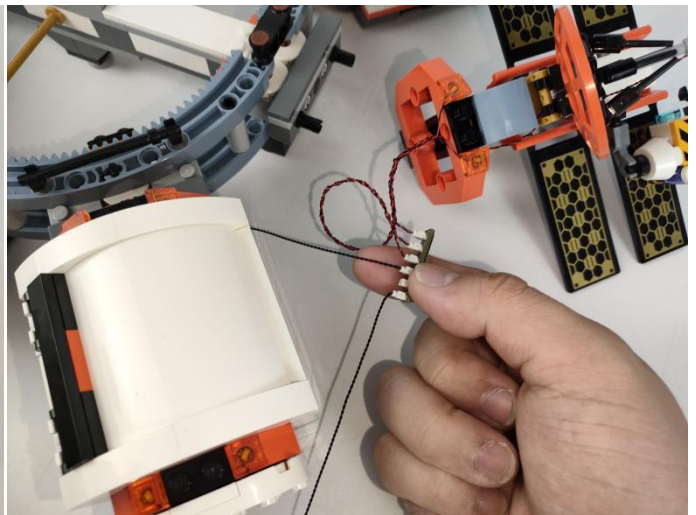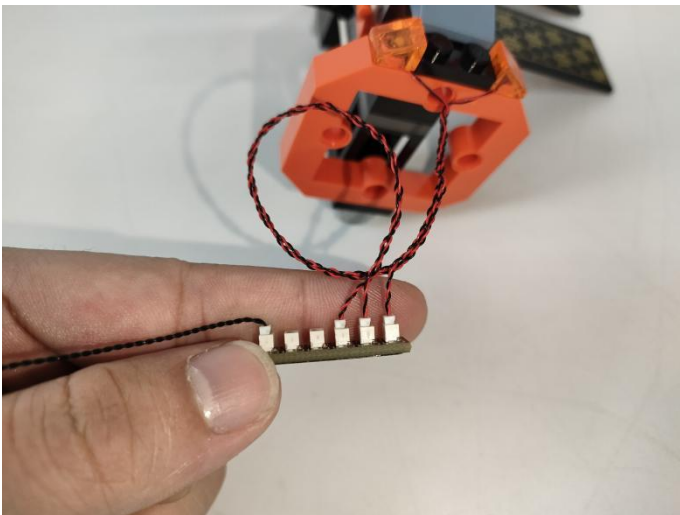


35

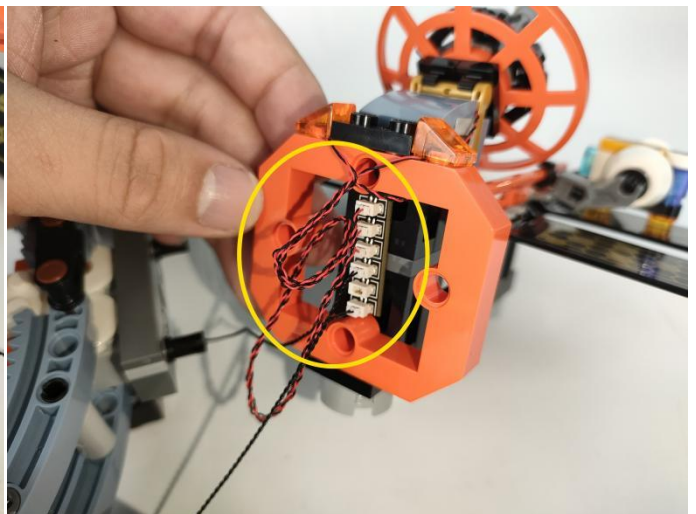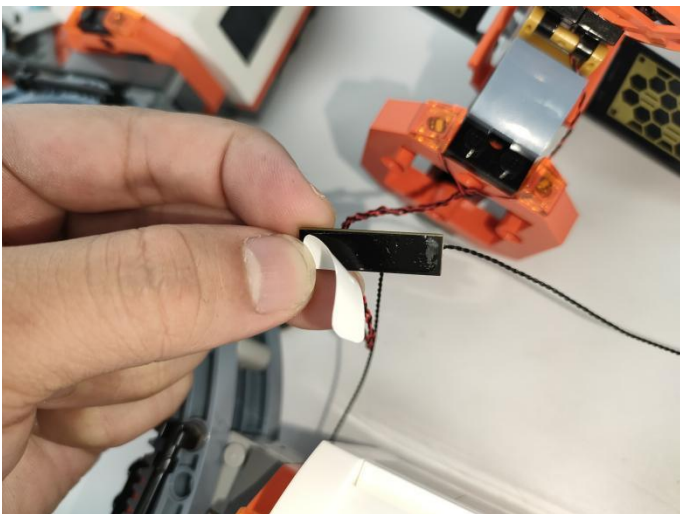



36

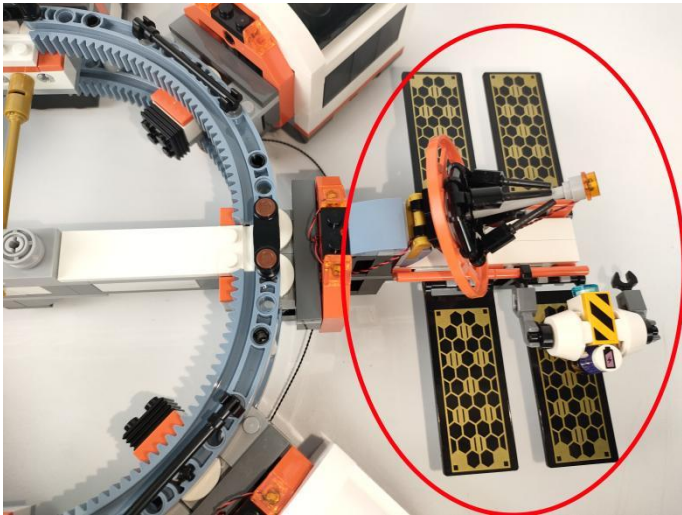


37

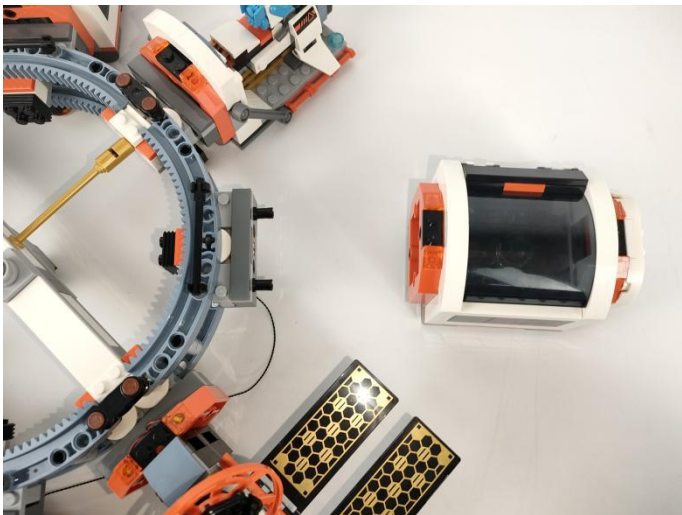



38

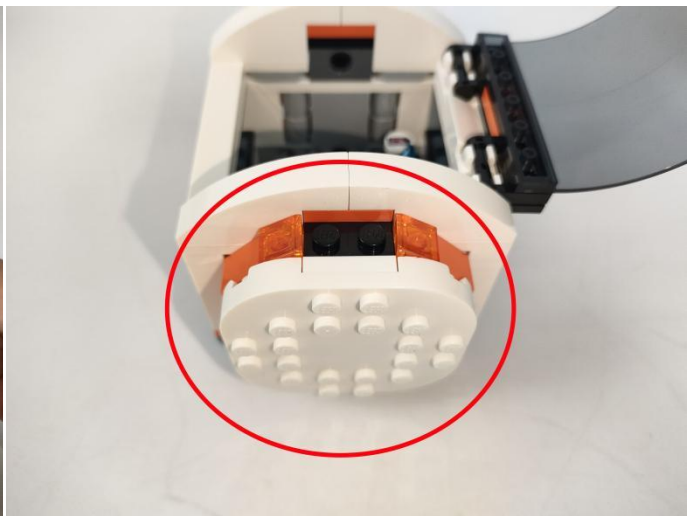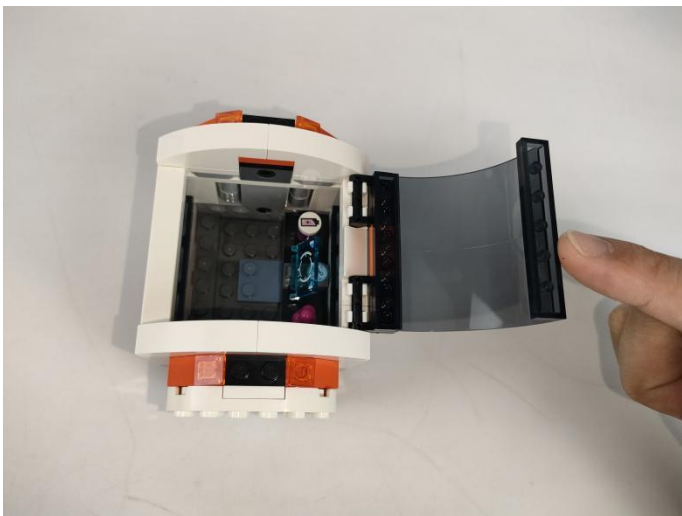



39

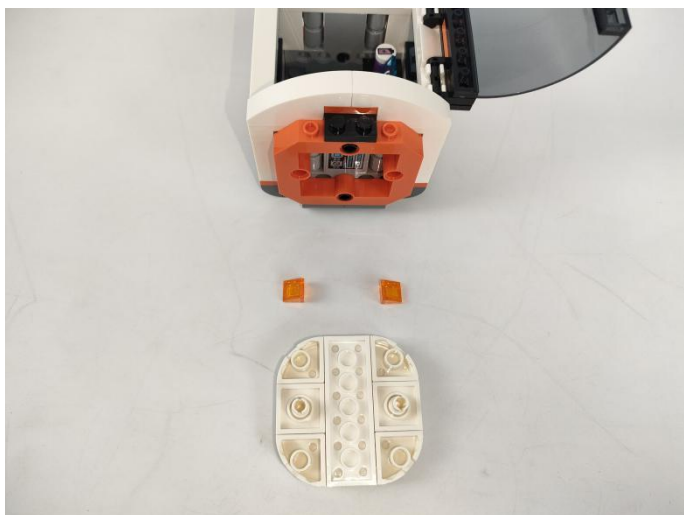



40

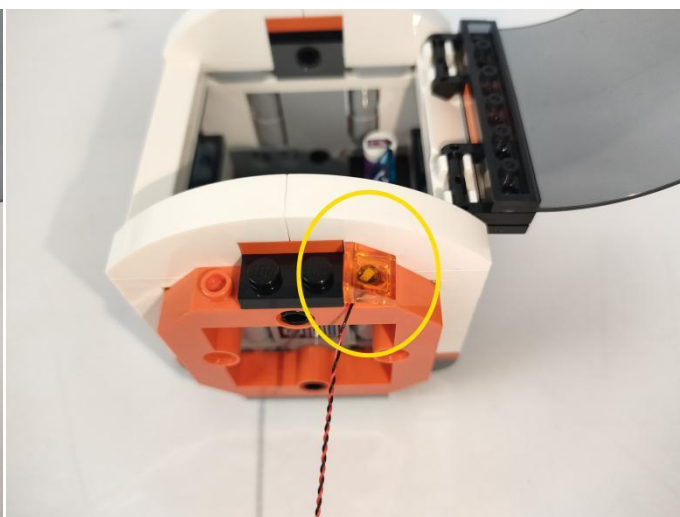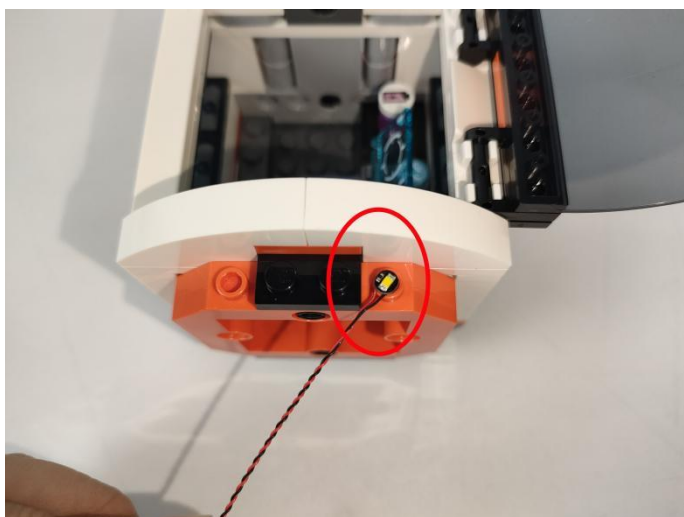


41

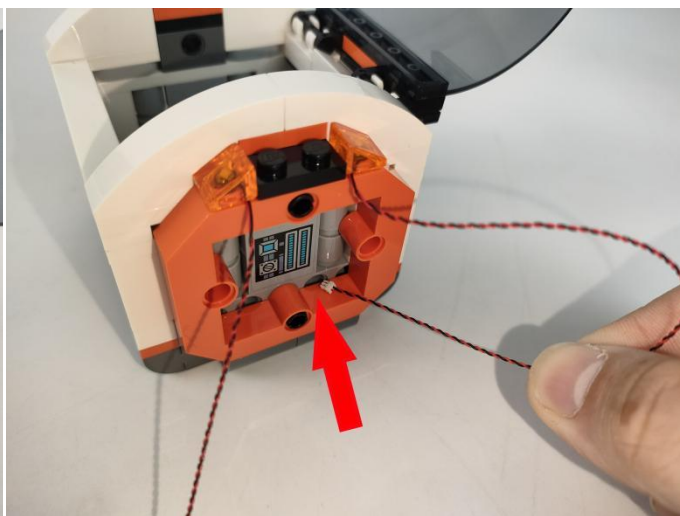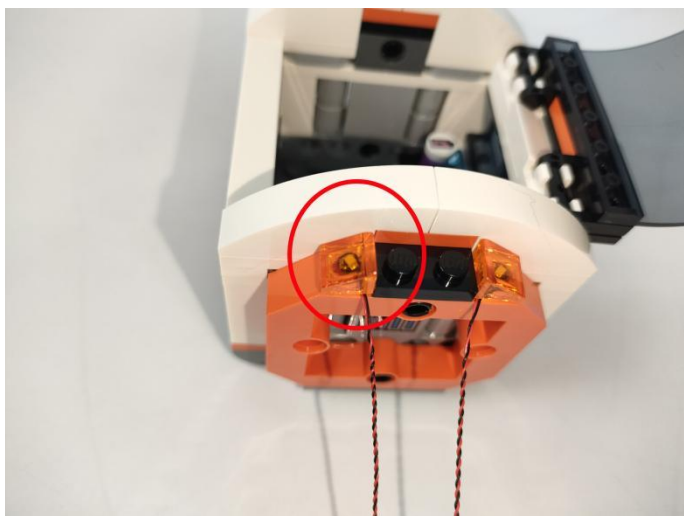


42

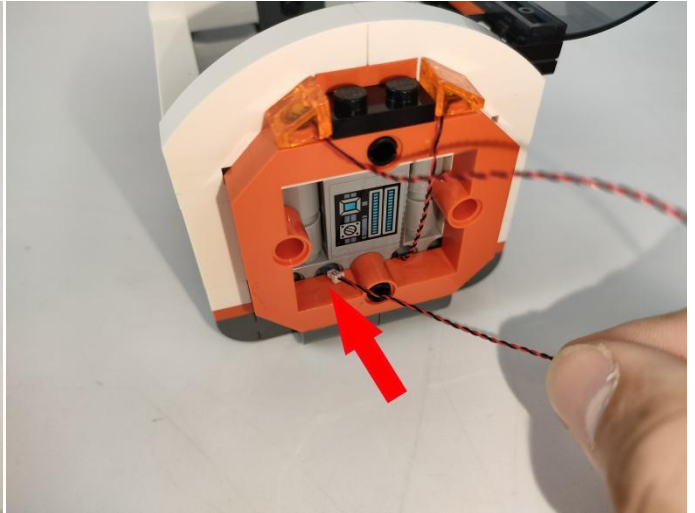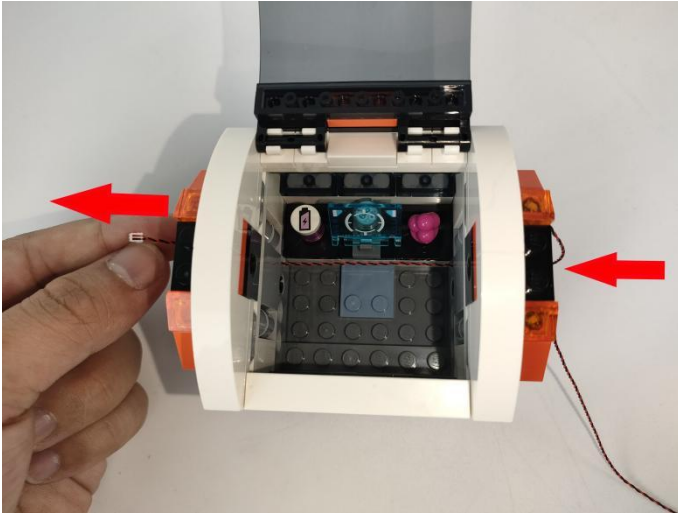

43

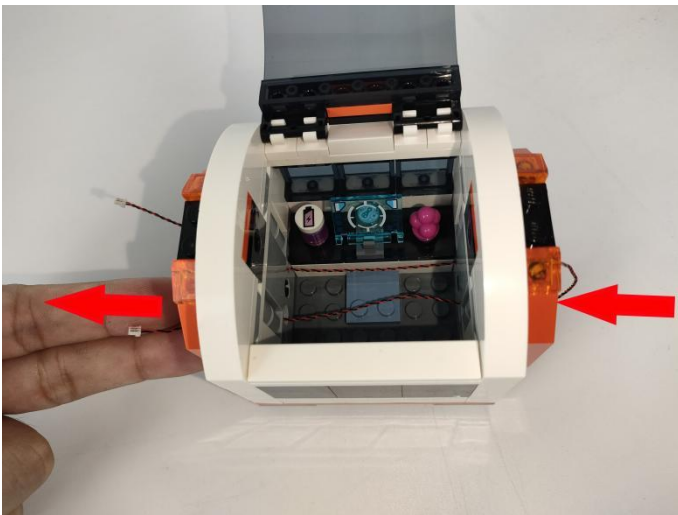



44

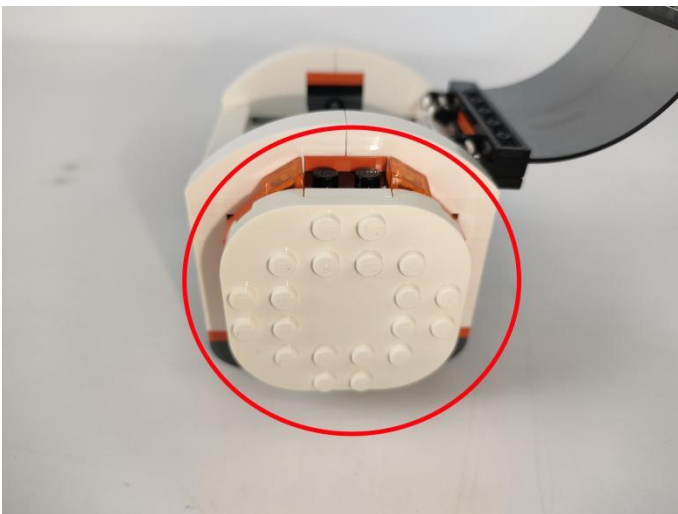



45





46

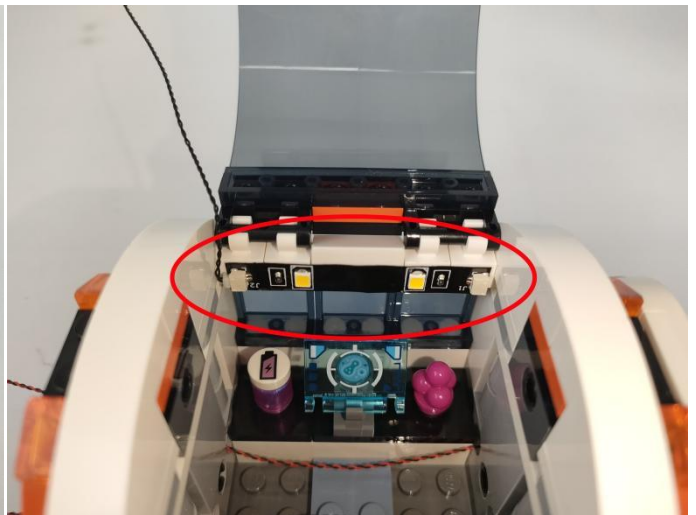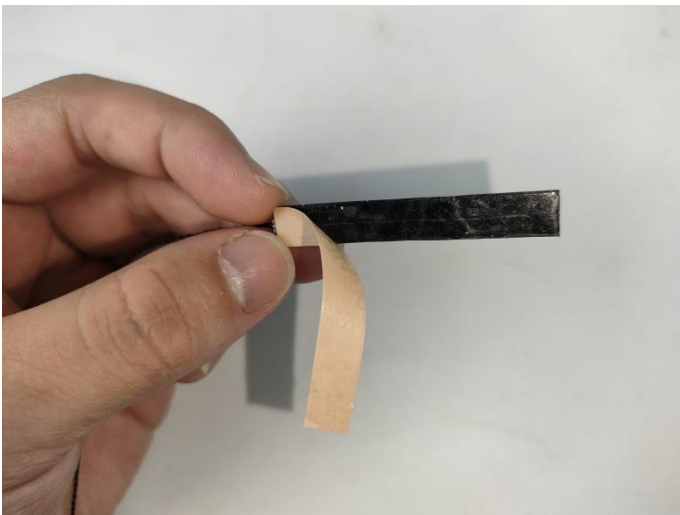



47

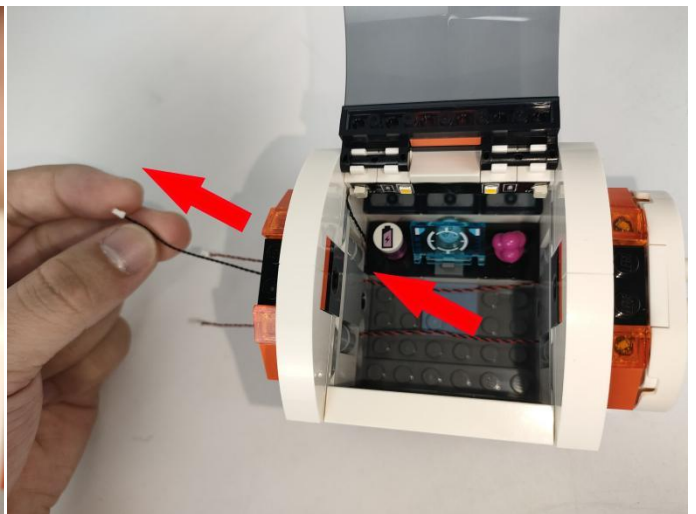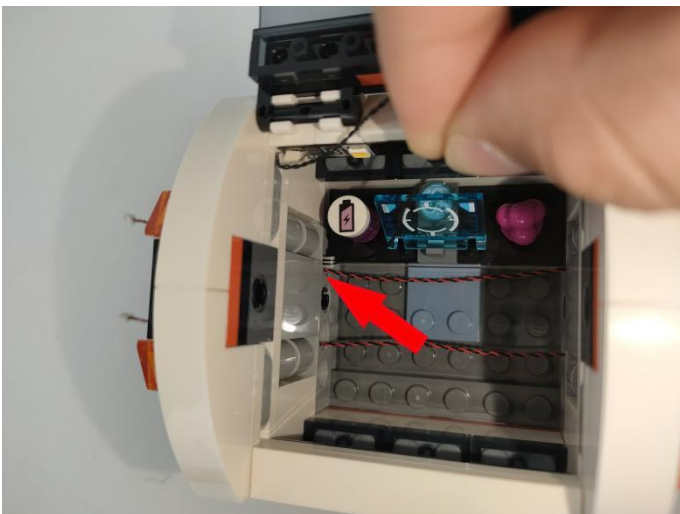


48

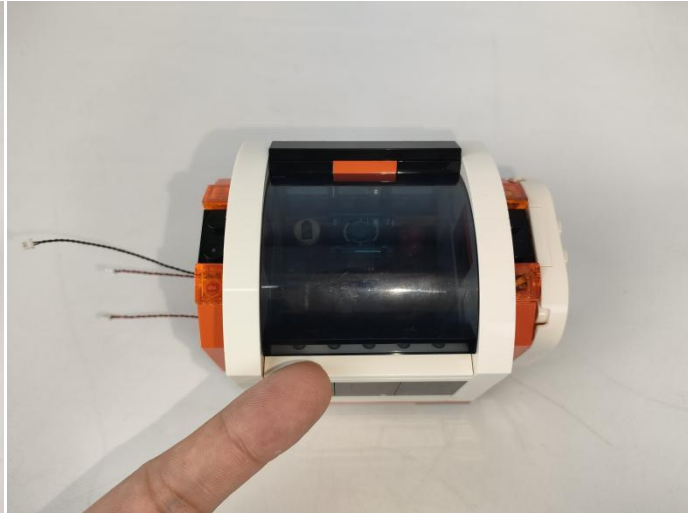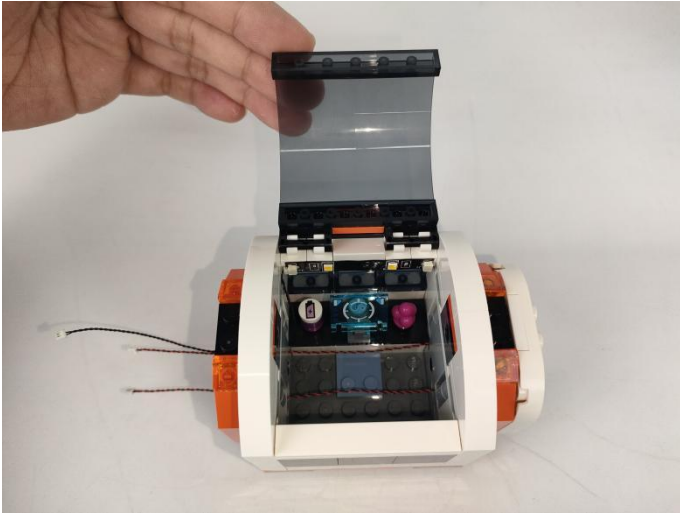



49

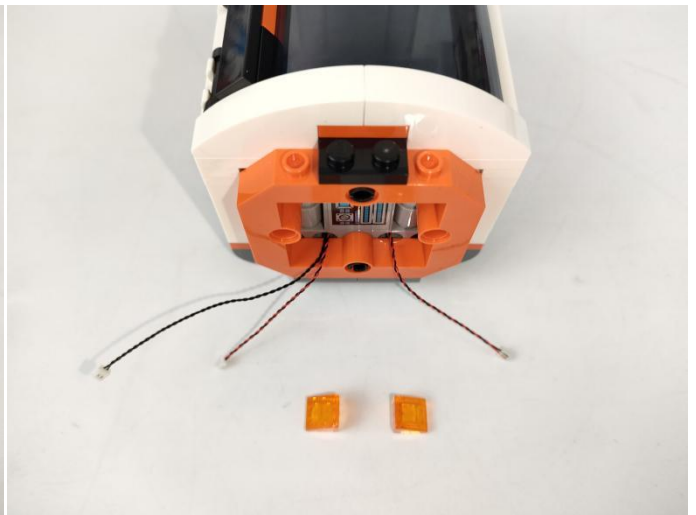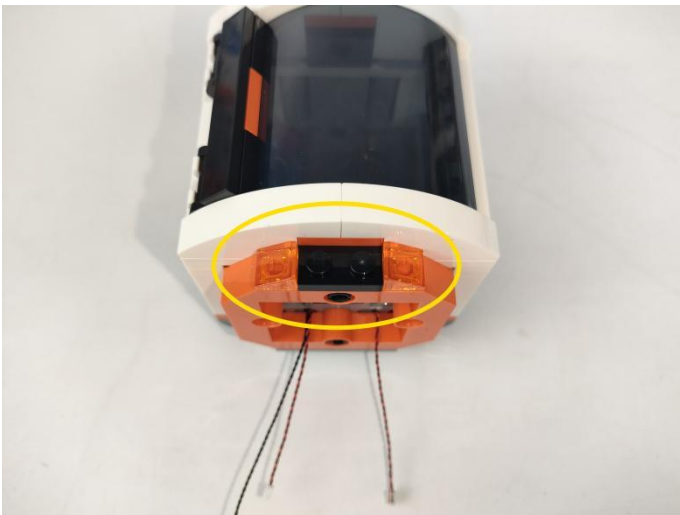


50

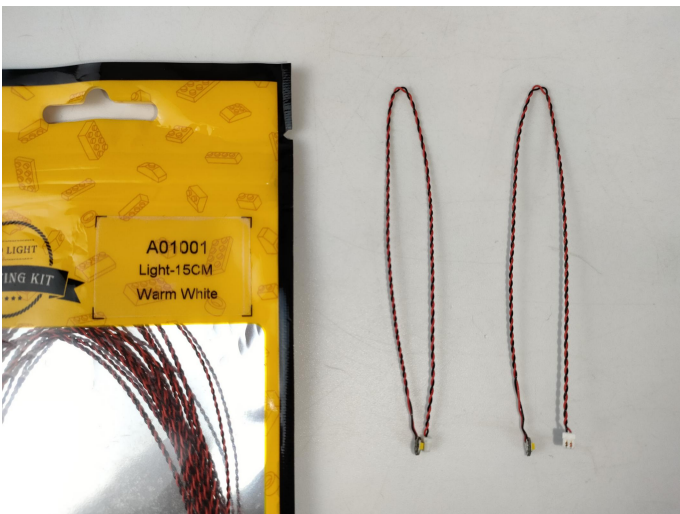

51

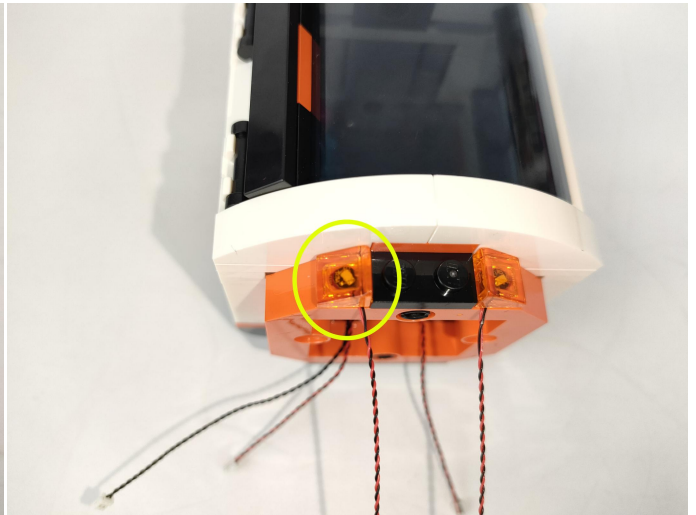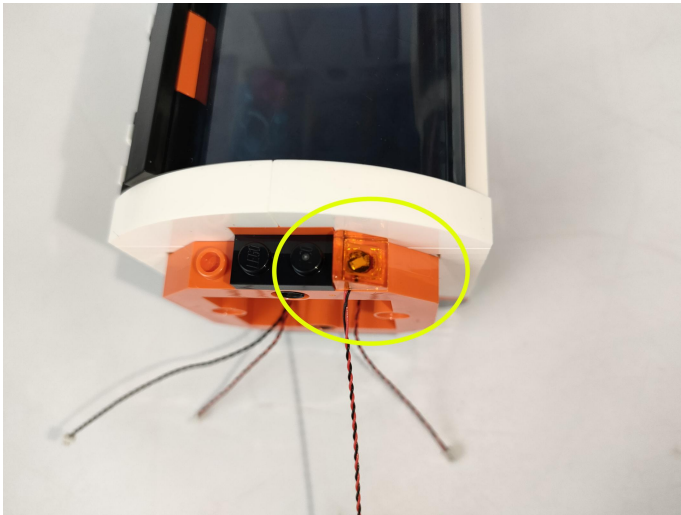


52

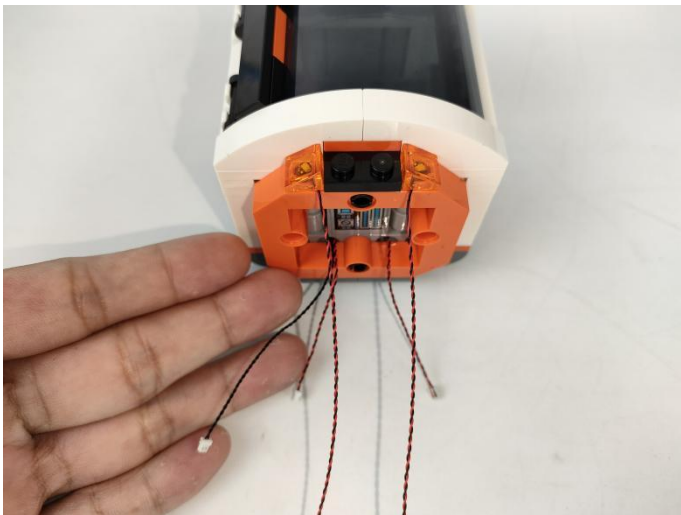



53





54

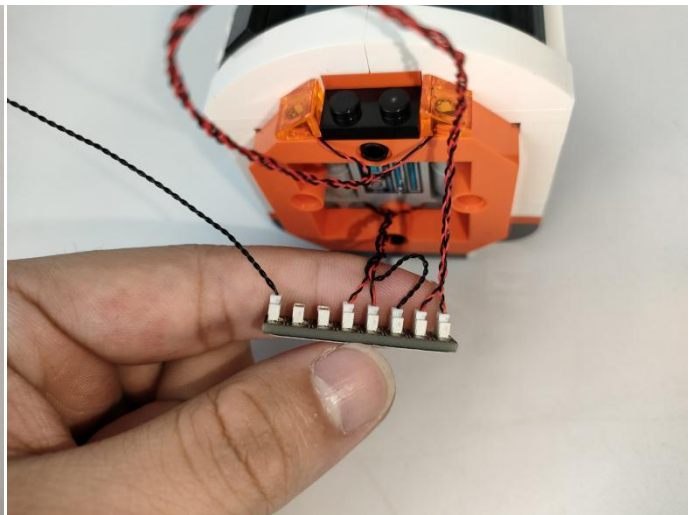


55

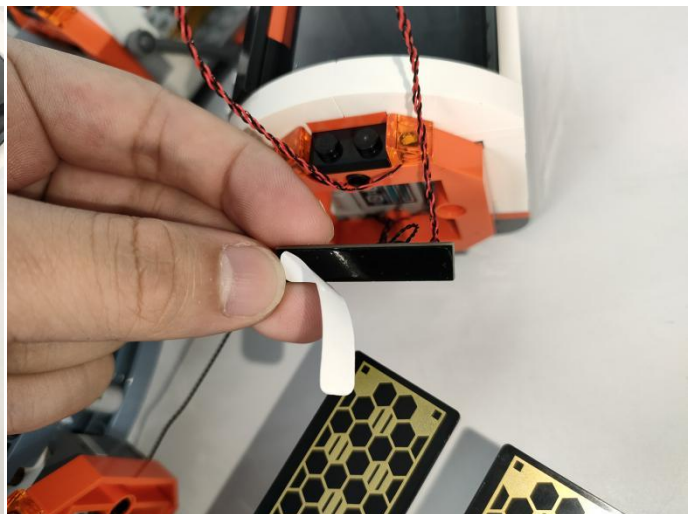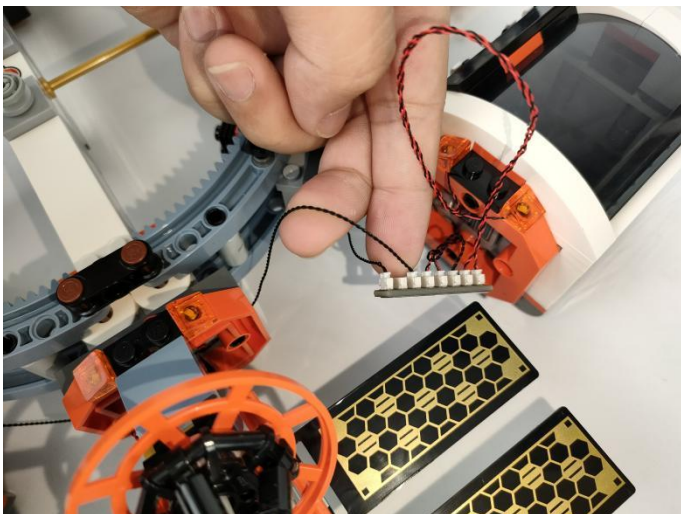

56

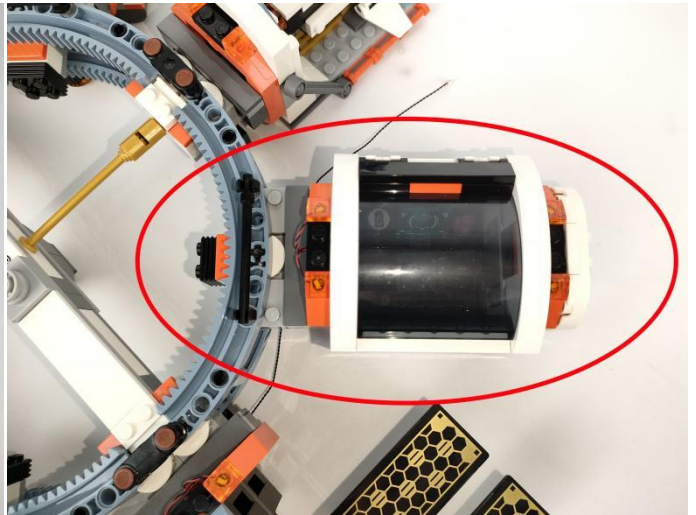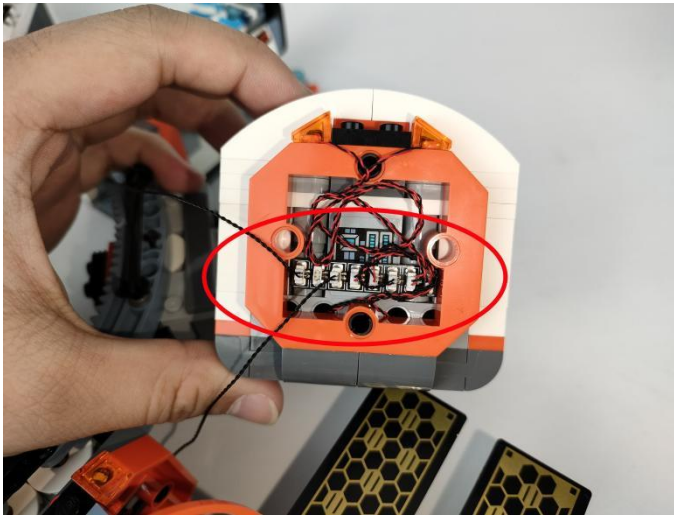

57

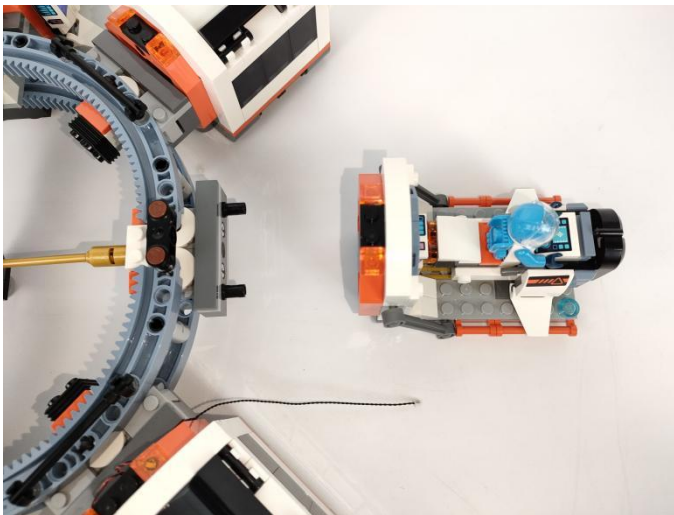

58



59



Tips

The plate without slit:

The plate without slit:

The squeeze causes the protective layer of the wire to be torn apart, the positive and negative wires touch together, and the set is short-circuited, and the hot wire is crushed, the wire to be disconnected and don't work.



The plate with slit:

The plate with slit:

The wire has enough space to avoid being squeezed endowed with longer service life and more stable effect.





The slit on the the plate round 1X1 are hand-made to avoid squeeze the wire and cause short circuit and abnormalheat during installation.



60




61

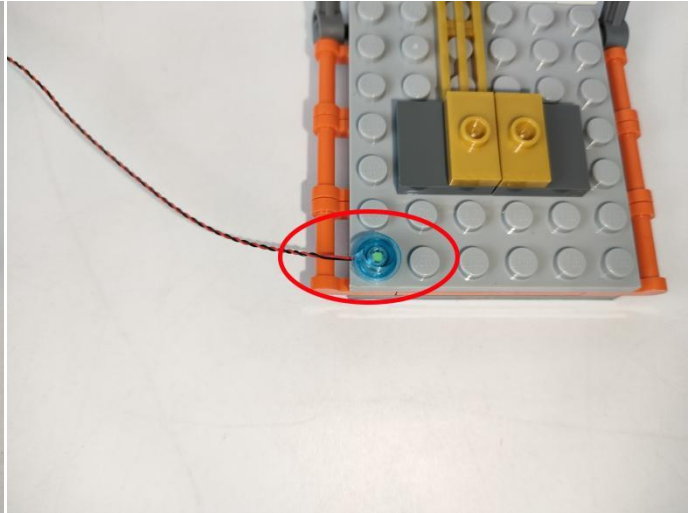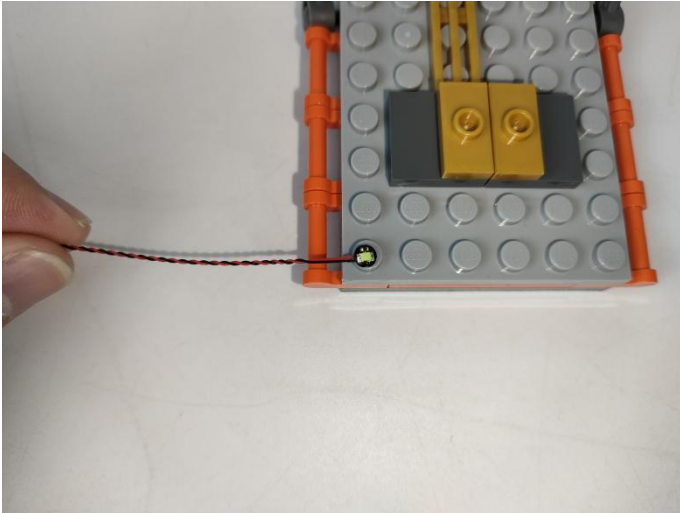


62

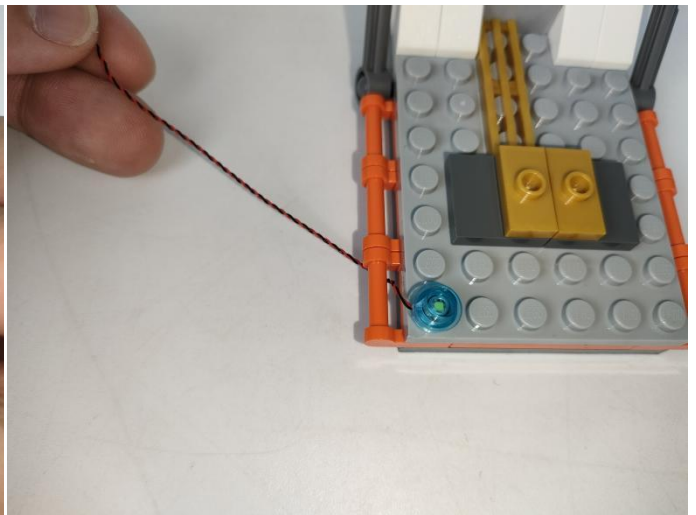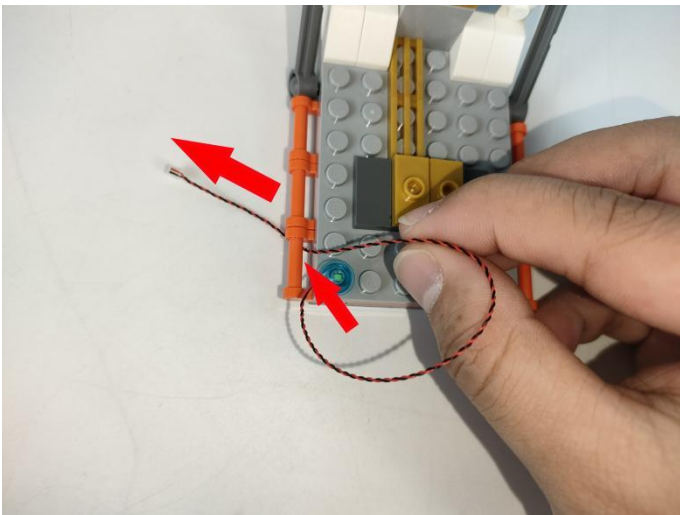



63

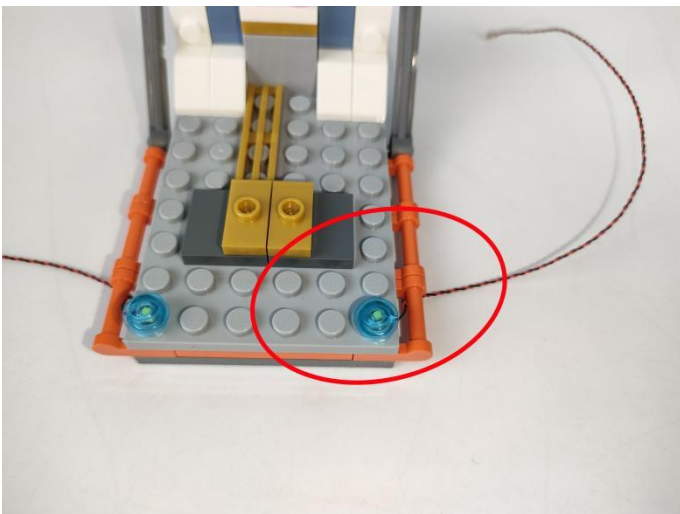



64

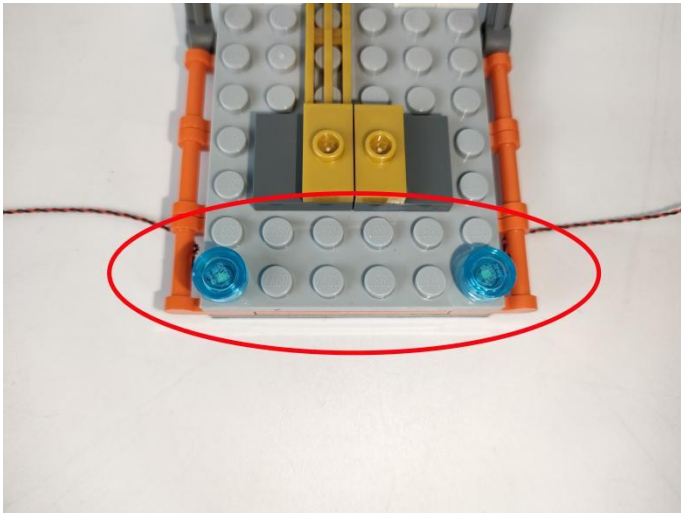


65

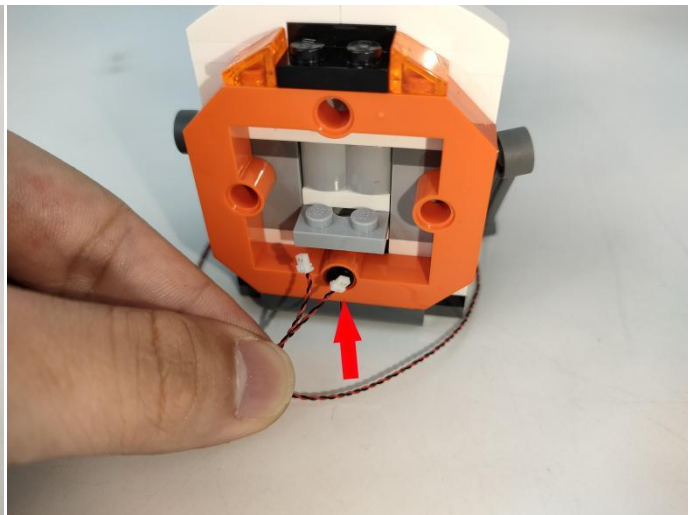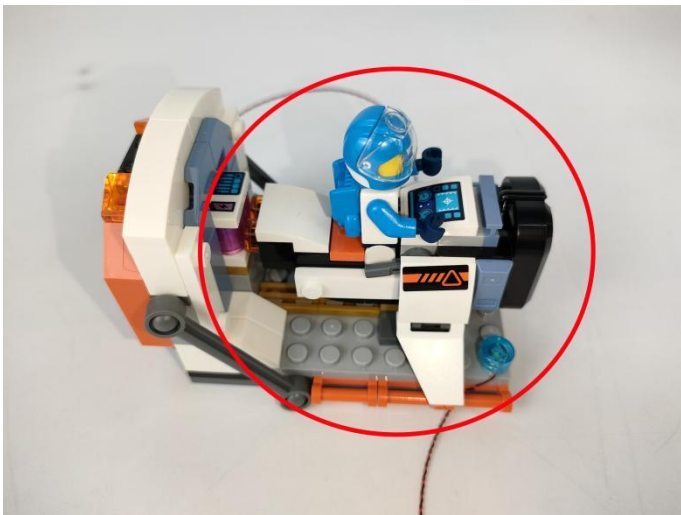



66

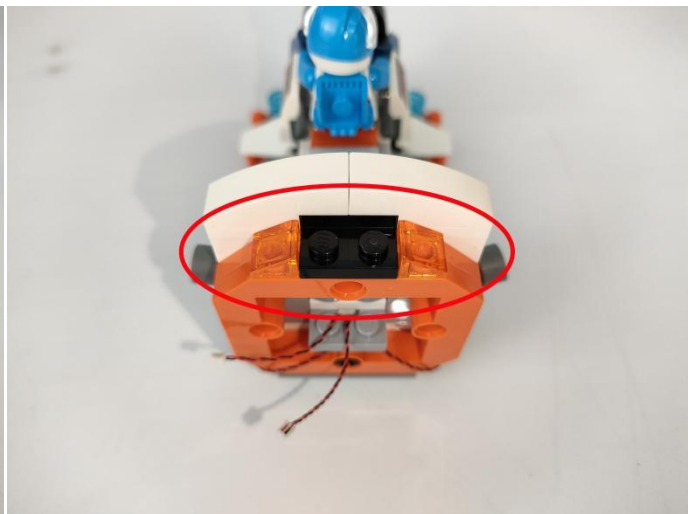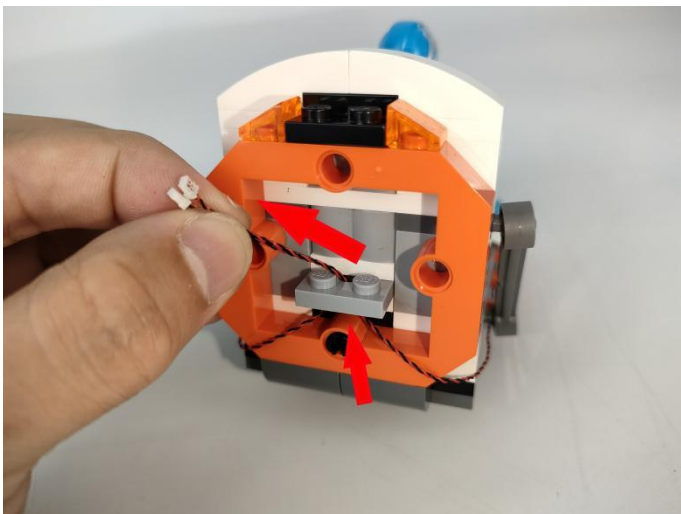



67

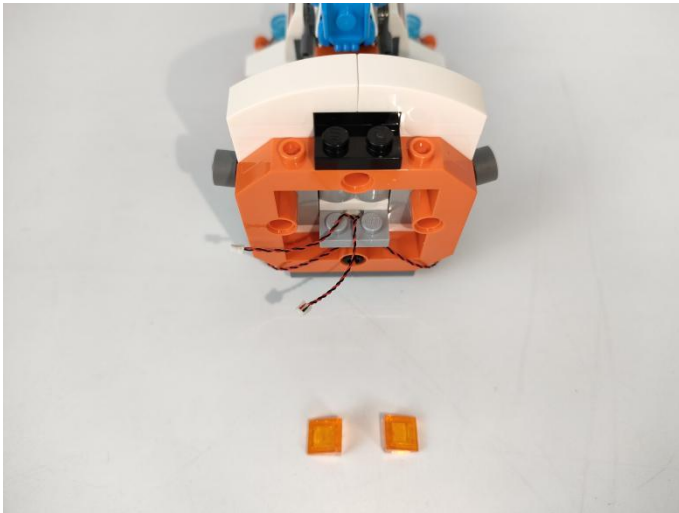


68

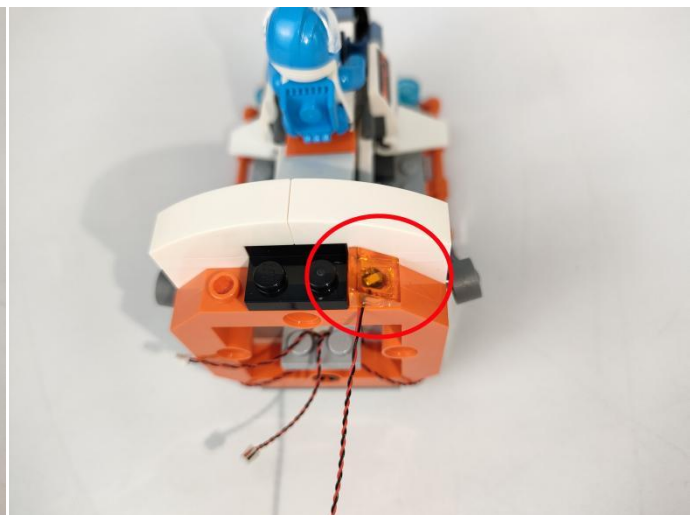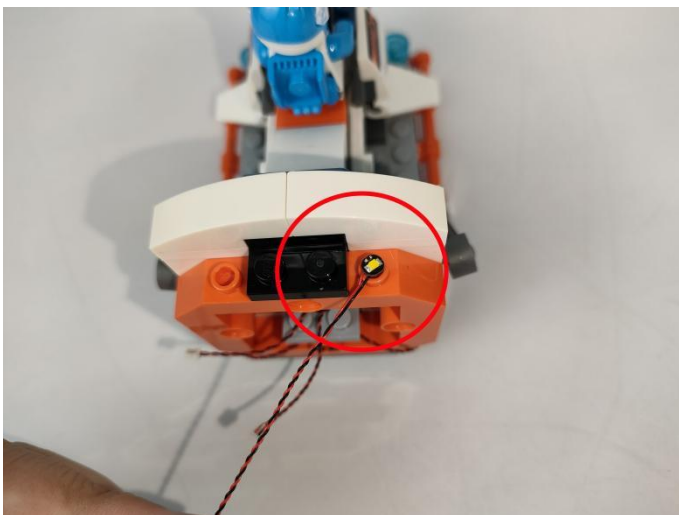


69

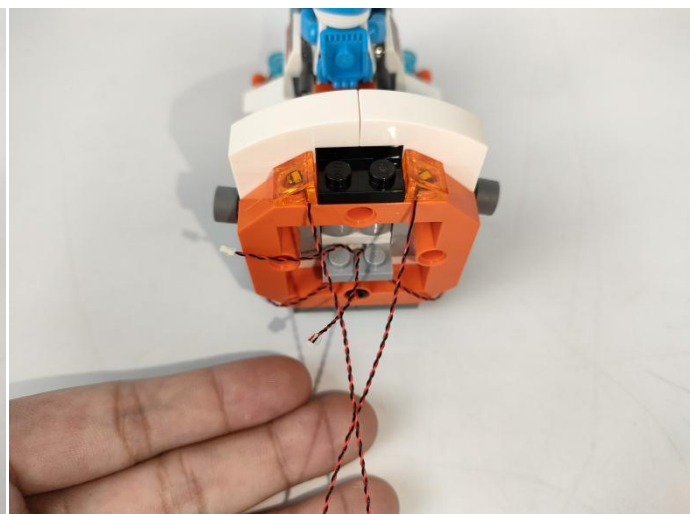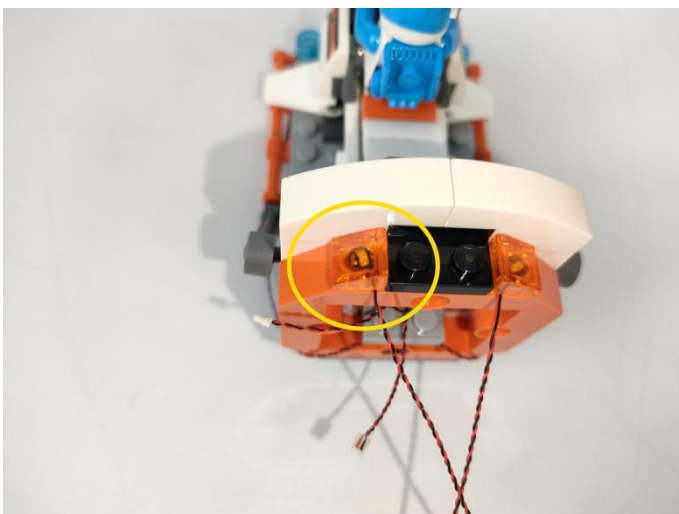



70

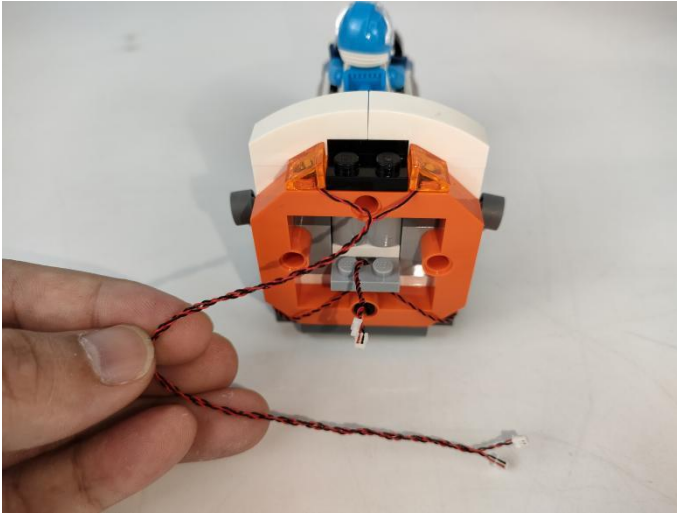


71

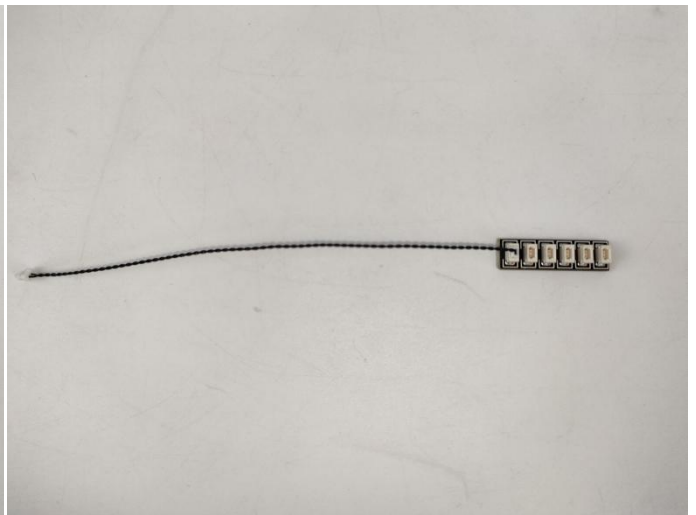



72

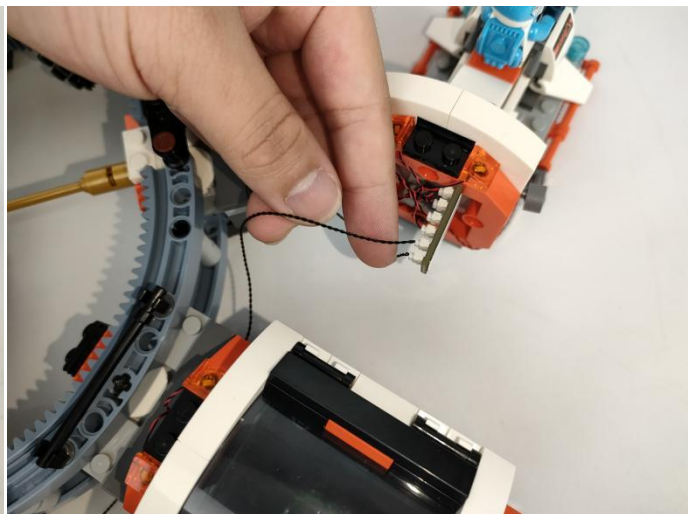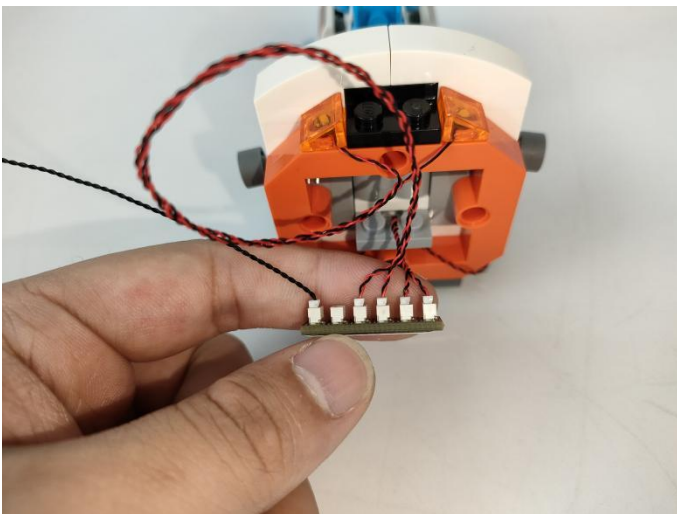


73

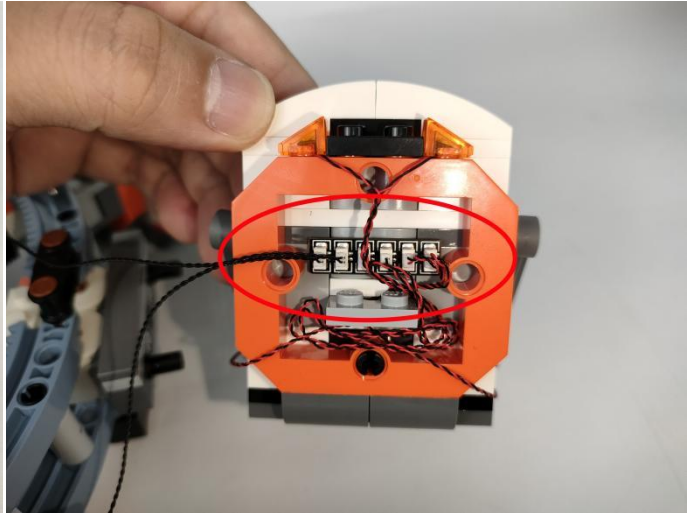



74

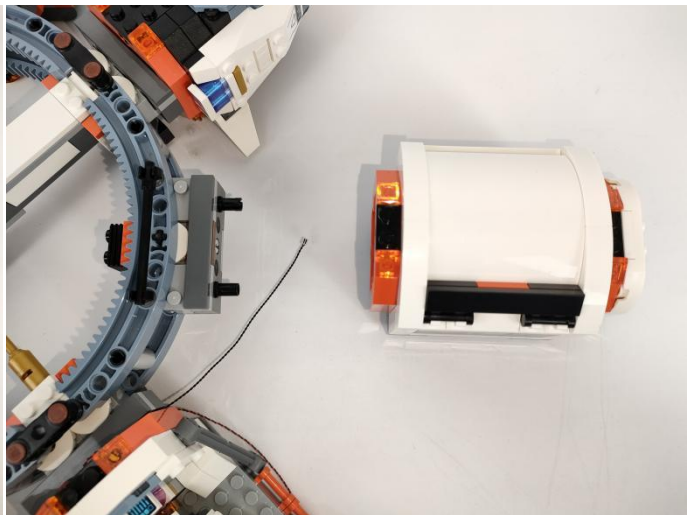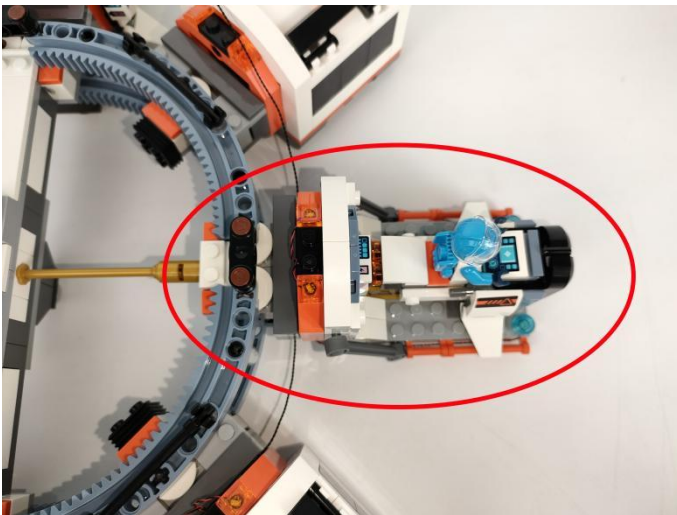


75

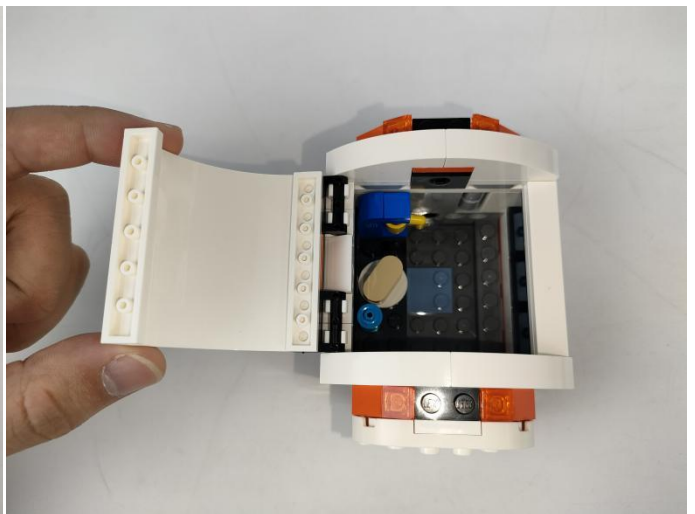



76

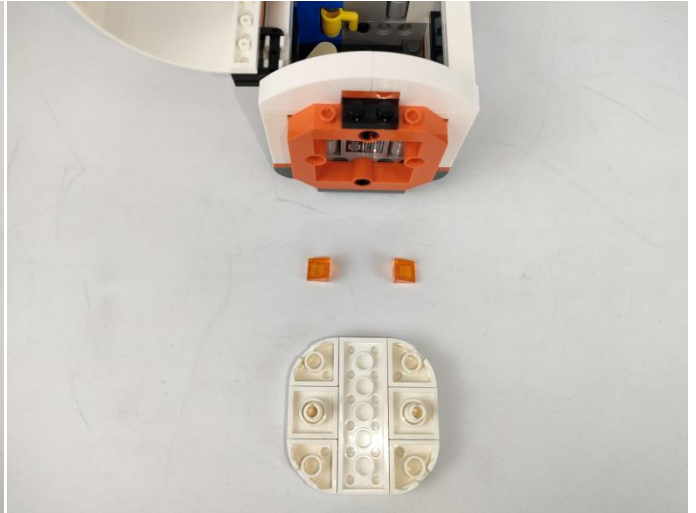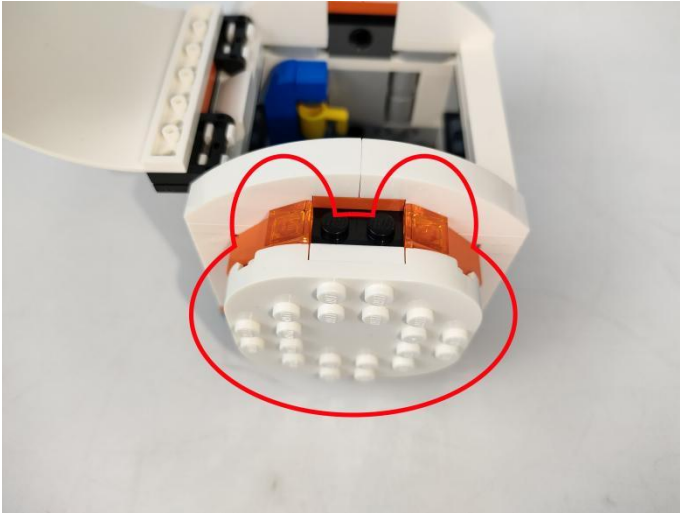



77

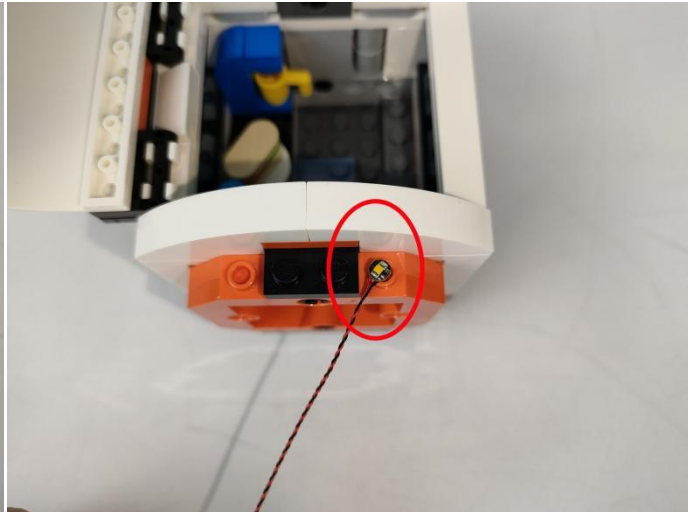



78

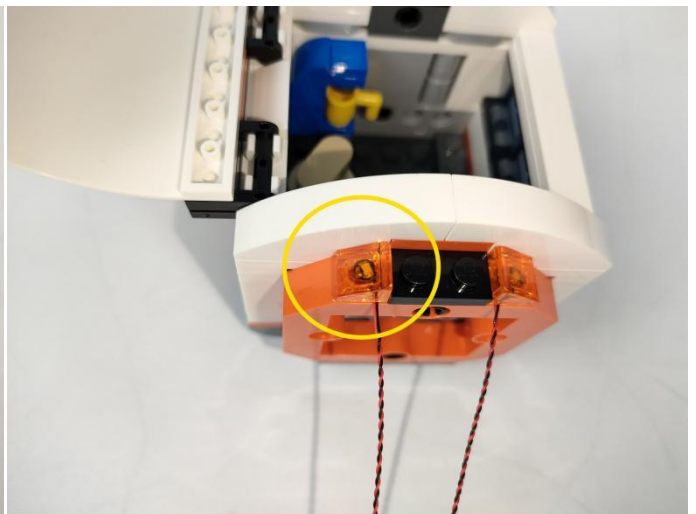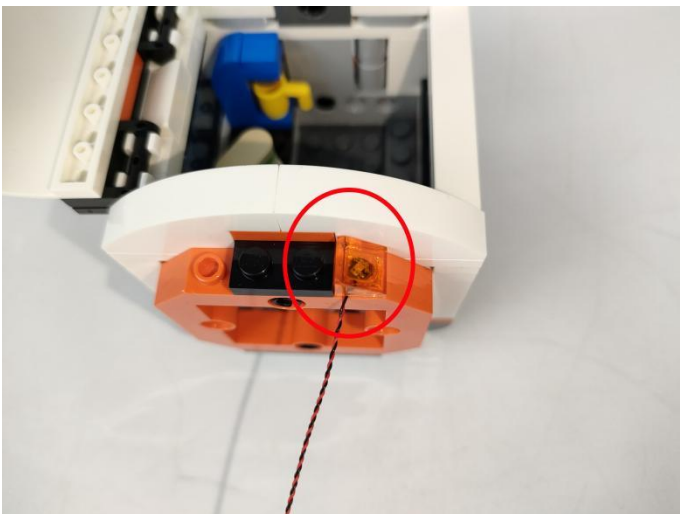


79

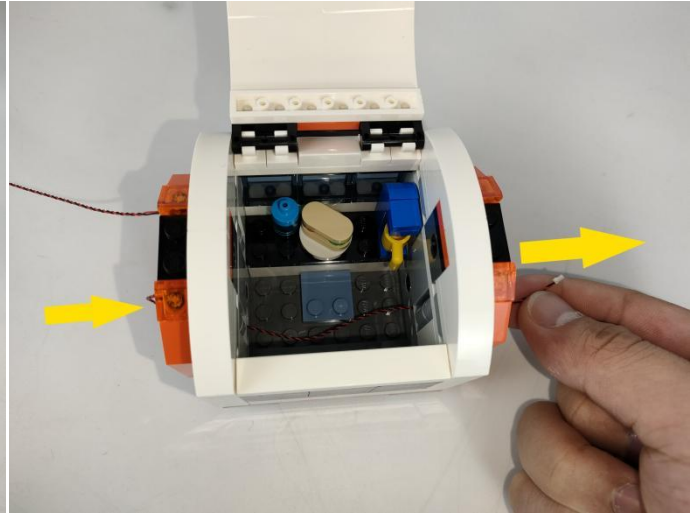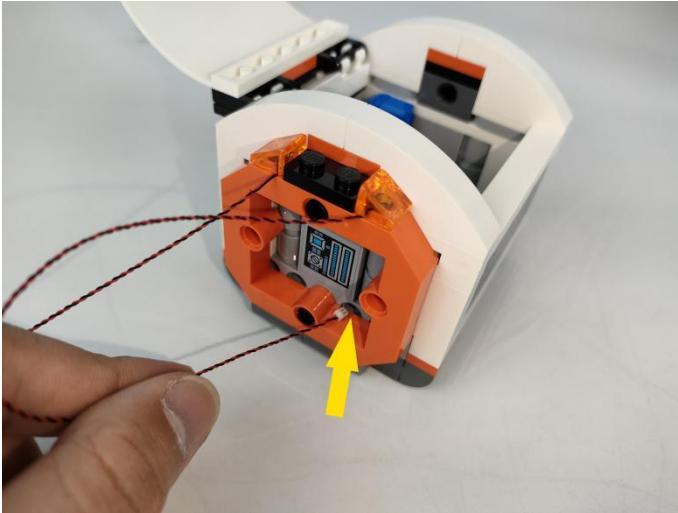

80

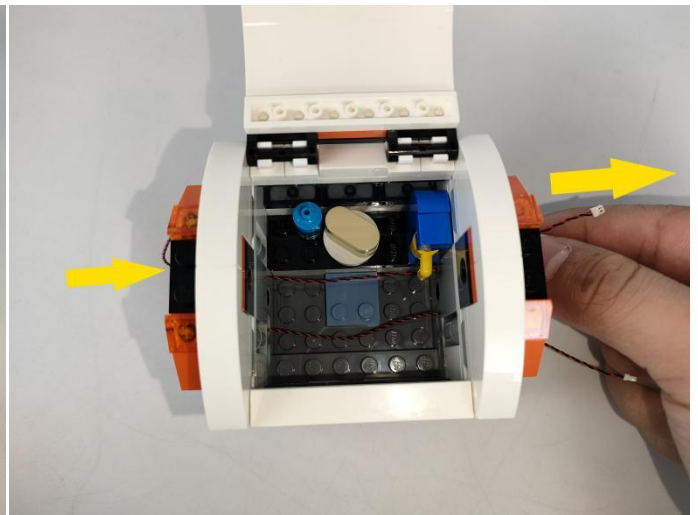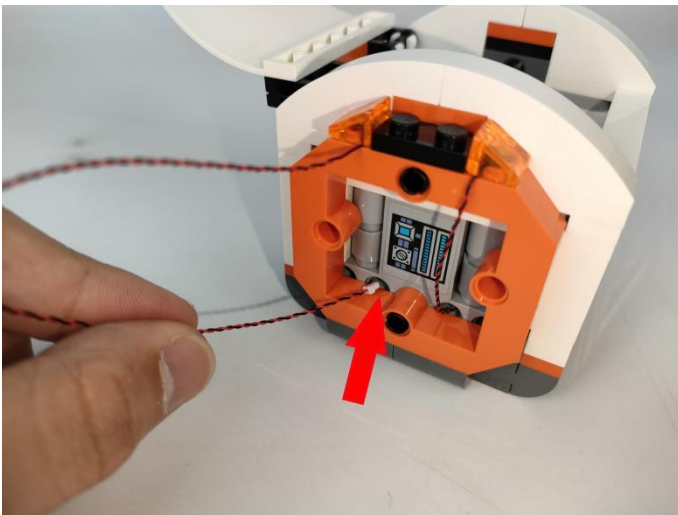


81

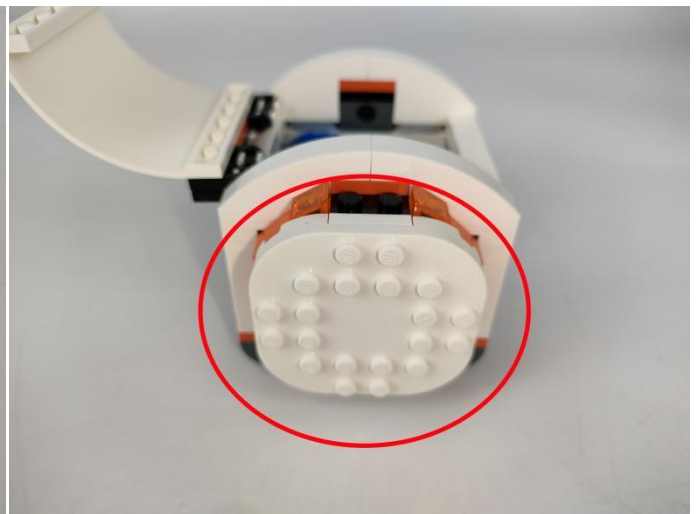



82





83

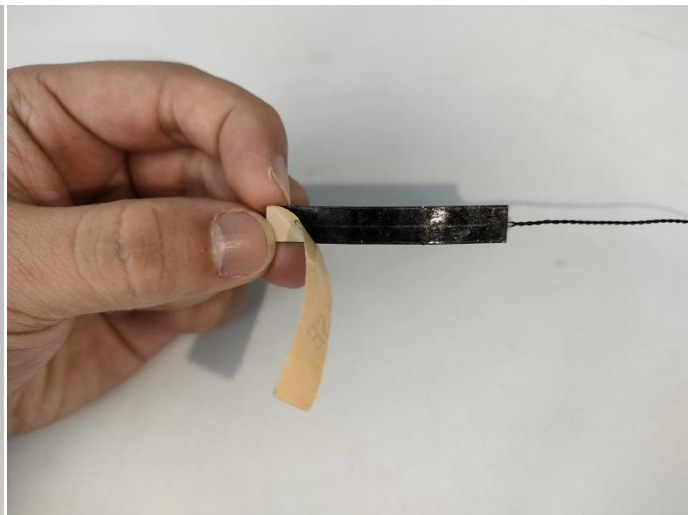


84

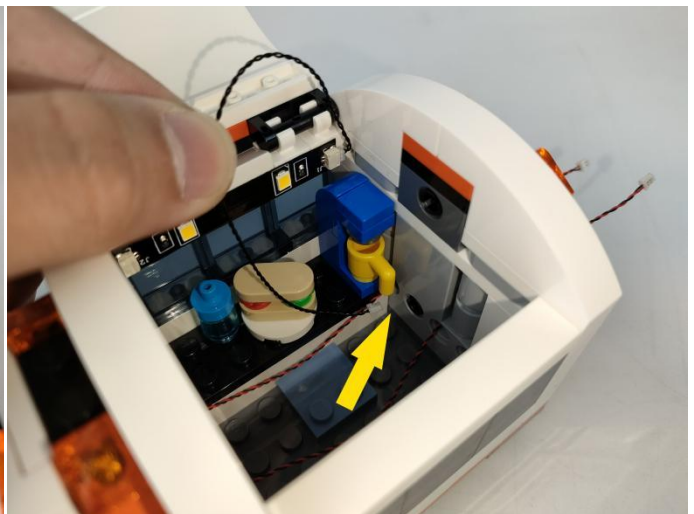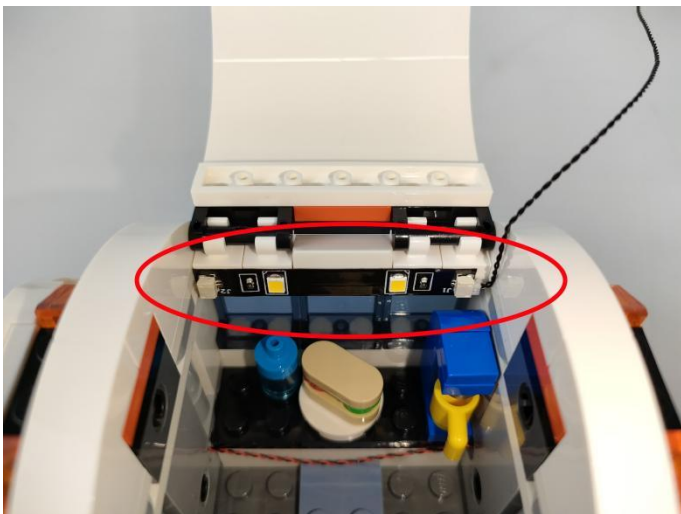


85

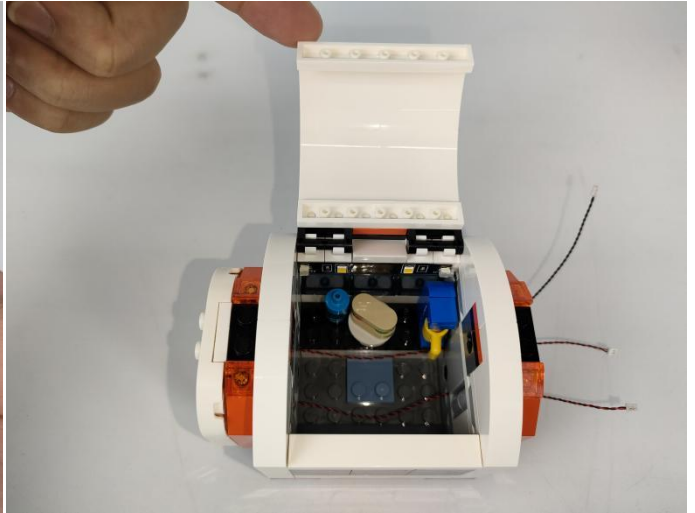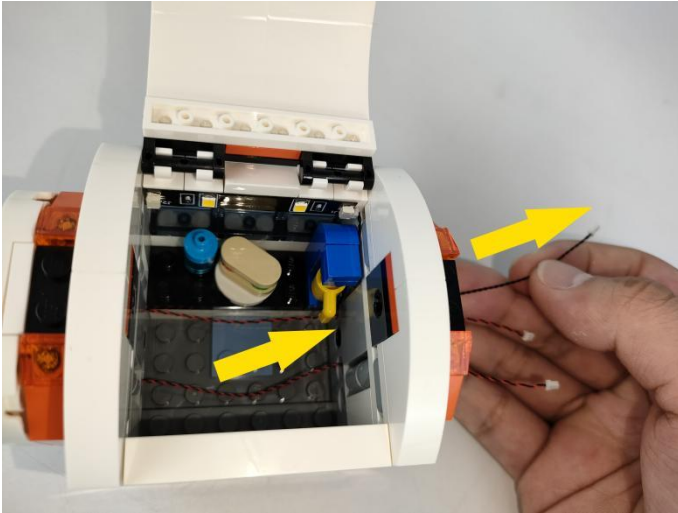


86

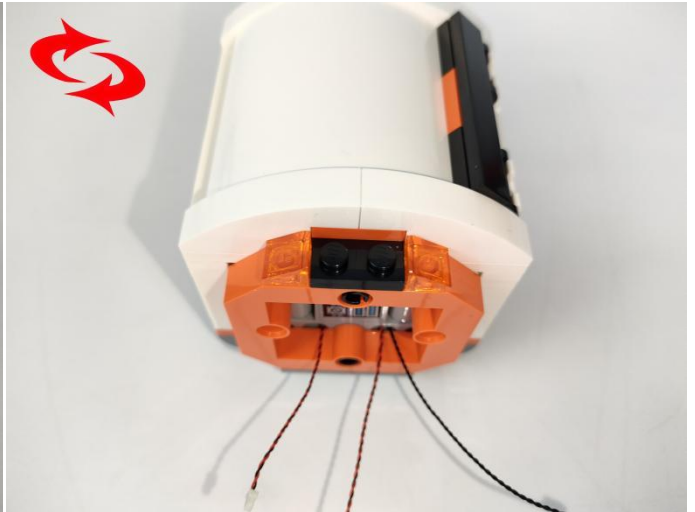



87

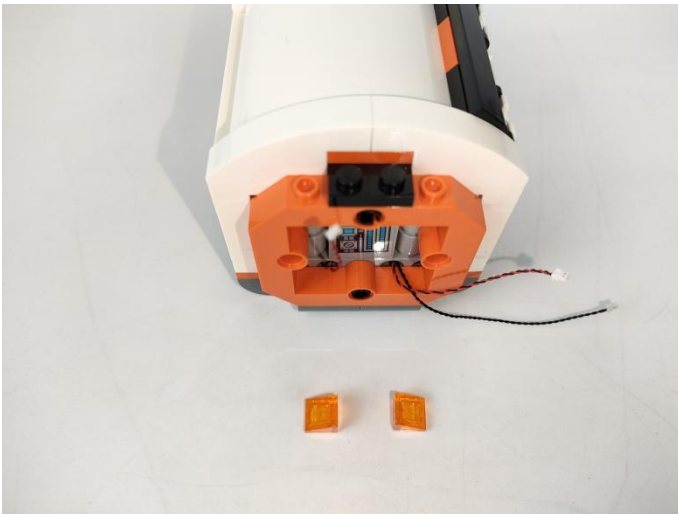


88

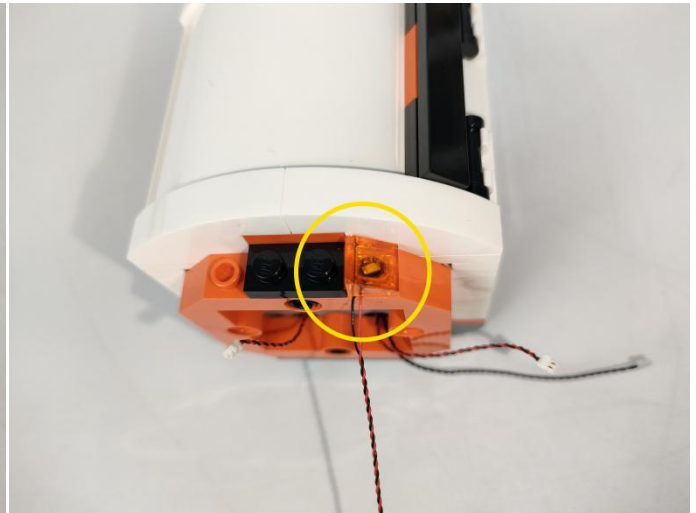

89

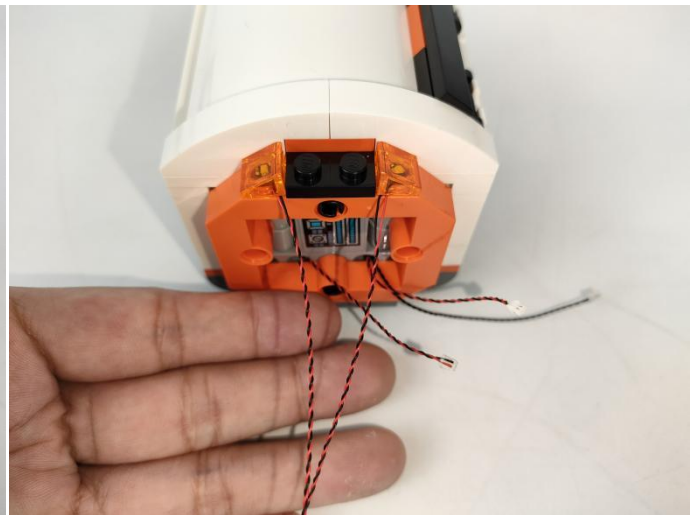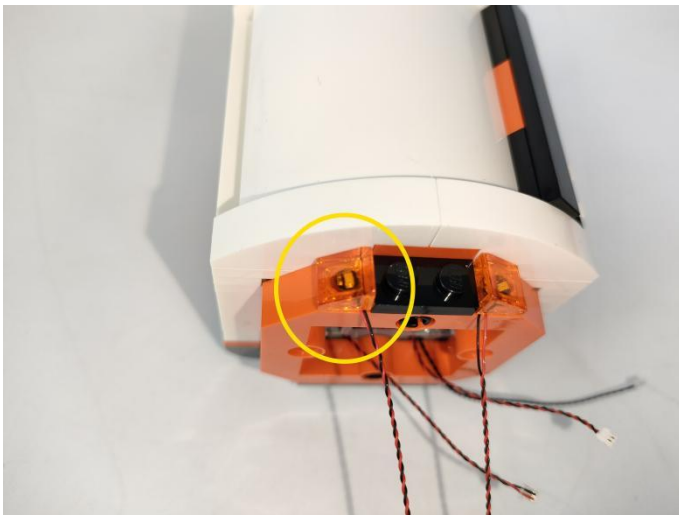



90

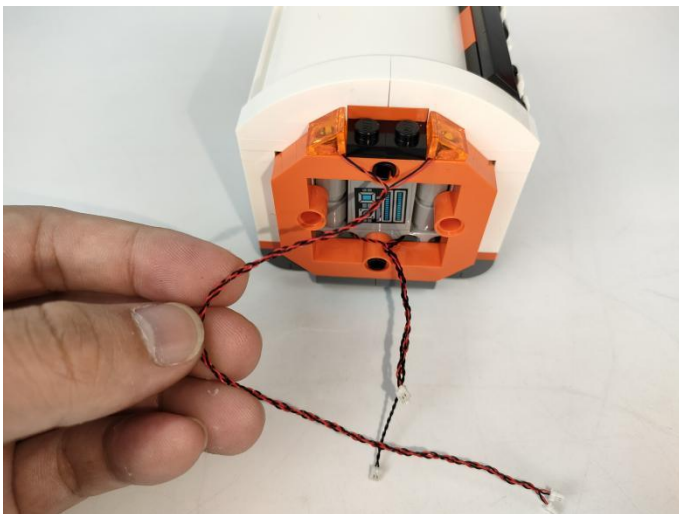


91





92

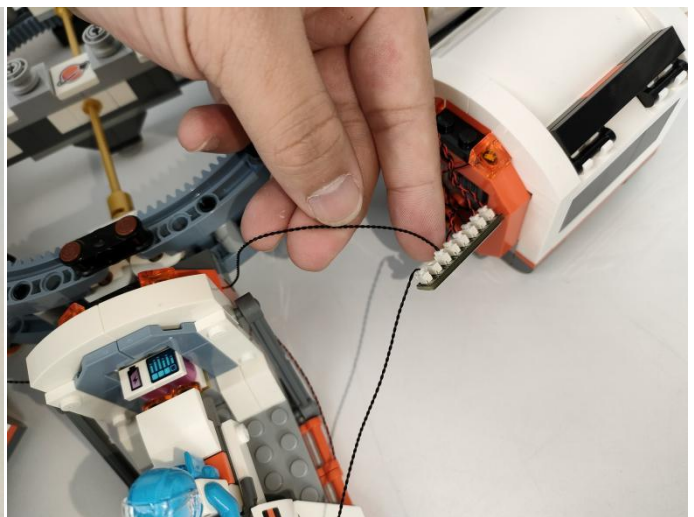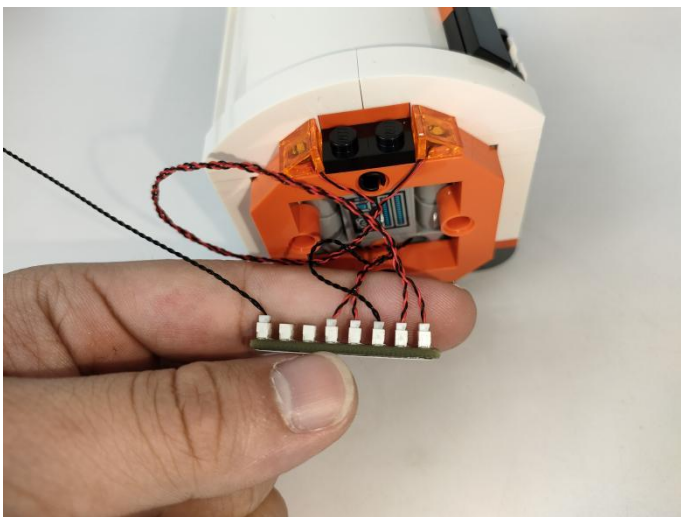


93

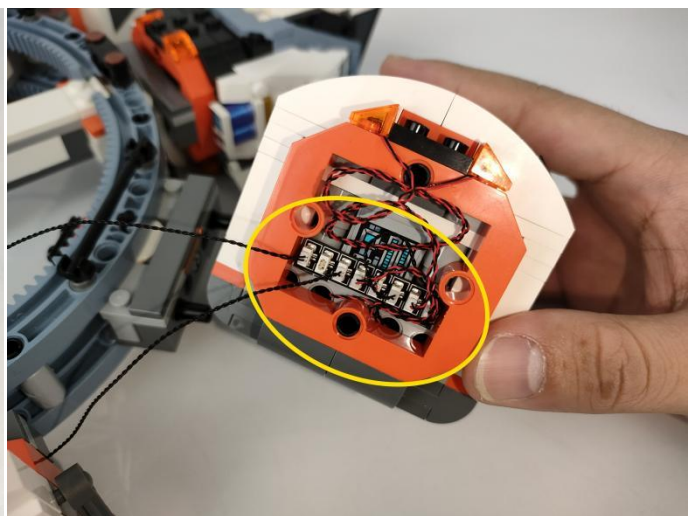

94

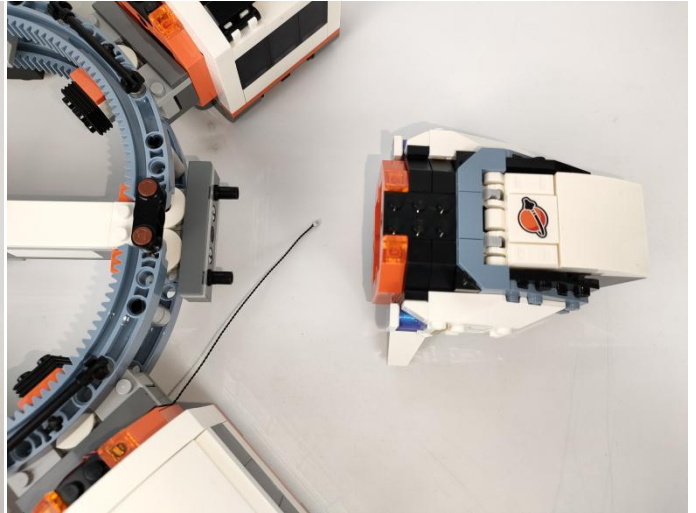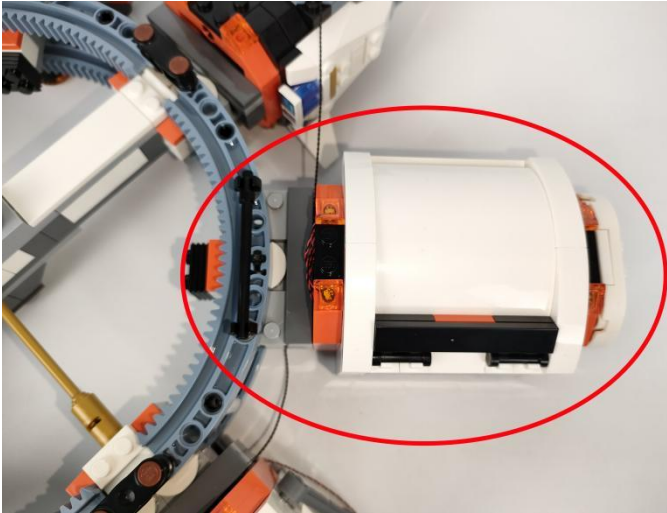

95

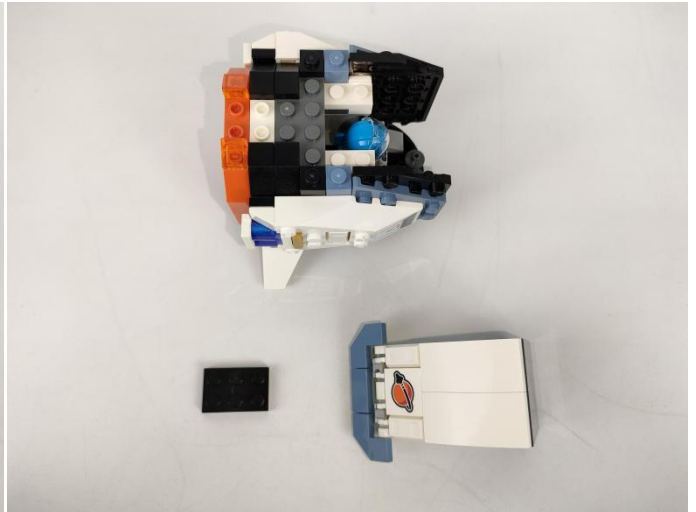



96




97





98

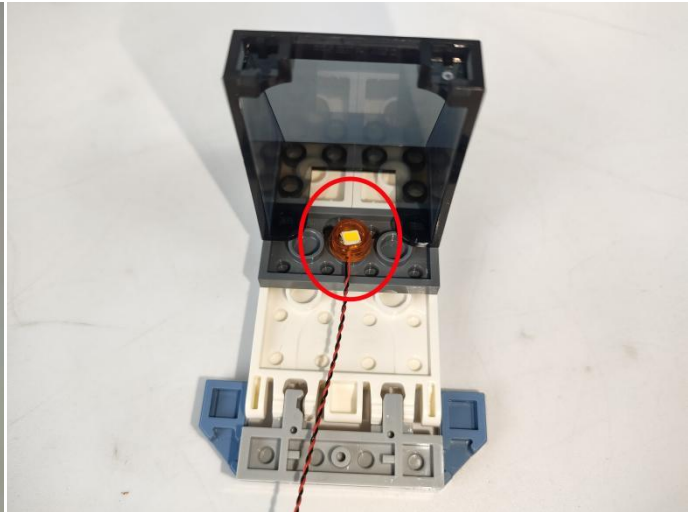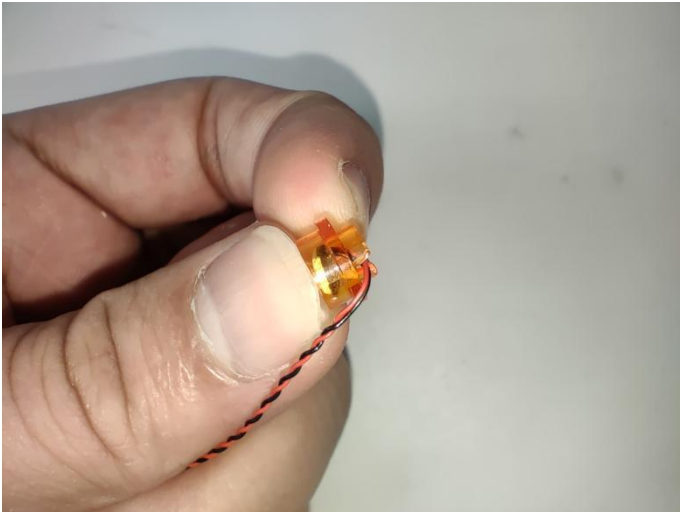


99

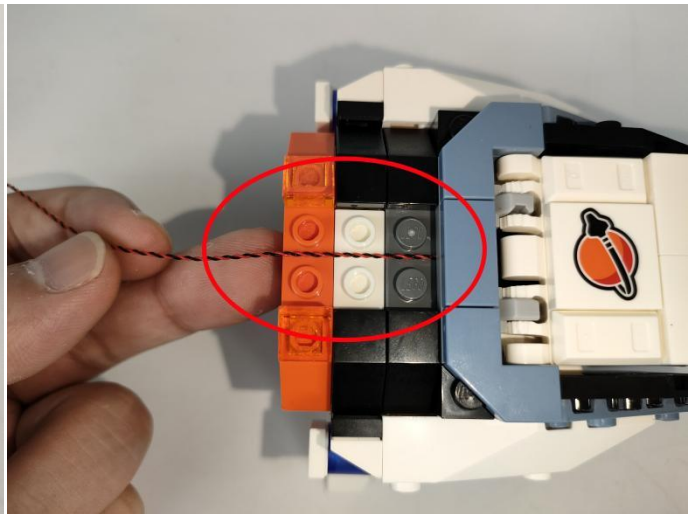



100

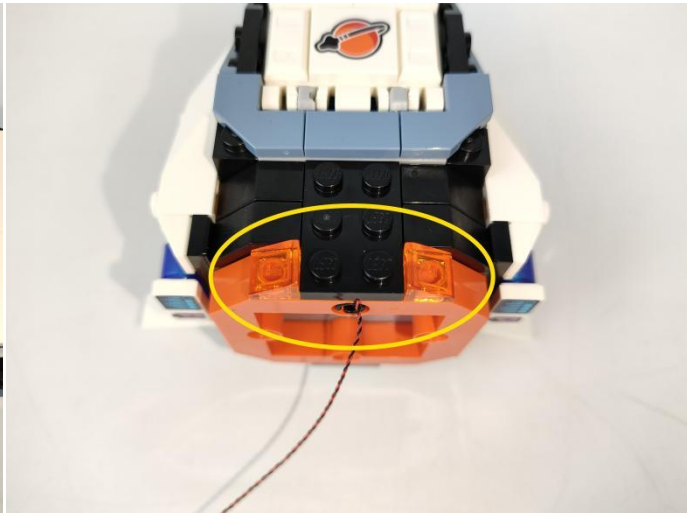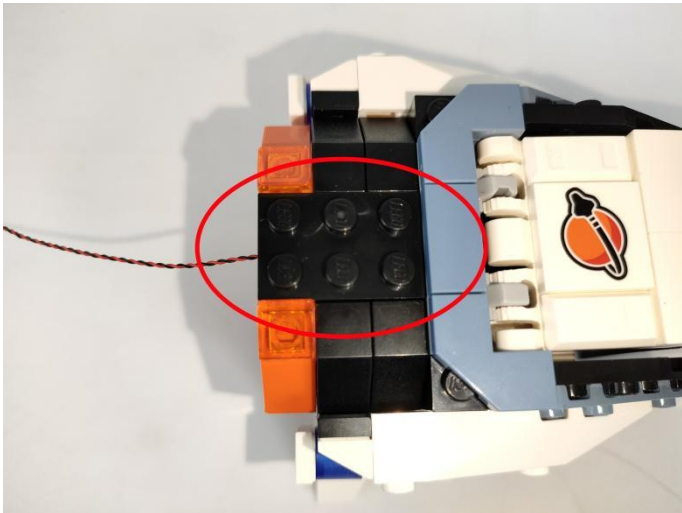



101

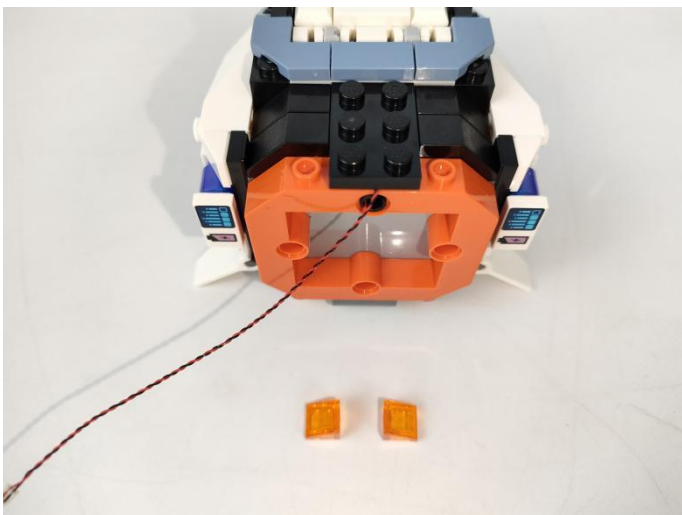

102

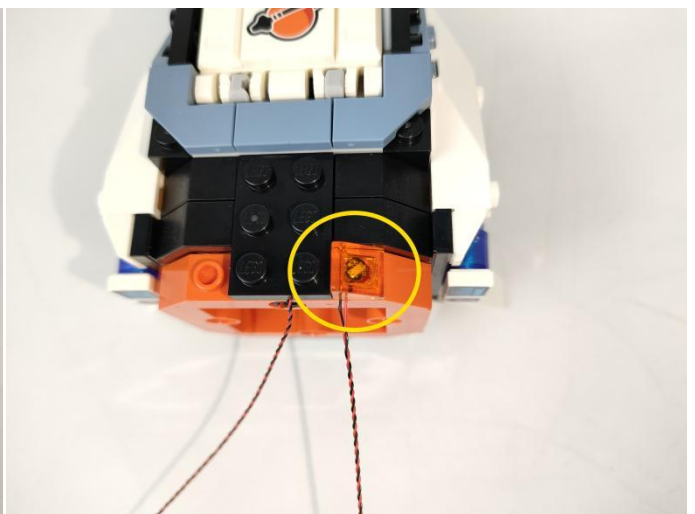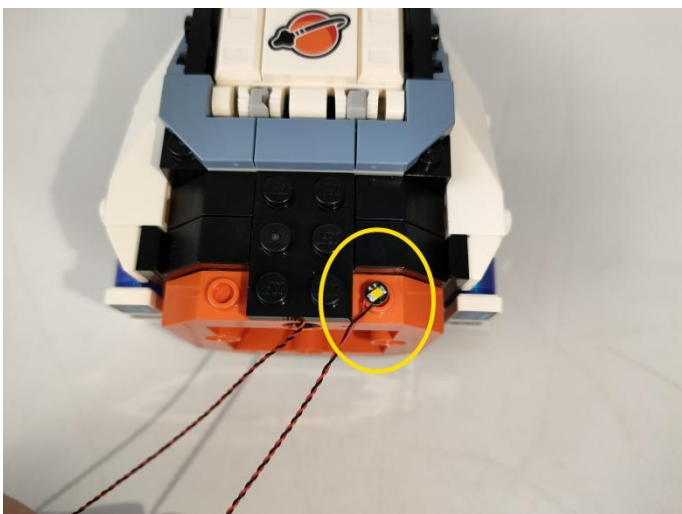



103

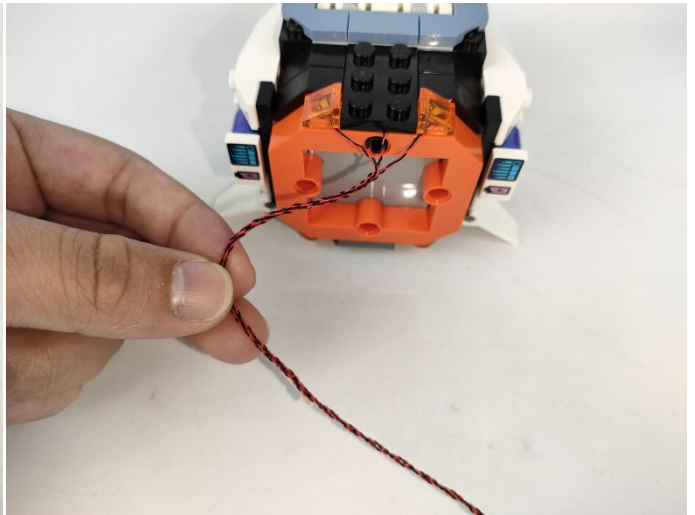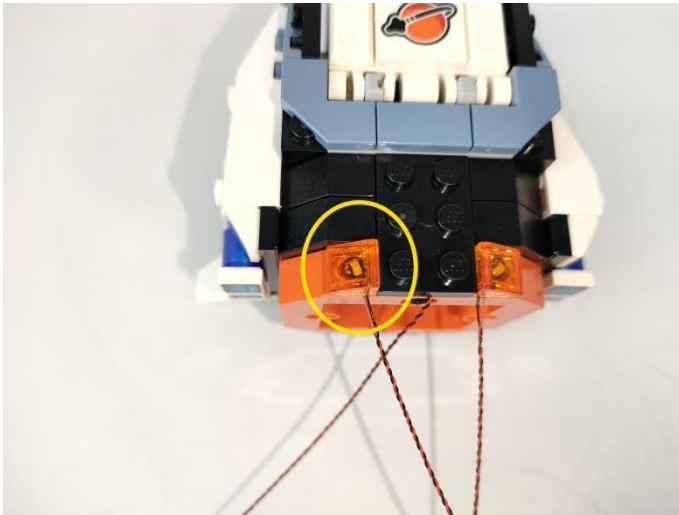



104





105

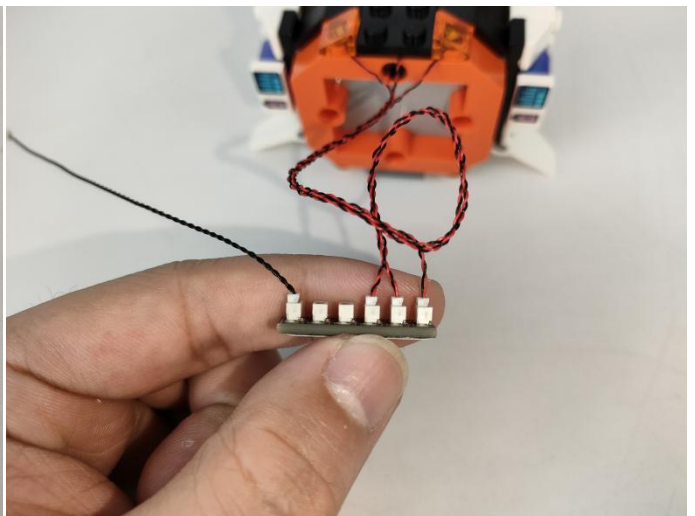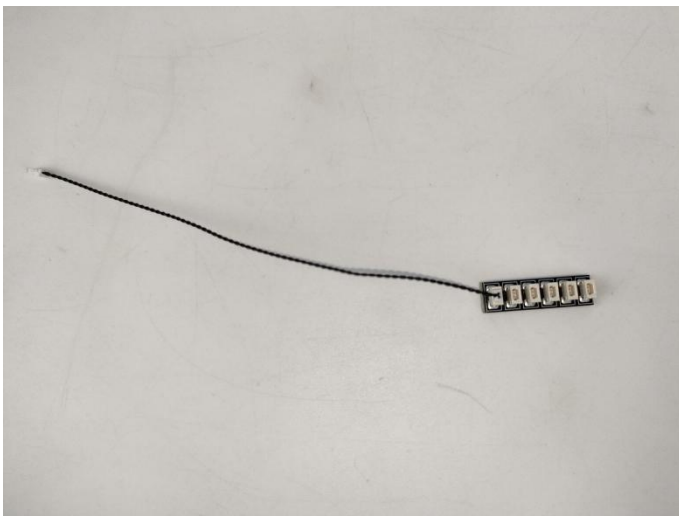


106

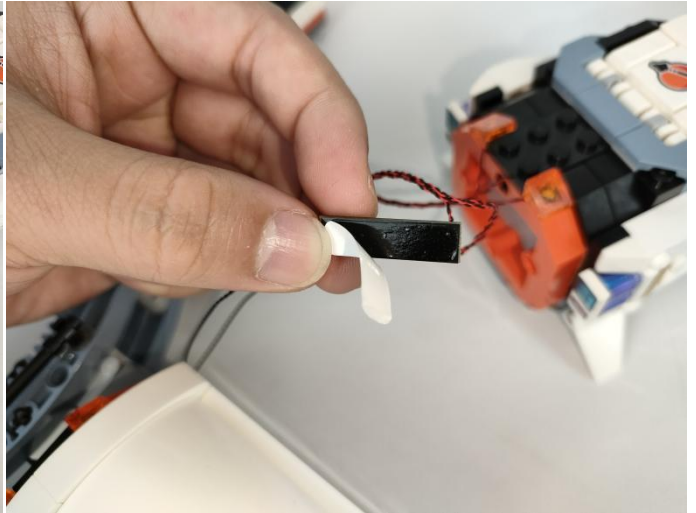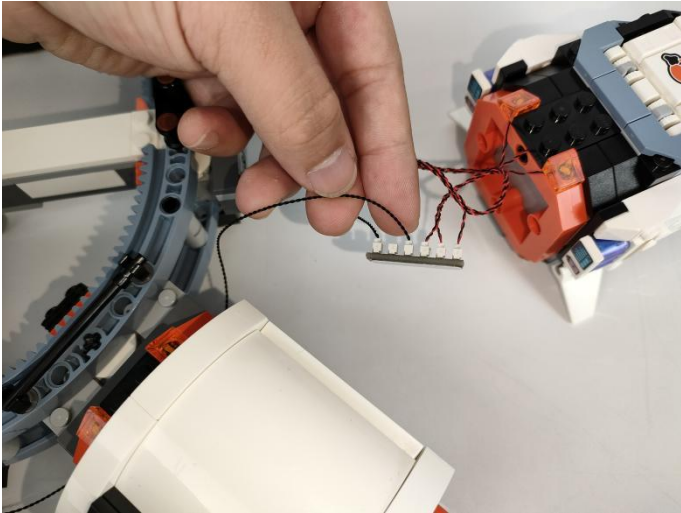



107

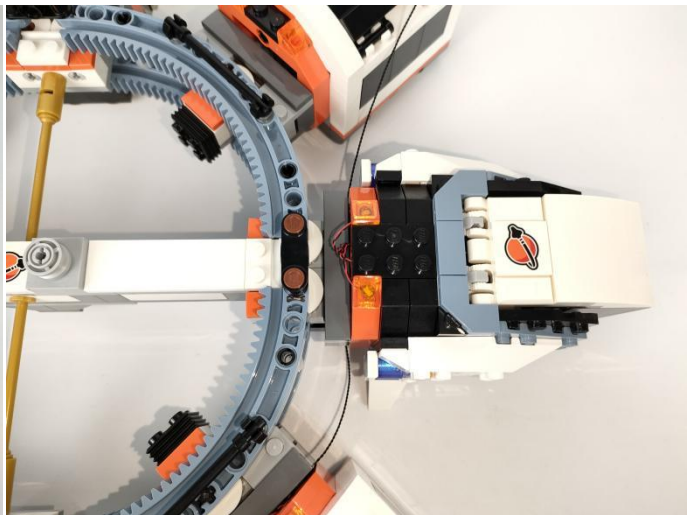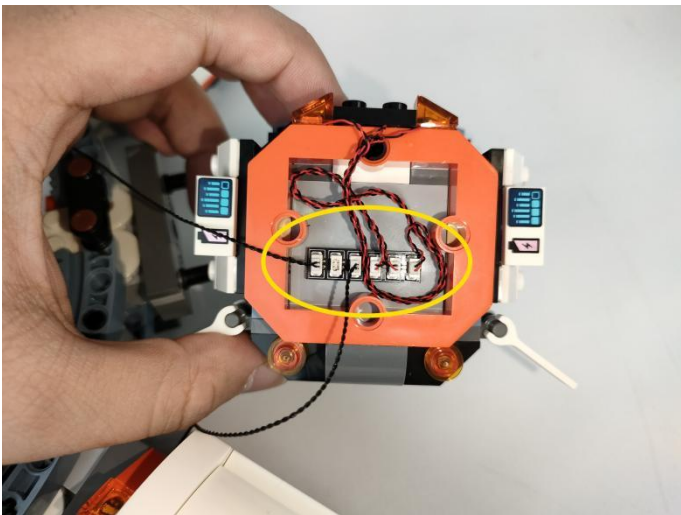


108

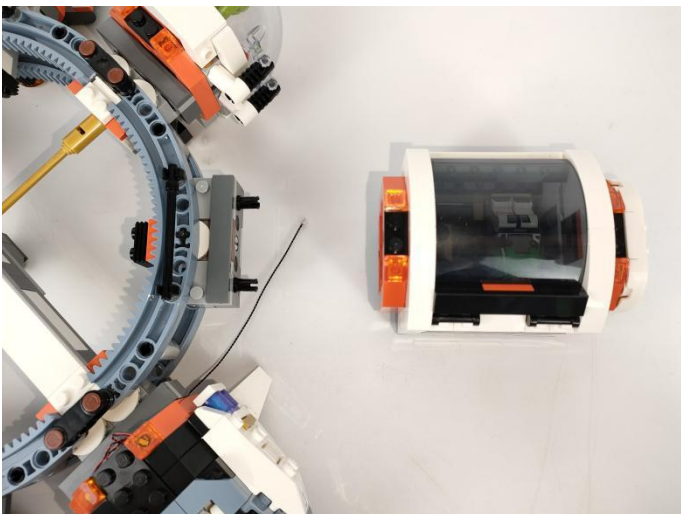



109

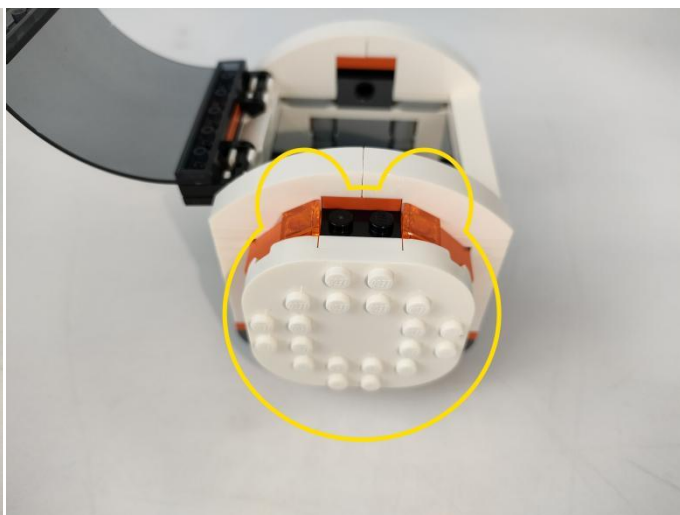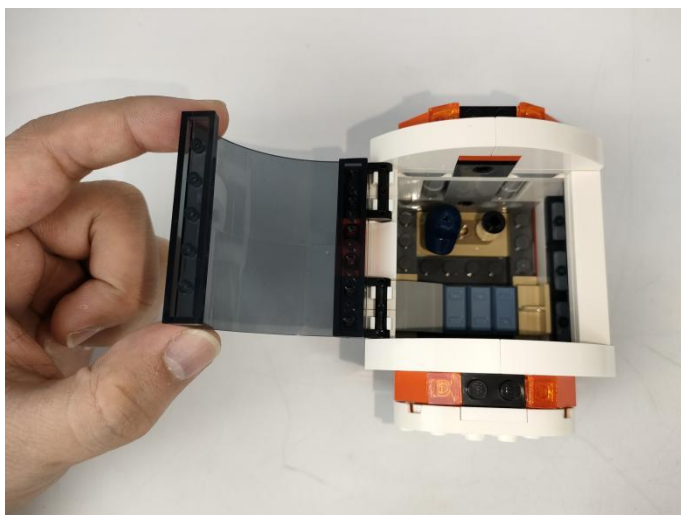


110

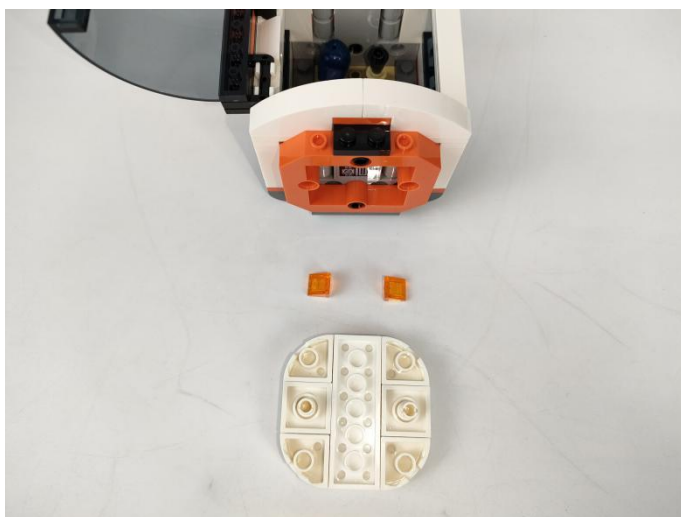



111

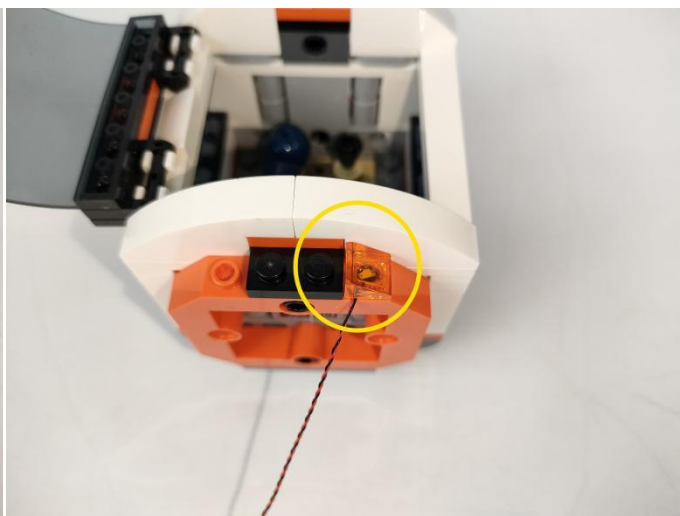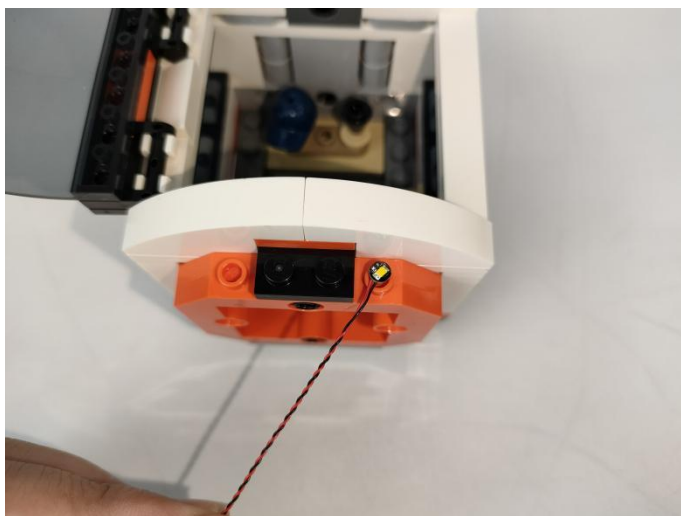



112

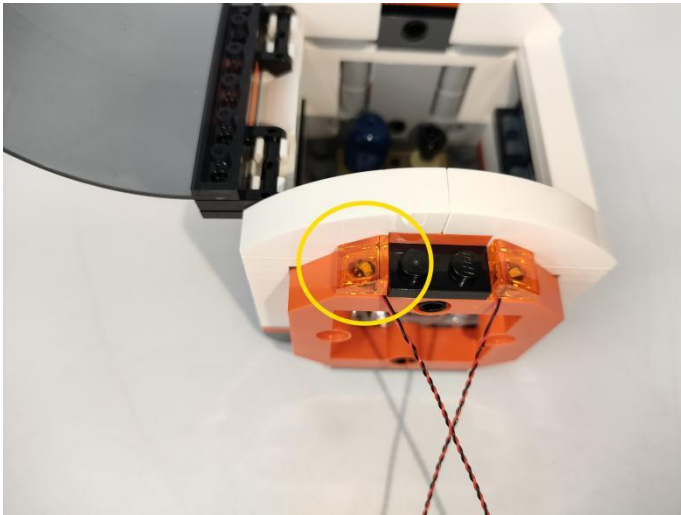


113

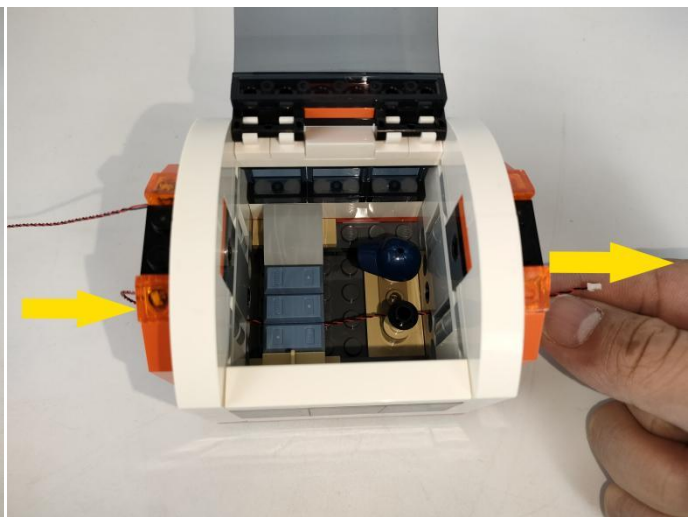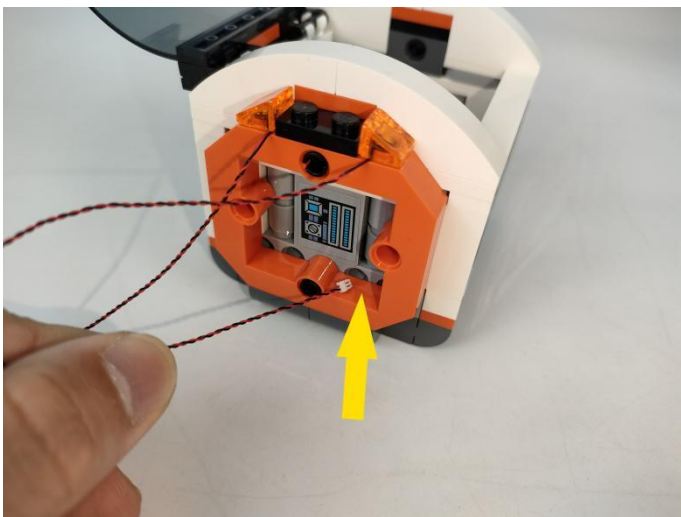

114

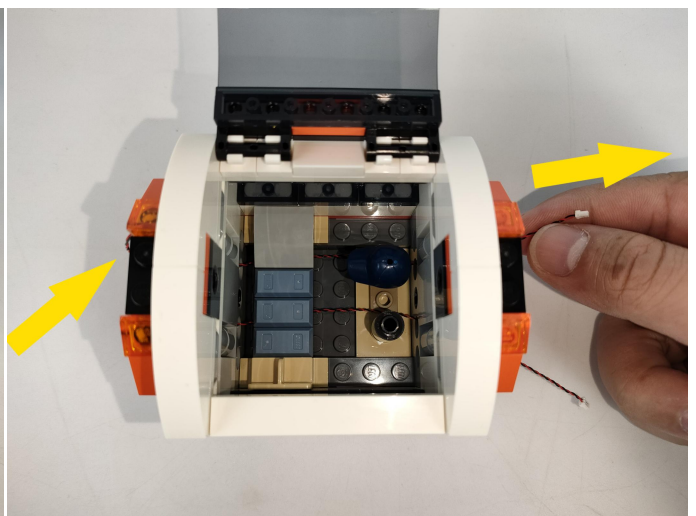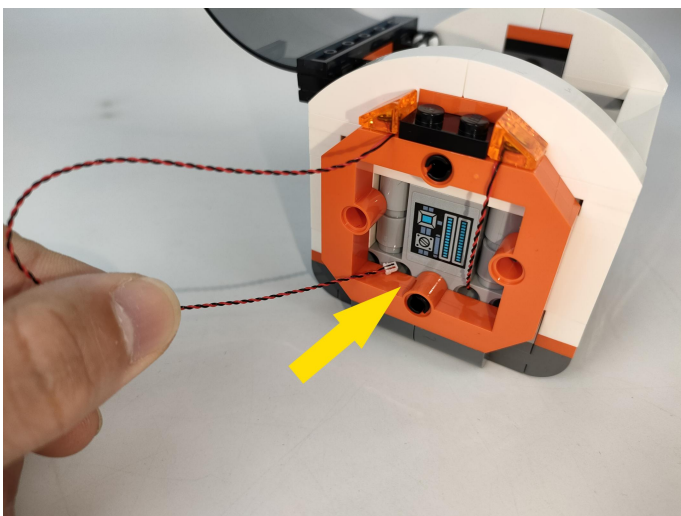


115

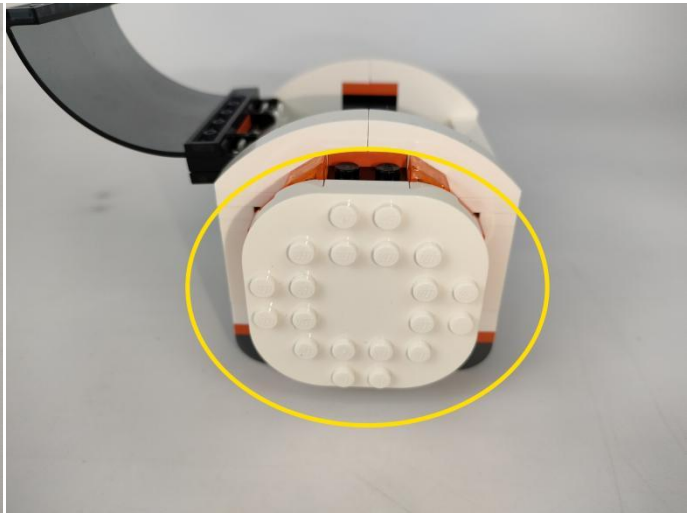



116





117

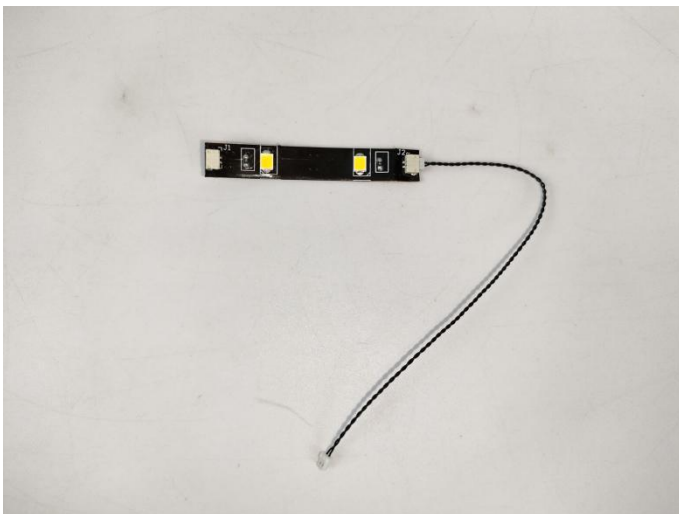



118

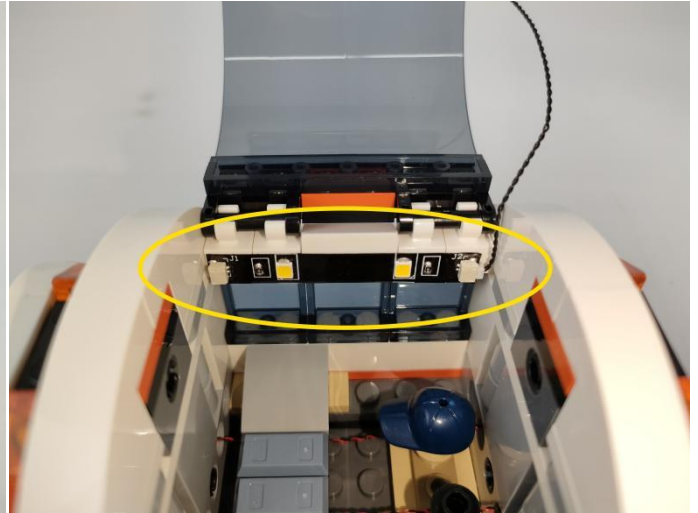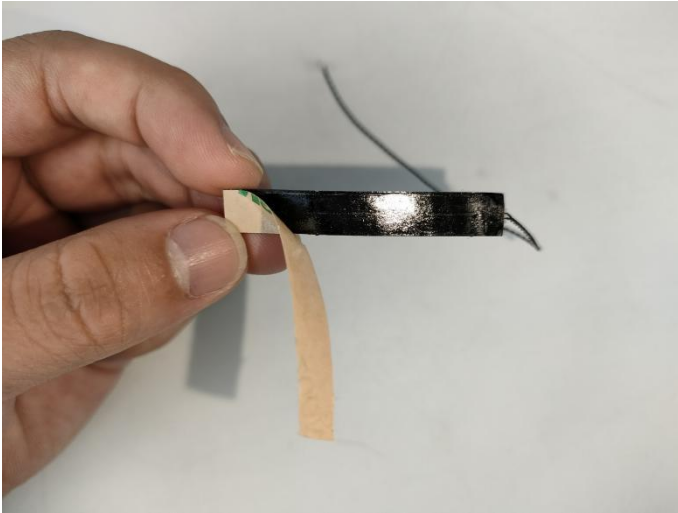



119

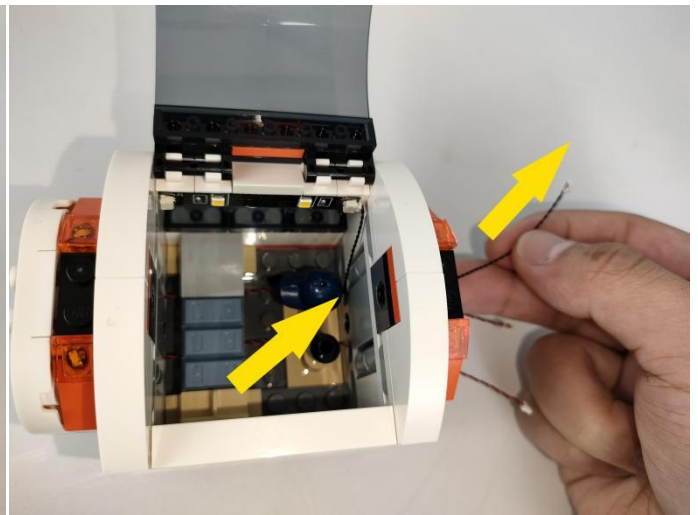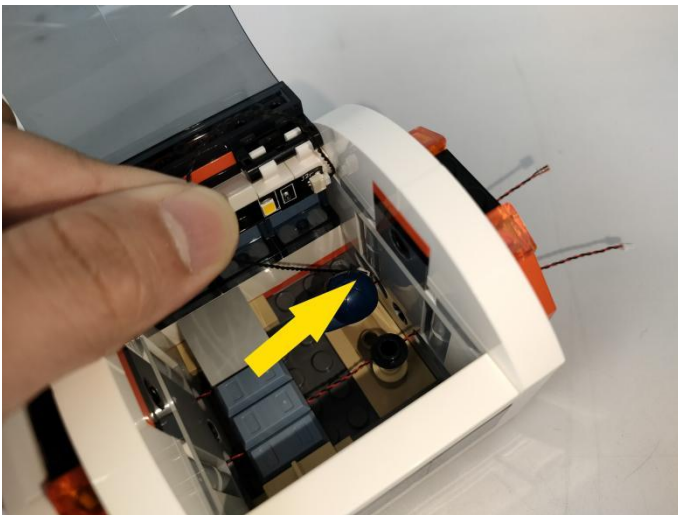


120

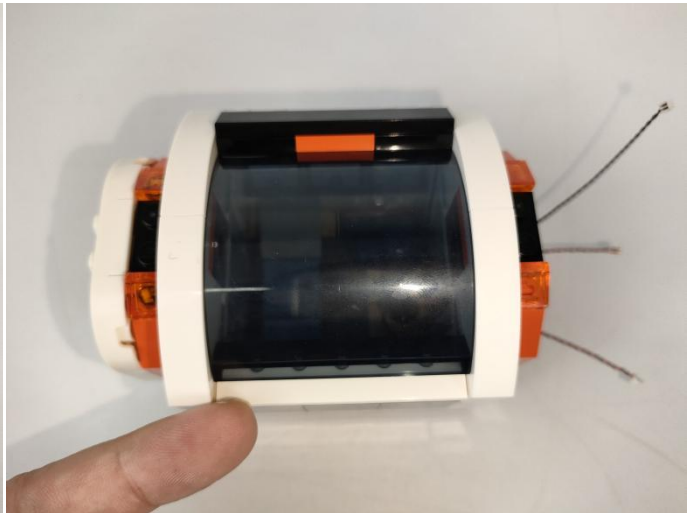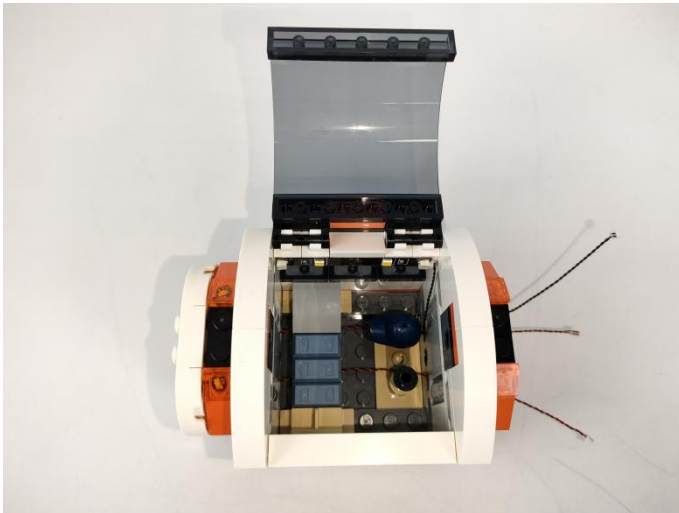



121

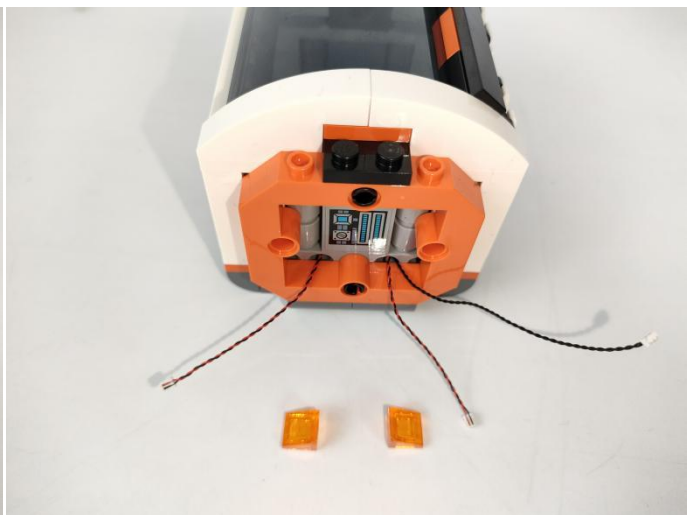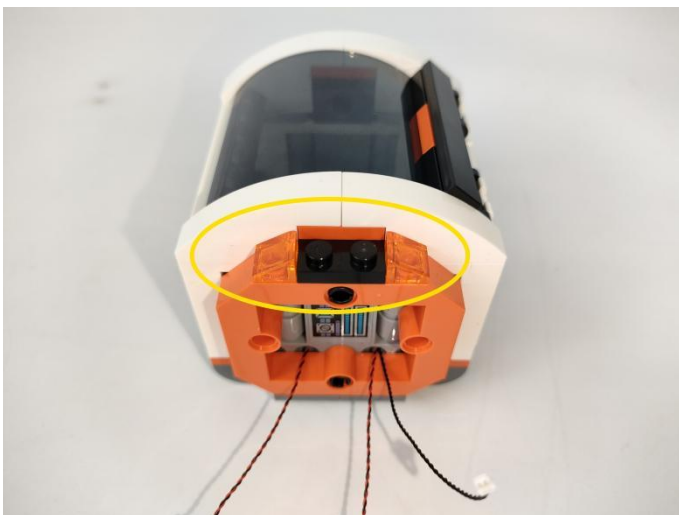



122

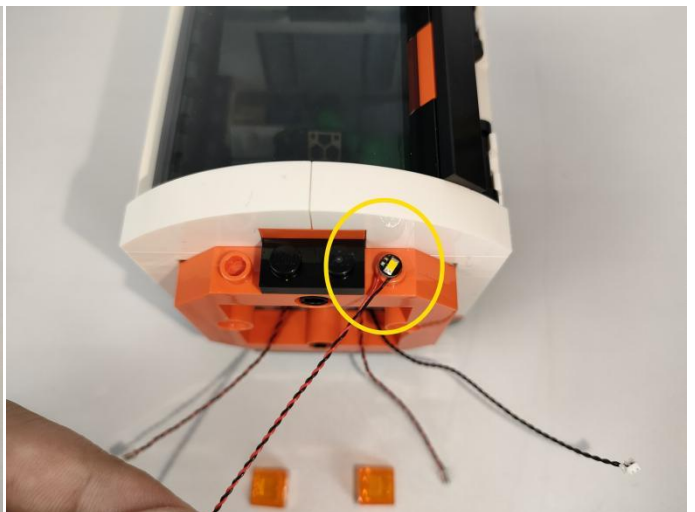

123

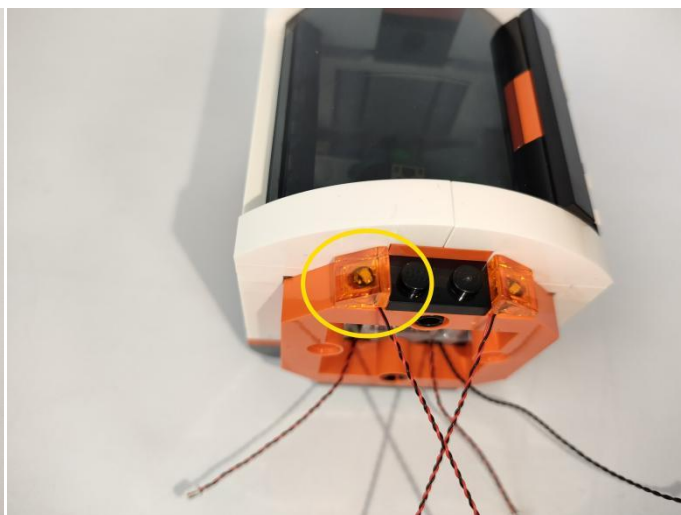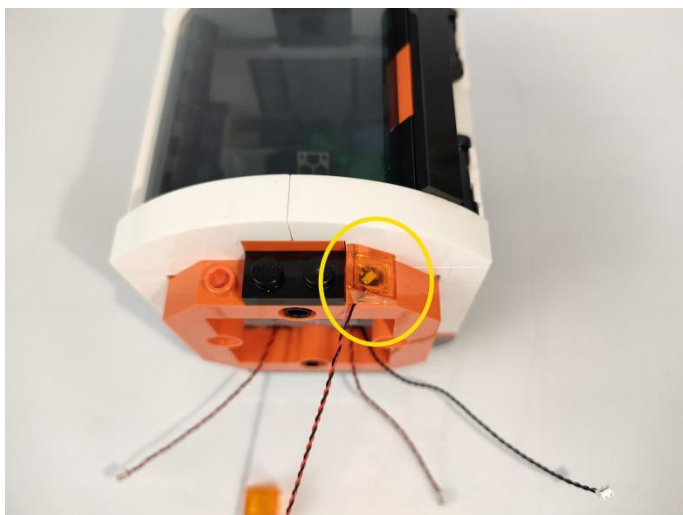


124

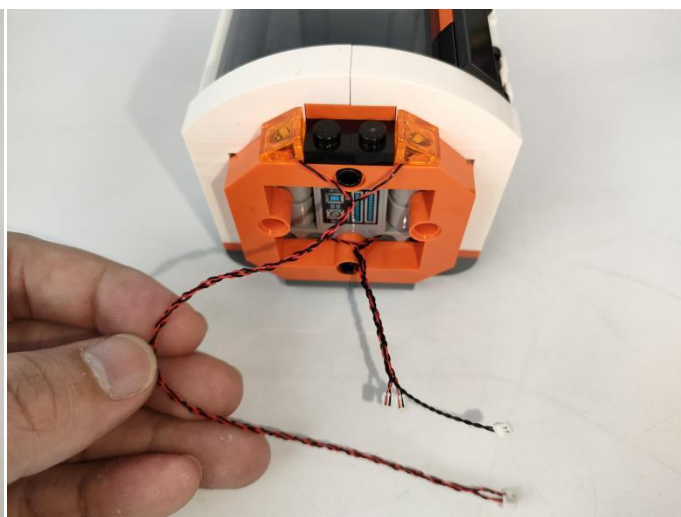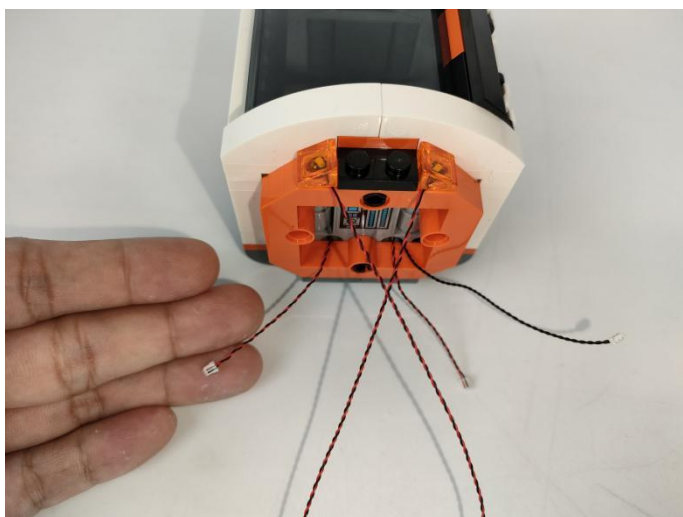


125





126

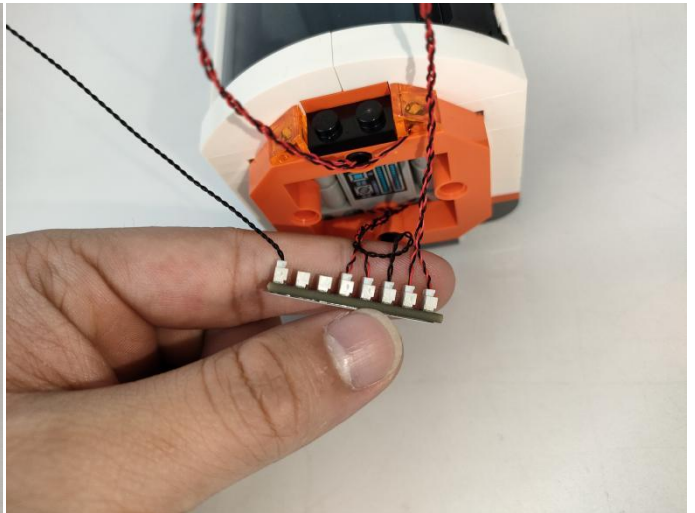


127

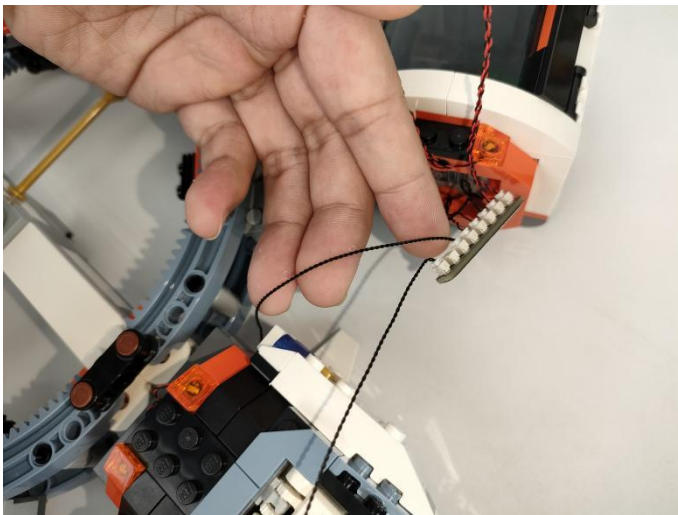


128

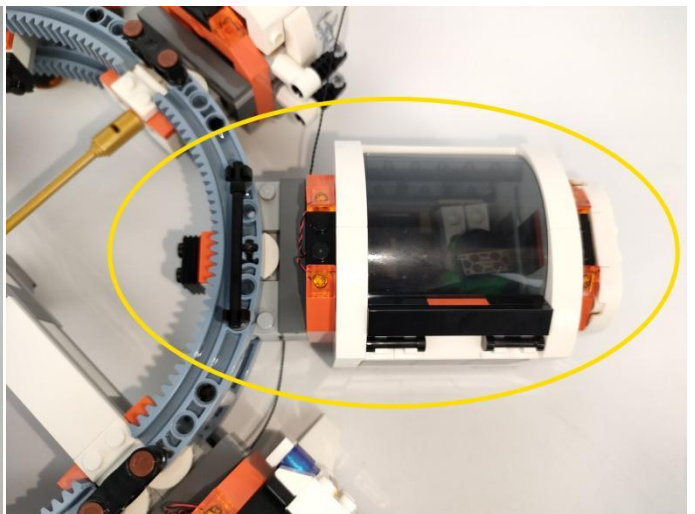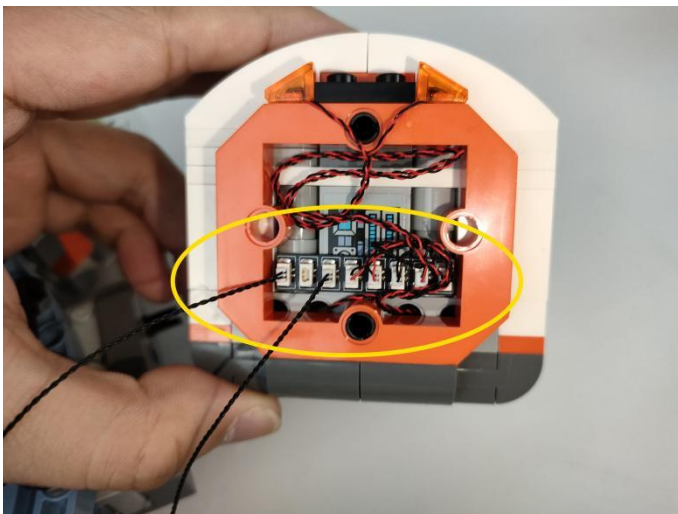

129

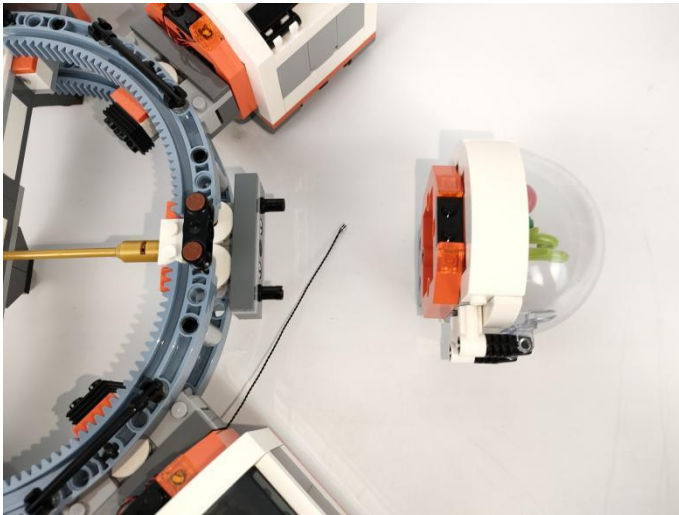

130

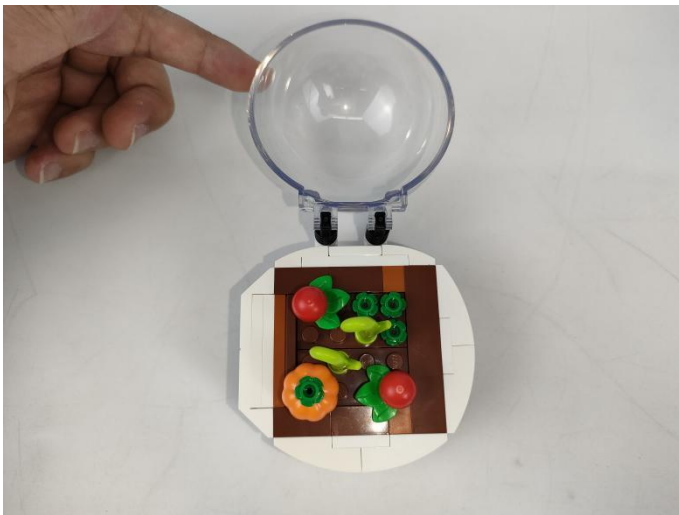

131





132




133




134

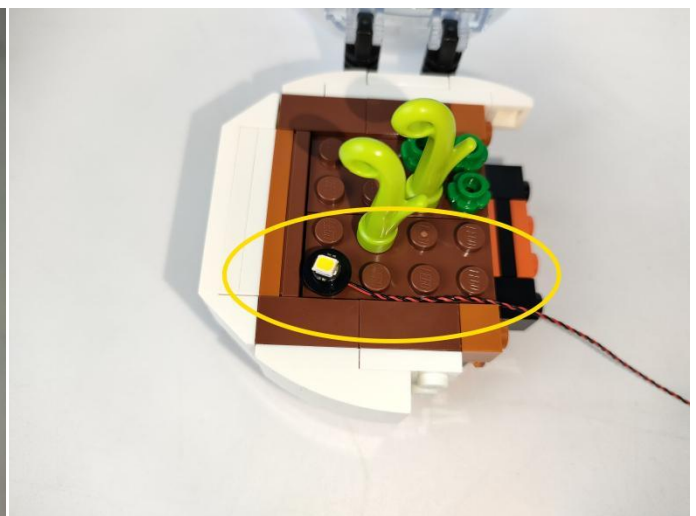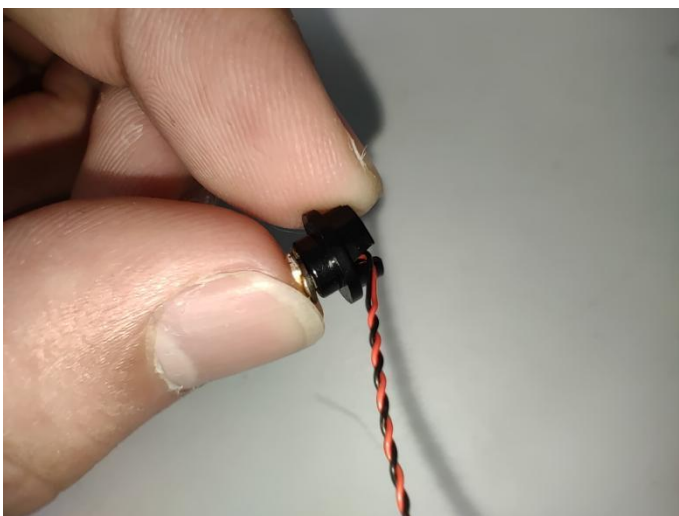

135

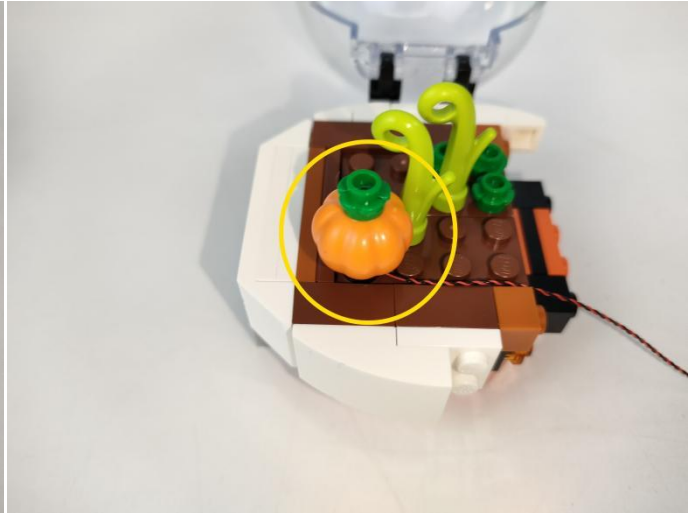


136

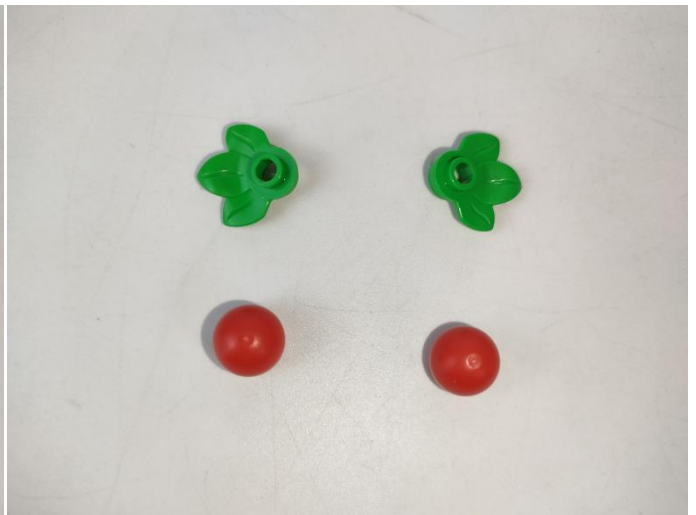


137




138

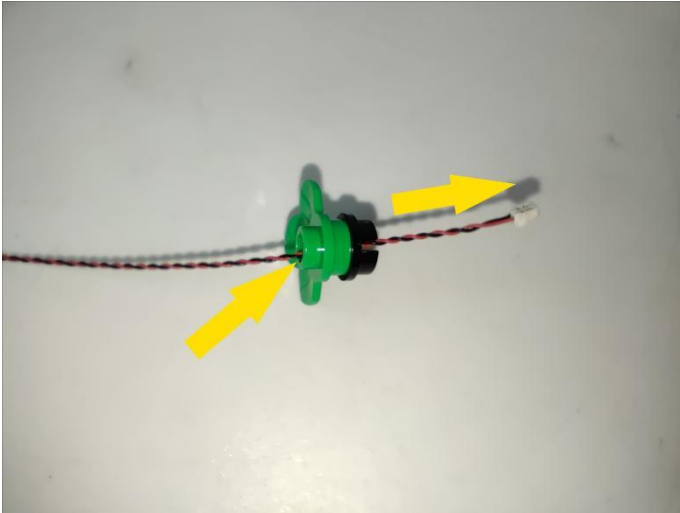


139

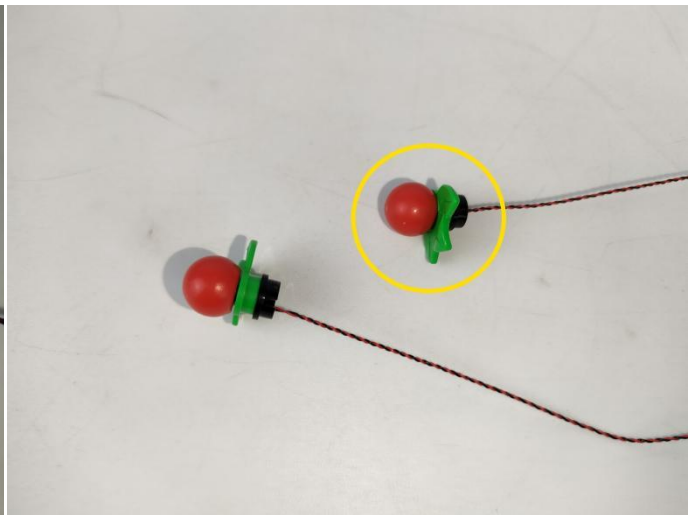


140

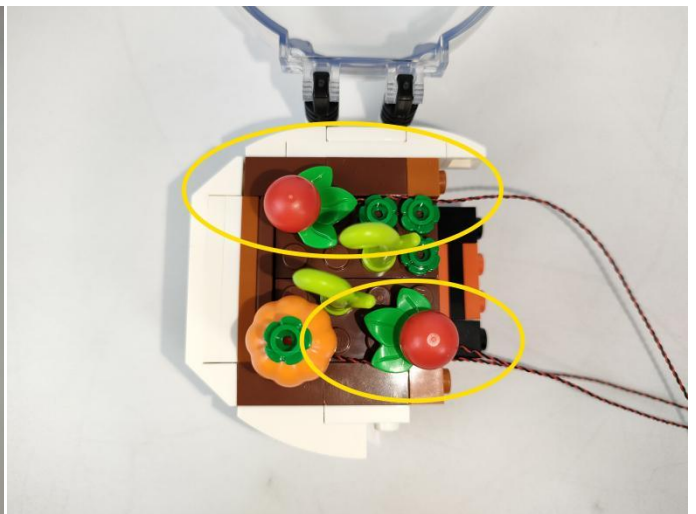



141

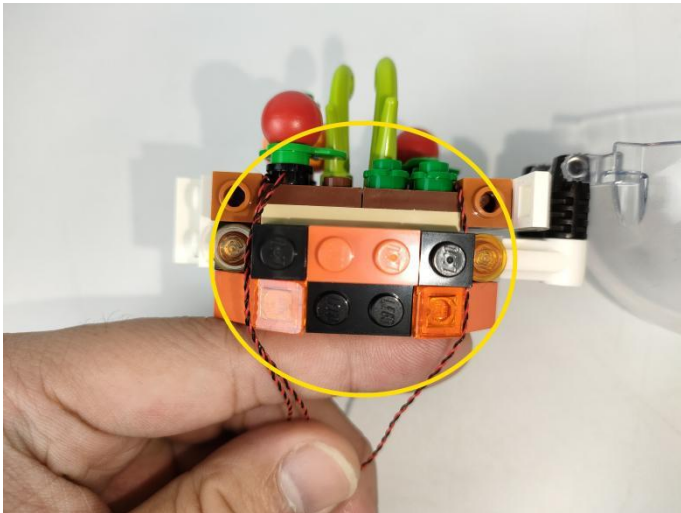


142

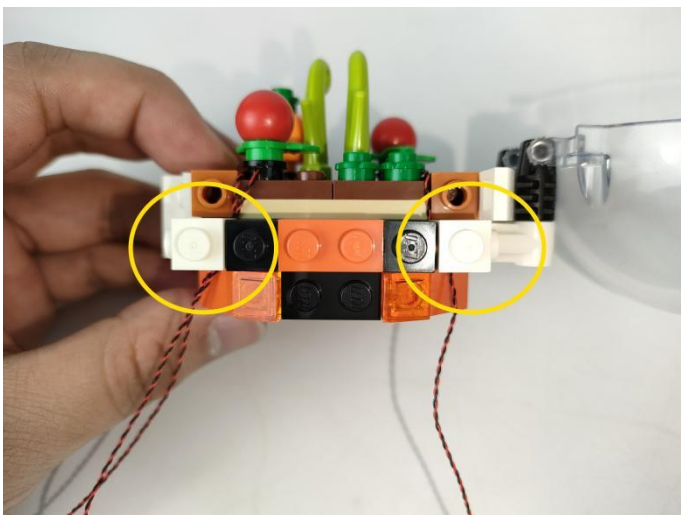



143

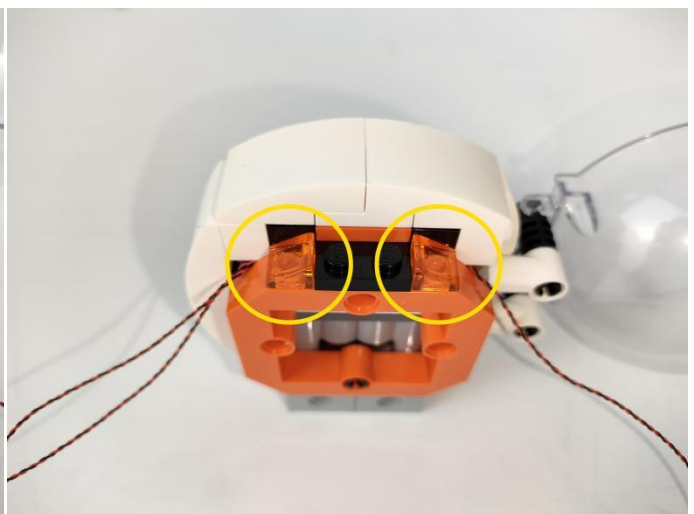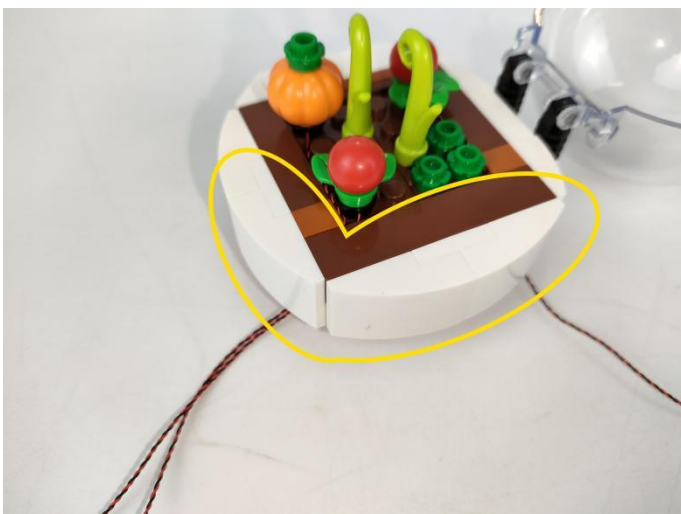



144

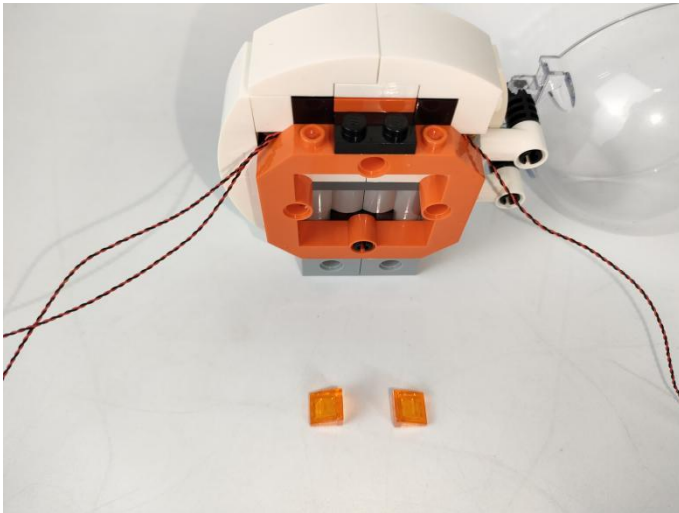


145

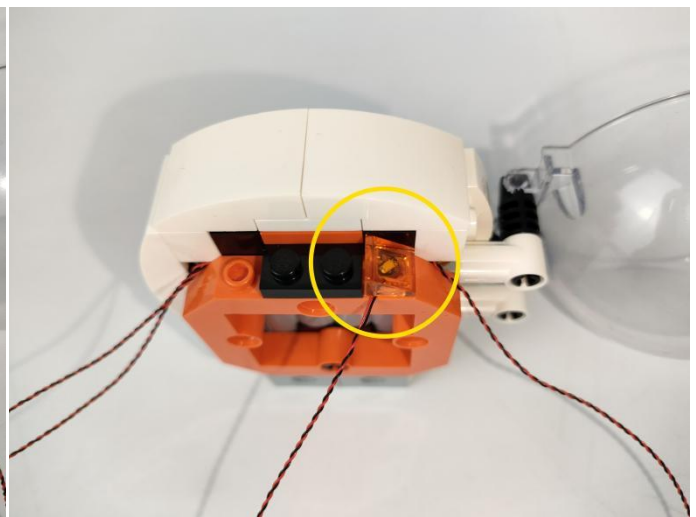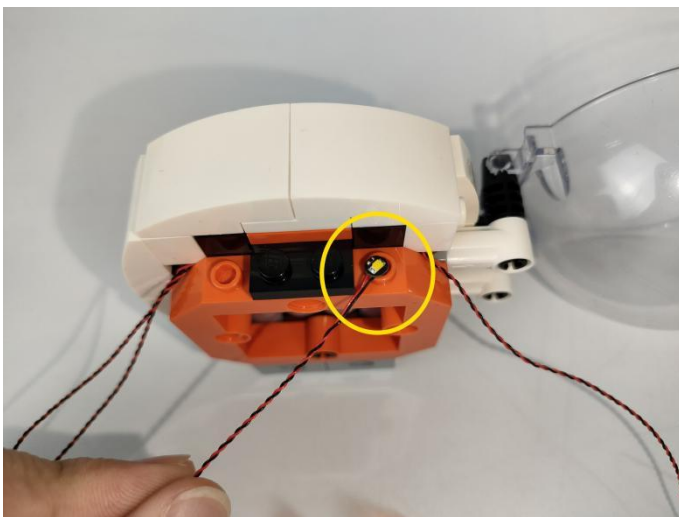


146

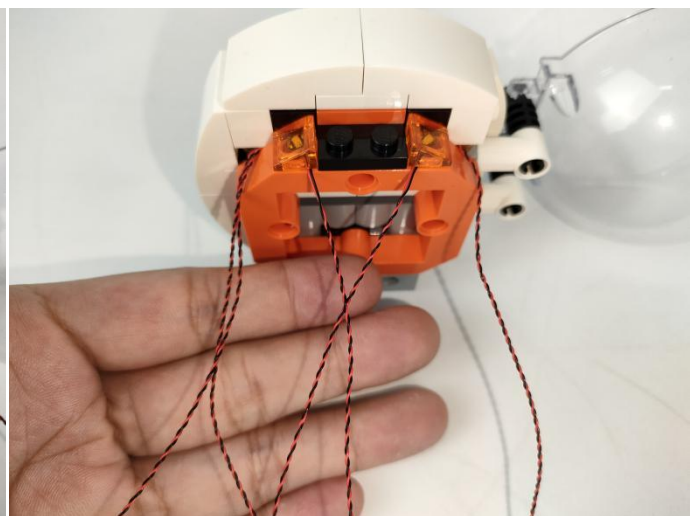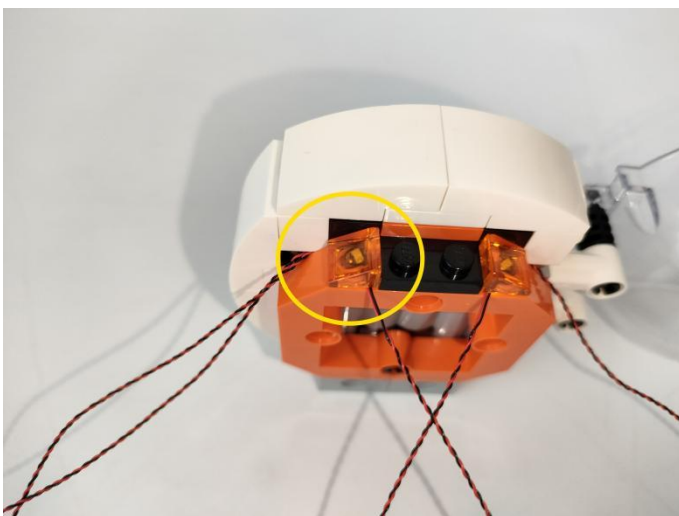

147

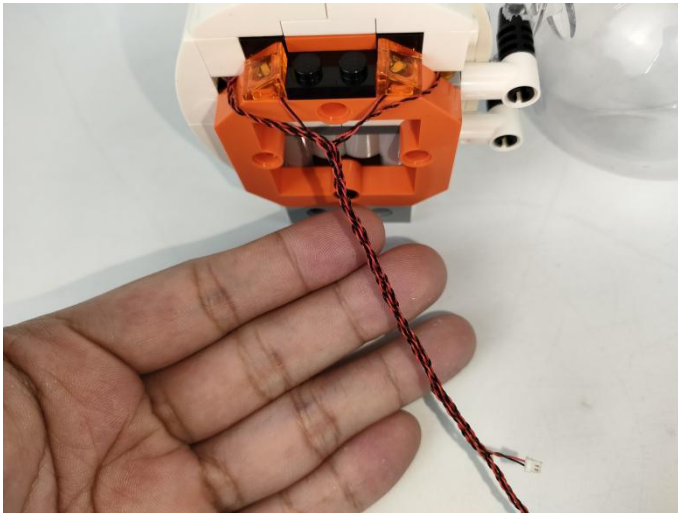


148

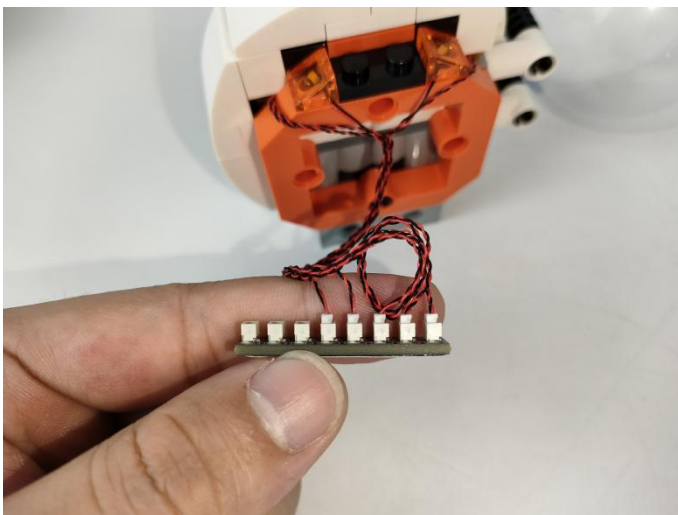

149



Action Control Module

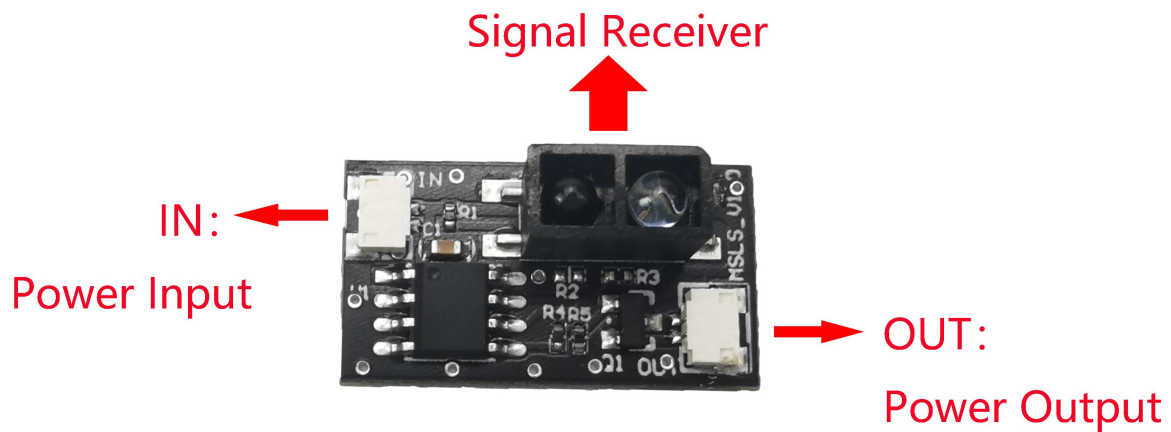

When the obstruction generate a reflected signal, the corresponding module can be turned on or off.

TIPS: 1、 The range of signal reception within 10cm of the vertical "signal receiver".



2、 The frequency of objects passing through the "signal receiver" cannot be too high or the uncontrollable situations will occur.

3、 The overall module is still working and consuming power even if the module is turned off. please turn off the power on the battery box or power bank If the light no longer be needed. please replace the power supply and try again If the light does not work for a period of time.



150





151

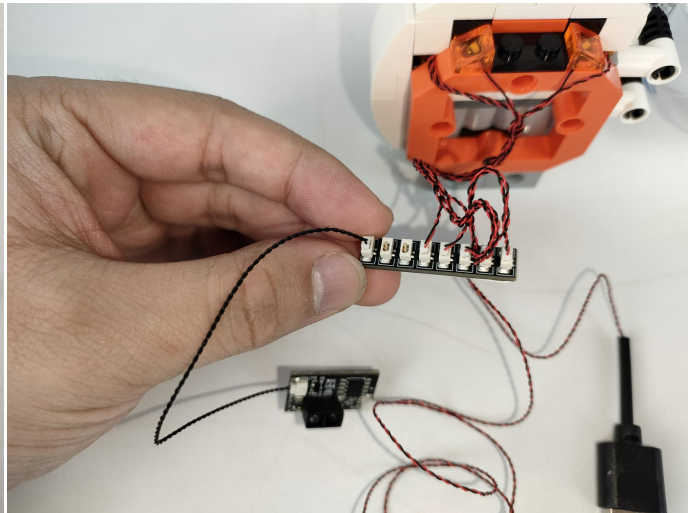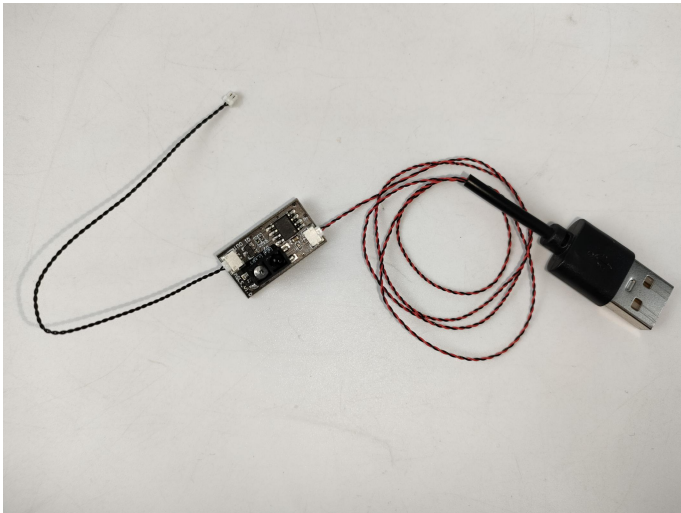


152

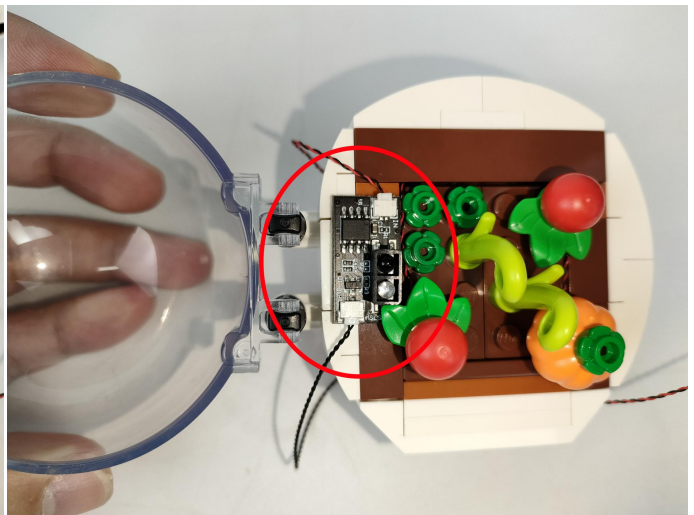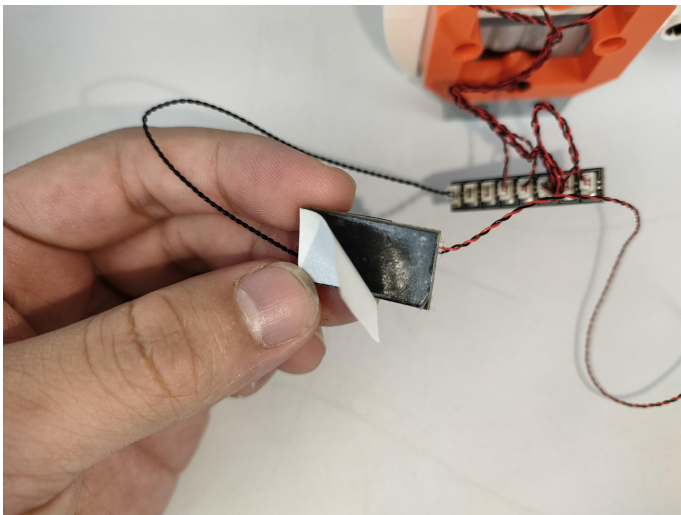



153

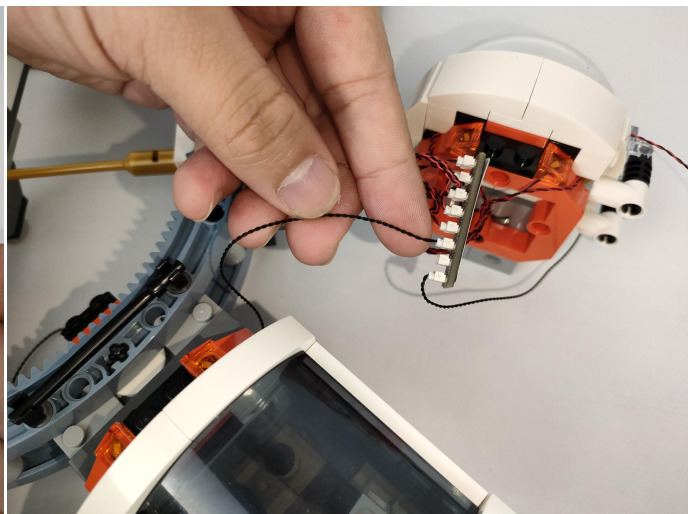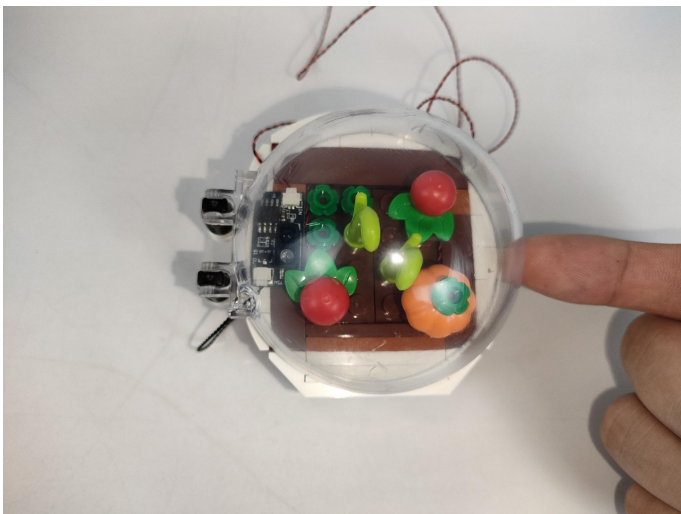


154

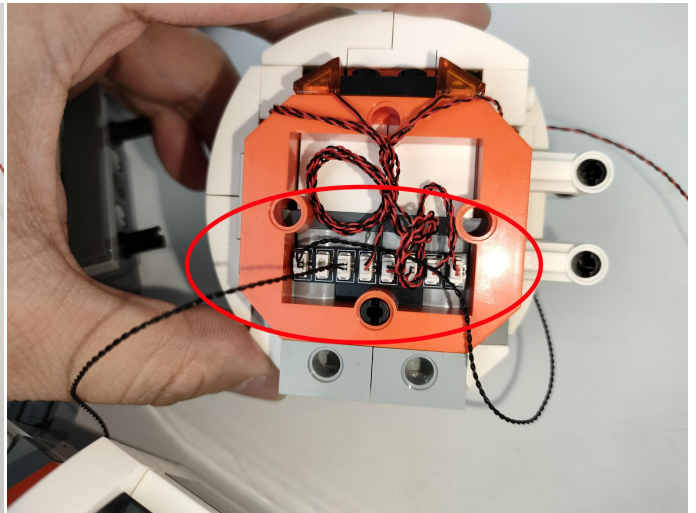

155

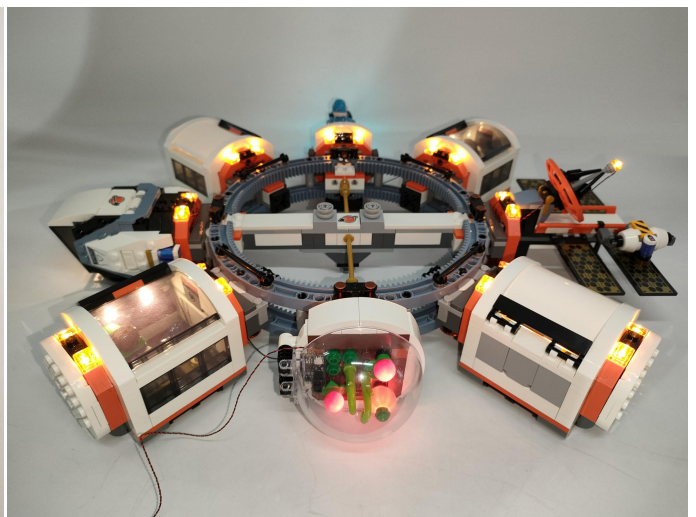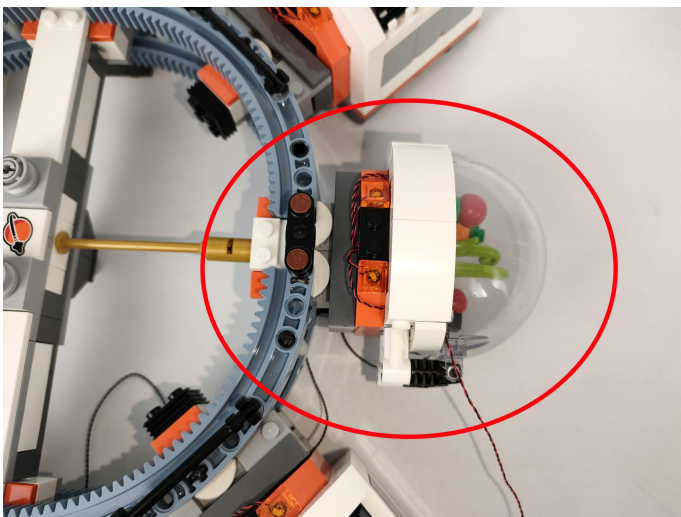

Good job, you've done all the installation steps, power it up and enjoy your work.

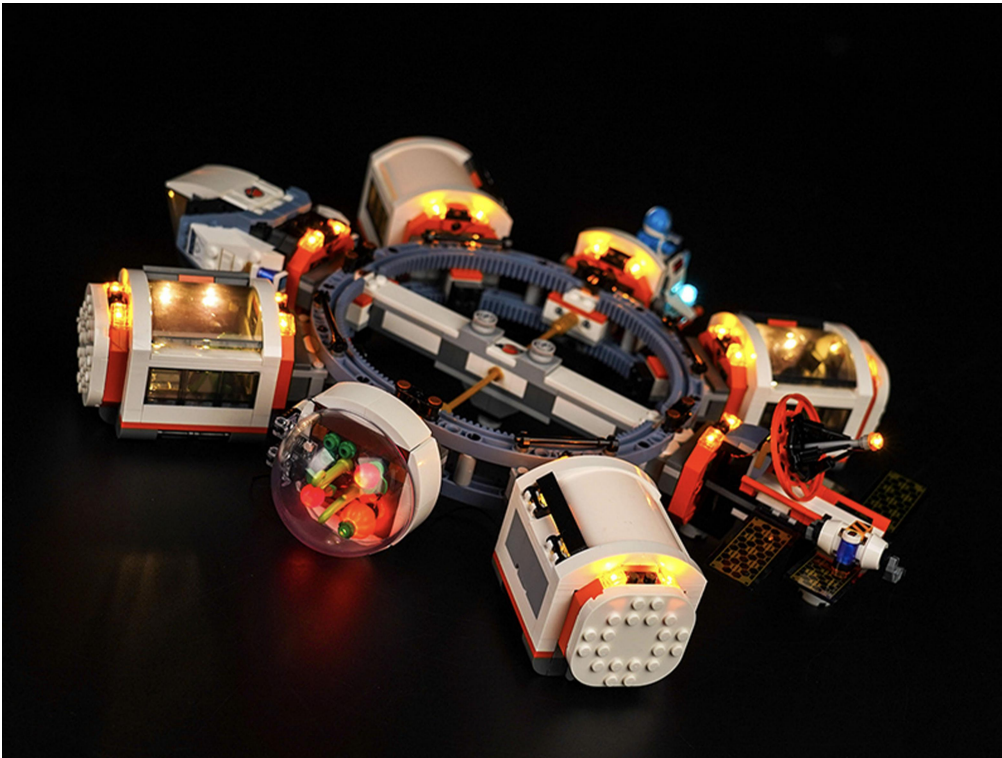

The battery box can also power the set. If it is necessary to change the power supply , prepare three AAA batteries, install them in the battery box, turn on the switch on the battery box, remove the plug of the USB Power Cable from the socket of the expansion board,plug the plug of the battery box to the same socket in the expansion board to power the suit as well.

THANKS