

BRICK BLING

INSTALLATION INSTRUCTIONS

75682 Elphaba & Glinda Figures

- Installation requires a lot of patience and great observation that your LEGO bricks will come alive when you get this finished. The bricks with lighting as below, so make sure you're ready and let's get started.



Strategies for the Installation

This instruction divides three sections to complete the installation of the lighting set.

Section A: Check the type and quantity of components.

The quantity and type of components of each products are different and it needs to be carefully checked to make sure there do have enough material. The type of components is indicated by the label on the bag.

Section B: Test that each components is working properly.

Each components is made individually so it is necessary to test that each components is working properly to avoid the situation that the lighting does not work .

Section C: laying out components following the instruction.

Our material is very small but not fragile, just be reminded that don't to pull the wires too hard. For different people, there may be some installation steps that you can't understand. Please look at the previous and later installation step.

Section A: Check the type and quantity of components.

There are 8 bags in this set. The name and quantities of specific components are as shown , please check carefully.

Label	Content	Quantity
A01004 Light-15CM Green	Light-15CM Green	1
A01013 Light-30CM Pink	Light-30CM Pink	2
A01021 Slow Flash-15CM Multi-Colour	Slow Flash-15CM Multi-Colour	1
A012 Expansion Board	12 Socket Expansion Board	1
A01305 Power Supply	Power Supply	1
A02506 Light Strip-Warm White	Light Strip-Warm White	2
A1033 High-Brightness Light 15CM-Green	High-Brightness Light 15CM-Green	2
Components		

Please contact us immediately if there have any missing components.

Section B: Test that each components is working properly.

We need a structure to test all lights, so take out the bag with label “USB Power Cord”and “Expansion Boards”as follows.




BRICK BLING

It is worth reminding that our products are all customized. They have a unique way of connecting. The white plug on wire and the socket of the expansion board need to be connected together to transmit power.

Note that on one side of the white plug you can see two very small golden wires that should be connected to the two golden needles in socket of the expansion board. shown as blow.


Expansion Board

BRICK
BLING

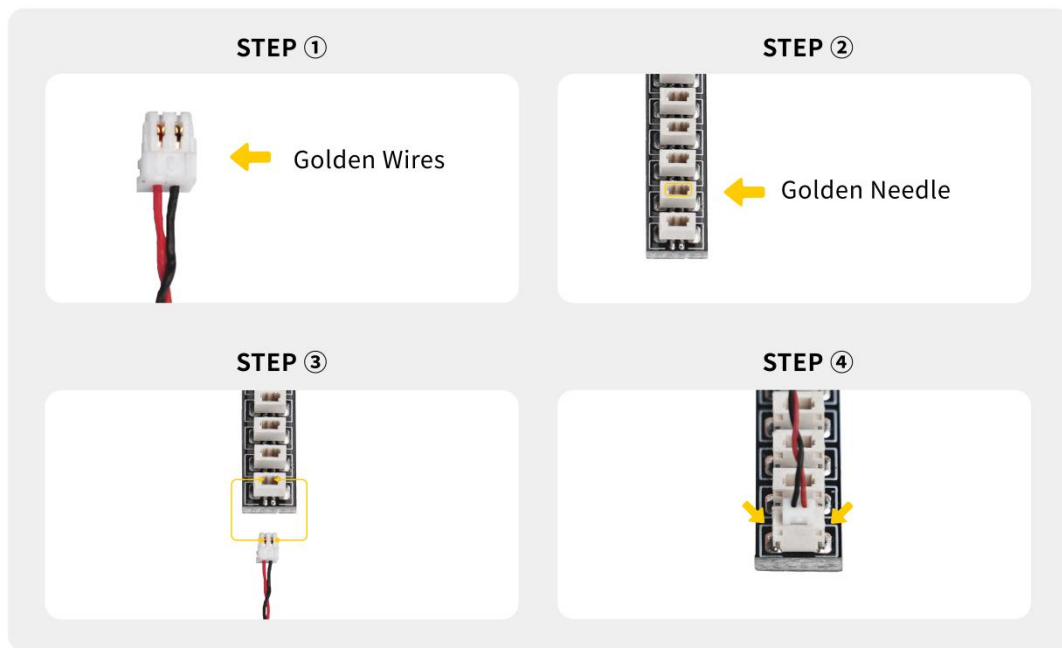


All our connections between plug and socket are all the same as shown above. So for any such structure with plug and socket, please pay attention to the golden wire of the plug and the golden needle of the socket, they must be touched together.

The connection method between the USB Power Cord and Expansion Boards is as follows:

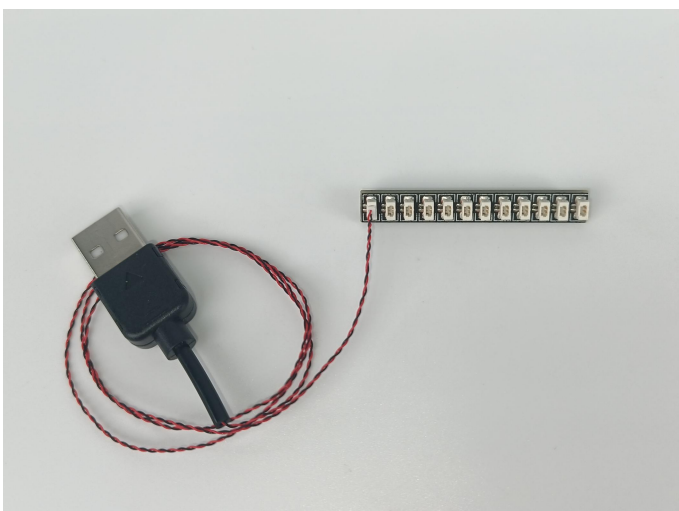

The USB Power Cord can be powered by phone chargers, power banks, etc.

USB connectors to connect devices

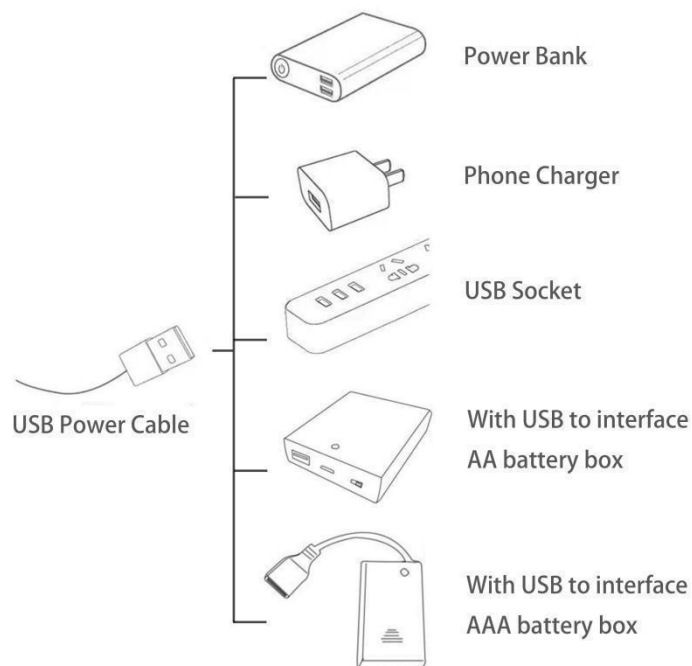


This instruction will use the power bank as power supply . The test structure is shown as follow. All lamp in this set will be tested by this structure.



BRICK BLING

When we test "A01004 Light-15CM Green" particles,Take out the bag labelled "A01004 Light-15CM Green".Take out one of the light and connect it to the socket. Turn on the power bank, the light will turn on normally as shown below.

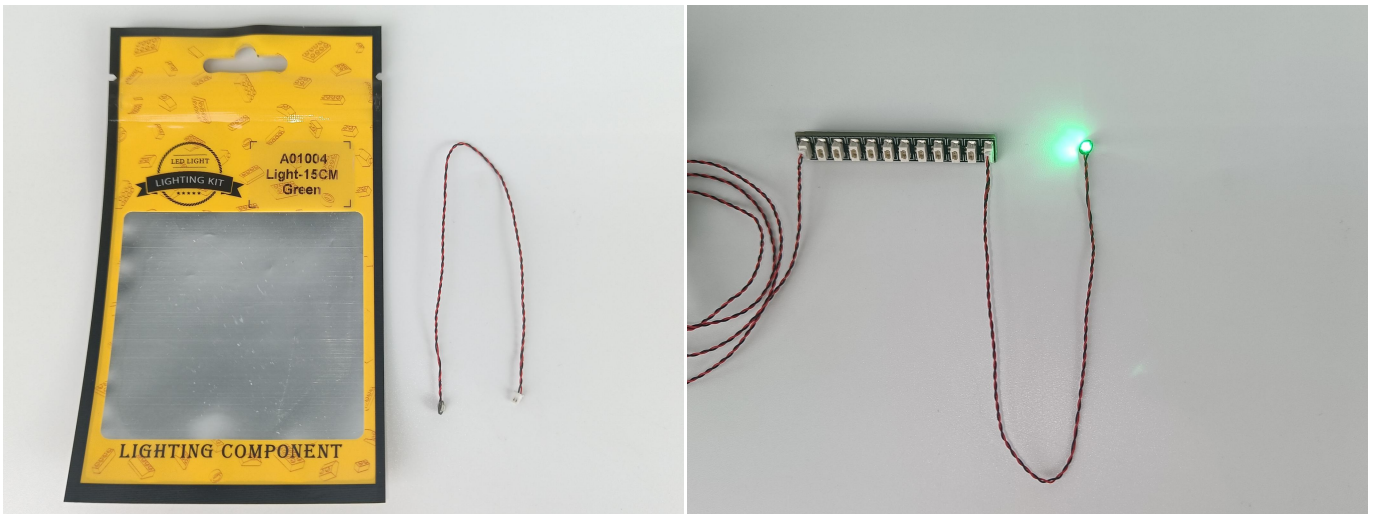

Test each lamp according to this method. It should be noted that after the test, the lamp must be returned to the corresponding bag to avoid confusion of types.



The components needs to be tested in this set is 2*Light-30CM Pink,1*Slow Flash-15CM Multi-Colour, 2*Light Strip-Warm White,2*High-Brightness Light 15CM-Green.

Please contact us immediately if any components don't work.

BRICK BLING

Section C: laying out components following the instruction.

1



2



3



BRICK BLING

4




TIPS

BRICK
BLING


The slit on the the plate round 1X1 are hand-made to avoid squeeze the wire and cause short circuit and abnormal heat during installation.

The plate without slit

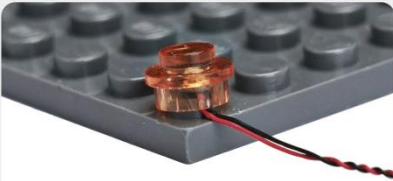


The squeeze causes the protective layer of the wire to be torn apart, the positive and negative wires touch together, and the set is short-circuited and the hot or wire is crushed, the wire to be disconnected and don't work.

The plate with slit

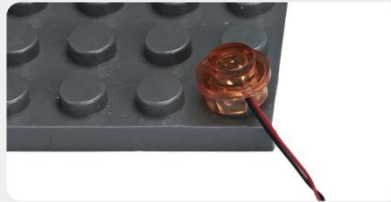


The wire has enough space to avoid being squeezed endowed with longer service life and more stable effect.

5

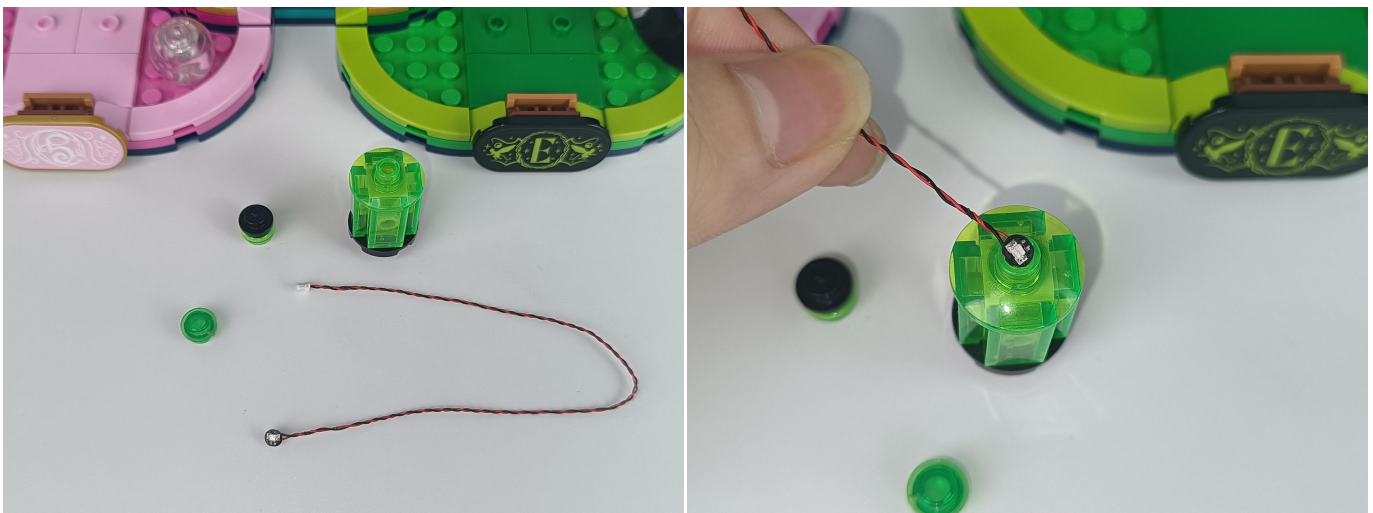

BRICK BLING



6

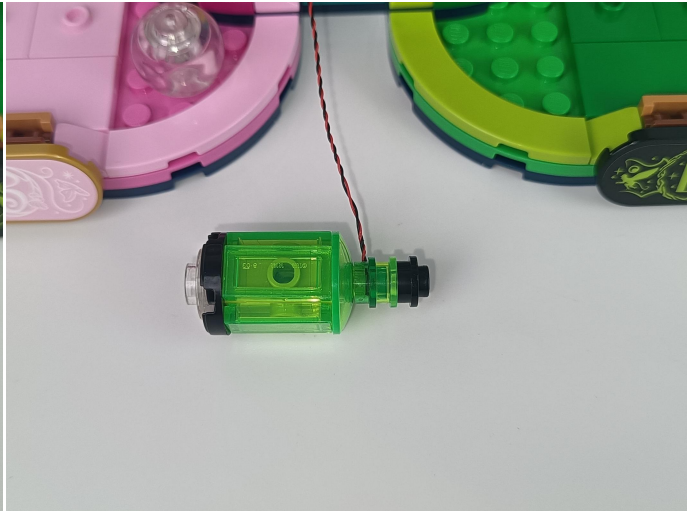

7





8

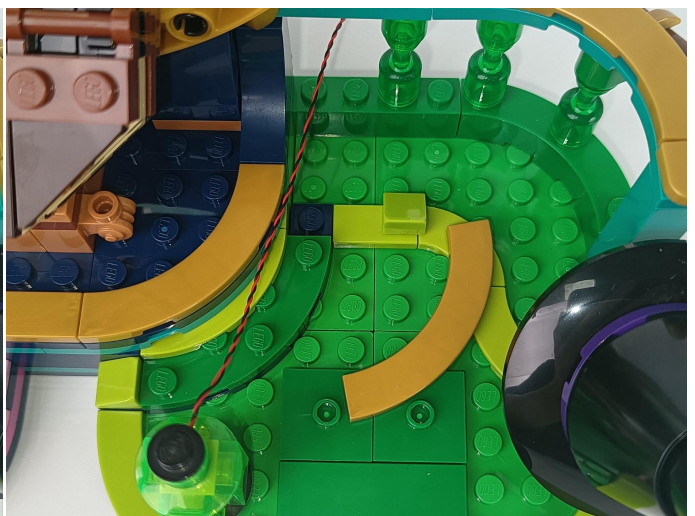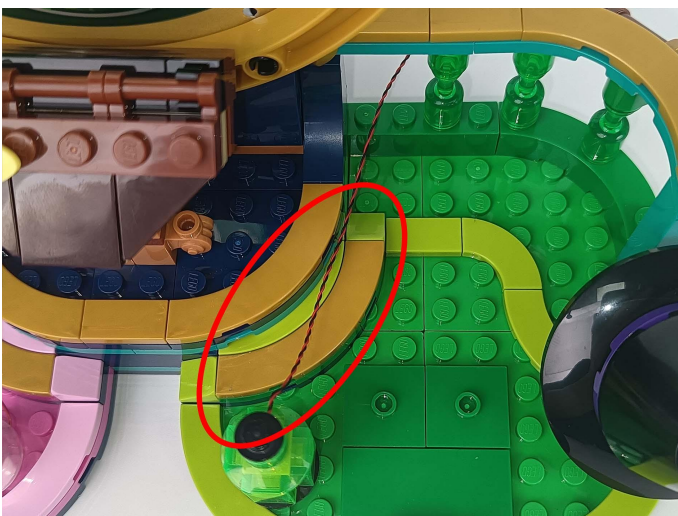

BRICK BLING

9

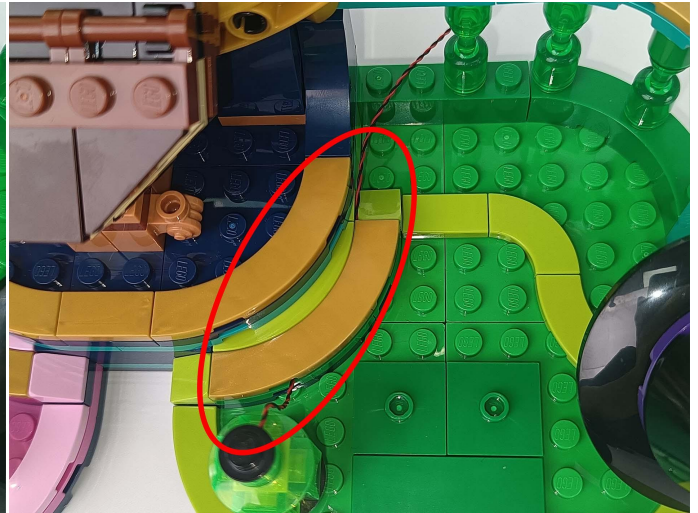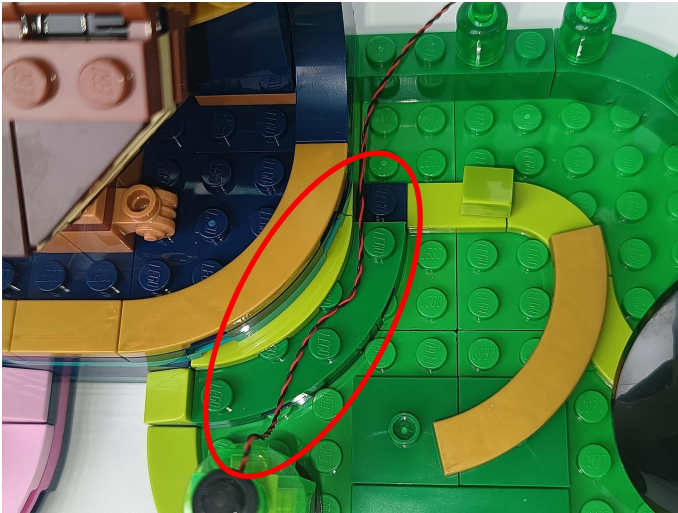

10



11



BRICK BLING


12



13



14

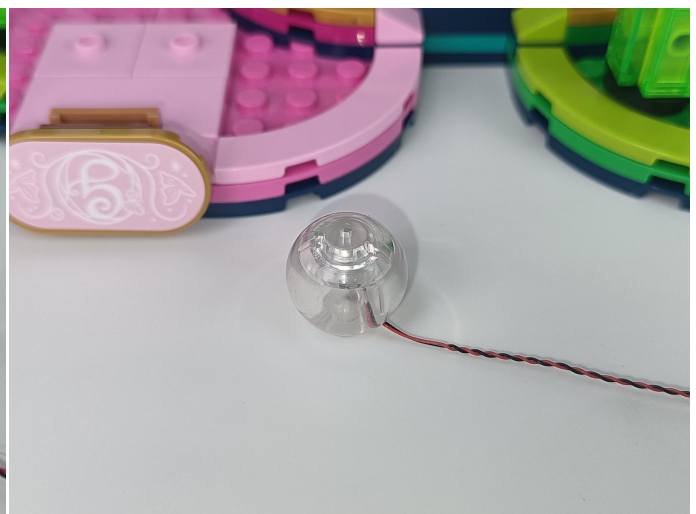


BRICK BLING



15



16

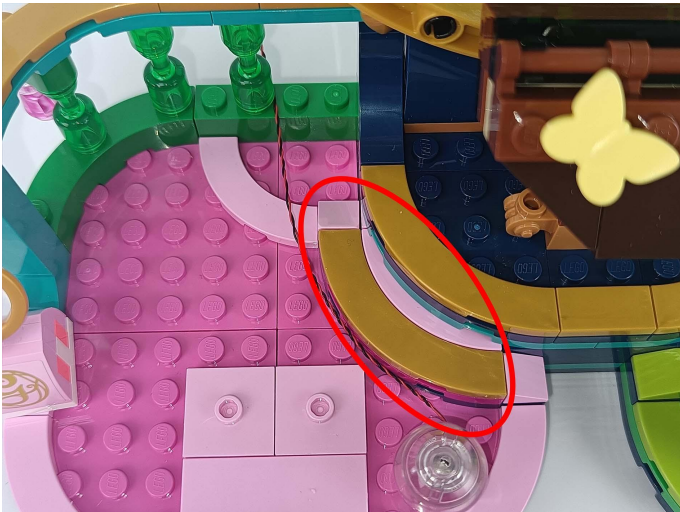

17

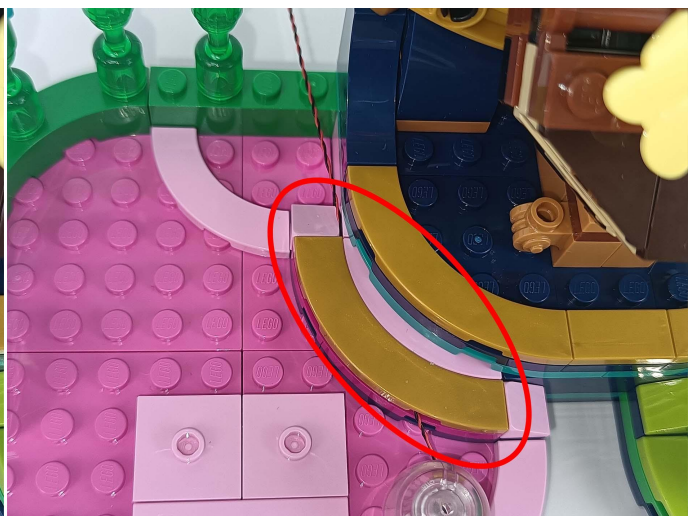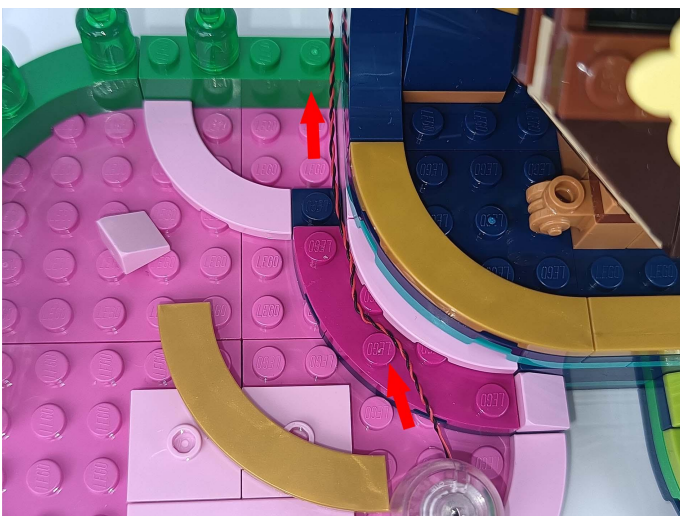


18



19



20

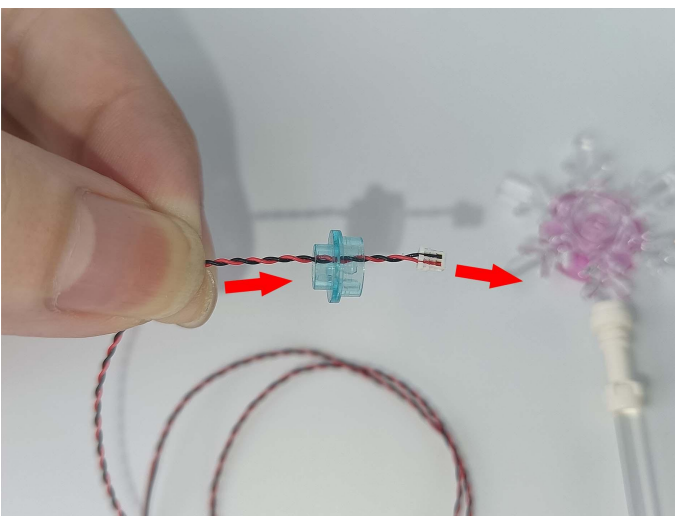


BRICK BLING

21




22

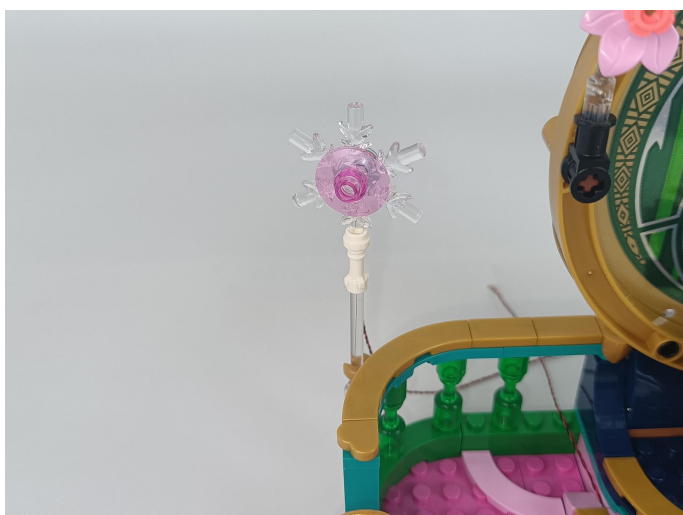

23




24

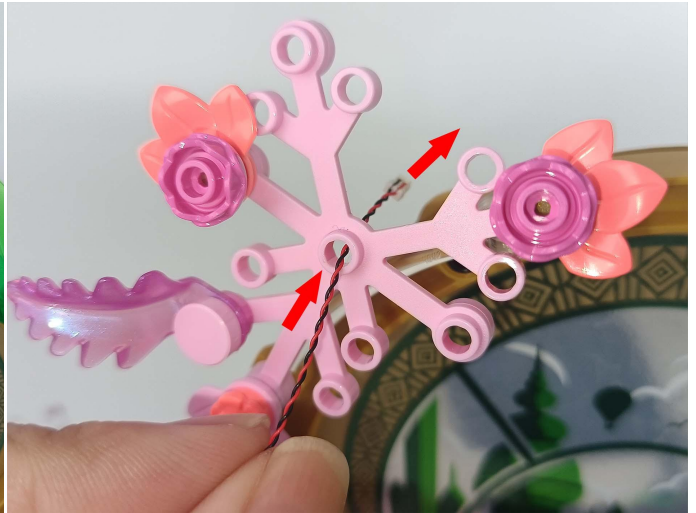

25



26

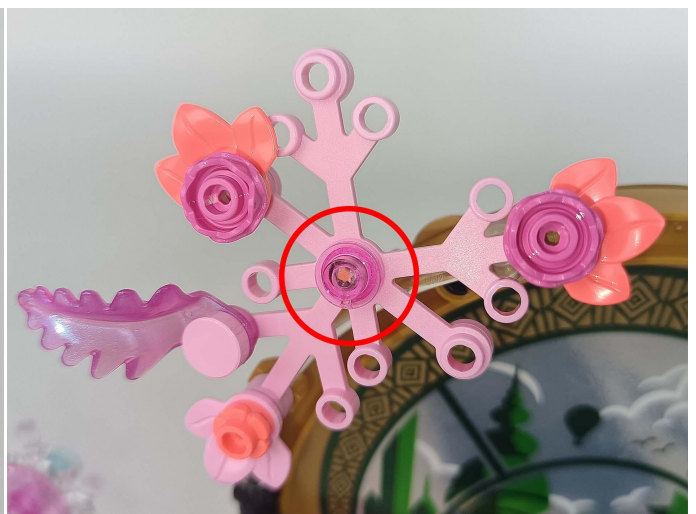


BRICK BLING



27



28

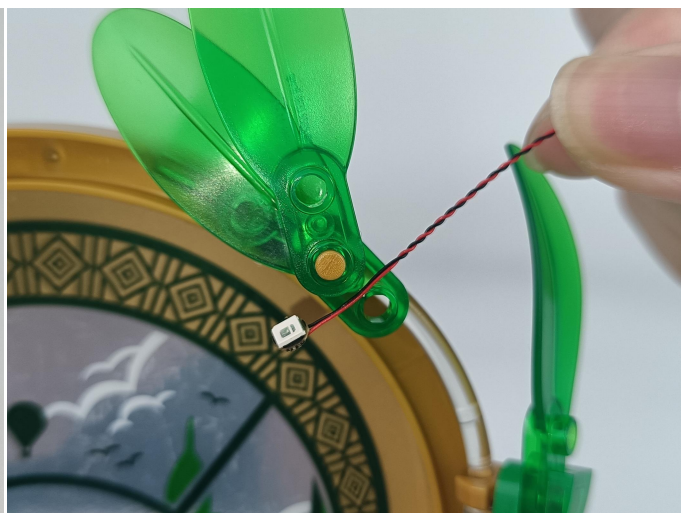

29

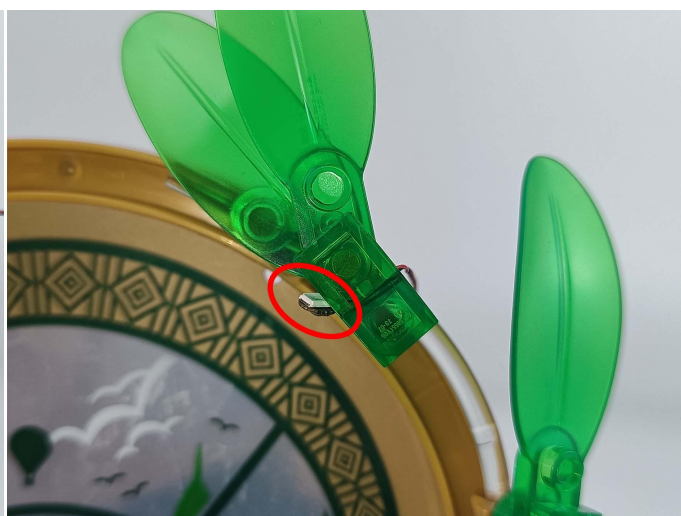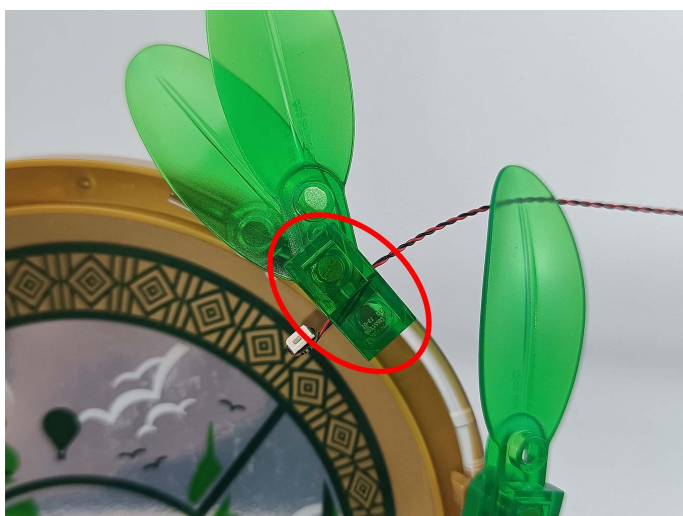


BRICK BLING

30



31

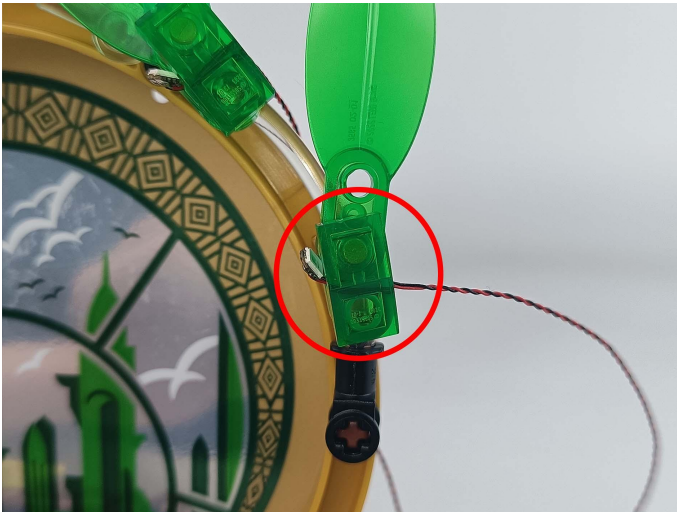

32



BRICK BLING

33



34



35





BRICK BLING


36



37

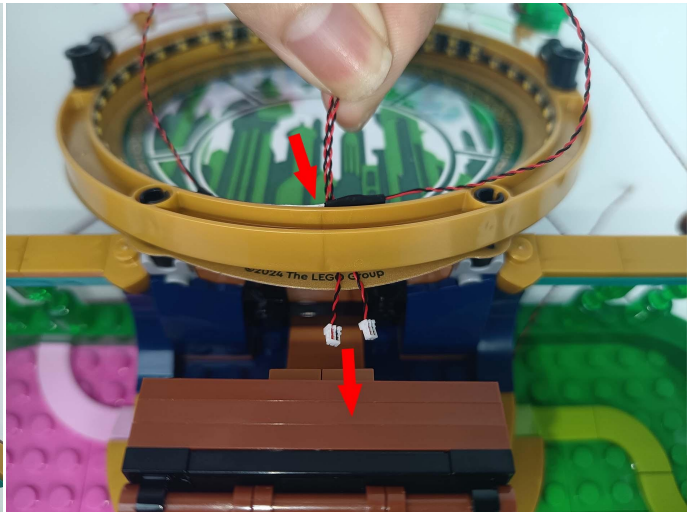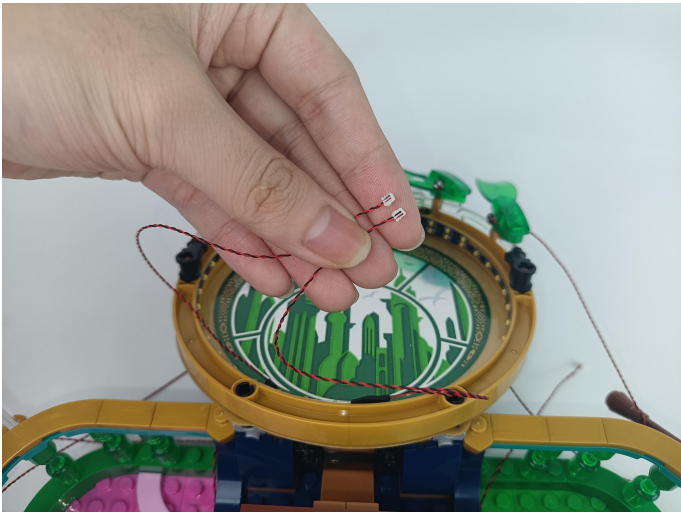



38

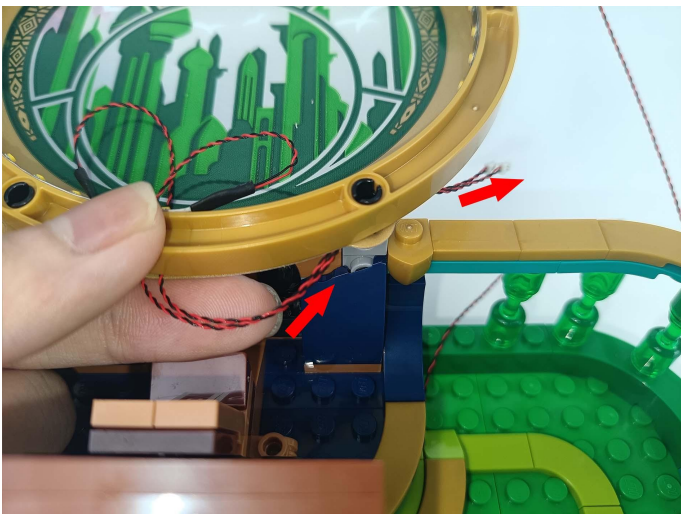



39





40

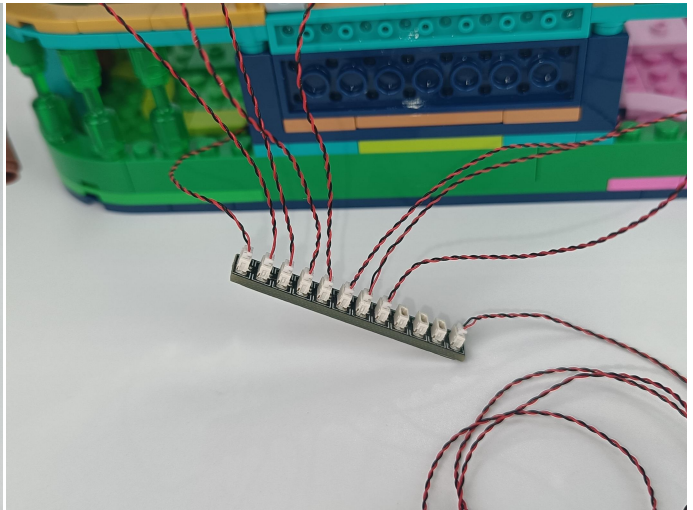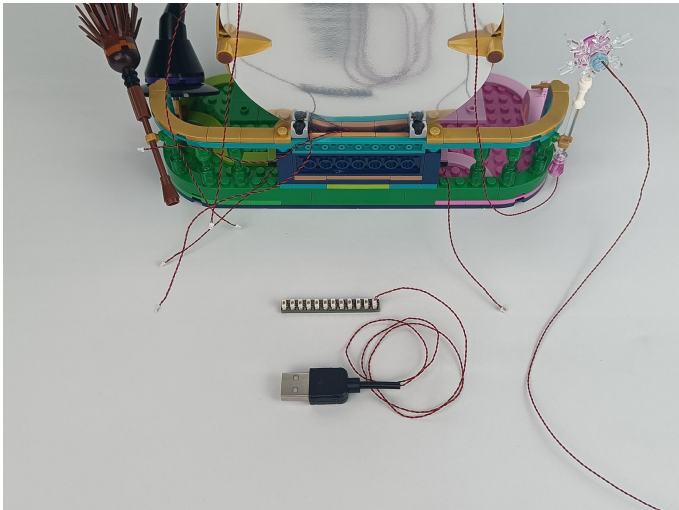

41

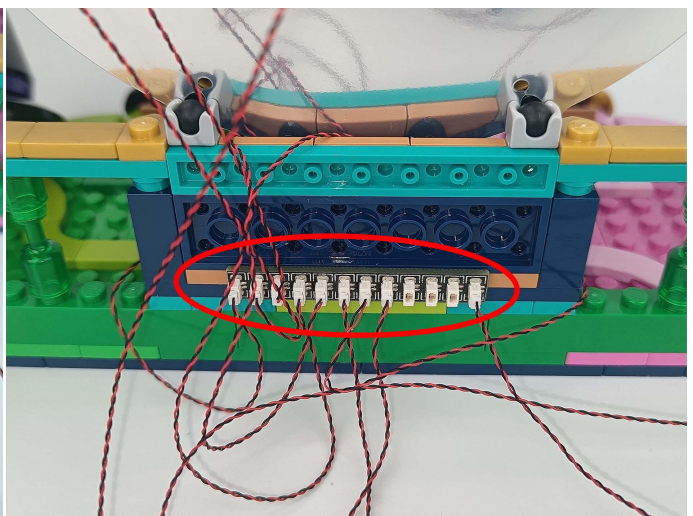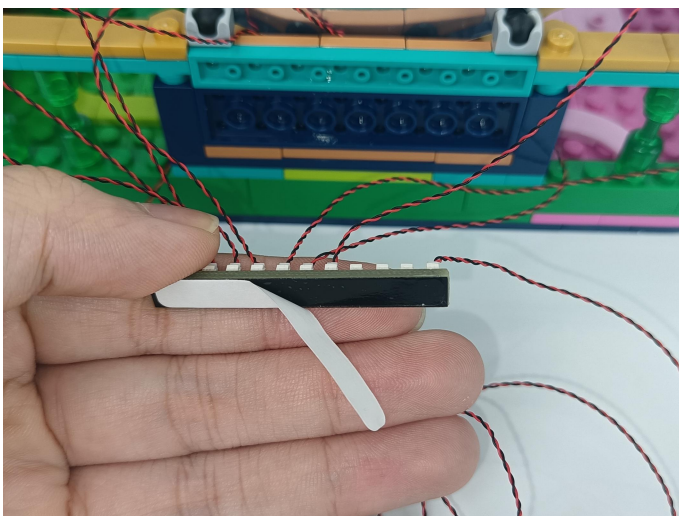

42

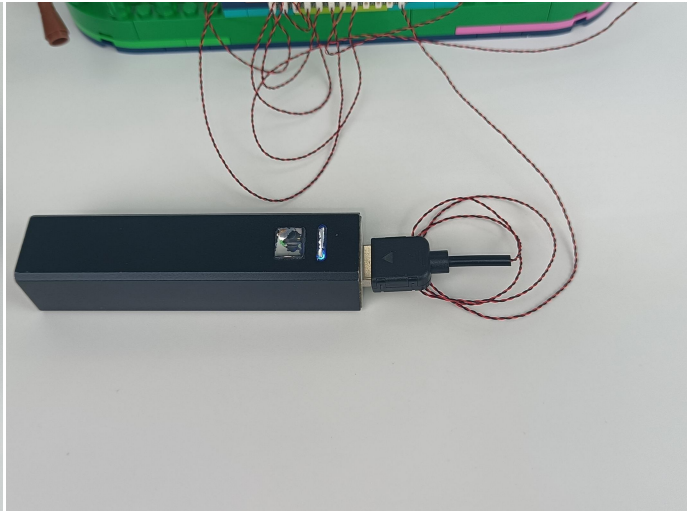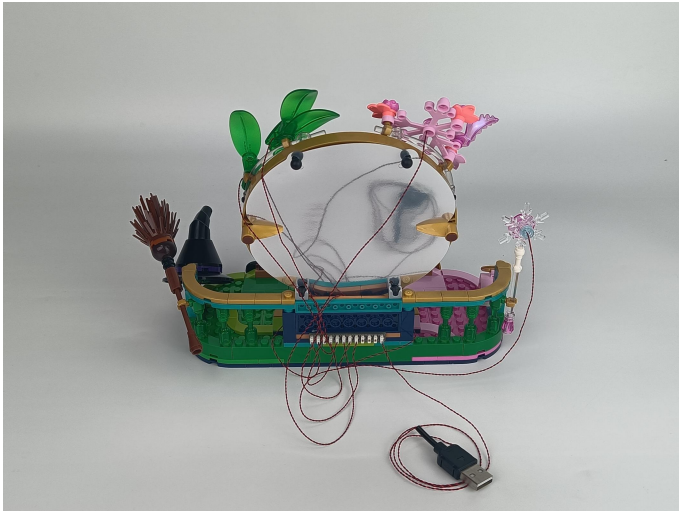

43



BRICK BLING

Good job, you've done all the installation steps, power it up and enjoy your work.



The battery box can also power the set. If it is necessary to change the power supply , prepare three AAA batteries, install them in the battery box, turn on the switch on the battery box, remove the plug of the USB Power Cable from the socket of the expansion board,plug the plug of the battery box to the same socket in the expansion board to power the suit as well.

THANKS