

10375 How to Train Your Dragon: Toothless

- Installation requires a lot of patience and great observation that your LEGO bricks will come alive when you get this finished. The bricks with lighting as below, so make sure you're ready and let's get started.



Strategies for the Installation

This instruction divides three sections to complete the installation of the lighting set.

Section A: Check the type and quantity of components.

The quantity and type of components of each products are different and it needs to be carefully checked to make sure there do have enough material. The type of components is indicated by the label on the bag.

Section B: Test that each components is working properly.

Each components is made individually so it is necessary to test that each components is working properly to avoid the situation that the lighting does not work .

Section C: laying out components following the instruction.

Our material is very small but not fragile, just be reminded that don't to pull the wires too hard. For different people, there may be some installation steps that you can't understand. Please look at the previous and later installation step.

Section A: Check the type and quantity of components.

This set contains four bags labelled "1" "2" "3" "A01305 Power Supply", please make sure that the components in each bag are the same as shown in the pictures.



Please contact us immediately if there have any missing components.

Section B: Test that each components is working properly.


Take out the expansion board and USB power cable from "No. 3 bag " and the " A01305 Power Supply" .



It is worth reminding that our products are all customized. They have a unique way of connecting. The white plug on wire and the socket of the expansion board need to be connected together to transmit power.


Note that on one side of the white plug you can see two very small golden wires that should be connected to the two golden needles in socket of the expansion board.shown as blow.

Side-Mounted Expansion Board

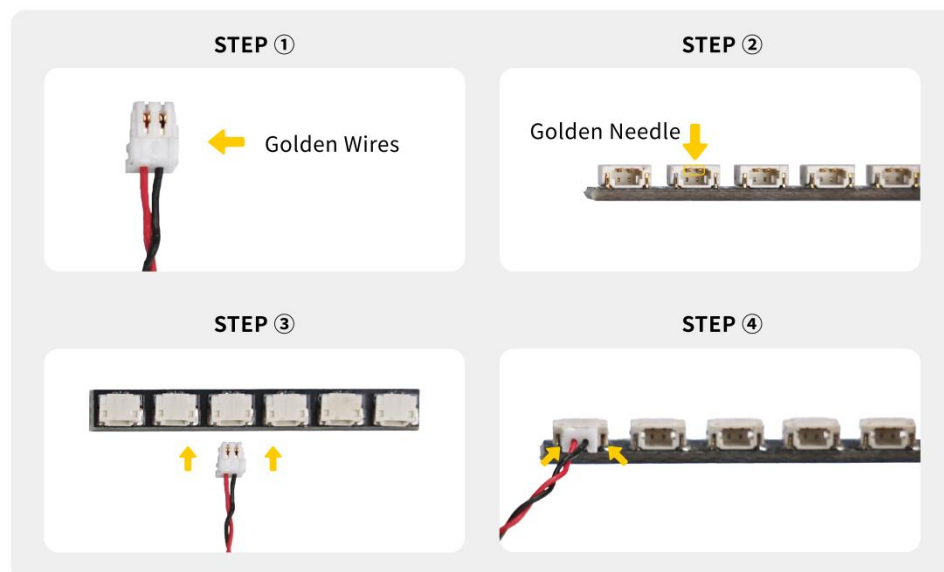


All our connections between plug and socket are all the same as shown above. So for any such structure with plug and socket, please pay attention to the golden wire of the plug and the golden needle of the socket, they must be touched together.

The connection method between the USB Power Cord and Expansion Boards is as follows:

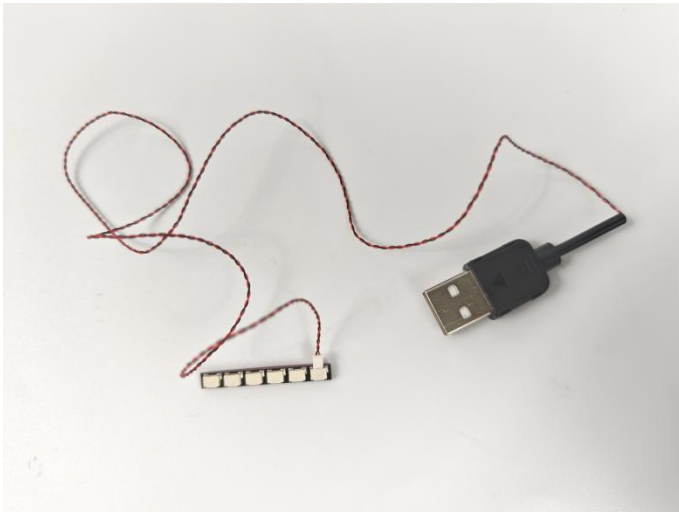

The usb power cable can be powered by phone chargers, power banks, etc.

USB Connectors to Connect Devices

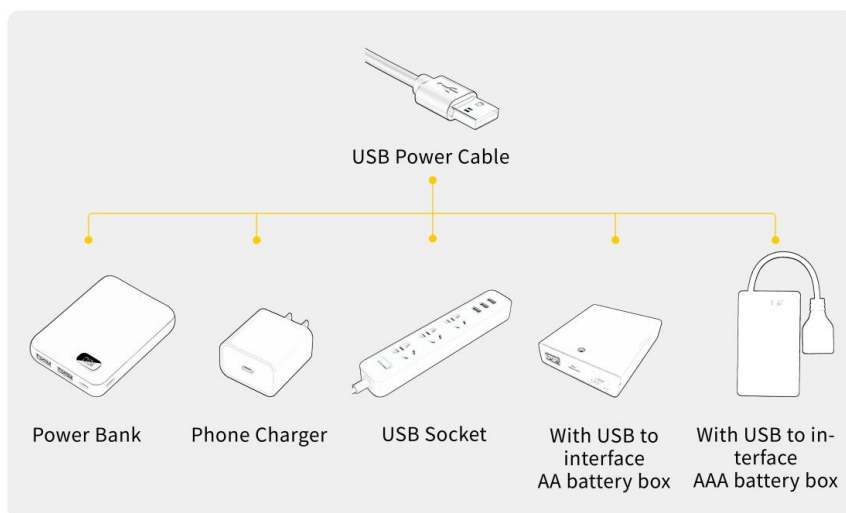

This instruction will use the power bank as power supply . The test structure is shown as follow. All lamp in this set will be tested by this structure.



When we test the "②" lighting fixtures, remove one of them and connect it to the socket. Turn on the portable power bank, and the light strip will light up normally, as shown in the figure below.




Test each lamp according to this method. It should be noted that after the test, the lamp must be returned to the corresponding bag to avoid confusion of types.



LED strip test:

Take out the LED light bar, connect the usb power cable, turn on the mobile power supply, the light will be on normally, as shown in the figure below.

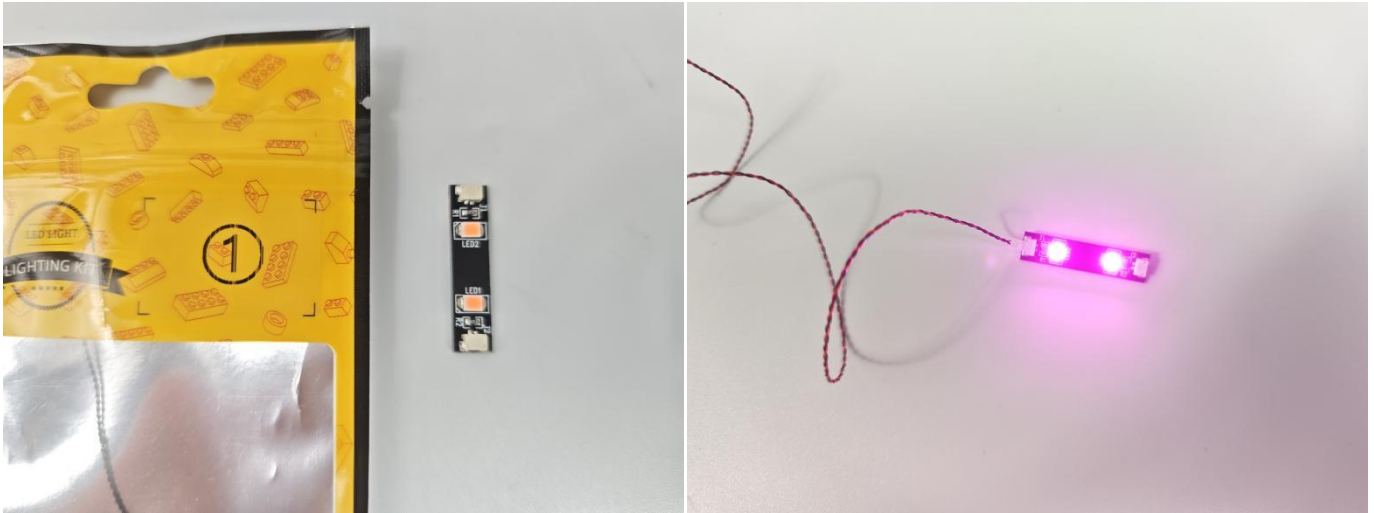

Attention that after the test is completed, each components should put back in the corresponding bag including the socket and the usb power cable.
Please contact us immediately if any components don't work.

Section C: laying out components following the instruction.

1



2




3





4



5

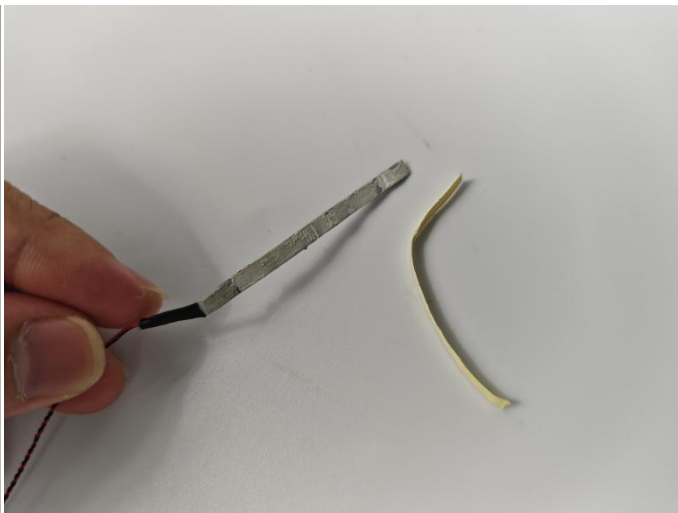

6

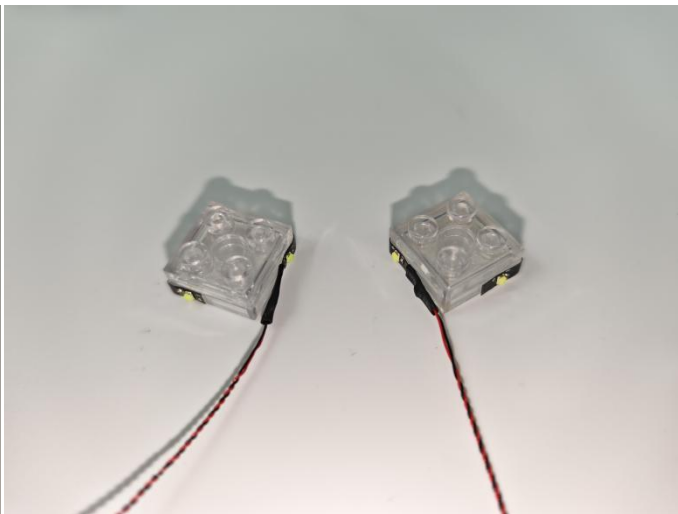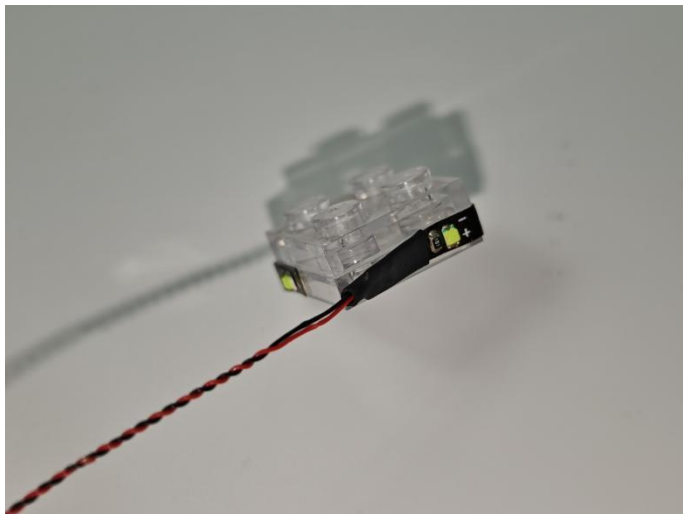

7



8



9




10



11



12

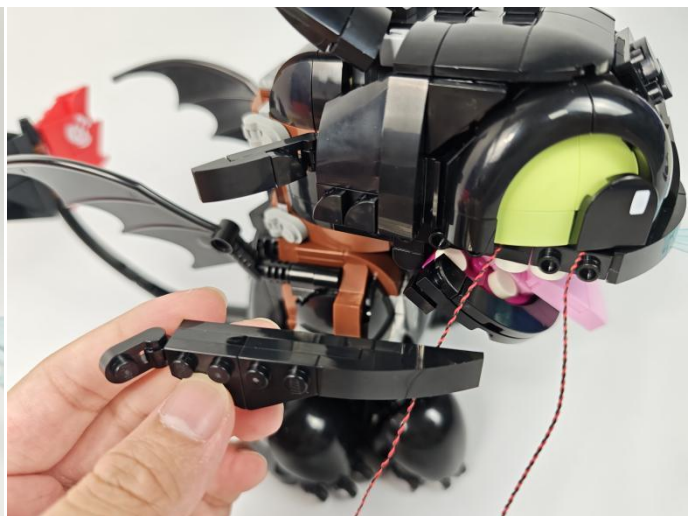

13



14



15




16



17





18

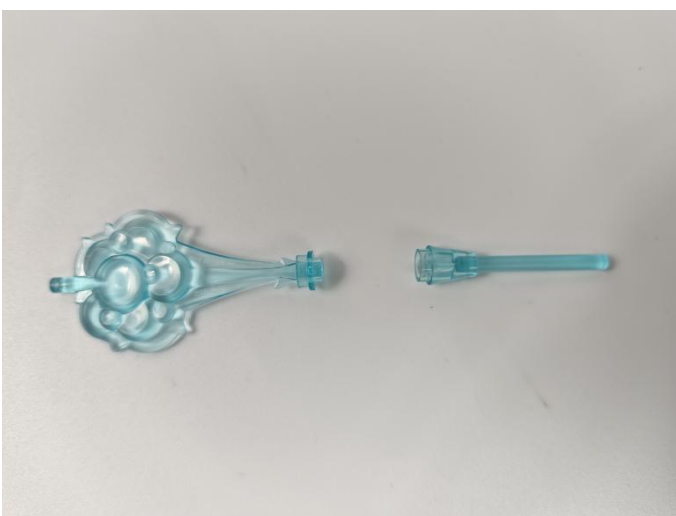

TIPS

The slit on the the plate round 1X1 are hand-made to avoid squeeze the wire and cause short circuit and abnormal heat during installation.

The plate without slit

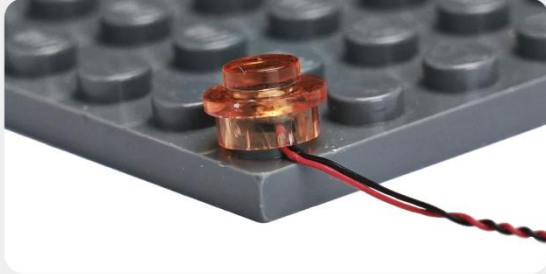

The squeeze causes the protective layer of the wire to be torn apart, the positive and negative wires touch together, and the set is short-circuited and the hot or wire is crushed, the wire to be disconnected and don't work.



The plate with slit




The wire has enough space to avoid being squeezed endowed with longer service life and more stable effect.




20

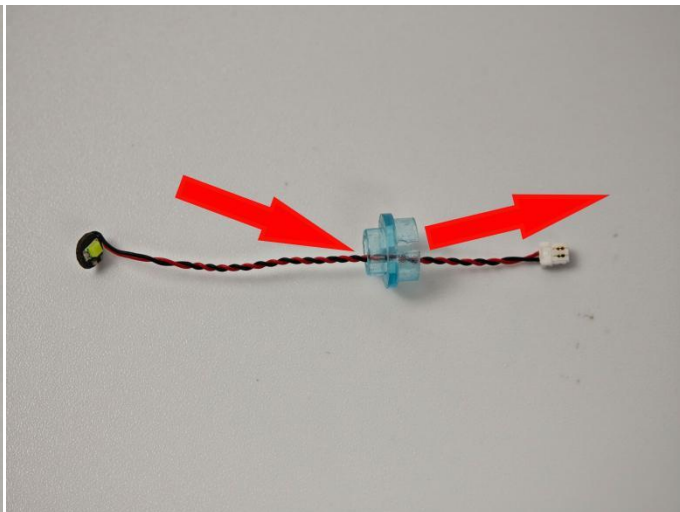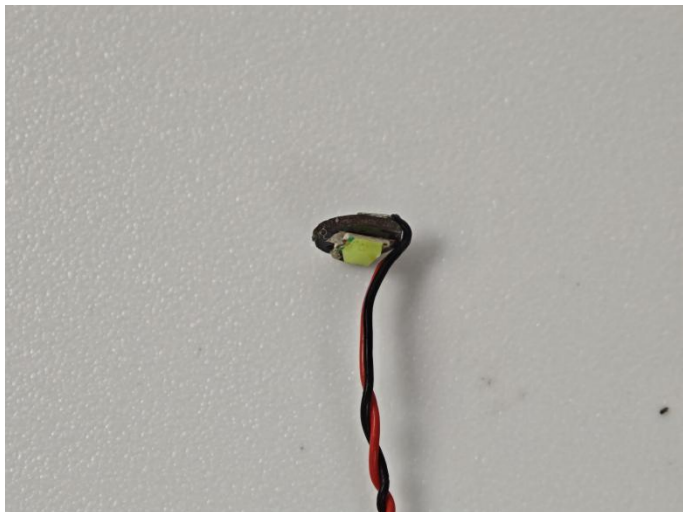



21

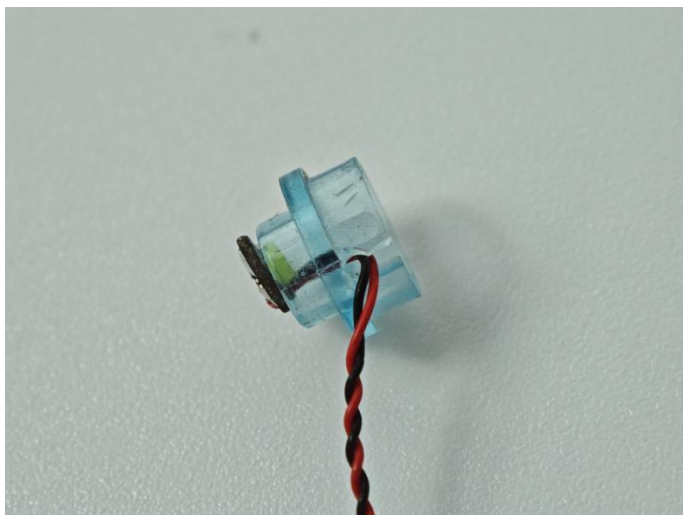



22

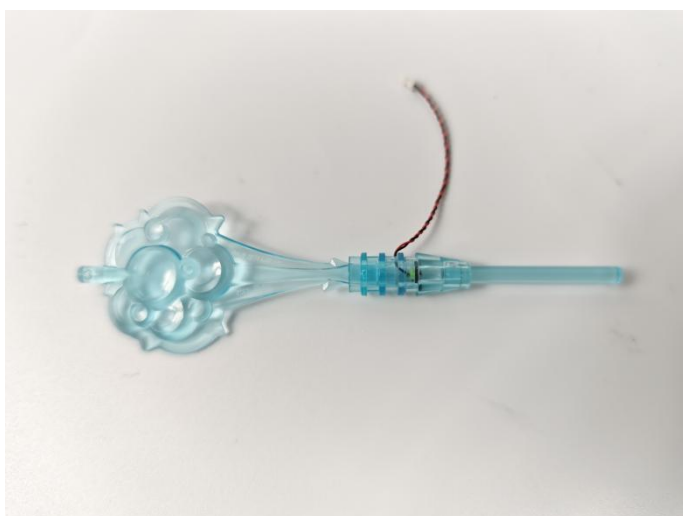



23

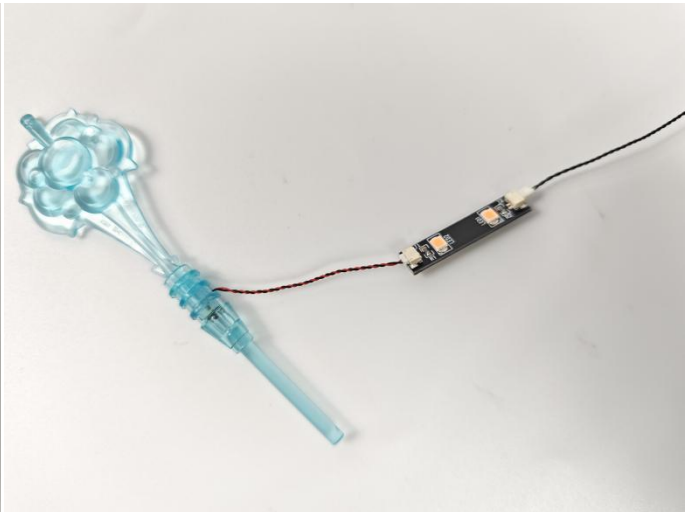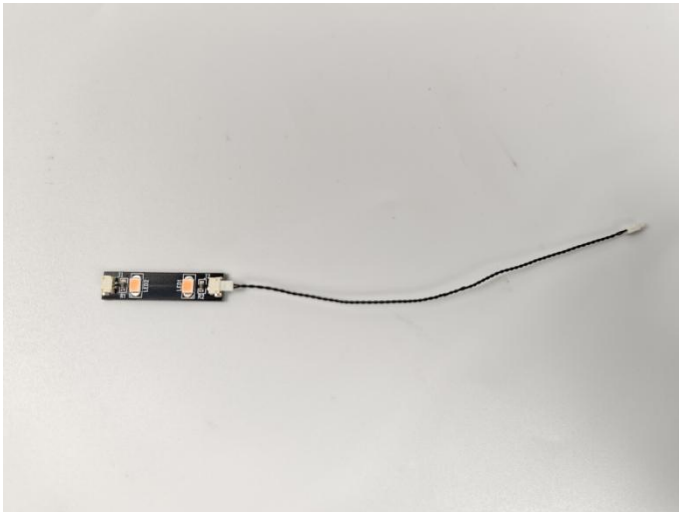

24

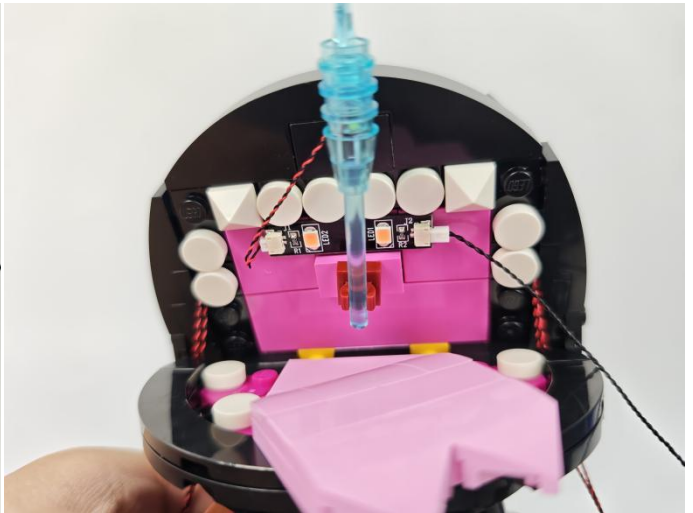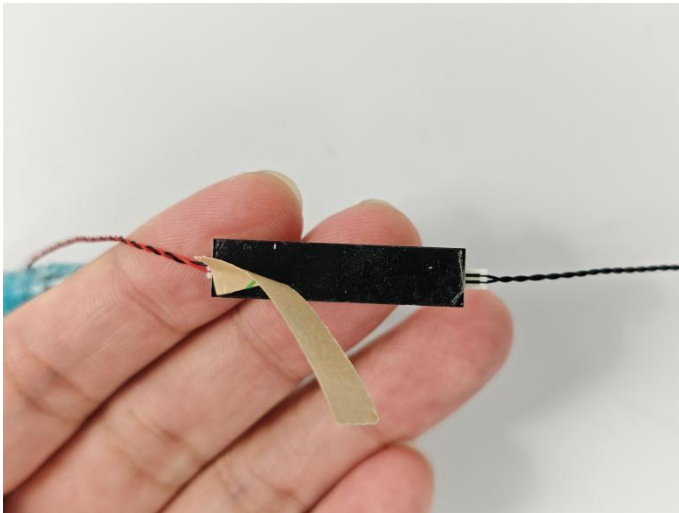


25

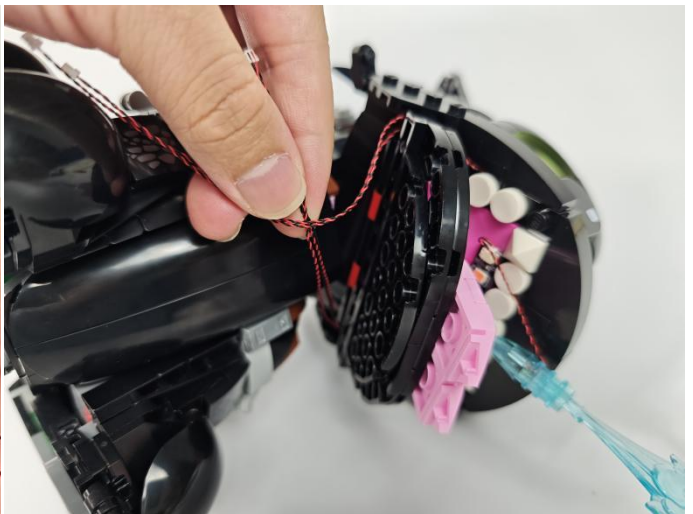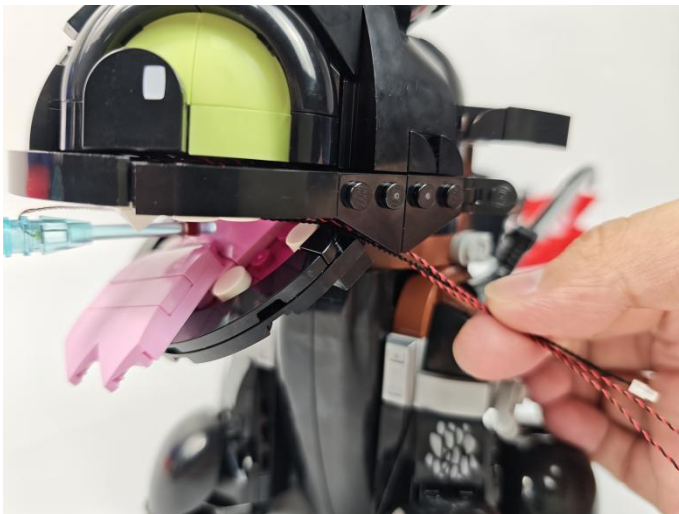


26




27

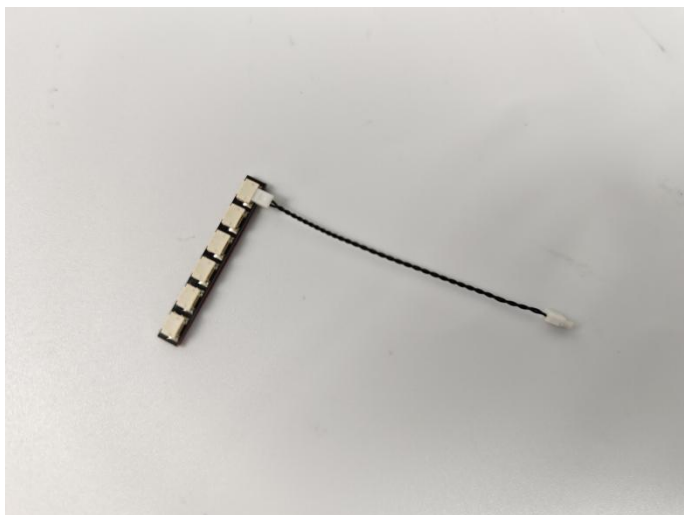


28

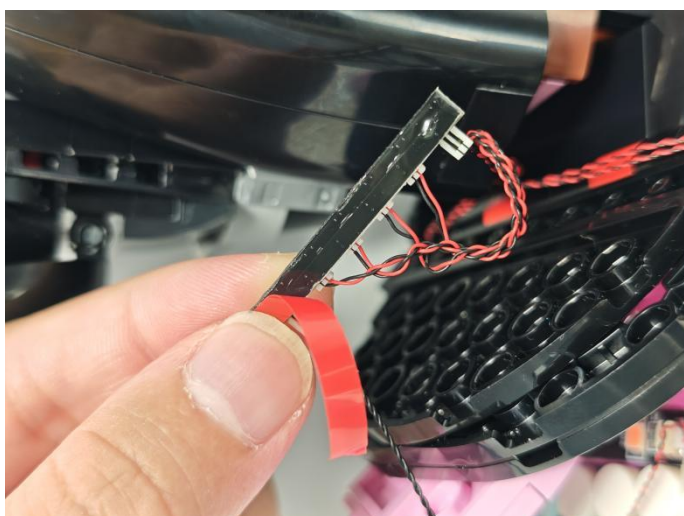

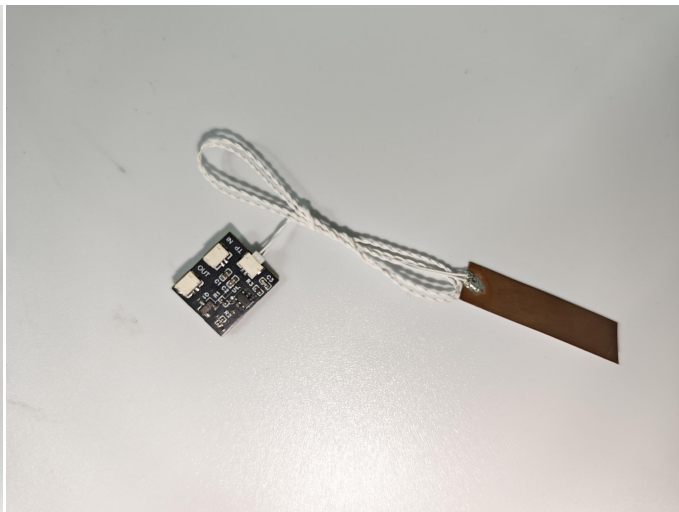

Touch Module Function introduce

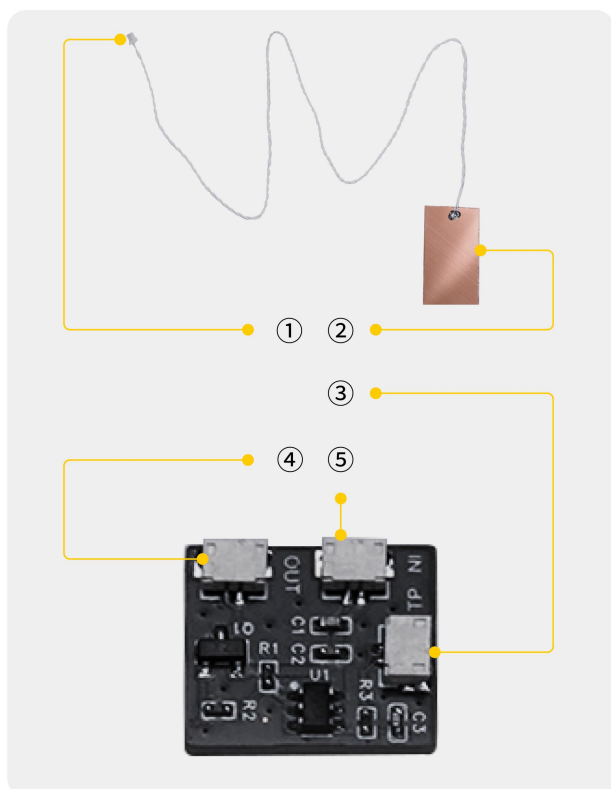

- ①: Sensor wire-30cm
- ②: Sensor plate
- ③: SensorInterface,Connecting Sensor Cable
- ④:(OUT) Power output port(5V)
- ⑤:(IN) Power input port (5V)

Tip:

(1) Separate the wires

Separate the touch module's sense wires from the power and bulb wires to prevent interference with the sensors!

(2) Press the sensing wires together

Press the touch module's sensing tab firmly onto the block -- no gaps! -- to make sure it senses touch.

(3) Disconnecting the Power Operation

Disconnect the power when connecting the module, or the module will pick up excess signals causing errors.


(4) Touch Interval

Leave your hand after each touch and wait 1 second for the next one to allow the sensor to respond.


(5) Problem solving

If the control is unstable, please first check whether the sensor wire touches other light fixture wires or power wires or metal products, and restart after disconnecting the power supply for 1 minute after troubleshooting.


30. Take out the power cord from the bag and connect it to the module's input port. (Be careful not to let the power cord touch the sensor wire, otherwise the sensor will be interfered with after powering on!)

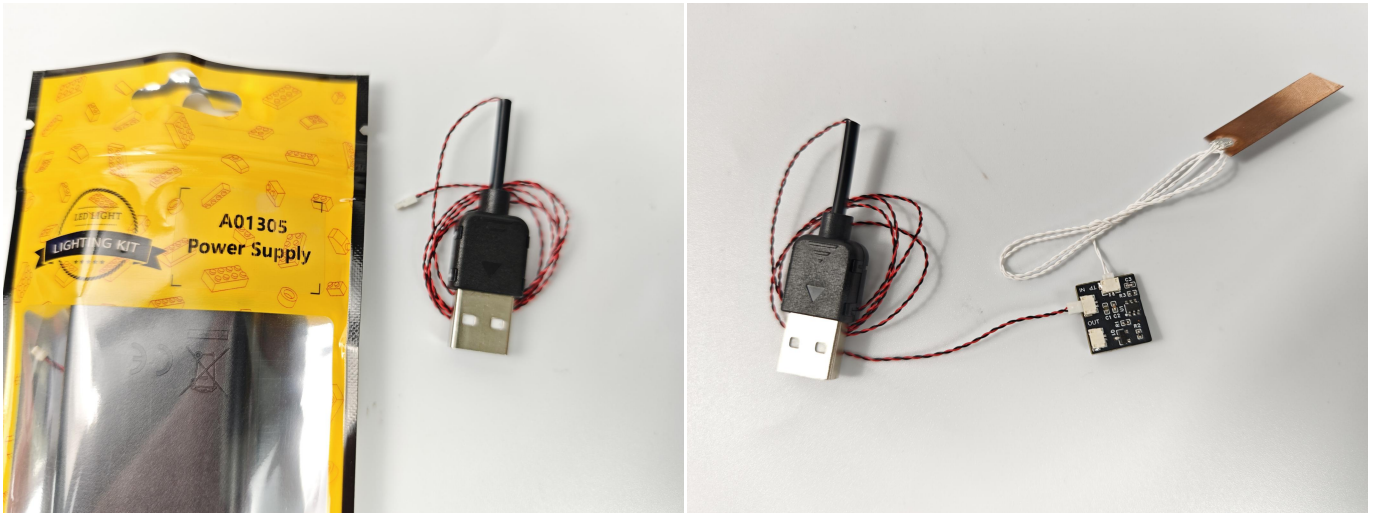

31. Connect the expansion board's connecting wire to the module's output port. (Be careful not to let the connecting wire come into contact with the power cord or the sensing wire, as the sensor may be interfered with after powering on!)

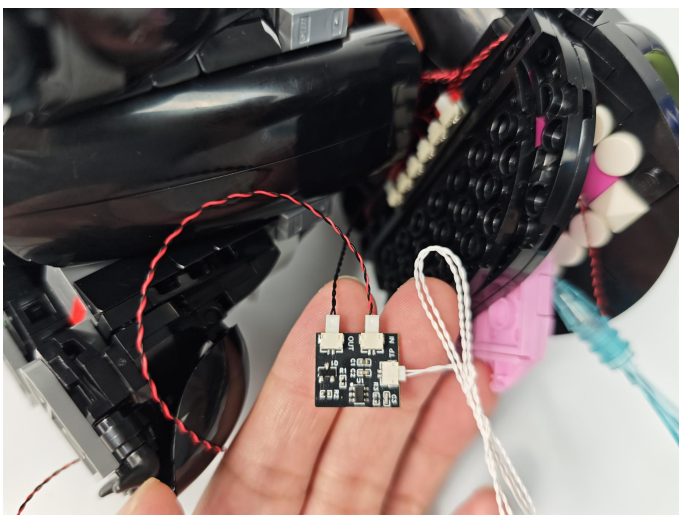

32. Peel off the adhesive paper on the module and sensor, and stick them onto the building blocks. (Be careful to keep the power cord, connecting wire, and sensor wire separate, otherwise the sensor will be interfered with after being powered on!)

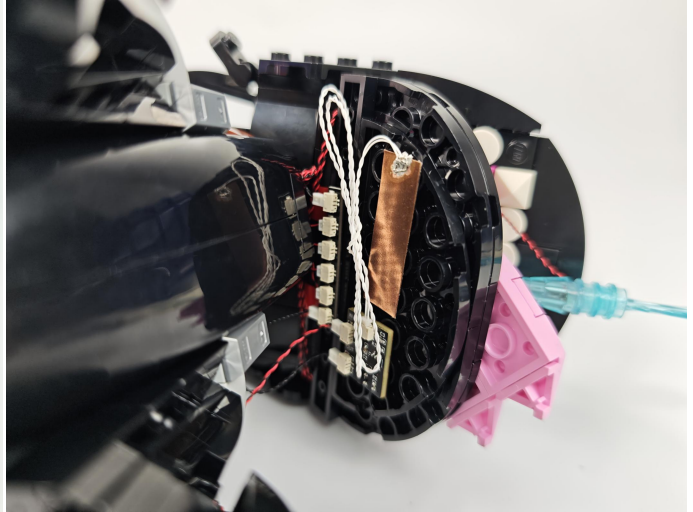

33. Connect to the power supply, and the model's lighting effect is as shown in the picture. (After each touch, please wait for 1 second before making the next touch to allow the sensor to respond!)



Good job, you've done all the installation steps, power it up and enjoy your work.



The battery box can also power the set. If it is necessary to change the power supply , prepare three AAA batteries, install them in the battery box, turn on the switch on the battery box, remove the plug of the USB Power Cable from the socket of the expansion board,plug the plug of the battery box to the same socket in the expansion board to power the suit as well.

THANKS

Tips

If you encounter any installation problems please contact the seller, we will be happy to help you solve!